Explicit low-degree isogeny and return-map controls

Run `isogeny-20261021T2320Z`; source freeze `411a254c0ac518e8462ecd6f07e4f315917a48b6`. Host `a81fcf6dc864`, Debian 13 x86_64, managed four-CPU virtual host, L0. Workloads use public synthetic fixtures or public-parameter checks. No wall-clock or full-cost improvement is admitted.

Raw outputs: run directory. Commands, binary/input hashes, seeds, resource limits and statuses are in execution receipts and the versioned protocols in the study root. No independent-host replay is claimed.

Recorded observations

Metric	Count / recorded value
algebraic dual maps	2
degree fixture cells	30
explicit maps	3
inapplicable	27

Vector figures and editable data accompany this report on the following pages.


Degrees 2, 3 and 7 were checked on ten fixtures. Eligible kernels are constructed over the frozen Fp^6 tower; the rational functions descend to Fp. Every rational source point, generator addition and available dual composition is checked. The finite lookup return map has linear-in-group-order setup and supplies no scalable DLP gain. New destination representations are registered separately.

The chart has no statistical interval: census counts are exact on the stated finite sets; solver completion counts describe these bounded processes only. Missing or failed computations stay unresolved. Full original acceptance criteria and proof/measurement gaps remain in the requirement matrix.

Vector figures and editable data accompany this report on the following pages.

Explicit low-degree isogeny and return-map controls

Recorded counts; exact censuses or bounded run outcomes. No wall-time comparison.

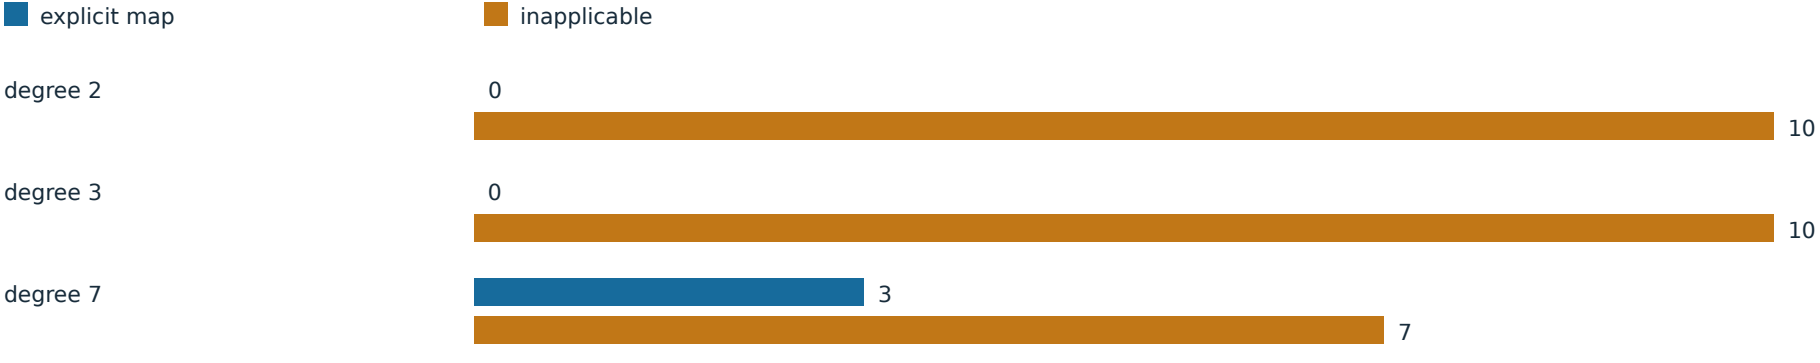

Verified rational isogeny maps; no cost comparison or assigned volcano depth

