Finite-base solver diagnostic outcomes

Run `solver-20261021T2320Z`; source freeze `411a254c0ac518e8462ecd6f07e4f315917a48b6`. Host `a81fcf6dc864`, Debian 13 x86_64, managed four-CPU virtual host, L0. Workloads use public synthetic fixtures or public-parameter checks. No wall-clock or full-cost improvement is admitted.

Raw outputs: run directory. Commands, binary/input hashes, seeds, resource limits and statuses are in execution receipts and the versioned protocols in the study root. No independent-host replay is claimed.

Recorded observations

Metric	Count / recorded value
Singular dimensions returned	0
cell execution or verification errors	458
external attempt invalid	true
native complete	558
native ideal equalities verified	0
native record missing or nonzero	701
projected set equivalence cells	240
projected set mismatches	0
solver cells	1930

Vector figures and editable data accompany this report on the following pages.

The V1 external attempt is INVALID: Unicode operators were sent to the CAS tools. Reject every external comparison from this attempt. Native outputs retain their own scope. Preserve all raw cases in the deterministic split archive; do not count failure as refutation.

The chart has no statistical interval: census counts are exact on the stated finite sets; solver completion counts describe these bounded processes only. Missing or failed computations stay unresolved. Full original acceptance criteria and proof/measurement gaps remain in the requirement matrix.

Finite-base solver diagnostic outcomes
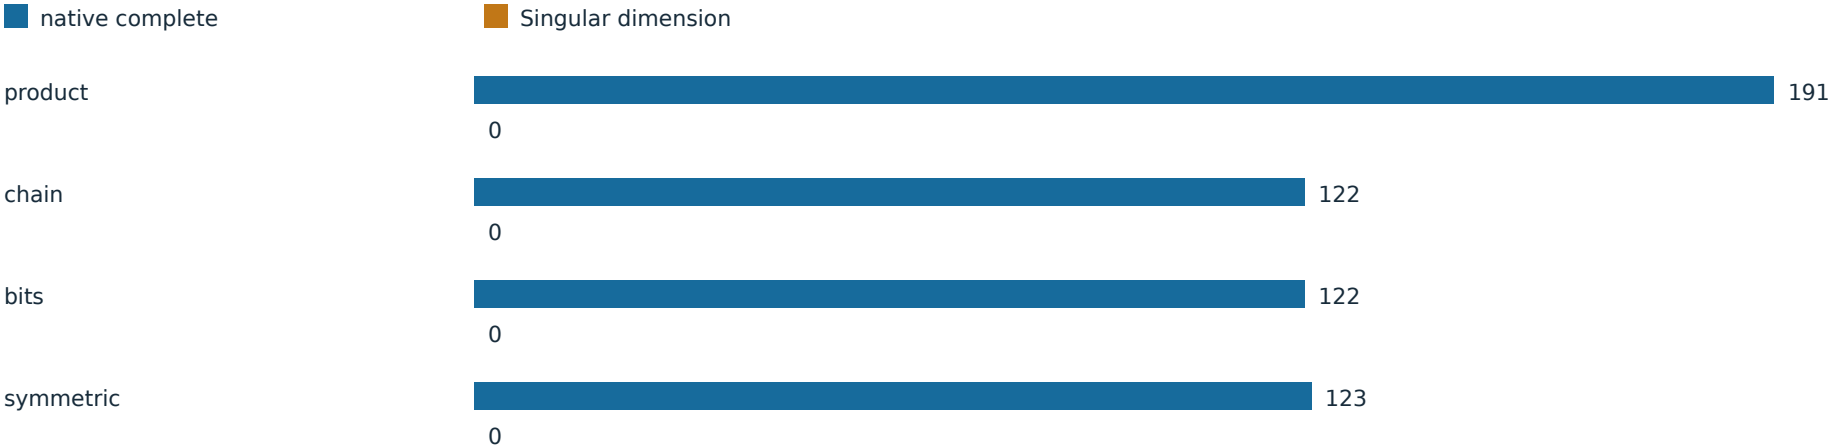
Recorded counts; exact censuses or bounded run outcomes. No wall-time comparison.