Finite-base solver diagnostic outcomes

Run `solver-20261021T2349Z-v2`; source freeze `5d6cd4dc595020077d189e999fcbbb6ca64e6ded`. Host `a81fcf6dc864`, Debian 13 x86_64, managed four-CPU virtual host, L0. Workloads use public synthetic fixtures or public-parameter checks. No wall-clock or full-cost improvement is admitted.

Raw outputs: run directory. Commands, binary/input hashes, seeds, resource limits and statuses are in execution receipts and the versioned protocols in the study root. No independent-host replay is claimed.

Recorded observations

Metric	Count / recorded value
Singular dimensions returned	970
cell execution or verification errors	0
external attempt invalid	false
native complete	731
native ideal equalities verified	868
native record missing or nonzero	244
projected set equivalence cells	240
projected set mismatches	0
solver cells	1930

Vector figures and editable data accompany this report on the following pages.

V2 uses valid ASCII input but the 768 MiB virtual-address limit crashes msolve even on a tiny valid system. Its intended msolve comparison is unresolved. Native and Singular outcomes retain only their separately verified scope. V3 changes every engine to 4 GiB and keeps both earlier attempts.

The chart has no statistical interval: census counts are exact on the stated finite sets; solver completion counts describe these bounded processes only. Missing or failed computations stay unresolved. Full original acceptance criteria and proof/measurement gaps remain in the requirement matrix.

Finite-base solver diagnostic outcomes
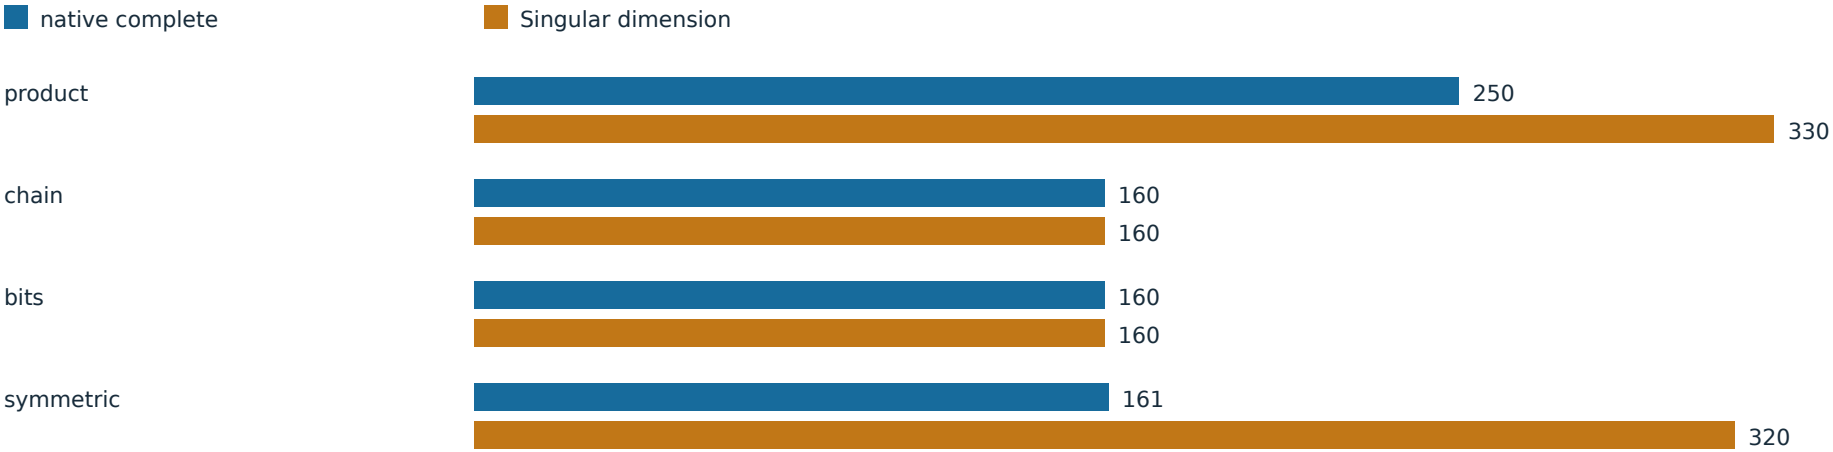
Recorded counts; exact censuses or bounded run outcomes. No wall-time comparison.