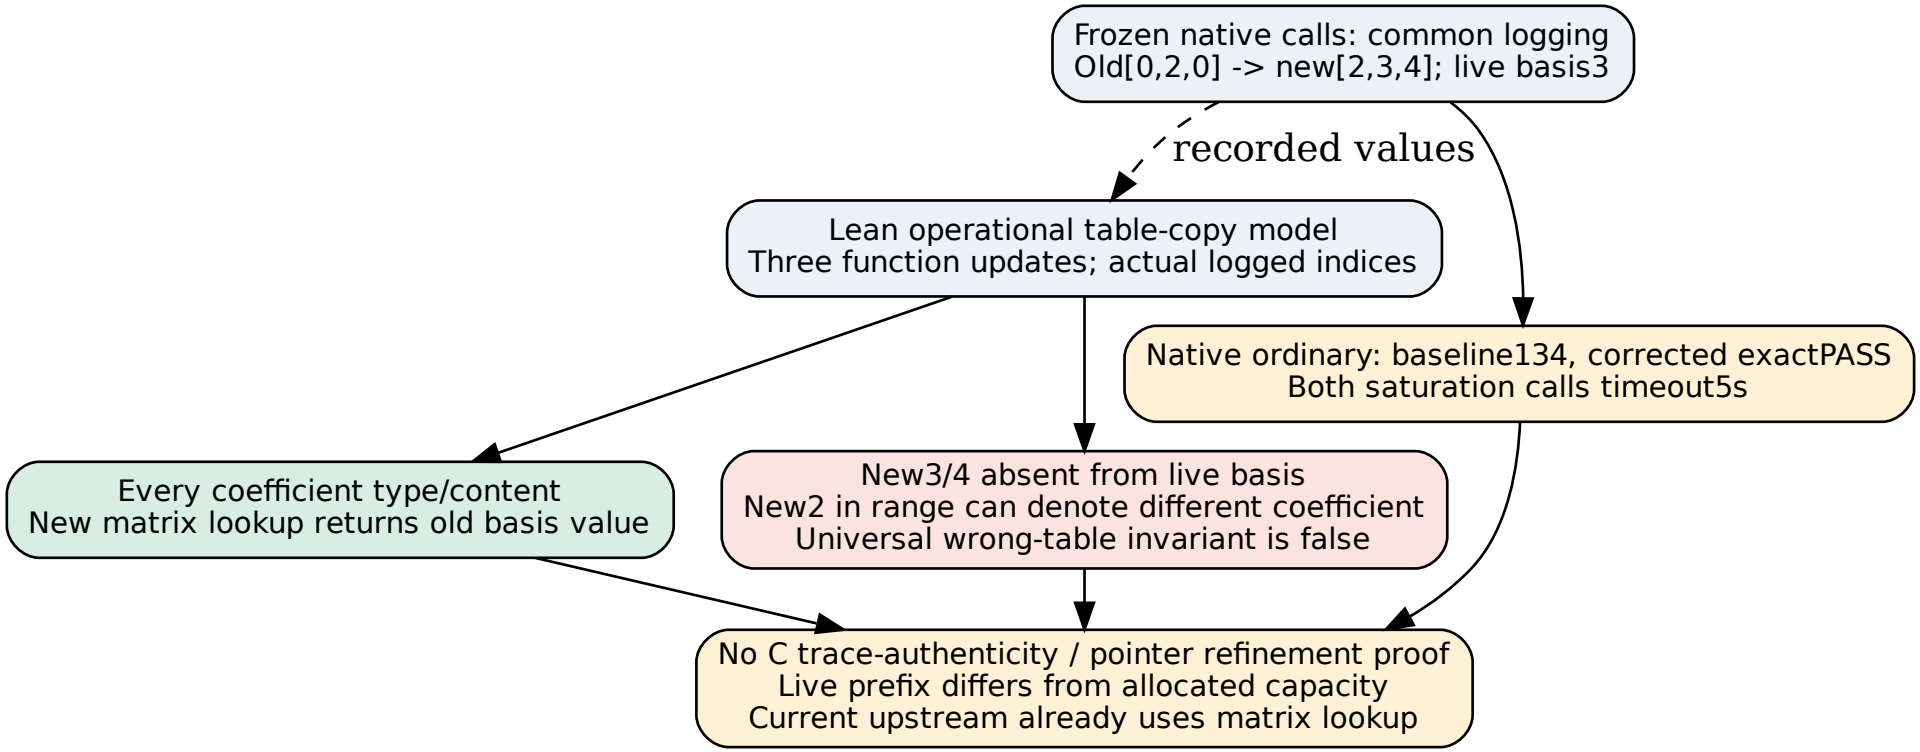
Frozen native calls: common logging
Old[0,2,0] -> new[2,3,4]; live basis3
recorded values
Lean operational table-copy model
Three function updates; actual logged indices
Native ordinary: baseline134, corrected exactPASS
Both saturation calls timeout5s
Every coefficient type/content
New matrix lookup returns old basis value
New3/4 absent from live basis
New2 in range can denote different coefficient
Universal wrong-table invariant is false
No C trace-authenticity / pointer refinement proof
Live prefix differs from allocated capacity
Current upstream already uses matrix lookup