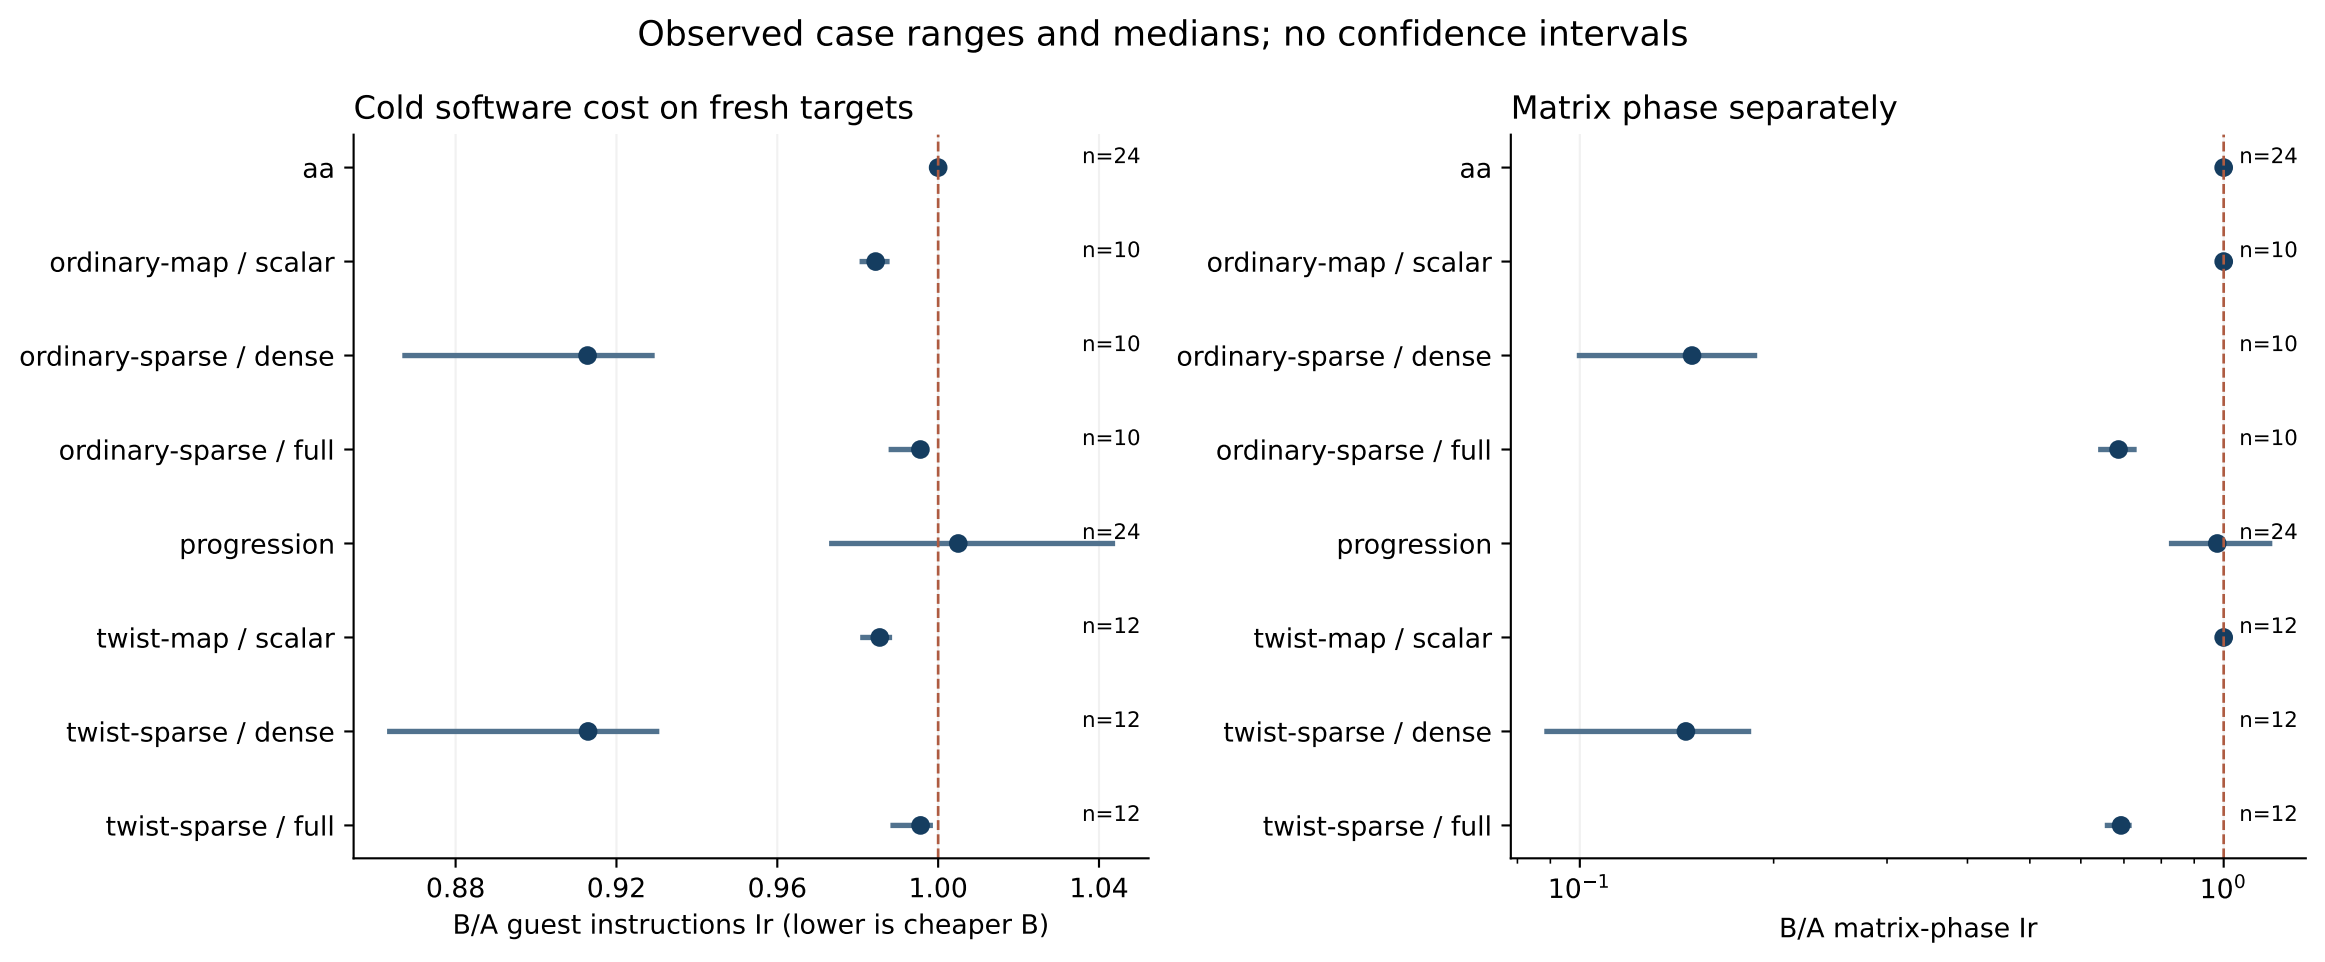
Observed case ranges and medians; no confidence intervals
Cold software cost on fresh targets
aa
ordinary-map / scalar
ordinary-sparse / dense
ordinary-sparse / full
progression
twist-map / scalar
twist-sparse / dense
twist-sparse / full
n=24
n=10
n=10
n=10
n=24
n=12
n=12
n=12
0.88
0.92
0.96
1.00
1.04
B/A guest instructions lr (lower is cheaper B)
Matrix phase separately
aa
ordinary-map / scalar
ordinary-sparse / dense
ordinary-sparse / full
progression
twist-map / scalar
twist-sparse / dense
twist-sparse / full
n=24
n=10
n=10
n=10
n=24
n=12
n=12
n=12
10^{-1}
10^{0}
B/A matrix-phase lr