Native solver operation counts: five seeds per arm

M = base-field multiplications/squarings. Median with min/max; logarithmic axis.

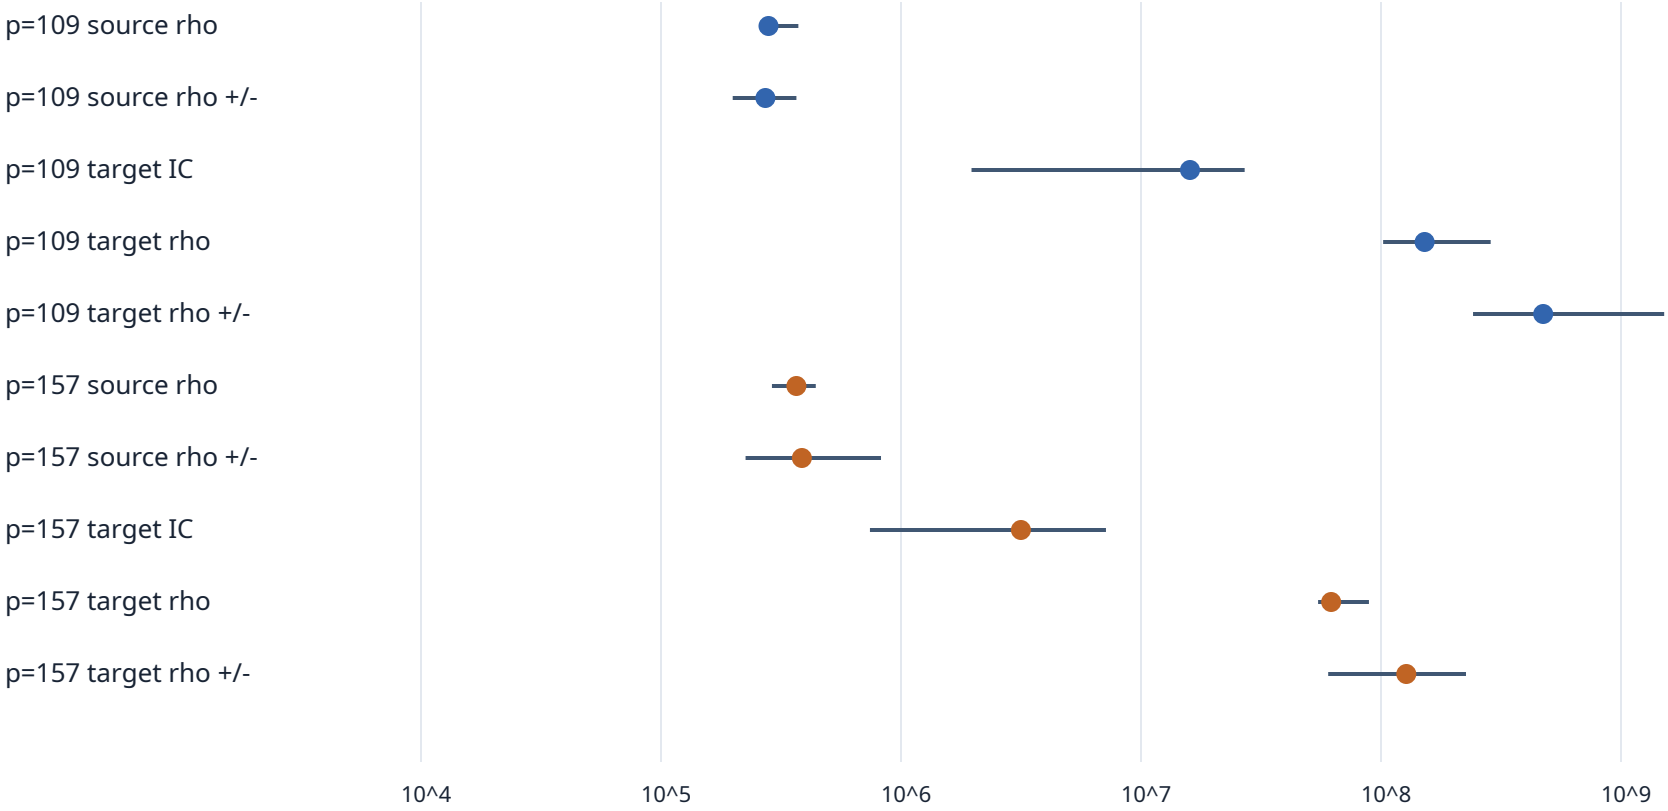

Run: RUN_MANIFEST.json; raw receipts: results/pinned-diagnostic/reservation.json

Target construction/transfer/inversion absent. Counts are solver-stage diagnostics.

Wall times are unqualified: missing PSI and incomplete core reservation.