Recorded run: b-c3

Session `ECBS1h92e2f7e1df51`; spec `ECS1hc4c4686f22a9`. Source commit `68e6c8b12d9185824bc071d7bc29ce2c2b5a2372`. Public synthetic, independent one-target solves.

Requested 384; recorded 384. Statuses: `{'verified': 384}`. Required isolation L0; wall time is descriptive only.

Arm	Attempts	Verified	Charged GAE sum (lower bound)	Peak RSS KiB
ic-recurrence	128	128	14589348.0	151144
ic-scalar	128	128	15173028.0	151052
rho-neg	128	128	3318705.0	128056

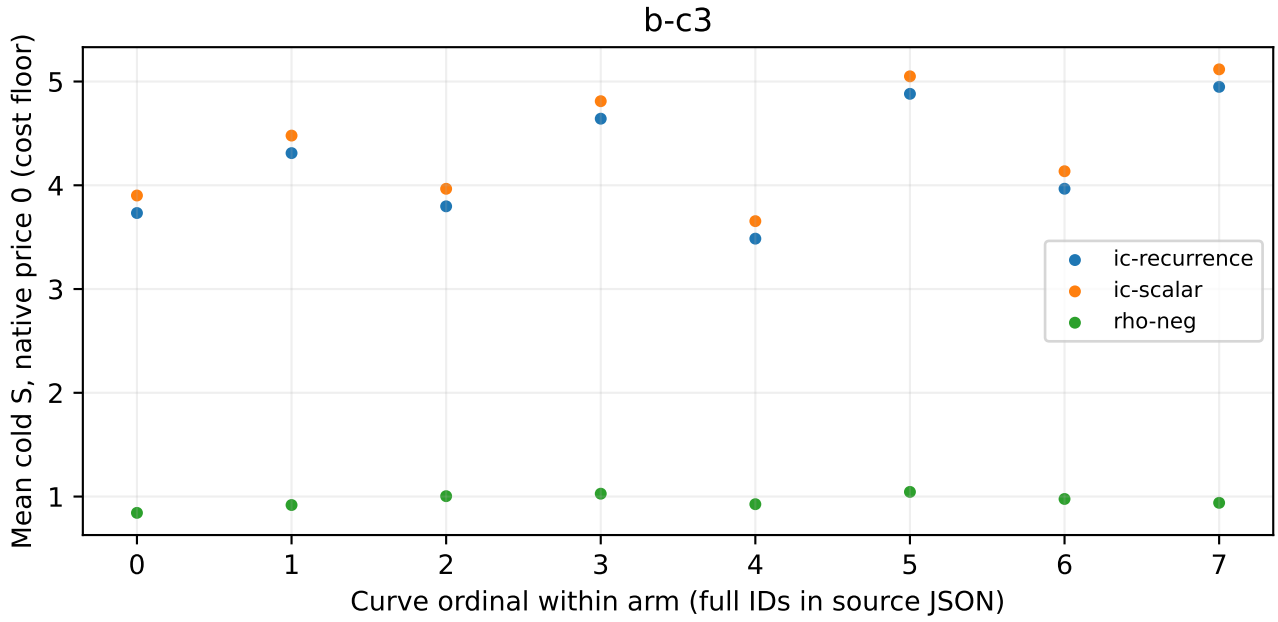


Figure 1: Native recorded means; no timing or speed ranking.

Raw records: `research/conductor_gap_replication_20261025/sessions/b-c3/records.jsonl`; spec and seeds: that session's `spec.json`. Host: `host.json`; exact replay: `research/conductor_gap_replication_20261025/sessions/b-c3.au` All per-curve 0/0.1/1 GAE bands, native counters, resource and failure totals: `analysis/diagnostics-B.json`. The plotted means are native ecbench summaries of verified records. Missing prices remain unknown. These observations alone admit no full-cost method ranking. Calibration sessions are excluded from primary inference.