Recorded run: pilot-b-c2

Session `ECBS1hc8a4f288bb5b`; spec `ECS1h356a6213e4f5`. Source commit `45def5ca7a5546113bc2fb47b44c43138323ac1d`. Public synthetic, independent one-target solves.

Requested 16; recorded 16. Statuses: `{'verified': 16}`. Required isolation L0; wall time is descriptive only.

Arm	Attempts	Verified	Charged GAE sum (lower bound)	Peak RSS KiB
ic-recurrence	4	4	375621.0	147040
ic-scalar	4	4	394341.0	147000
ic-velu	4	4	372417.0	147040
rho-neg	4	4	143513.0	128040

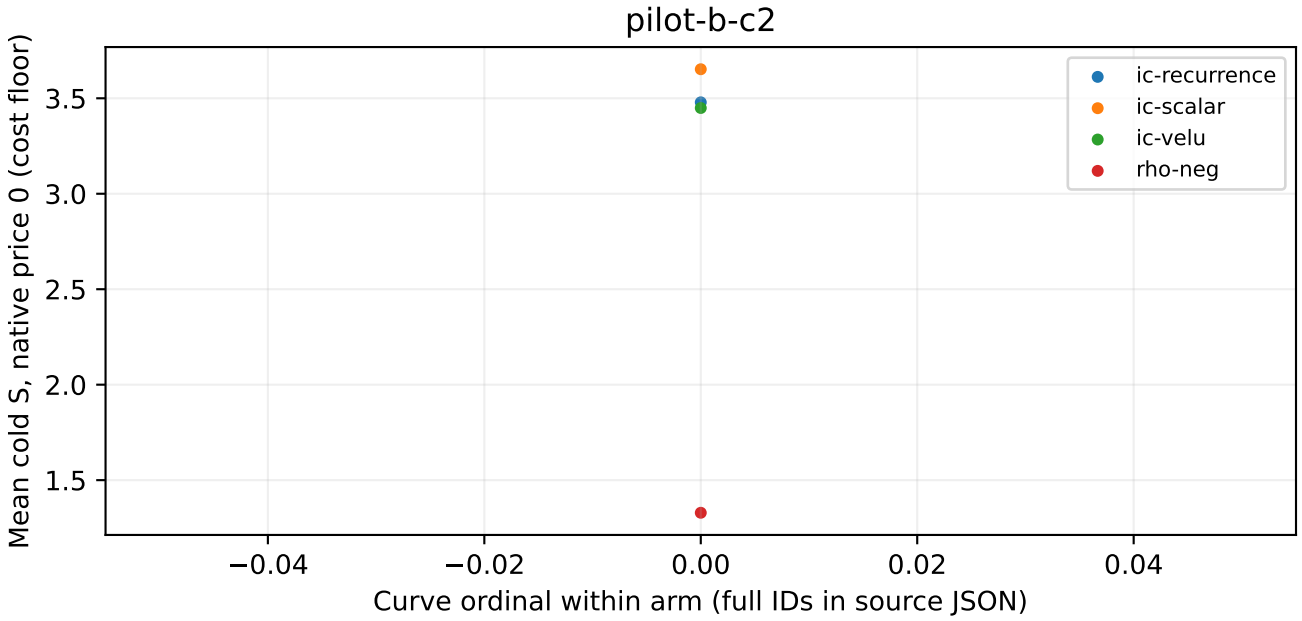


Figure 1: Native recorded means; no timing or speed ranking.

Raw records: `research/conductor_gap_replication_20261025/sessions/pilot-b-c2/records.jsonl`; spec and seeds: that session's `spec.json`. Host: `host.json`; exact replay: `research/conductor_gap_replication_20261025/sessions/pi`
All per-curve 0/0.1/1 GAE bands, native counters, resource and failure totals: `analysis/diagnostics-calibration.json`.
The plotted means are native ecbench summaries of verified records. Missing prices remain unknown. These observations alone admit no full-cost method ranking. Calibration sessions are excluded from primary inference.