# Recorded run: a-c4-level0

Session `ECBS1h7f01ccf1f565`; spec `ECS1h8adbbfe5323b`. Source commit `68e6c8b12d9185824bc071d7bc29ce2c2b5a2372`. Public synthetic, independent one-target solves.

Requested 768; recorded 768. Statuses: `{'verified': 768}`. Required isolation L0; wall time is descriptive only.

| Arm | Attempts | Verified | Charged GAE sum (lower bound) | Peak RSS KiB |
|---|---|---|---|---|
| rho-neg | 768 | 768 | 5799448.0 | 128068 |

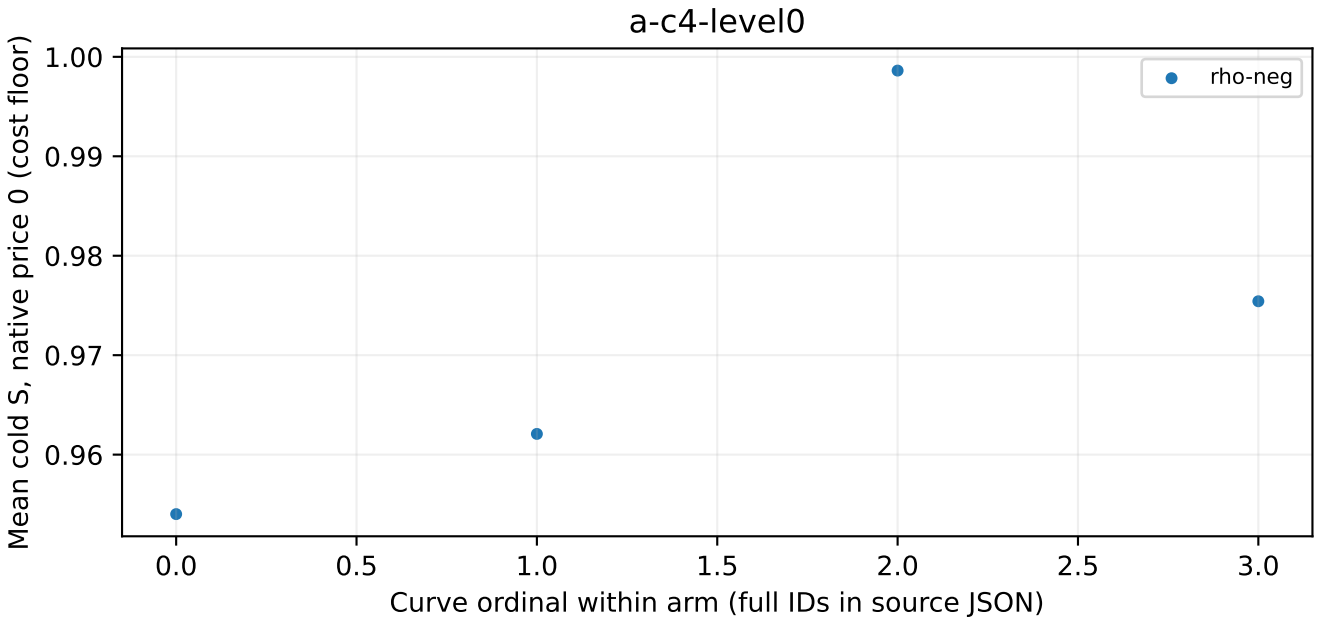



Figure 1: Native recorded means; no timing or speed ranking.

Raw records: `research/conductor_gap_replication_20261025/sessions/a-c4-level0/records.jsonl`; spec and seeds: that session's `spec.json`. Host: `host.json`; exact replay: `research/conductor_gap_replication_20261025/sessions/a-` All per-curve 0/0.1/1 GAE bands, native counters, resource and failure totals: `analysis/diagnostics-A.json`. The plotted means are native ecbench summaries of verified records. Missing prices remain unknown. These observations alone admit no full-cost method ranking. Calibration sessions are excluded from primary inference.