Dispatch acceptance: independent source-fidelity review

The two acceptance declarations correctly compose the retained modeled dispatch and stored-validity results at their stated representation boundary. Every modeled Runs output is accepted without assuming output validity; the existence theorem produces the classifier-selected execution. No blocking source finding was identified in this composition. This review read existing source and machine records; it did not run a compiler.

The derivation is explicit: total_preserving_execution supplies a wellformed output, runs_tag and runs_unique transfer that property to any execution of the same modeled branch, and test_accepts_wellformed establishes validator success. The native snapshot checks left identity before right identity, then degree-two and norm/slope guards before the fallback. The classifier represents branch outcomes; it does not reproduce the exact operation schedule or costs.

Assumptions remain prime2<p<2^31, canonical quintic coefficients, and both inputs WellFormed. WellFormed means degree at most2, array capacities3/2, canonical slots including inactive padding, active leading coefficient1 and divisibility of f-v^2 by u. Native valid reads degree, active leading coefficient and active residual remainder. These claims use the n=1/no-table value model; the table and extension-field arithmetic paths are outside this correspondence.

The controls expose both boundaries. An invalid operand returned by the left-identity branch fails the validator. Noncanonical inactive padding can pass the validator while failing WellFormed, so acceptance alone cannot recover canonical storage. Explicit prime17 degree, norm-zero and slope-zero fallback witnesses supply actual modeled Runs. Some fixtures use singular quintics; the representation theorem does not assume smoothness. Global divisor-class or scalar equivalence is a separate layer.

Independent parsing of retained raw readbacks matched all7 acceptance names and all23 affine-dispatch names. Each lists only propext, Classical.choice and Quot.sound. Successful receipts retain unchanged-binding reports. The acceptance False control exits1 with a mathematical rejection. The earlier failed AffineControls attempt remains recorded, followed by a successful corrected control attempt. The existing three malformed-inventory controls are recorded as rejected; their checker source was inspected without executing it.

This is a fresh source-fidelity review and readback of historical machine evidence. Historical caches were reused; no independent cache rebuild or binary kernel recheck was performed here. No additional reviewer-owned runtime tests were run. Accordingly this packet does not promote an official machine-validation status. Source bindings, exact names, recorded failures and limitations are available in JSON; no timing or cost measurement is inferred.

Dispatch acceptance: reviewed proof composition

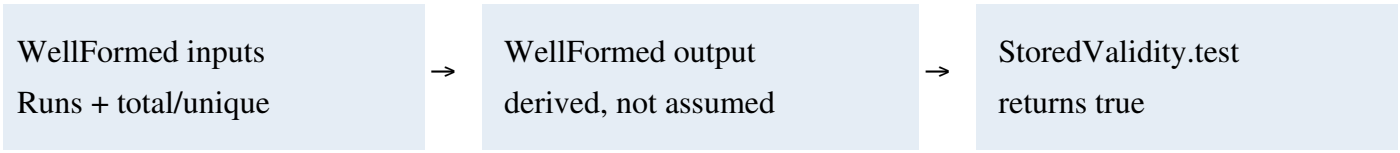

Counter-boundary: accepted inactive padding need not be canonical

Recorded readbacks:7 acceptance +23 dispatch; no new compiler run

Source-fidelity review and historical receipt readback.