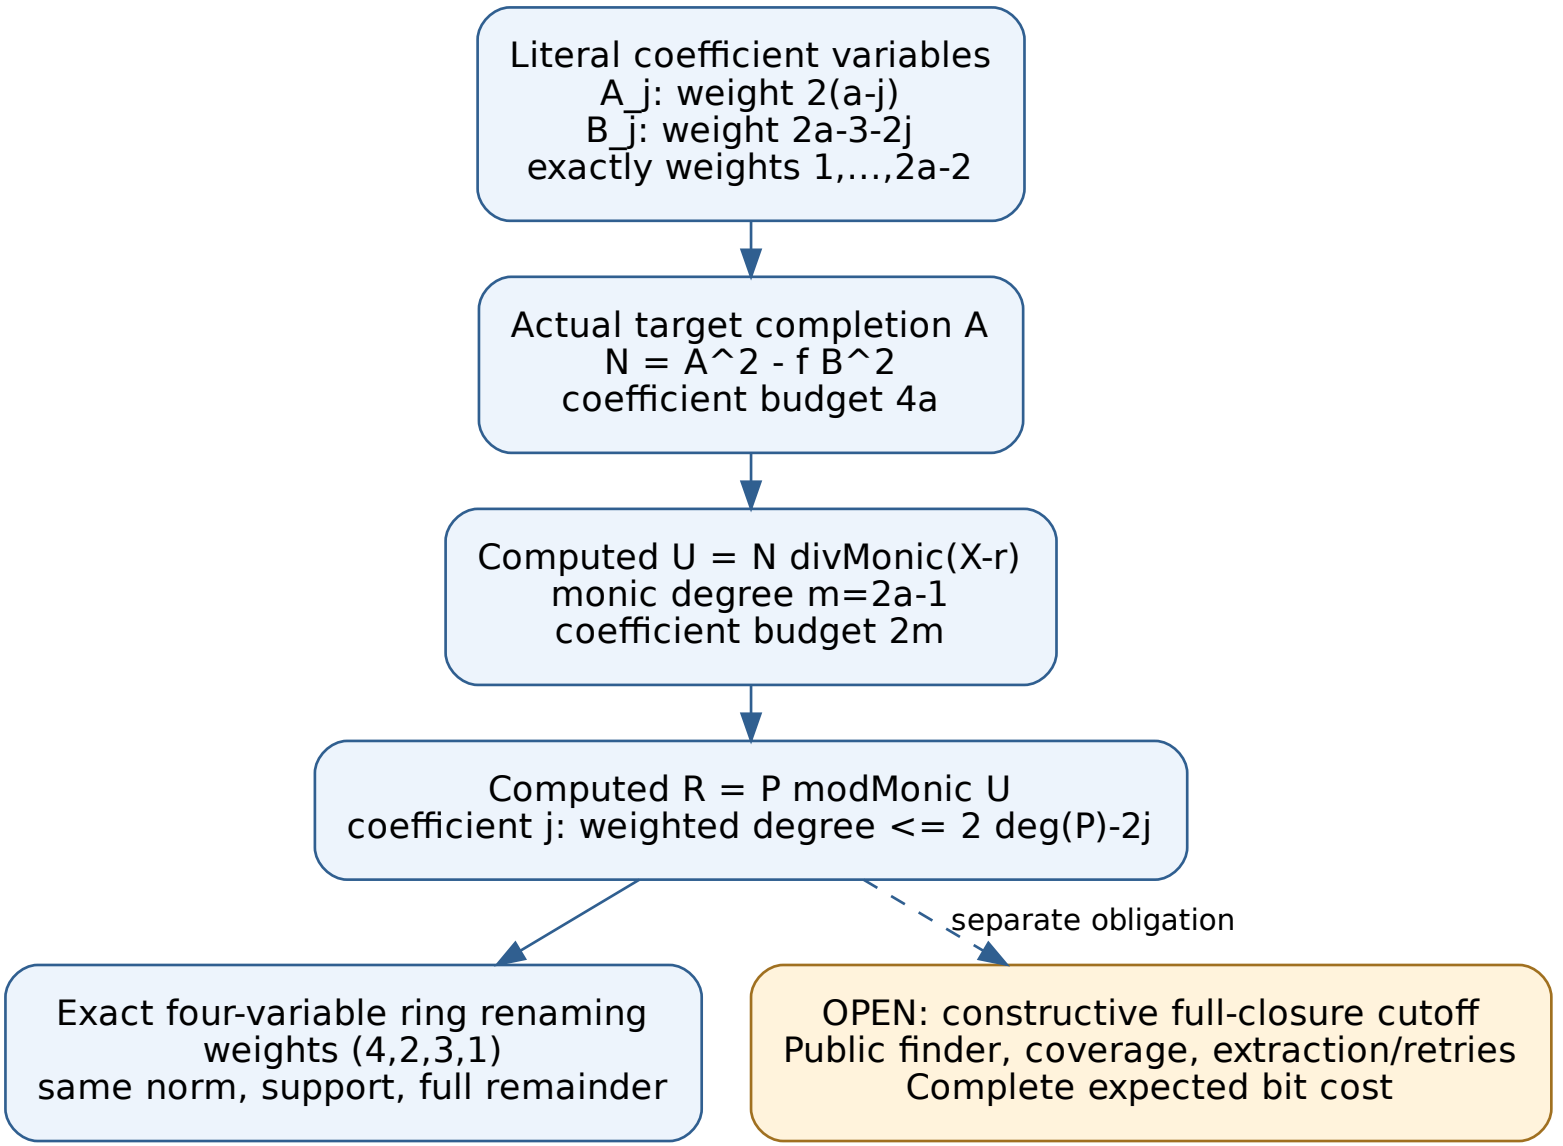
Literal coefficient variables
A_j: weight 2(a-j)
B_j: weight 2a-3-2j
exactly weights 1,...,2a-2
Actual target completion A
N = A^2 - f B^2
coefficient budget 4a
Computed U = N divMonic(X-r)
monic degree m=2a-1
coefficient budget 2m
Computed R = P modMonic U
coefficient j: weighted degree <= 2 deg(P)-2j
separate obligation
Exact four-variable ring renaming
weights (4,2,3,1)
same norm, support, full remainder
OPEN: constructive full-closure cutoff
Public finder, coverage, extraction/retries
Complete expected bit cost