ic_autolab round 17 (generic track): report

Protocol: PROTOCOL.md, frozen 2026-11-04T06:45:30Z at git `fbc220886744f4ba731cf19a2efcdc14c735b367`; route `local`. Counted GAE only (deterministic, host independent); no wall-time claim; development loop, no validation-gate row. Loop home: `../`; ledger: `../ledger.json`.

Claim record: `PCC-20261104-2b80d2` (`python3 tools/pcc/pcc.py standing PCC-20261104-2b80d2`). Until a signed replay and recompute exist, this round's outcome is an unverified assertion [pcc:unverified].

Outcome

k	class	sel	sel / inc at w = 0 [95%]	w = 0.1	w = 1	band	S sel (w = 0 / 0.1 / 1)	S inc	S rho-neg	distance sel / rho
24	**improvement**	wsum-b4-n4	0.620 [0.591, 0.649]	0.610 [0.579, 0.643]	0.559 [0.514, 0.608]	sel < inc	4.201 / 4.433 / 6.528	6.780 / 7.269 / 11.669	1.235 / 1.346 / 2.352	3.4x / 3.3x / 2.8x

Classes follow the protocol's decision rule. Distance to rho is the distance remaining, not a gate. The reasons per size:


- k = 24: compare ops.status = ok, admissible = true; sel / inc = 0.6196 [0.591, 0.649] at w = 0; band: sel < inc; A/A inc-aa / inc interval [1.000, 1.000] contains 1

Train (development screen, in sample)

k = 24: session `ECBS1h048c06f202a2` (run exit 0, verify exit 0, receipt sha256 `891c2f997afef3bad5677cdbc95ad0fc31c4f543f1af7d9b9ddac66f88541db1`)

arm	family	N factor base	oracle	runs	verified	S (w = 0 / 0.1 / 1)	reason proposed
`rho-neg`	rho	- -	`rho.negation`	32	32	1.206 / 1.315 / 2.295	matched reference
`inc`	ksum4	12 `prime-projected-abscissa:size=12,scan_cap=192`	`ksum:m=4`	32	32	6.789 / 7.281 / 11.714	incumbent
`wsum-b5-n4`	wsum-b5	4 `prime-projected-abscissa:size=4,scan_cap=64`	`wsum:coef=5,free=1`	32	32	6.288 / 6.386 / 7.261	cross-size transfer: wsum-b5-n3 is the k = 20 incumbent at N / N_a = 0.094
`wsum-b4-n4`	wsum-b4	4 `prime-projected-abscissa:size=4,scan_cap=64`	`wsum:coef=4,free=1`	32	32	4.048 / 4.251 / 6.080	exploration: family wsum-b4 untried at k = 24, N = 0.0001 x N_a
`wsum-b12-n3`	wsum-b12	3 `prime-projected-abscissa:size=3,scan_cap=48`	`wsum:coef=12,free=1`	32	32	6.557 / 6.641 / 7.400	exploration: family wsum-b12 untried at k = 24, N = 0.0001 x N_a

arm	family	N factor base	oracle	runs	verified	S (w = 0 / 0.1 / 1)	reason proposed
wsum-b20-n3	wsum-b20	3 prime-projected-abscissa:size=3,scan_cap=48	wsum:coef=20,free=1	32	32	29.356 / 29.855 / 34.352	exploration: family wsum-b20 untried at k = 24, N = 0.0001 x N_a
wsum-b5-n3	wsum-b5	3 prime-projected-abscissa:size=3,scan_cap=48	wsum:coef=5,free=1	32	32	6.777 / 7.809 / 17.096	exploration: family wsum-b5 untried at k = 24, N = 0.0001 x N_a

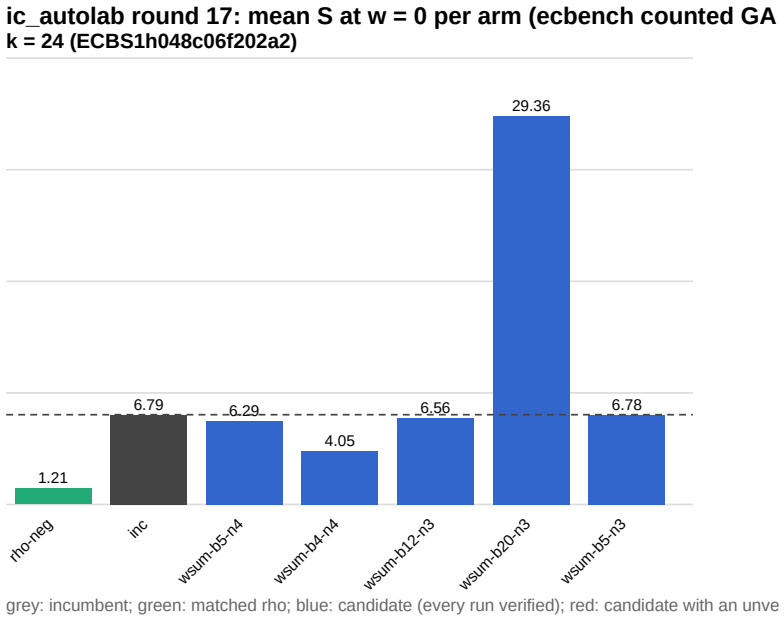

train screen

Selection

- k = 24: challenger `wsum-b4-n4` (Pareto alternative at w = 1: `wsum-b4-n4`)


Holdout sessions

k	session	run exit	verify exit	receipt sha256	levels
24	ECBS1h509cf46feb02	0	0	6a286b7a31f12413ecae0caa8c0d407a89e4a0e2c93ef6330334c26a886e686c	{“verified”:480}

Ledger after this round

k	incumbent	since round	S (w = 0 / 0.1 / 1)	distance to rho
20	wsum-b5-n3 (prime-projected-abscissa:size=3,scan_cap=48 + wsum:coef=5,free=1)	16	5.384 / 5.609 / 7.638	3.6x / 3.5x / 3.0x
24	wsum-b4-n4 (prime-projected-abscissa:size=4,scan_cap=64 + wsum:coef=4,free=1)	17	4.201 / 4.433 / 6.528	3.4x / 3.3x / 2.8x

k	incumbent	since round	S (w = 0 / 0.1 / 1)	distance to rho
28	`ksum4-n18` (`prime-projected-abscissa:size=18,scan_cap=288` + `ksum:m=4`)	8	7.445 / 7.910 / 12.100	7.8x / 7.6x / 6.5x
32	`ksum4-n26` (`prime-projected-abscissa:size=26,scan_cap=416` + `ksum:m=4`)	5	8.296 / 8.811 / 13.446	9.1x / 8.8x / 7.4x

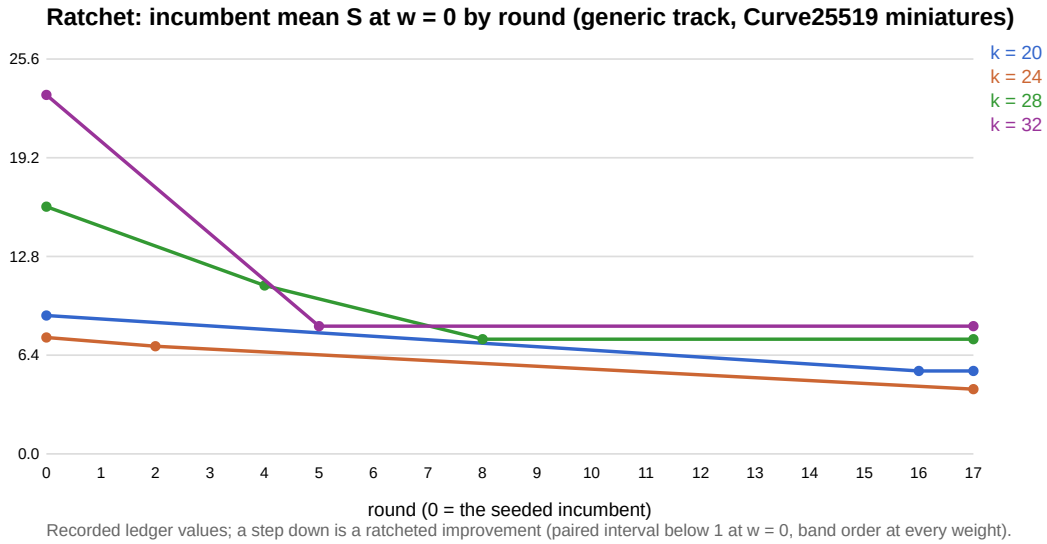

ratchet

Evidence and deviations

- ecbench binary sha256: `e7242bc192bda8c8da9e64895afe943e8aa47cfa37bd490d656e2181758e9533`; `--cpus auto`, allow_busy = true; `verify --replay 8` per session; audit receipts in `analysis/`; sessions in `sessions/` (records in the artifact store when large).
- Route: the local route is an explicitly requested development screen, not the Iso Lab EKS default; counts are deterministic and replayed, wall time is not claimed. No row of this round enters the IC leaderboard or `benchmarks/README.md` (validation gate).
- Train selection is in sample (disclosed); the holdout is fresh (new `target_seed`, excluded exposures). Failed, timed-out and regressing arms are retained above.