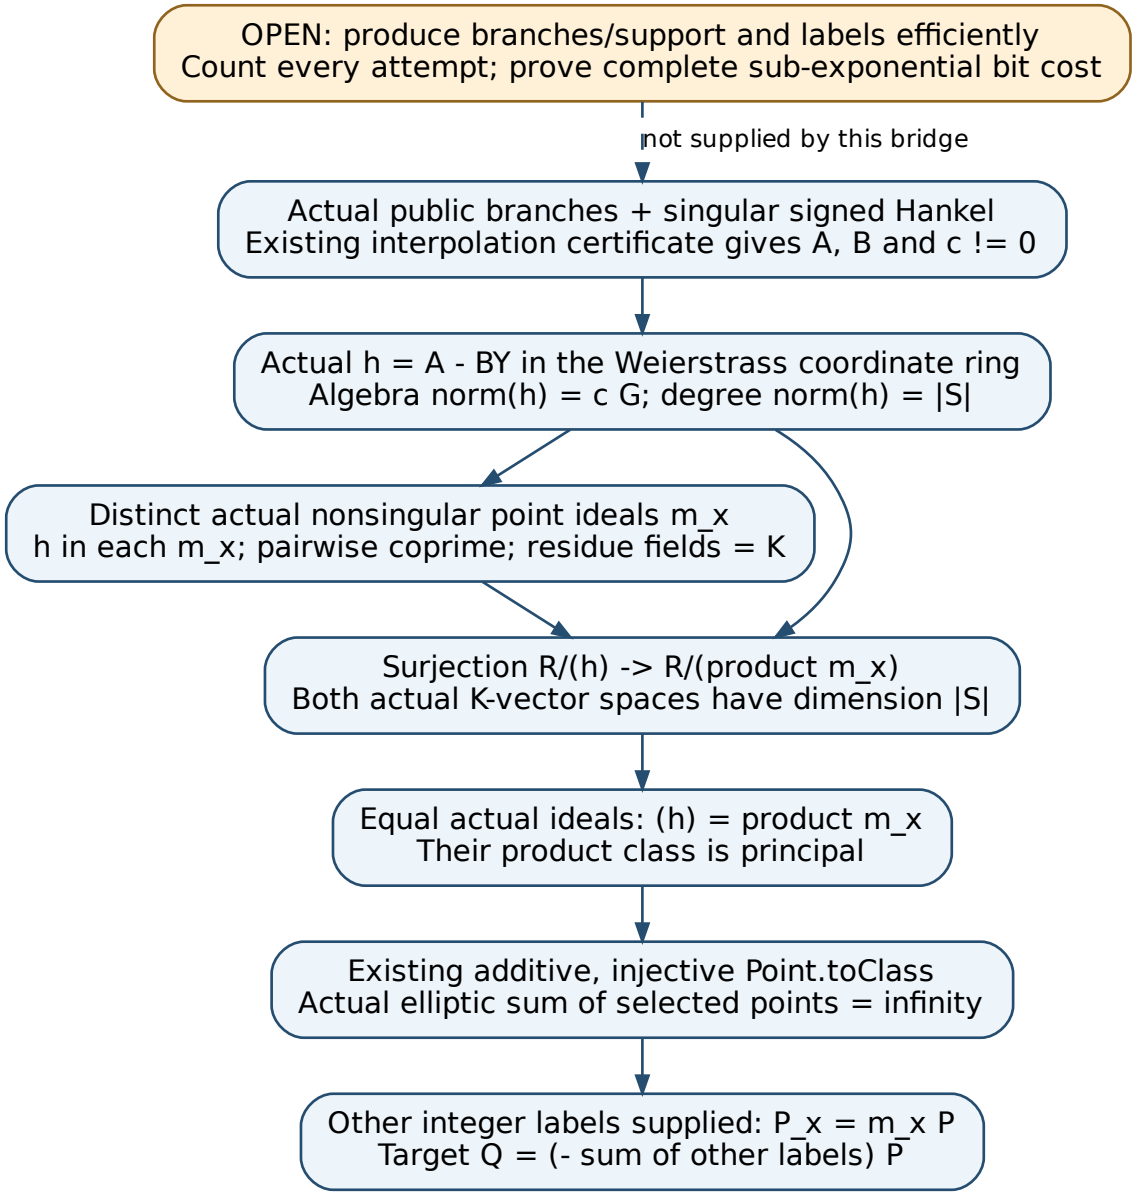
OPEN: produce branches/support and labels efficiently
Count every attempt; prove complete sub-exponential bit cost
not supplied by this bridge
Actual public branches + singular signed Hankel
Existing interpolation certificate gives A, B and c != 0
Actual h = A - BY in the Weierstrass coordinate ring
Algebra norm(h) = c G; degree norm(h) = |S|
Distinct actual nonsingular point ideals m_x
h in each m_x; pairwise coprime; residue fields = K
Surjection R/(h) -> R/(product m_x)
Both actual K-vector spaces have dimension |S|
Equal actual ideals: (h) = product m_x
Their product class is principal
Existing additive, injective Point.toClass
Actual elliptic sum of selected points = infinity
Other integer labels supplied: P_x = m_x P
Target Q = (- sum of other labels) P