Exact native calibration against Lean controls

Both frozen v2 cells complete and match their pre-data Lean counts. Rust and a separately implemented C++ checker agree on every actual polynomial pair, Cantor addition, complete group table and distinct cyclic subgroup. This is same-host, different-language checking. Scientific PCC standing remains unsigned/unverified. [pcc:unverified]

Recorded value	F3 positive	F5 all-smooth control
Complete reduced pairs	8	16
Split-u pairs	7	16
Ordered Cantor additions checked	64	256
Associativity triples checked	512	4096
Distinct cyclic subgroups checked	8	16
Proper nontrivial unequal subgroups	7	0

The fixed equation is $y^2 = x^5 - x$ in both fields. Identity is included. The complete count and splitting controls are Lean-backed; full geometric Picard identification is separate. No typical-subgroup, asymptotic, independent-machine or security conclusion follows. [pcc:unverified]

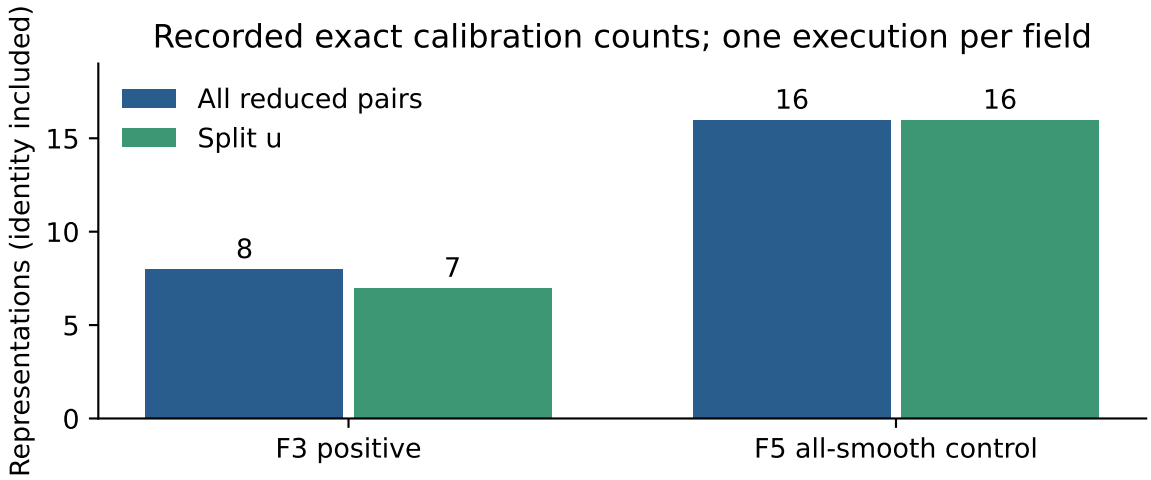

Figure 1: Recorded counts from export-v2.json, one execution per field. These are complete exact populations, so no sampling interval is claimed.

The raw records, C++ summaries, exact TSV, native analysis, launch logs, host facts and file hashes are in `../../evidence/calibration/`. Canonical v2 check-export with file verification passes with zero findings. No separate-runner review has been filed. [pcc:unverified]

Protocol, flow and failures

Native source `11100a8512bac3840bf1f85b1e7f0f523cd78464` was committed before affected calls. Rust binary SHA begins `851c5594fc67`; the C++ binary SHA begins `8030184af28b`. Exact source, compiler, dependency and binary pins are in `../../native-census-v1/sources.json`. Each cell runs Rust census, C++ verification, then source-frozen Rust analysis; JSON must regenerate the checked TSV byte-for-byte. [pcc:unverified]

The first frozen protocol (v1, `f2572b4d`) failed in the launcher because `/usr/bin/time` was absent: exit 127, zero native curve calls. Its second cell was not attempted under the frozen failure rule. Empty stdout, error, exit status and the failed version remain retained. This was an infrastructure failure, not a mathematical negative. [pcc:unverified]

Version 2 replaces only that timing dependency with Bash builtin `time -p` and fresh output directories. It was frozen at 22:17:41Z, hash `400a9c96380841436a15a857ead2893f8c66c79c8d99422a6792bf9b8419369c`, committed locally as `7c1dac39` and published as `9ee9f91b` before calls. Arithmetic, fixtures, seeds, thresholds, stopping rules and 120-second per-cell caps were unchanged. [pcc:unverified]

Flow	v1 failed launcher	v2 calibration
Planned cells	2	2
Launcher attempts	1	2
Native curve calls	0	2
Completed cells	0	2
Unattempted cells	1	0

The v1 export records attempts=0 for its cancelled cell. The canonical schema requires attempts>=1 even for that case, so the retained v1 export fails that single schema constraint. The accurate custom launcher-failure receipt is retained; no attempt is invented to make validation pass. The v2 export passes all schema/protocol/file checks. [pcc:unverified]

Metadata-only seeds are 202611090301 (F3) and 202611090501 (F5), replicate zero. Both used one thread on host `762f5fc120c9`, local capacity with zero paid compute, isolation L0. Diagnostic elapsed times were 0.07 and 0.08 seconds respectively; both clocks are invalid as scientific timing. No inference or performance comparison uses them. [pcc:unverified]

The next separately frozen protocol exhausts all monic quintics in the two fields with two deterministic repeats. This calibration does not replace that population census or the original fourteen-item audit. [pcc:unverified]