Independent PARI geometry and bounded rational-twist searches

Run `pari-20261021T2349Z`; source freeze `5d6cd4dc595020077d189e999fcbbb6ca64e6ded`. Host `a81fcf6dc864`, Debian 13 x86_64, managed four-CPU virtual host, L0. Workloads use public synthetic fixtures or public-parameter checks. No wall-clock or full-cost improvement is admitted.

Raw outputs: run directory. Commands, binary/input hashes, seeds, resource limits and statuses are in execution receipts and the versioned protocols in the study root. No independent-host replay is claimed.

Recorded observations

Metric	Count / recorded value
independent cover characteristic polynomials	10
rank intervals unresolved	1
relations outside same base Fp census	0
same E reductions checked	12
searches with rational points	25
searches with three term relations	5
twist searches	254

Vector figures and editable data accompany this report on the following pages.

PARI 2.17.2 independently computes all ten selected-cover characteristic polynomials. The 254 rational searches use d=-64..64 (excluding zero and bad reduction), rank effort zero, and standard-twist x height 16. Rust checks square-d finite-field reductions and every projected three-term relation against the identical-base ordinary census. Rank bounds are not a formal Mordell-Weil proof; standard-model height is not equal original-model height. General rational target lifting and all discovery/height costs remain open.

The chart has no statistical interval: census counts are exact on the stated finite sets; solver completion counts describe these bounded processes only. Missing or failed computations stay unresolved. Full original acceptance criteria and proof/measurement gaps remain in the requirement matrix.

Independent PARI geometry and bounded rational-twist searches
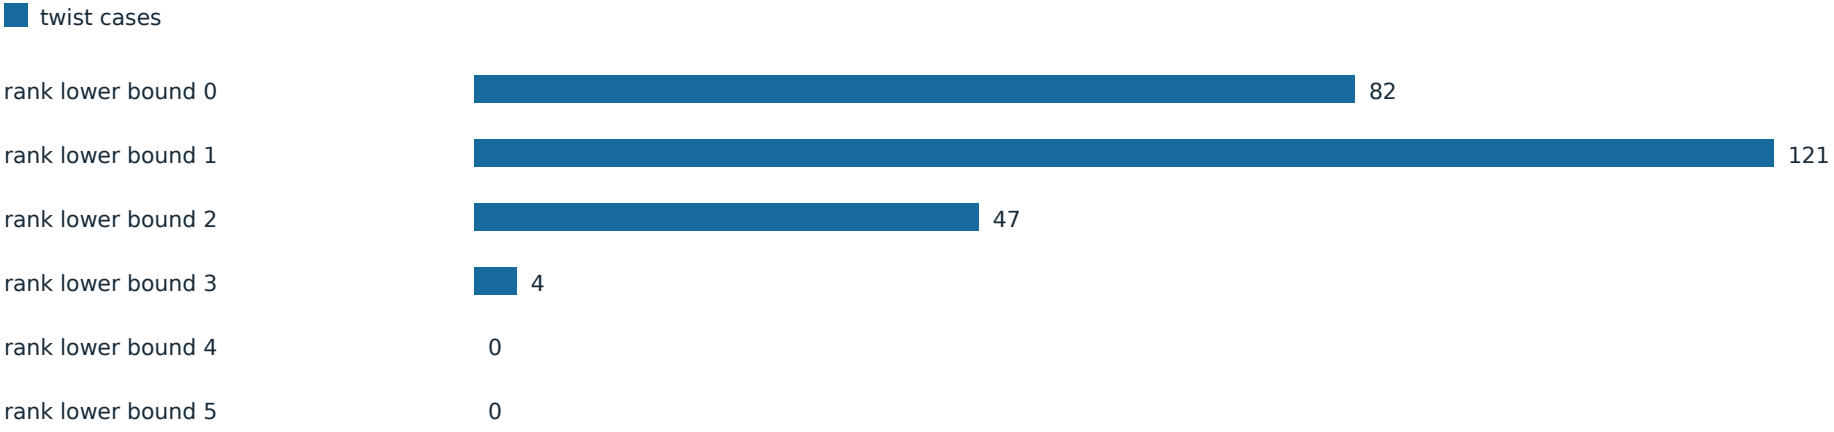
Recorded counts; exact censuses or bounded run outcomes. No wall-time comparison.