Executable genus-two pullback and norm checks

Run `transfer-20261021T2300Z`; source freeze `b8acaa16012e3b5009d22d46d3fe50fc87a59989`. Host `a81fcf6dc864`, Debian 13 x86_64, managed four-CPU virtual host, L0. Workloads use public synthetic fixtures or public-parameter checks. No wall-clock or full-cost improvement is admitted.

Raw outputs: run directory. Commands, binary/input hashes, seeds, resource limits and statuses are in execution receipts and the versioned protocols in the study root. No independent-host replay is claimed.

Recorded observations

Metric	Count / recorded value
arbitrary reduced classes checked	5855
exhaustive rational class fixtures	1
norm additivity and associativity samples	1280
transfer fixtures	10

Vector figures and editable data accompany this report on the following pages.

The p=59 product covers all 3,551 rational Jacobian classes; the other nine fixtures use 256 fixed sampled classes each. Every source and complement rational-point pullback is checked. The recorded odd branch chart handles the two-infinity model; both norm/pullback compositions are [2]. This is same-host executable evidence. PARI independently checks characteristic polynomials in its separate run, not arbitrary-divisor norm code. Faithful formal field/chart/Jacobian bridges remain open.

The chart has no statistical interval: census counts are exact on the stated finite sets; solver completion counts describe these bounded processes only. Missing or failed computations stay unresolved. Full original acceptance criteria and proof/measurement gaps remain in the requirement matrix.

Executable genus-two pullback and norm checks
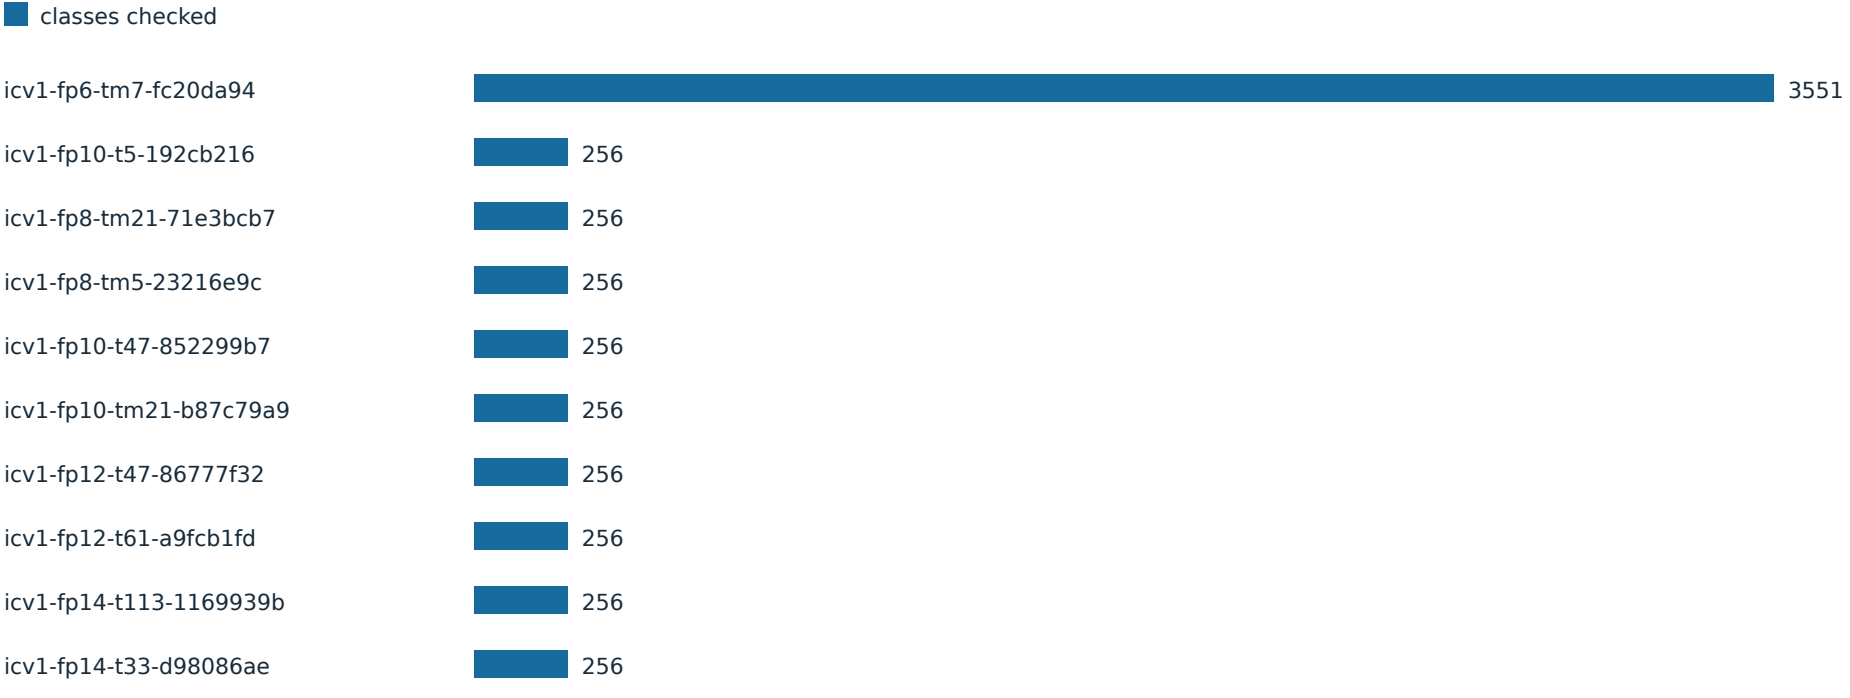
Recorded counts; exact censuses or bounded run outcomes. No wall-time comparison.