ic_autolab round 6 (generic track): report

Protocol: PROTOCOL.md, frozen 2026-11-04T04:21:45Z at git `3164ea861251556ac54c3f26da7defdd4a9d7db9`; route `local`. Counted GAE only (deterministic, host independent); no wall-time claim; development loop, no validation-gate row. Loop home: `../`; ledger: `../ledger.json`.

Claim record: `PCC-20261104-249a57` (`python3 tools/pcc/pcc.py standing PCC-20261104-249a57`). Until a signed replay and recompute exist, this round's outcome is an unverified assertion [pcc:unverified].

Outcome

k class	sel	sel / inc at w = 0 [95%]	w = 0.1	w = 1	band	S sel (w = 0 / 0.1 / 1)	S inc	S rho-neg	distance sel / rho
28 **null**	ksum4-n15	0.616 [0.593, 0.641]	0.675 [0.648, 0.703]	1.092 [1.039, 1.149]	unresolved inside the band	6.731 / 7.559 / 15.017	10.919 / 11.202 / 13.746	1.042 / 1.139 / 2.019	6.5x / 6.6x / 7.4x

Classes follow the protocol's decision rule. Distance to rho is the distance remaining, not a gate. The reasons per size:


- k = 28: compare ops.status = ok, admissible = true; sel / inc = 0.6164 [0.593, 0.641] at w = 0; band: unresolved inside the band; A/A inc-aa / inc interval [1.000, 1.000] contains 1

Train (development screen, in sample)

k = 28: session `ECBS1h239400575521` (run exit 0, verify exit 0, receipt sha256 `2cbf174ad639bad48305c339850443067356dc2e7c87e69284fa875340cf69cd`)

arm	family	N	factor base	oracle	runs	verified	S (w = 0 / 0.1 / 1)	reason proposed
`rho-neg`	rho	-	-	`rho.negation`	16	16	0.983 / 1.075 / 1.901	matched reference
`inc`	ksum4	21	`prime-projected-abscissa:size=21,scan_cap=336`	`ksum:m=4`	16	16	10.869 / 11.141 / 13.595	incumbent
`ksum4-n29`	ksum4	29	`prime-projected-abscissa:size=29,scan_cap=464`	`ksum:m=4`	16	16	36.337 / 36.473 / 37.698	incumbent neighbourhood: N = 1.4 x 21
`ksum4-n15`	ksum4	15	`prime-projected-abscissa:size=15,scan_cap=240`	`ksum:m=4`	16	16	6.665 / 7.484 / 14.852	incumbent neighbourhood: N = 0.7 x 21
`ksum4-n11`	ksum4	11	`prime-projected-abscissa:size=11,scan_cap=176`	`ksum:m=4`	16	16	15.548 / 18.450 / 44.571	incumbent neighbourhood: N = 0.5 x 21
`ksum3-n70`	ksum3	70	`prime-projected-abscissa:size=70,scan_cap=1120`	`ksum:m=3`	16	16	40.181 / 40.460 / 42.964	cross-size transfer: ksum3-n11 is the k = 20 incumbent at N / N_a = 0.344
`ksum3-n98`	ksum3	98	`prime-projected-abscissa:size=98,scan_cap=1568`	`ksum:m=3`	16	16	107.932 / 108.211 / 110.729	cross-size transfer neighbourhood: N = 1.4 x 70 (ksum3 from k = 20)

arm	family	N	factor base	oracle	runs	verified	S (w = 0 / 0.1 / 1)	reason proposed
ksum3-n49	ksum3	49	prime-projected-abscissa:size=49,scan_cap=784	ksum:m=3	16	16	15.478 / 15.891 / 19.607	cross-size transfer neighbourhood: N = 0.7 x 70 (ksum3 from k = 20)
ksum3-n35	ksum3	35	prime-projected-abscissa:size=35,scan_cap=560	ksum:m=3	16	16	8.906 / 9.670 / 16.553	cross-size transfer neighbourhood: N = 0.5 x 70 (ksum3 from k = 20)
mitmbatch-n203	mitmbatch	203	prime-projected-abscissa:size=203,scan_cap=3248	mitm-prime-batch:m=2	16	16	15.813 / 17.272 / 30.399	exploration: family mitmbatch untried at k = 28, N = 1 x N_a
mitmblocked-n203	mitmblocked	203	prime-projected-abscissa:size=203,scan_cap=3248	mitm-prime-blocked:m=2	16	16	15.813 / 17.272 / 30.399	exploration: family mitmblocked untried at k = 28, N = 1 x N_a

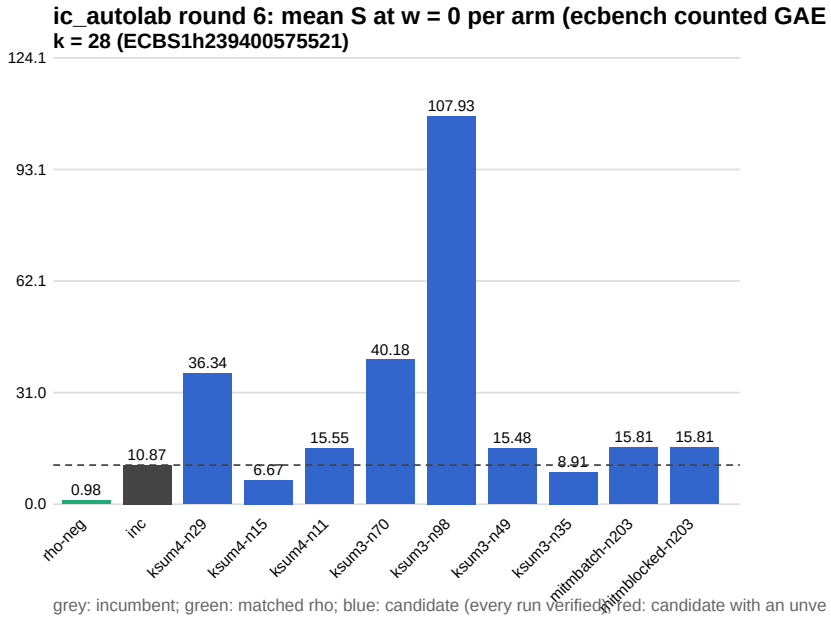

train screen

Selection


- k = 28: challenger `ksum4-n15` (Pareto alternative at w = 1: `ksum4-n15`)

Holdout sessions

k	session	run exit	verify exit	receipt sha256	levels
28	ECBS1h584855d3a3bb	0	0	d191bbb32a352406c1328260b9c0e8d98f18af16814df170d3906db136aa22f9	{“verified”:480}

Ledger after this round

k	incumbent	since round	S (w = 0 / 0.1 / 1)	distance to rho
20	`ksum3-n11` (`prime-projected-abscissa:size=11,scan_cap=176` + `ksum:m=3`)	0	8.987 / 9.710 / 16.217	5.7x / 5.7x / 6.0x
24	`ksum4-n12` (`prime-projected-abscissa:size=12,scan_cap=192` + `ksum:m=4`)	2	6.985 / 7.514 / 12.271	6.0x / 5.9x / 5.6x
28	`ksum4-n21` (`prime-projected-abscissa:size=21,scan_cap=336` + `ksum:m=4`)	4	10.939 / 11.226 / 13.809	10.8x / 10.1x / 7.0x
32	`ksum4-n26` (`prime-projected-abscissa:size=26,scan_cap=416` + `ksum:m=4`)	5	8.296 / 8.811 / 13.446	9.1x / 8.8x / 7.4x

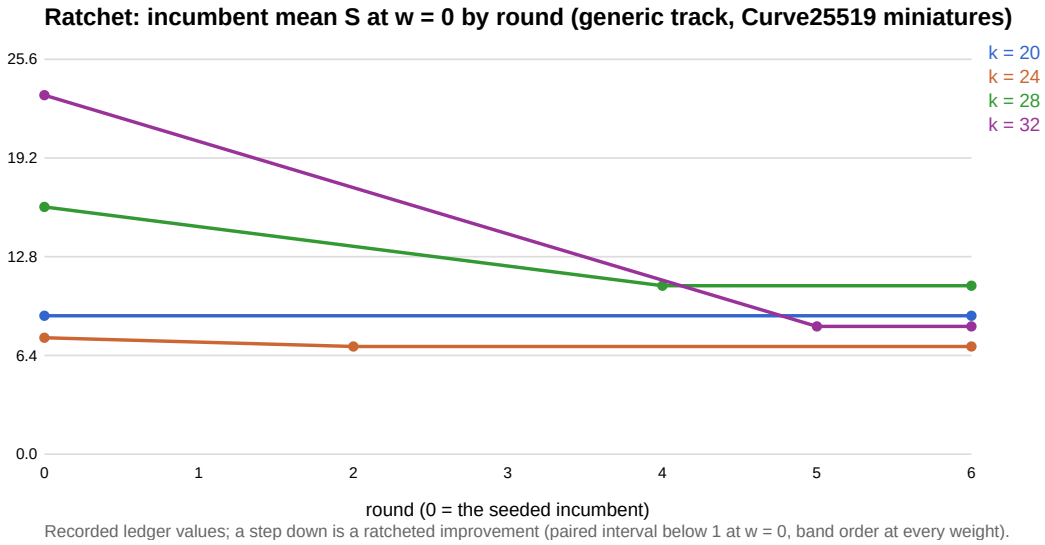

ratchet

Evidence and deviations

- ecbench binary sha256: `3fd22853485e388782ac0821295c56f81725fc832fd3610978be8088b5098bca`; `--cpus auto`, allow_busy = true; `verify --replay 8` per session; audit receipts in `analysis/`; sessions in `sessions/` (records in the artifact store when large).
- Route: the local route is an explicitly requested development screen, not the Iso Lab EKS default; counts are deterministic and replayed, wall time is not claimed. No row of this round enters the IC leaderboard or `benchmarks/README.md` (validation gate).
- Train selection is in sample (disclosed); the holdout is fresh (new `target_seed`, excluded exposures). Failed, timed-out and regressing arms are retained above.