N83 K4405 current-source resource control

Run: `evidence-01`, started approximately 2026-10-26 22:10:56 UTC.
Status: `BOUNDED_UNKNOWN_HOST_SWAP_ABORT`.
Candidate: `IC1N83Ckb1a1fb731230PDP4rootRCguidedLAgaussTDdirectISO0h76ff6ddee28c`.

The K4405 wide3 producer was run on earlier public N83 fixture zero on a local macOS host. The wrapper admitted the host at 53% system-wide free memory and sampled the child process and host during a 1,200-second outer cap. An operator sent SIGTERM to the worker process group after observing host swap pressure. The terminal receipt records exit code −15 and 873.169 seconds of wrapper wall time. This is a bounded resource control; the source, executable, point, flags, receipt, and samples are retained in `../../evidence-01/`.

Recorded resource trace

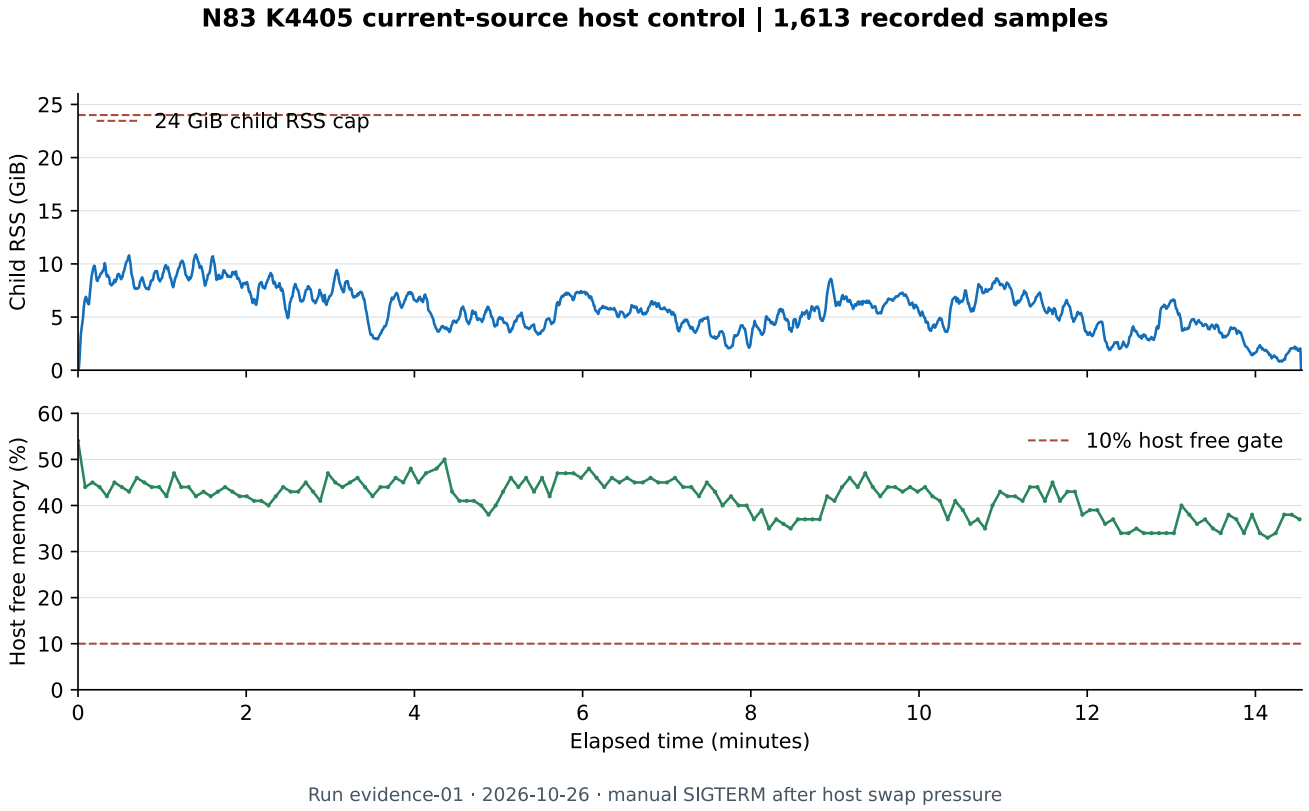


Figure 1: K4405 `evidence-01` resource samples (n = 1,613). Child RSS is recorded every sample; host free memory is recorded periodically. Dashed lines show the configured 24 GiB child RSS cap and 10% host-free stop gate. The manual stop was prompted by host swap pressure, which this original wrapper did not monitor.

The largest sampled child RSS was 11,680,759,808 bytes (10.88 GiB after byte-to-GiB conversion). Recorded host-free memory ranged from 33% to 54%. The final sample was at 872.624 seconds. The post-stop `vm.swapusage` line in `manual_abort.json` reads `used = 12092.38M`; the record does not attribute swapped pages to an individual process. The producer emitted no rank, base dump, relation matrix, or target receipt before termination.

Reproduction and evidence

- Frozen run configuration: `../../evidence-01/config.json`.
- Terminal receipt and operator stop: `../../evidence-01/receipt.json` and `../../evidence-01/manual_abort.json`.
- Resource samples: `../../evidence-01/samples.json`; its SHA-256 is bound by the receipt. `plot.py` verifies that digest before rendering `resource_trace.svg` and `resource_trace.png`.
- Exact executed wrapper: `../../evidence-01/runner_v1.py`; the historical file is preserved byte for byte. The source and binary digests are in the configuration.

The graph displays recorded values only. The run's local host did not have a Tier 0 or Tier 1 timing receipt. The separately sealed cross-family candidate comparison remains pending on eligible hosts.