
Finite pricing: current source reconciliation

2026-11-03 T-1503 / rendering T-1506

Observation. Ten of seventeen source bindings match the preserved historical review; seven differ. The historical review closes nine categories under its declared finite semantic model, binary and protocol. This packet records source identity and rebind obligations. It does not issue a new independent admission.

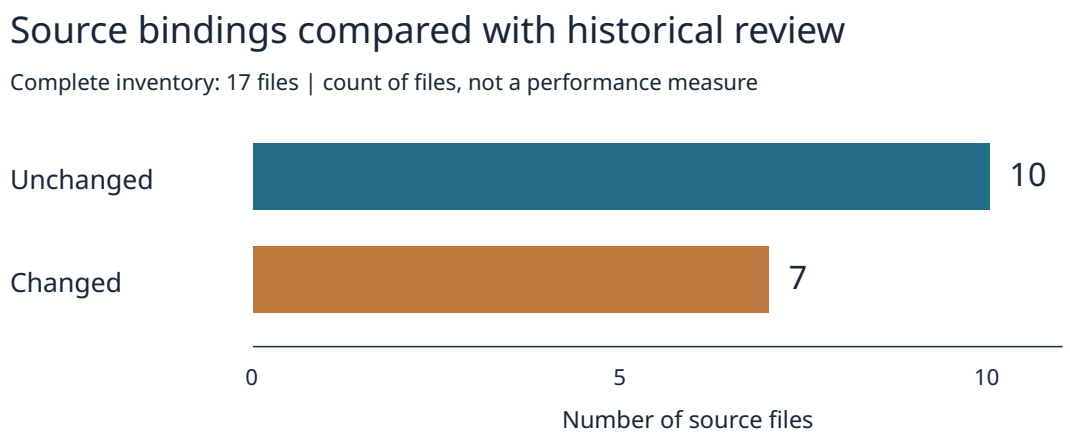

Evidence. Source inventory: `../reconciliation.json`; all 17 rows and exact old/current SHA256 values are in `source-comparison.csv`. Original packet commit: `e866228027`. Historical review: `finite_coverage_run_binding_20261030/coverage-review.json`. Original binary begins `a1c8ca89`; protocol body begins `cf8f76ea`. The graph is a complete fixed inventory; no sampling interval is applicable.

Inspected changes. Mapper/importer permit null session identities for unexecuted plans, while actual records still require a concrete session. The inspected mapper change does not alter arithmetic pricing. Rho event changes are test-only; the library exports a reporting module. Native solver and pencil adapters add trace/progress routes and move applicability checks. Actual selected routes and added dependencies require source-specific review.

Historical scope and precise next bindings

The nine historical categories are: field arithmetic; scalar arithmetic; outer and constructor validation; setup and transfer; collection, graph and elimination; hash and RNG; source verification; metadata clone; calibration. Each is marked covered in the preserved historical review. Ten unchanged hashes permit exact reuse where the later review justifies it; seven changed hashes are not a blanket rejection of the model.

Existing mapping. Atomic inverse normalization already removes expanded multiplications. Cold setup, geometry segments and calibration have explicit disjoint treatment. The finite grid contains 36 declared algorithm-price cells; none are evaluated here. Diagnostic aggregate counters are excluded to prevent double counting.

Candidate obligations. Bind the final finite-difference recurrence source, its initialization/update arithmetic and collection primitives, actual route, producer/reference binaries, mapper and prospective protocol. Check exact sieve output equality and phase/counter correspondence before review. Rebind all nine source categories, preserving prior coverage where source and semantics agree. Retain failed/capped/missing pairs as null outcomes and aggregate prescribed matched sums.

Separate resources. Allocation, JSON/serialization/digest work, observer traversal, process/harness costs, wall/CPU/RSS and infrastructure/retries retain their own units. They have no invented GAE coefficient. This finite model is not an all-instruction or total-dollar census.

Cohort decision. Preserve historical p739 records as old-arm evidence. Output equivalence does not convert old operation counts into optimized-candidate prices. The coordinator requires new candidate execution across all 1,260 original targets, under the remaining prospective execution gates.

Provenance and limitations. This is an additive source reconciliation by an agent with integration context, not a blind independent review. Historical records remain unchanged. No pricing calculation, test, scientific execution or runtime launch was performed. Sources inspected include the current native-price analyzer/importer/README, meter, scalar ledger, native solver, cost draft and retained historical finite source review. Exact source comparisons are retained in the JSON and CSV for independent inspection.