Run report: ecbench session `ECBS1hc5c21ea63db6` (e-m17b-ic), 2026-10-27T05:53Z

Part E, `m = 17`, IC on a second target (checkpointing binary). Spec `specs/SPEC-E-m17b-ic.json`. Binary sha256 `ad1dd91a…`, commit `1b15f8b35` (clean). Host: Xeon @ 2.10 GHz, 4 vCPU, one core per session (isolation level L1 or L0, recorded per run: wall time is descriptive only). The session completed: every planned run was recorded.

arm	workload	m	status	S	GAE	trials	relations	wall (h)
ic-wied	`W591d11cef5d4`	17	verified	0.8492	1.032e+10	6172522	32192	11.112

All values are recorded fields (`S` = `cost.s`, GAE = `cost.total_gae`, trials and relations from `counters`, wall = `time.solve_wall_ns` ÷ $3.6{\cdot}10^{12}$); no run here is a replay. Records: `sessions/e-m17b-ic/records.jsonl`. Audit receipts: `audits/`.

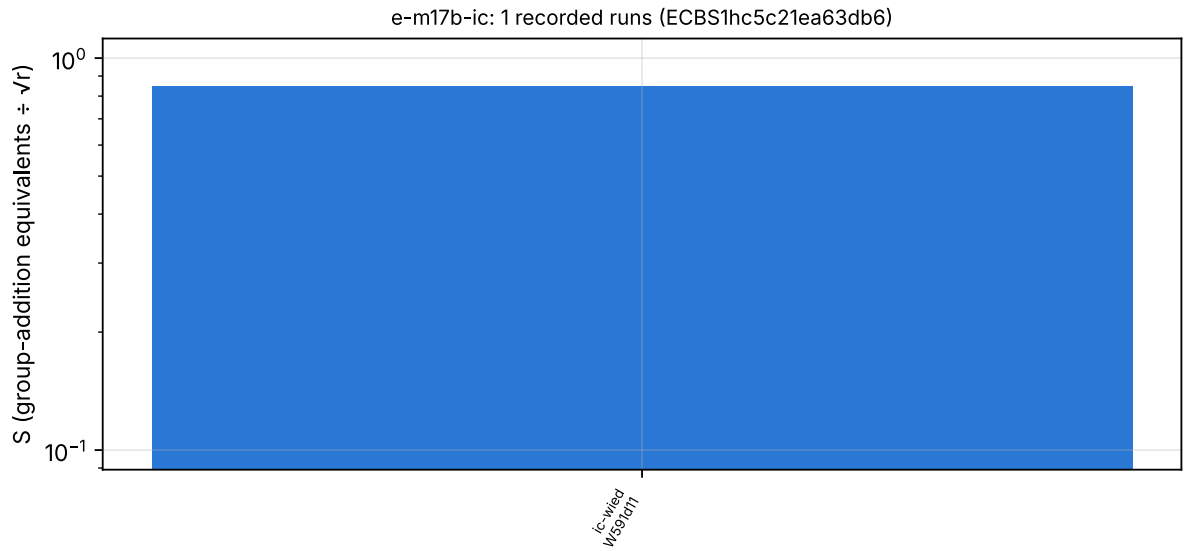

Figure 1: Recorded `S` per run, session `ECBS1hc5c21ea63db6`.