
XOR-cache v2 bounded work-counter run

Run ID: `xor-cache-v2-20261020T011634Z` · Complete bounded · 2026-10-20 02:00:10 UTC

Worker revision `1de47a9d4186bff08abc84c224a111183e820106`; driver revision `f1667c313910a1021daed455c9e48cd03524f42a`; policy `small-m4-xor-cache/v1`.

The existing authorized SSH card ran 16 fresh natural attempts across K2048/D12 and public targets 0/1. Each cell ran A1/B1/B2/A2. Every attempt reached 10,000 conflicts and ended `UNKNOWN_search_cap`; no natural relation returned. Four constructed controls and four independent general-field replays passed. The shared Spot host used CPU 31, one CPU quota, 4 GiB, zero swap, read-only inputs and no worker network (L0).

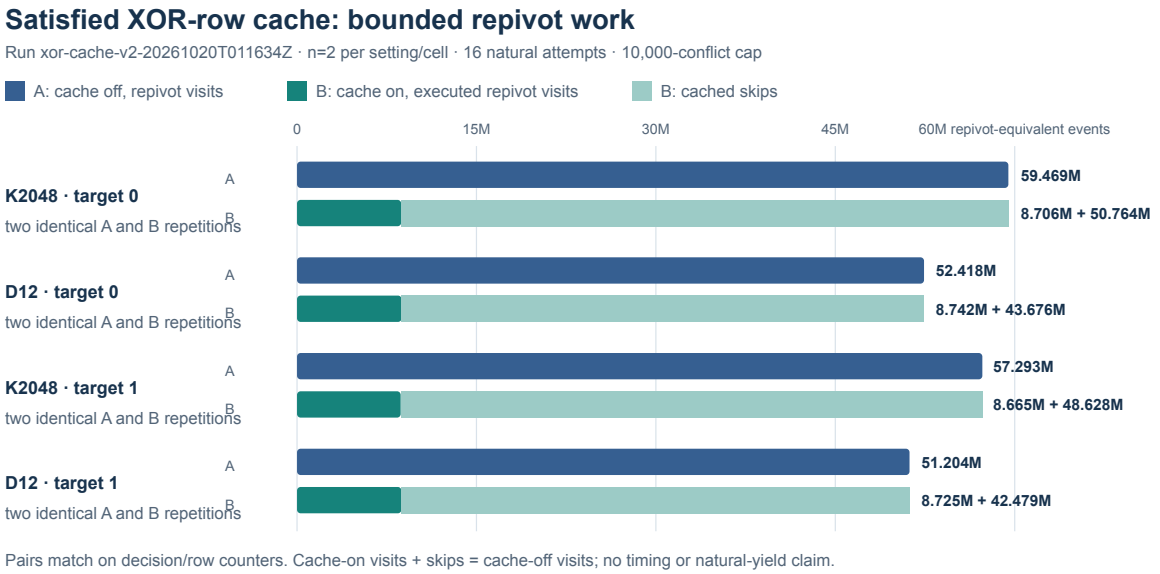

Each cell has two identical repetitions per setting. Decisions, conflicts, restarts, XOR passes, row operations and row scans match between cache off and on. Cache-on repivot visits plus skipped cached rows equal cache-off repivot visits. These are recorded work counters; wall times are not compared.

Natural yield/rank, complete IC cost and base selection remain unresolved. The card is censored by its conflict cap and does not establish a timing improvement.

Archive SHA-256: `cf3310c7cb597c144b30a427683ed41d37cf4e2ec2425945d259a1173e776abd`. Manifest SHA-256: `55a87e7e0ca6561c48d1ad558ec8b3d8ba385e4cb4c26a6b6188688732eea4ee`.