Point-driven pencil: exact pivot-order continuation

run-20261022T0516Z | source-verified matched targets

Observed values from native price-sparse and validate-sparse records.

Target rows: 540; verified candidate/rho pairs: 540; validated price cells: 19440.

Non-wall replay rows: 549; missing replays: 0.

Cold cost includes setup and variable-order logical work. Wall times are L0 diagnostics.

p	order	targets	verified	row updates	pencil/rho
739	affine	60	60	6,164,628	12.840416
739	identity	60	60	6,288,519	12.931178
739	reverse	60	60	6,162,526	12.831728
1151	affine	60	60	21,253,537	29.519296
1151	identity	60	60	20,344,734	28.666756
1151	reverse	60	60	20,783,127	29.084432
1187	affine	60	60	23,304,945	31.282567
1187	identity	60	60	23,112,414	31.080921
1187	reverse	60	60	22,368,648	30.439502

Full requested pencil cohort: 1,260 distinct targets. This report identifies partial coverage explicitly.

Raw JSONL, all 36-cell prices per target, manifest and native validator sit beside this report.

No inference about unrun targets or upper field sizes is made from these slices.

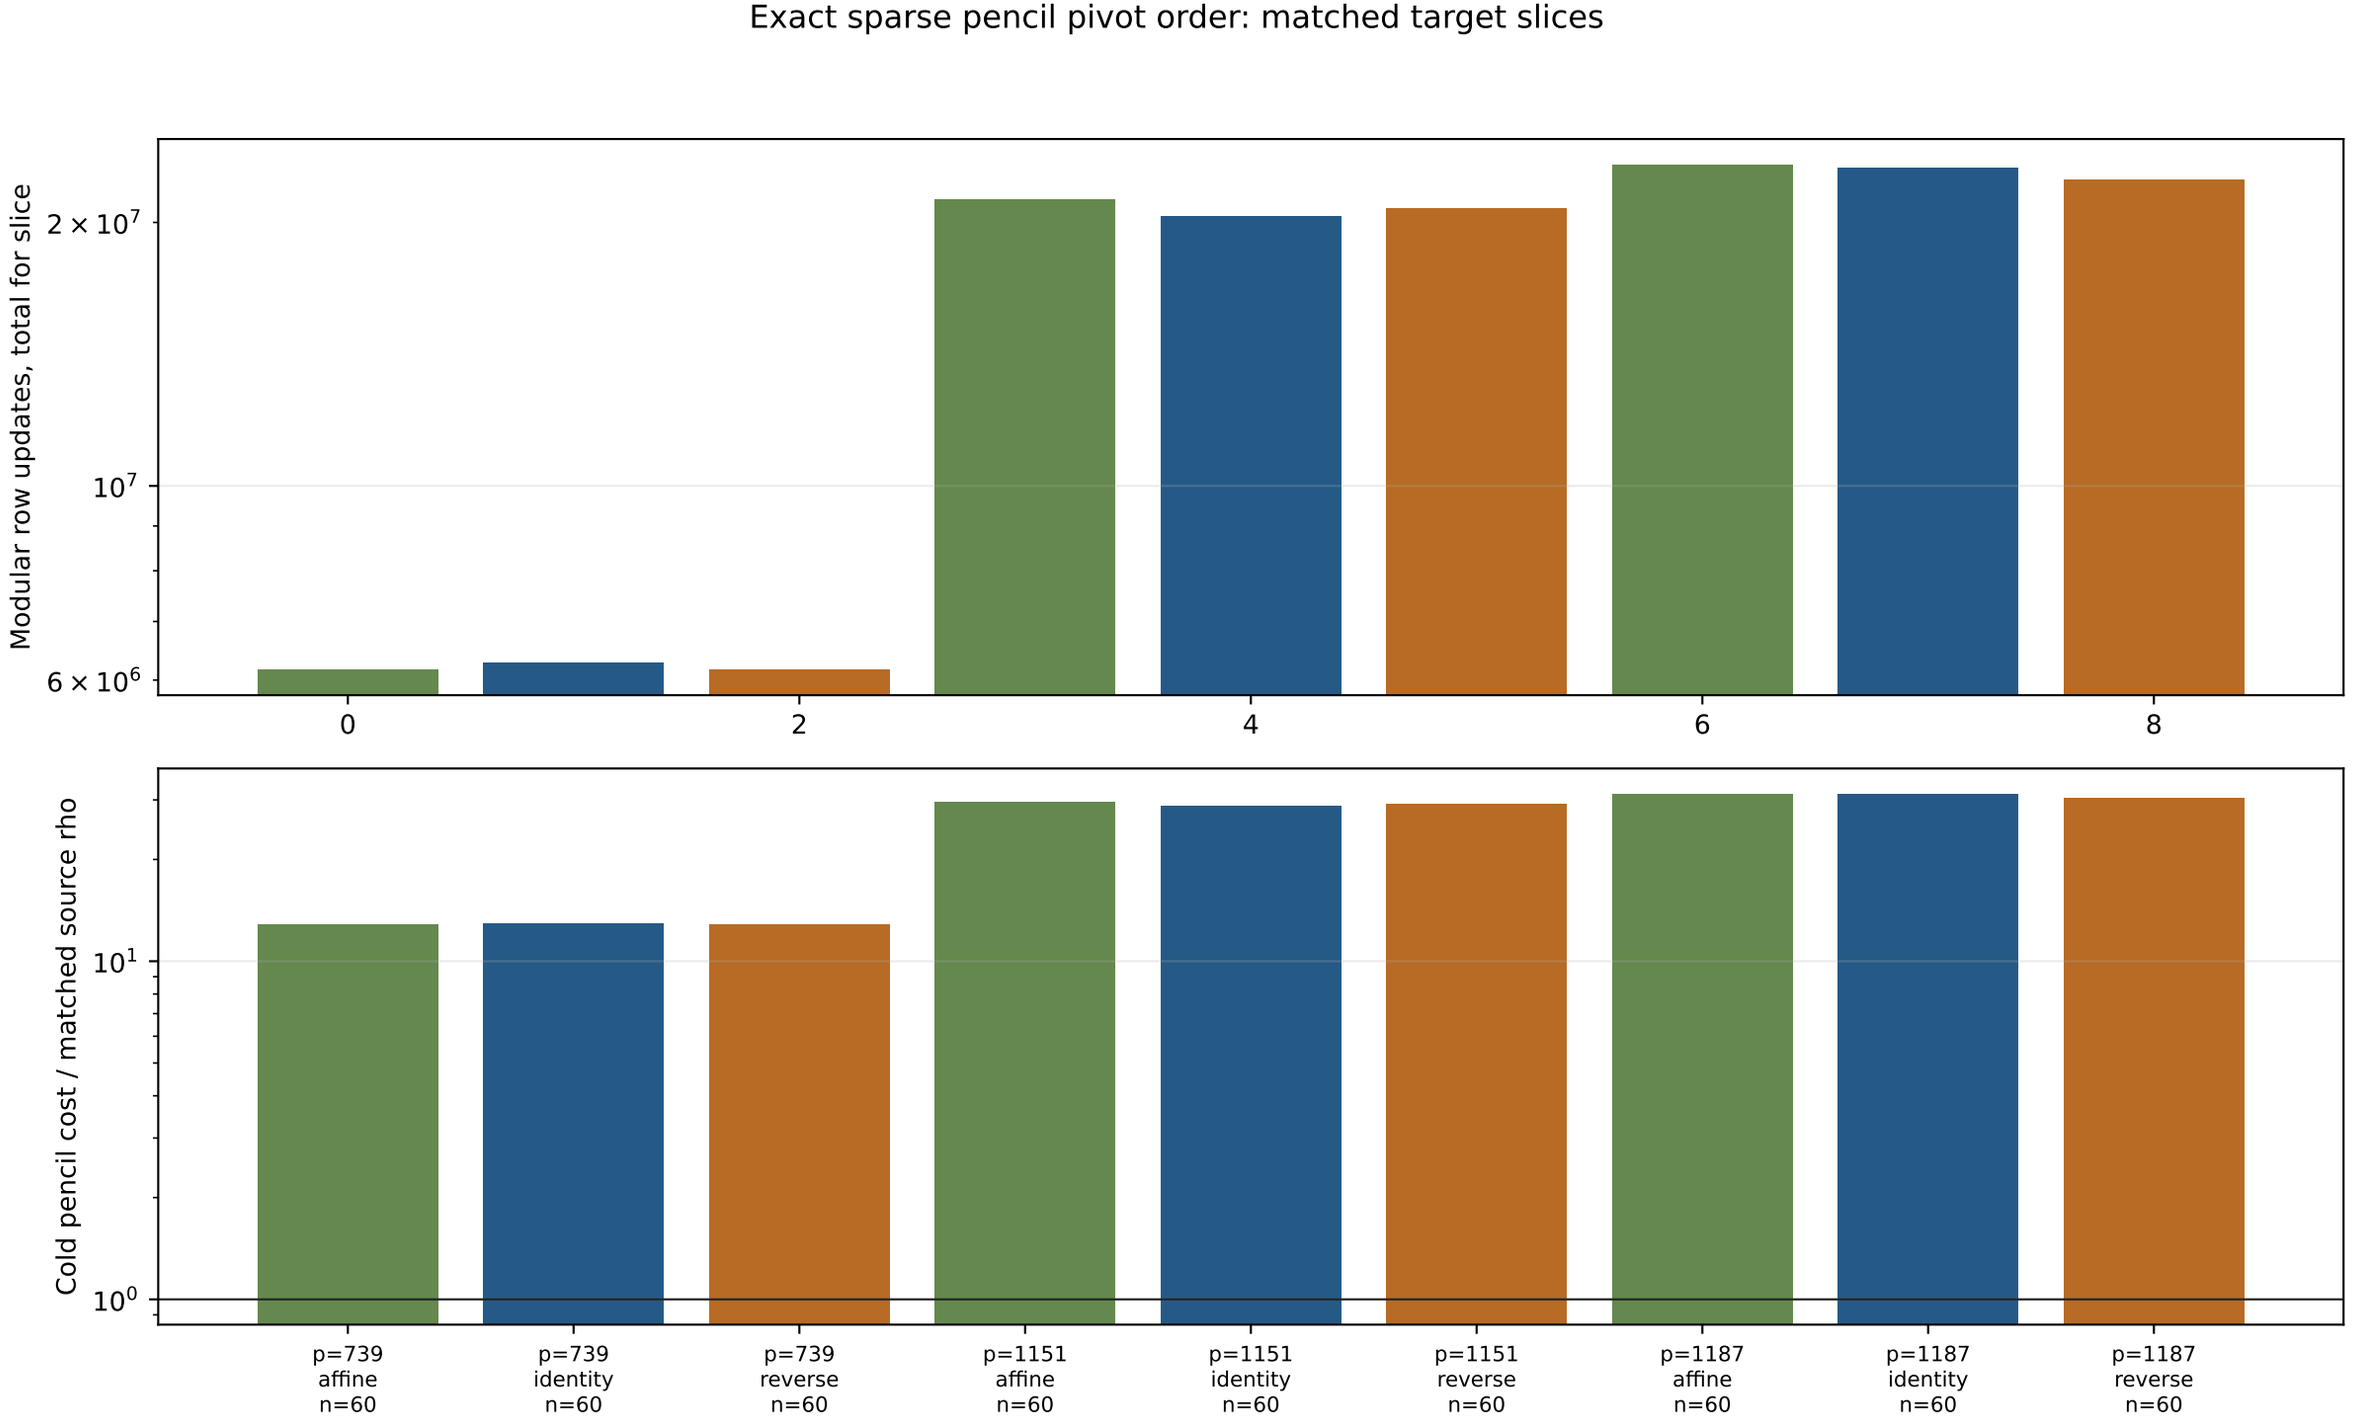
Exact sparse pencil pivot order: matched target slices
Modular row updates, total for slice
2×10^7
10^7
6×10^6
0
2
4
6
8
Cold pencil cost / matched source rho
10^1
10^0
p=739 affine n=60
p=739 identity n=60
p=739 reverse n=60
p=1151 affine n=60
p=1151 identity n=60
p=1151 reverse n=60
p=1187 affine n=60
p=1187 identity n=60
p=1187 reverse n=60
run-20261022T0516Z · M+0.5S+10I · 0.1 GAE/native logical op · 1080 independent source-scalar checks · wall time excluded