Separate BK boundary pilot

All four registered calls complete and the canonical export/file check passes. The complete p<14 population contains 506 coefficient models across six prime fields: 178 general F2/F3 models and 328 short models. There are 262 representative/model rows. Reference and A/A emit identical 270-row JSONL files; this tests determinism on the same host. [pcc:unverified]

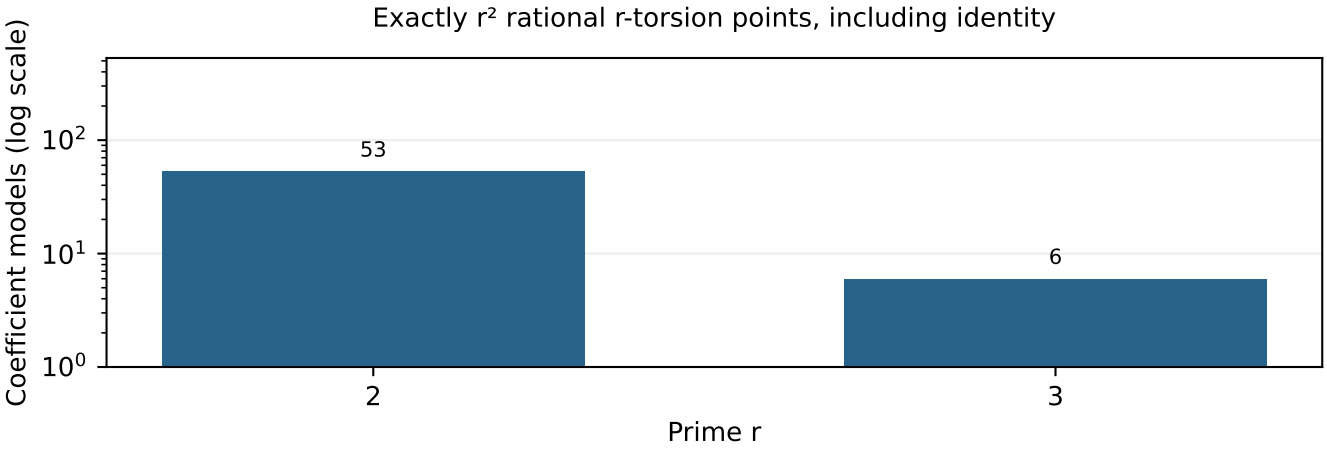

The figure copies exact native SQL counts. Models are weighted by their short scaling orbits; the eligible populations differ by r. There is no random-sample or probability inference. The identity is included in every torsion count. [pcc:unverified]

The native implementation counts points and every prime-factor kernel. SQL independently reconstructs all 328 short scaling members, 84 polynomial point/2/3-torsion counts and 34 modular orders. All 25 integrity checks pass. The pilot has 212 qualified prime-to-characteristic k=1 cases and zero mismatches. Dropping the condition yields 331 failures, including 122 with r^2 dividing #E. This reproduces a source-known omitted-condition boundary. [pcc:unverified]

The positive and negative control calls both run the four fixed known fixtures, including the original F19:$y^2=x^3+x+6$, #E=18, r=3 example. On F7:$y^2=x^3+2$, the correct count9 differs from the deliberately corrupted polynomial count3. A separate copied-weight SQL corruption exits1 at the registered CHECK constraint. Canonical data remain unchanged. [pcc:unverified]

Protocol dad642117df8 was committed49c8a1f2 before data. Exact source, binary/runtime pins, all outputs, failures and clocks are retained; every scientific clock is invalid. The separately frozen main population includes these fields as part of a complete universe; it is not a held-out confirmation sample. No outcome-dependent tuning or retry occurred. [pcc:unverified]