Run report: interrupted session A-n19-fast (amendment 2; 23 of 32 executions)

Descriptive run report (research-visuals, "Every experiment run"): what ran and what was recorded; interpretation is in the study README.

Sessions

- `A-n19-fast`: session `ECBS1h4b06d5b9903d`, spec `ECS1hff185a54f5d1` (pdp_split_slots_20261012 Part A, n=19 (fast arms; amendment 2)); status `running`, 32 executions planned, status counts `{}`; commit `4c12ae37b38684ced1f45369892a2763da1eb469` (dirty: False), binary SHA-256 `226a31f06997964c…`; targets: 8 per curve, seed 202610121101, rounds 1, isolation required L0.

Recorded values (medians over verified runs; per-workload values in ANALYSIS.json)

curve	arm	verified	median S (recorded)	median F4 XORs	median systems	median priced S	priced ÷ strong rho (min–max)
icv1-f2m19-tm797-9c54981b	clo-unsplit-g4	5/5	1.835	6.945e+08	2532.0	2143.444	889.211 (417–1.27e+03)
icv1-f2m19-tm797-9c54981b	rho-frob	6/6	0.522	—	—	0.522	0.219 (0.172–0.908)
icv1-f2m19-tm797-9c54981b	rho-strong	6/6	2.346	—	—	2.346	1.000 (1–1)
icv1-f2m19-tm797-9c54981b	std-unsplit-g4	6/6	19.587	1.264e+09	8113.0	3916.873	1670.824 (1e+03–2.36e+03)

`S` = charged group-addition equivalents / √r. F4 arms: solver word XORs counted, not charged, so recorded S is a lower bound. Priced S adds XORs × the curve's pinned `ns_per_word_xor` (`docs/ic/calibration.json`, calibrated on another host) / √r: a sensitivity, and one that understates F4's per-call work. Table arms (`mitm-frobenius`) are fully charged. Wall time is descriptive only (L0).

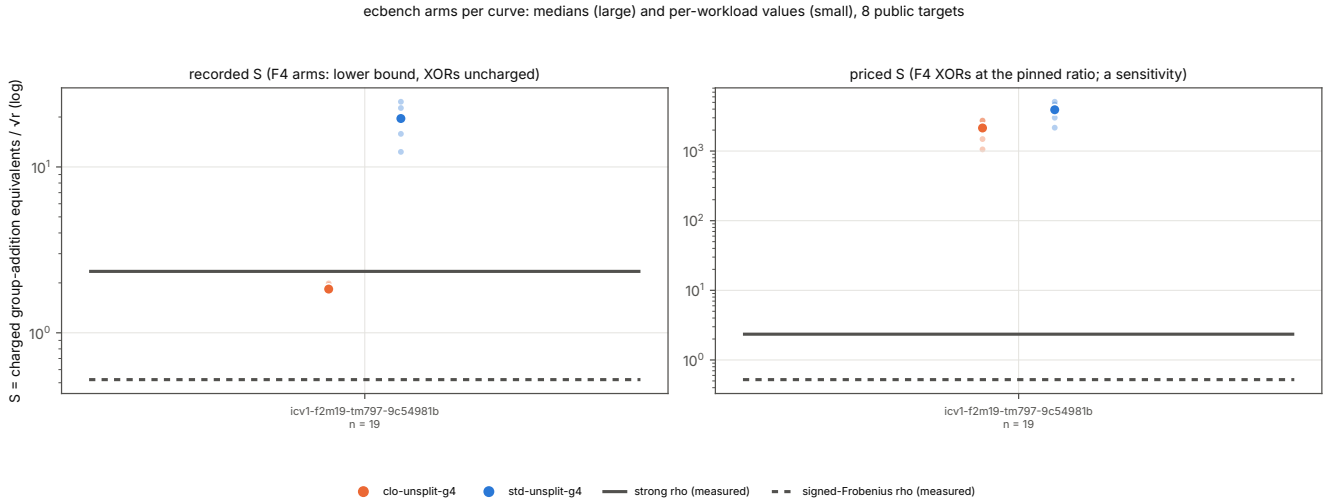


Figure 1: Recorded values from ANALYSIS.json; layout `reports/plot_ecbench.py`.

Raw records

`research/pdp_split_slots_20261012/sessions/A-n19-fast/records.jsonl`; audits under `audits/`.

A session marked dirty ran with untracked or modified files in the checkout (drafts of this study's own reports and protocols); the binary SHA-256 above is the one `BINARIES.sha256` records, and `ecbench verify` replays against it.