R92 independent rank-32 multiplication table

The frozen R92 native run checked the unit and all 528 unordered basis products. A fresh-readback, ideal-free F2(u) replay checked the full table, 16,896 polynomial coordinates and 528 corruption controls. A separate source-field replay recomputed all 528 products. The exact post-run comparison matched all 528 pair labels and 16,896 coefficients of the previously accepted R50 table.

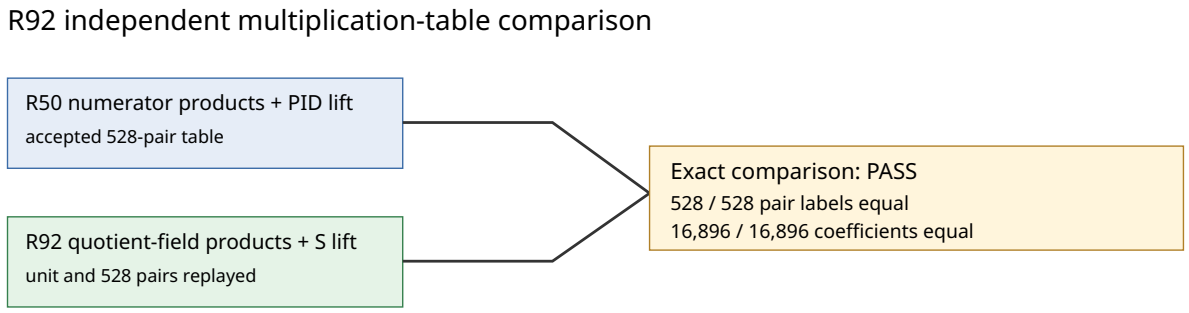

One R92 run, two independent replays, and a post-run comparison to the accepted R50 table.
Counts are exact; no runtime metric was taken.

R50 had already established the table; R92 supplies a distinct reconstruction and cross-check. Source revision: `a58703742c8cdd4a91beb0eb1bc78c7eb8cb0c51`. The one-thread Singular/FLINT run used seed 92, a 4 GiB virtual-memory cap and a 1200-second timeout. All 18 raw members passed fresh-readback hashes. The next task is explicit chart gluing and proper boundary checks, then the modular-factor action. See `CM.md` and `SCOPE-ERRATUM.md` for the claim boundary.