ic_autolab round 10 (generic track): report

Protocol: PROTOCOL.md, frozen 2026-11-04T04:28:44Z at git `bb4c6c0ef164288d4417e7e70011c727804483f0`; route `local`. Counted GAE only (deterministic, host independent); no wall-time claim; development loop, no validation-gate row. Loop home: `../`; ledger: `../ledger.json`.

Claim record: `PCC-20261104-87cbc0` (`python3 tools/pcc/pcc.py standing PCC-20261104-87cbc0`). Until a signed replay and recompute exist, this round's outcome is an unverified assertion [pcc:unverified].

Outcome

k class	sel	sel / inc at w = 0 [95%]	w = 0.1	w = 1	band	S sel (w = 0 / 0.1 / 1)	S inc	S rho-neg	distance sel / rho
32 **null**	ksum4-n22	0.889 [0.869, 0.910]	0.937 [0.914, 0.961]	1.202 [1.163, 1.242]	unresolved inside the band	7.493 / 8.408 / 16.638	8.430 / 8.971 / 13.845	0.988 / 1.085 / 1.959	7.6x / 7.8x / 8.5x

Classes follow the protocol's decision rule. Distance to rho is the distance remaining, not a gate. The reasons per size:


- k = 32: compare ops.status = ok, admissible = true; sel / inc = 0.8889 [0.869, 0.910] at w = 0; band: unresolved inside the band; A/A inc-aa / inc interval [1.000, 1.000] contains 1

Train (development screen, in sample)

k = 32: session `ECBS1ha0eef36434a4` (run exit 0, verify exit 0, receipt sha256 `d9d7b916157de7637f070e5a9fc2383d31ef111c5016a3b24ecfc27a3579e774`)

arm	family	N factor base	oracle	runs	verified	S (w = 0 / 0.1 / 1)	reason proposed
`rho-neg`	rho	- -	`rho.negation`	32	32	1.065 / 1.170 / 2.113	matched reference
`inc`	ksum4	26 `prime-projected-abscissa:size=26,scan_cap=416`	`ksum:m=4`	32	32	8.179 / 8.671 / 13.096	incumbent
`ksum4-n22`	ksum4	22 `prime-projected-abscissa:size=22,scan_cap=352`	`ksum:m=4`	32	32	7.196 / 8.052 / 15.751	incumbent neighbourhood: N = 0.85 x 26
`ksum4-n31`	ksum4	31 `prime-projected-abscissa:size=31,scan_cap=496`	`ksum:m=4`	32	32	13.241 / 13.539 / 16.224	incumbent neighbourhood: N = 1.2 x 26
`ksum4-n36`	ksum4	36 `prime-projected-abscissa:size=36,scan_cap=576`	`ksum:m=4`	32	32	22.647 / 22.840 / 24.577	incumbent neighbourhood: N = 1.4 x 26
`ksum4-n18`	ksum4	18 `prime-projected-abscissa:size=18,scan_cap=288`	`ksum:m=4`	32	32	10.459 / 12.282 / 28.691	incumbent neighbourhood: N = 0.7 x 26
`ksum4-n13`	ksum4	13 `prime-projected-abscissa:size=13,scan_cap=208`	`ksum:m=4`	32	32	29.657 / 35.500 / 88.084	incumbent neighbourhood: N = 0.5 x 26

arm	family	N	factor base	oracle	runs	verified	S (w = 0 / 0.1 / 1)	reason proposed
ksum3-n150	ksum3	150	prime-projected-abscissa:size=150,scan_cap=2400	ksum:m=3	32	32	97.229 / 97.511 / 100.050	cross-size transfer neighbourhood: N = 0.85 x 176 (ksum3 from k = 20)
ksum3-n211	ksum3	211	prime-projected-abscissa:size=211,scan_cap=3376	ksum:m=3	32	32	269.196 / 269.574 / 272.973	cross-size transfer neighbourhood: N = 1.2 x 176 (ksum3 from k = 20)
ksum5-n41	ksum5	41	prime-projected-abscissa:size=41,scan_cap=656	ksum:m=5	32	32	554.538 / 554.577 / 554.925	exploration: family ksum5 untried at k = 32, N = 0.08 x N_a
rfmitm2-n512	rfmitm2	512	prime-projected-abscissa:size=512,scan_cap=8192	rootfind-mitm:m=2	32	32	23.548 / 25.807 / 46.136	exploration: family rfmitm2 untried at k = 32, N = 1 x N_a

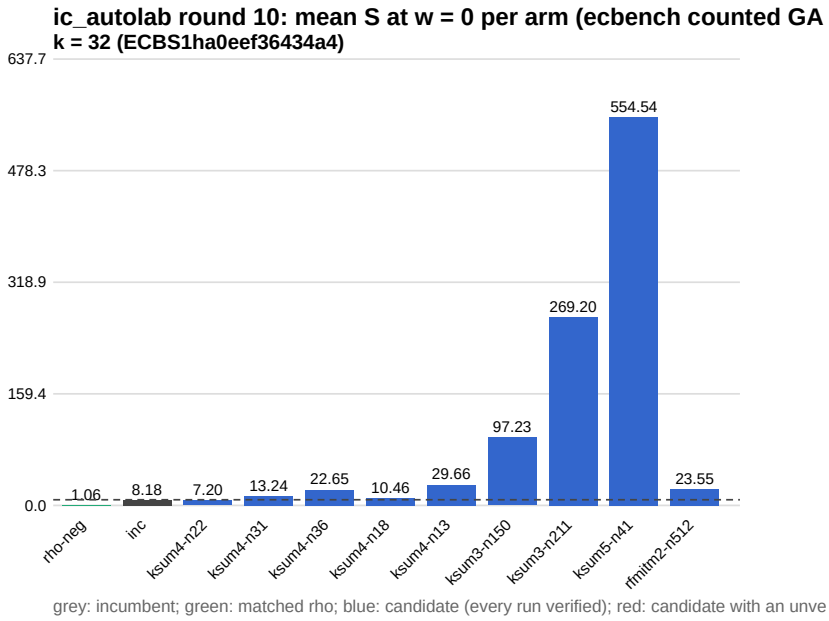

train screen

Selection


- k = 32: challenger `ksum4-n22` (Pareto alternative at w = 1: `ksum4-n22`)

Holdout sessions

k	session	run exit	verify exit	receipt sha256	levels
32	ECBS1h572a148f6fbf	0	0	a07ad64e6efb8d2f763433a834bbaf95ca7b24e46b006d70beca747c797f39d7	{“verified”:480}

Ledger after this round

k	incumbent	since round	S (w = 0 / 0.1 / 1)	distance to rho
20	`ksum3-n11` (`prime-projected-abscissa:size=11,scan_cap=176` + `ksum:m=3`)	0	8.987 / 9.710 / 16.217	5.7x / 5.7x / 6.0x
24	`ksum4-n12` (`prime-projected-abscissa:size=12,scan_cap=192` + `ksum:m=4`)	2	6.985 / 7.514 / 12.271	6.0x / 5.9x / 5.6x
28	`ksum4-n18` (`prime-projected-abscissa:size=18,scan_cap=288` + `ksum:m=4`)	8	7.445 / 7.910 / 12.100	7.8x / 7.6x / 6.5x
32	`ksum4-n26` (`prime-projected-abscissa:size=26,scan_cap=416` + `ksum:m=4`)	5	8.296 / 8.811 / 13.446	9.1x / 8.8x / 7.4x

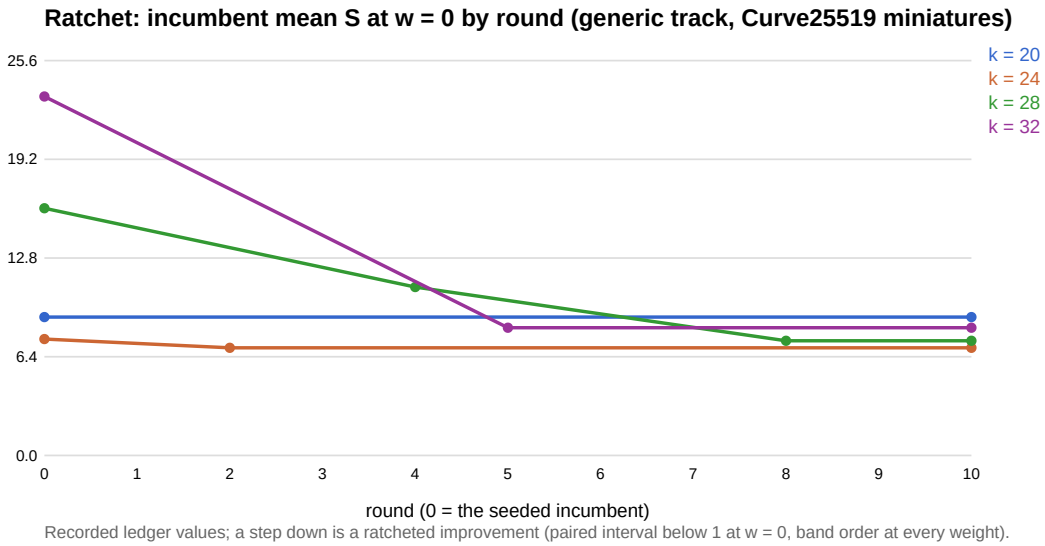

ratchet

Evidence and deviations

- ecbench binary sha256: `3fd22853485e388782ac0821295c56f81725fc832fd3610978be8088b5098bca`; `--cpus auto`, allow_busy = true; `verify --replay 8` per session; audit receipts in `analysis/`; sessions in `sessions/` (records in the artifact store when large).
- Route: the local route is an explicitly requested development screen, not the Iso Lab EKS default; counts are deterministic and replayed, wall time is not claimed. No row of this round enters the IC leaderboard or `benchmarks/README.md` (validation gate).
- Train selection is in sample (disclosed); the holdout is fresh (new `target_seed`, excluded exposures). Failed, timed-out and regressing arms are retained above.