Repaired program: preserved decoder binding

2026-11-03 · Software API / recorded-oracle checks · Fresh source cases: zero

Integration. The original recovery path ultimately calls the evaluator in target-aware-decoder/compiler.py. This module is preserved byte-for-byte. The adapter binds the verified repaired coefficients and supplies the missing legacy metadata: field479, window16, complete prefix0..15 and degree3.

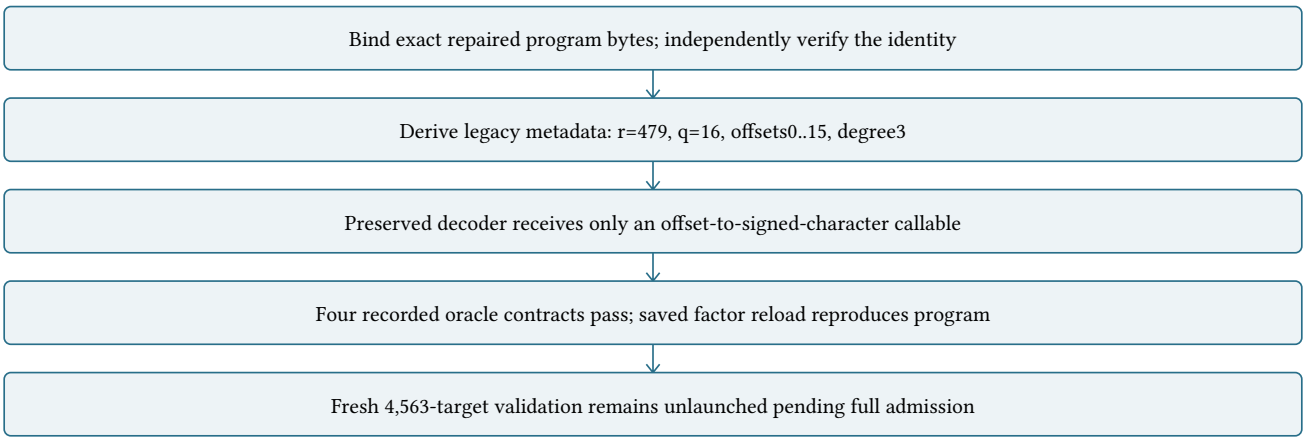

Public boundary. The decoder receives an immutable program and offset oracle. The four recorded oracle fixtures retain public points, signs and call logs; expected scalar labels stay in the checker. They correspond to O,P,2P,−P on E/F509, subgroup order479. This is recorded-source API replay, not fresh elliptic-source computation or a new recovery panel.

Local exact checks	Outcome
Recorded public oracle cases	4 passed; full prefix queried once in order
Program mutation	Rejected before oracle calls
Malformed sign values	bool,478,float,None rejected
Preserved synthesis entrypoints	Guarded against calls
Factor reload	Same coefficients; all479 identity points verified
Test methods / attempts	3 passed / 1

Accounting. Byte hashing, JSON parse, support scan and fresh view allocation are additional native work on every decode. Original decoder field counters remain separate. No complete-cost or timing improvement is measured. Existing one-CPU local test used512MiB/30second limits and exited0; no new cloud job.

Full cohort. The separate correctness plan retains4,563 targets on all three original prime-field curves and all three arms. It is specified, not frozen or launched. Source/runtime/runner/protocol publication remains needed. It does not claim cold compiler cost while consuming precompiled programs.

Admission. Live NodePool read was unauthorized and namespace quota read Forbidden under the configured EKS identity. Overview pool values are compiled defaults. Iso Lab requires actual limits/quota readback; no role or quota was changed. The four local API cases do not replace or shrink the full cohort.

Sources / next. Original recovery runner, public Oracle/guards, preserved evaluator, corrected-span certificate and Iso Lab instructions. Finish the fresh-source runner and exact runtime manifest, obtain authoritative admission, freeze the complete protocol, then submit the full cohort. See DERIVATION.md, contract-check-receipt.json, admission.json and validation-plan.json.