Pencil upper-size diagnostic: three capped attempts

p=186,379 · frozen target 0 · 32-bit model

solver	cap	rank	peak coeff.	row updates	index ops
Online 10m	10,000,000	69,672	10,011,236	1,233,576,833	0
Peel 10m	10,000,000	84,696	10,000,145	18,203,354	971,612,198
Peel 25m	25,000,000	85,168	25,000,079	79,696,712	4,778,336,117

Each attempt stopped at its preregistered stored-coefficient cap.

All same-process rho controls recovered and verified the source scalar.

Candidate scalar: null; candidate/rho cost ratio: null in every record.

The changed row and index counts are unsuccessful-stage observations.

The 25m extension kept the same target, collector, and source control.

No 32-bit curve-slice success is inferred from these three attempts.

Wall time has L0 isolation because other jobs shared the host.

Raw JSONL, replay, protocol, process record, and validator accompany this PDF.

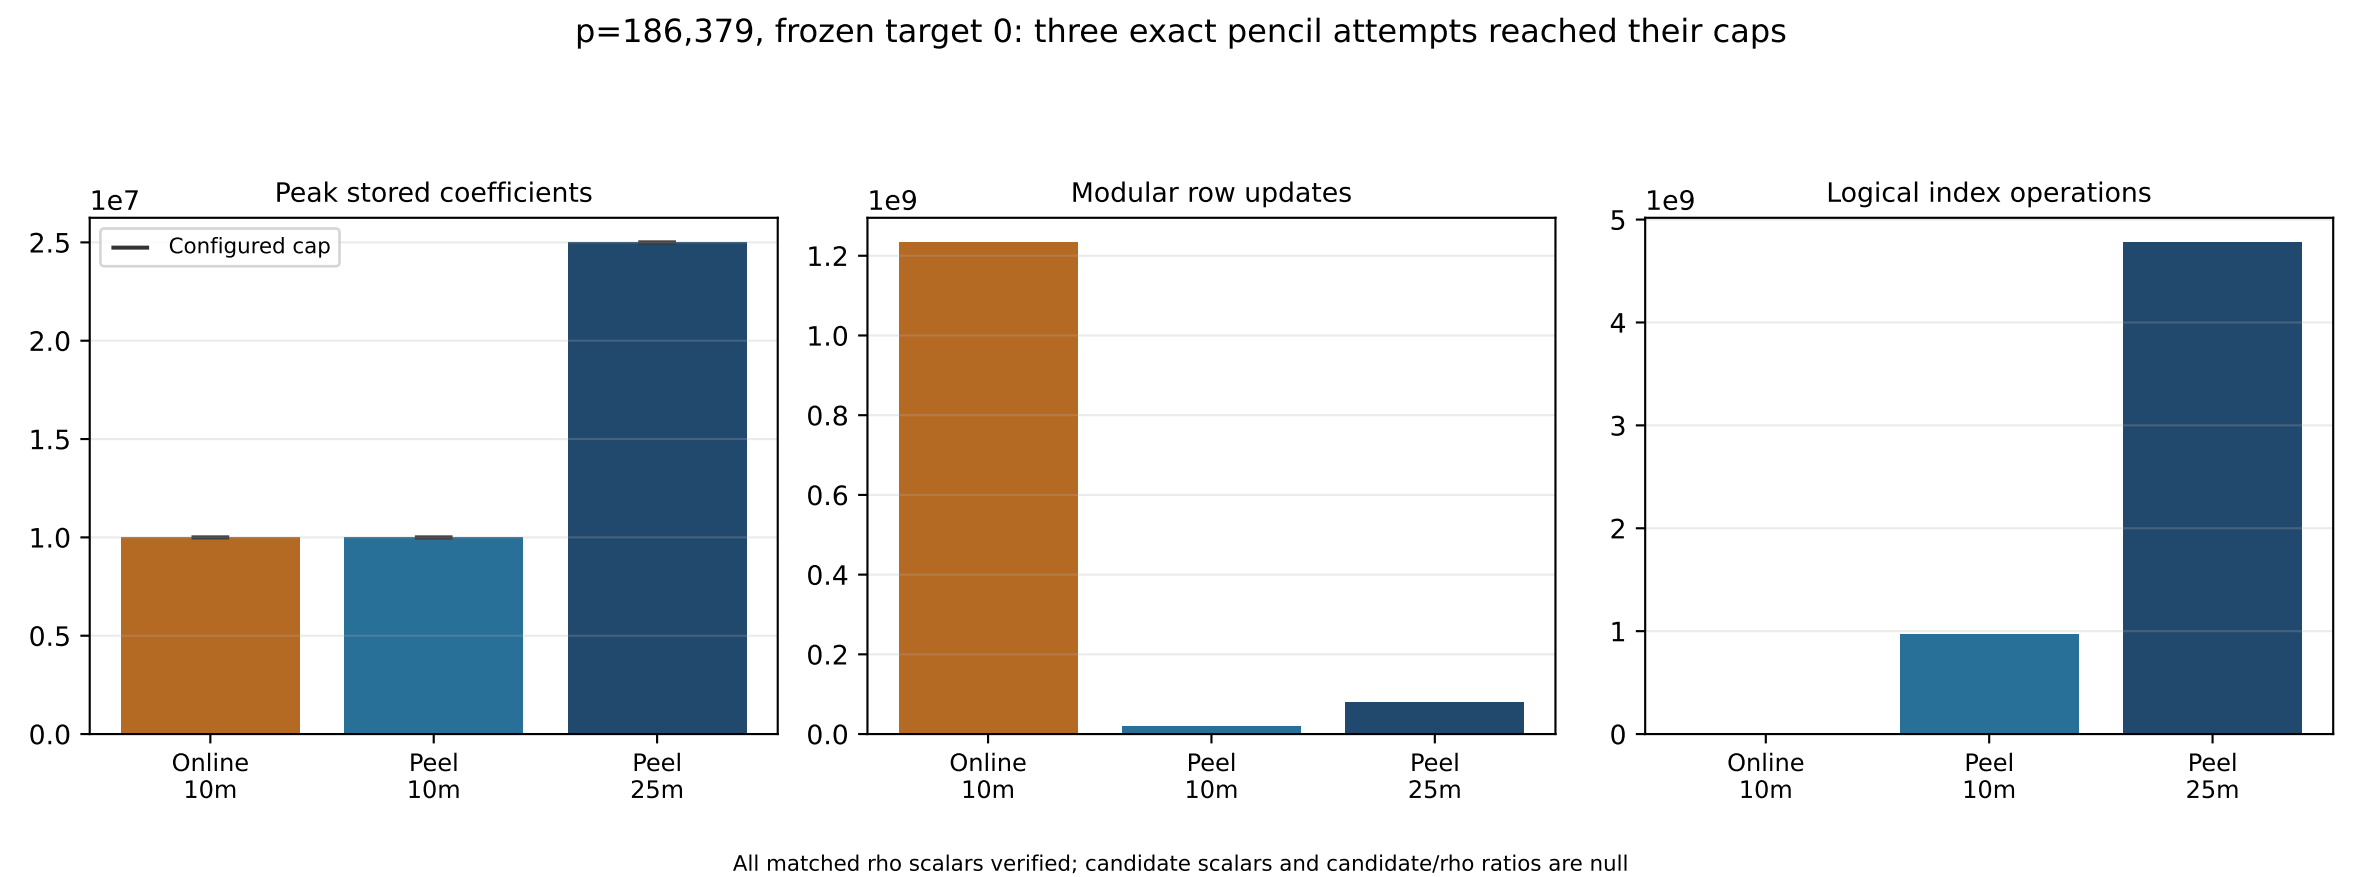
p=186,379, frozen target 0: three exact pencil attempts reached their caps
Peak stored coefficients
1e7
Configured cap
2.5
2.0
1.5
1.0
0.5
0.0
Online 10m
Peel 10m
Peel 25m
Modular row updates
1e9
1.2
1.0
0.8
0.6
0.4
0.2
0.0
Online 10m
Peel 10m
Peel 25m
Logical index operations
1e9
5
4
3
2
1
0
Online 10m
Peel 10m
Peel 25m
All matched rho scalars verified; candidate scalars and candidate/rho ratios are null