First target-information prefixes in 64 saved streams

Derived result, 2026-11-02. All 39 determined streams first determine the target at their final recorded relation and native terminal candidate attempt. There are zero later recorded relations and zero later candidate attempts in each of these 39 streams. Their first-information attempts range from 76 to 255. The other 25 streams have a terminal affine-family certificate permitting every target coordinate in the recorded linear equations.

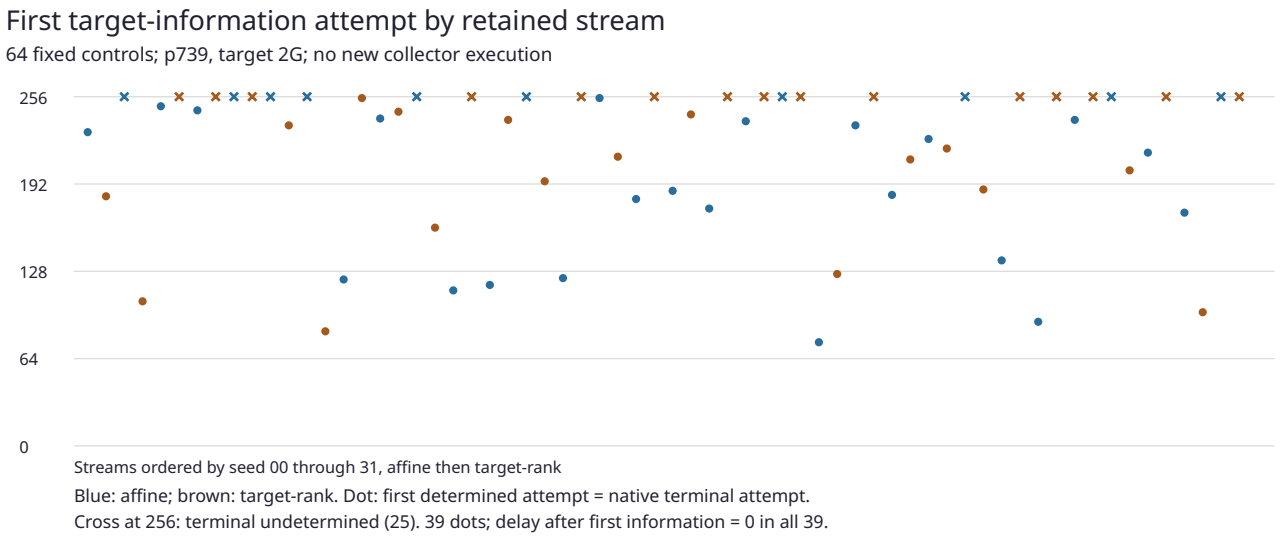

Data scope: signed-native-restarts/check-8q7O1SwE, all 64 software-control streams, 6,900 relation rows; p=739, subgroup order 34147, target 2G, seeds 0 through 31, affine/component and projective/target-rank configurations. These are two configurations on one known-answer instance, not 64 distinct targets from the 1,260-target cohort. Attempt numbers are retained candidate indices, not elapsed time or cost. No collector was invoked.

Method: binary search locates a proposed first prefix. A separate direct-sum checker verifies an isolating row combination and a particular solution there, plus an affine family allowing every target coordinate at its immediate predecessor. These two certificates prove earliest determination without trusting the search. The 25 terminal-undetermined affine families also certify every earlier prefix as undetermined. PROOF.md gives the implication; systems.csv retains one row per stream, with null first-information fields for all 25 unresolved streams.

Checks: producer exit 0; fresh readback exit 0. Exact archive hashes, all 64 distinct expected source names, every source row and origin, all native scalar outcomes and every output record were checked. Four synthetic controls passed (empty, immediate, delayed and terminal undetermined); scalar and zero-boundary alterations were rejected for determined controls. Fresh readback rejected duplicate manifest membership, a corrupted predecessor direction and a falsely shifted boundary. The initial readback and its source remain preserved. Its 64 certificate checks used no elimination. These checks share the existing direct checker and are not a non-author source review.

Sources: signed-witness/PROOF.md, certificates.py and check_certificate.py; signed-native-restarts stream-manifest.json and native-streams.tar. Input and code hashes are in summary.json and readback.json. Standard exact solve and right-kernel conventions were checked against SageMath's official matrix reference, doc.sagemath.org/html/en/reference/matrices/sage/matrix/matrix2.html (2026-11-02). No algorithmic novelty or runtime comparison is asserted.

Root inspected the prefix argument and source; this was not blind derivation or full independent replay. Next check: independent source-fidelity review of the archive joins. The graph and table describe all saved streams, including capped streams without a determined target. No confidence interval is attached to this complete fixed software-control inventory.