


FIG. 8

Bijjective Tamper Detection — Tokenize-Decode Round-Trip Invariant
 $parse(decode(encode(src))) \equiv parse(src)$ when input is legitimate

800

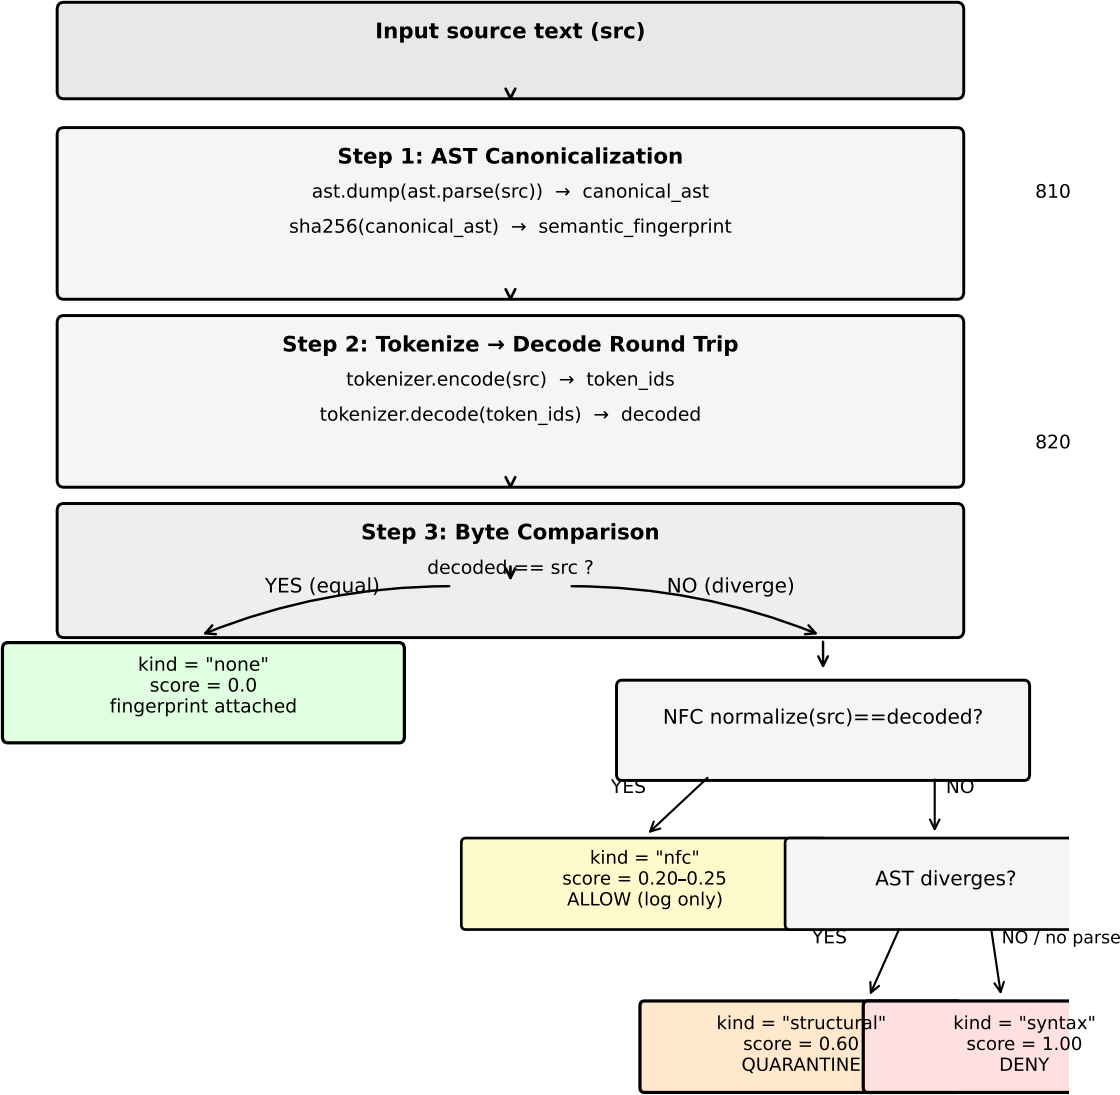

Fingerprint = SHA-256(canonical AST). Two semantically-equal programs always produce the same fingerprint.