

Scavenger Hunt

📁 picoCTF > Web · + Tags

Most of the flag can be achived just by inspecting the website's html page source.

```
1 <!doctype html>
2 <html>
3   <head>
4     <title>Scavenger Hunt</title>
5     <link href="https://fonts.googleapis.com/css?family=Open+Sans|Roboto" rel="stylesheet">
6     <link rel="stylesheet" type="text/css" href="mycss.css">
7     <script type="application/javascript" src="myjs.js"></script>
8   </head>
9
10  <body>
11    <div class="container">
12      <header>
13        <h1>Just some boring HTML</h1>
14      </header>
15
16      <button class="tablink" onclick="openTab('tabintro', this, '#222')" id="defaultOpen">How</button>
17      <button class="tablink" onclick="openTab('tababout', this, '#222')">What</button>
18
19      <div id="tabintro" class="tabcontent">
20        <h3>How</h3>
21        <p>How do you like my website?</p>
22      </div>
23
24      <div id="tababout" class="tabcontent">
25        <h3>What</h3>
26        <p>I used these to make this site: <br/>
27          HTML <br/>
28          CSS <br/>
29          JS (JavaScript)
30        </p>
31        <!-- Here's the first part of the flag: picoCTF{t -->
32      </div>
33
34    </div>
35
36  </body>
37 </html>
38
```

picoCTF{t

If i go into `mycss.css` i can find part 2 of the flag

```
width: 100%;
}

header {
  background-color: black;
  padding: 1em;
  color: white;
  clear: left;
  text-align: center;
}

body {
  font-family: Roboto;
}

h1 {
  color: white;
}

p {
  font-family: "Open Sans";
}

.tablink {
  background-color: #555;
  color: white;
  float: left;
  border: none;
  outline: none;
  cursor: pointer;
  padding: 14px 16px;
  font-size: 17px;
  width: 50%;
}

.tablink:hover {
  background-color: #777;
}

.tabcontent {
  color: #111;
  display: none;
  padding: 50px;
  text-align: center;
}

#tabintro { background-color: #ccc; }
#tababout { background-color: #ccc; }

/* CSS makes the page look nice, and yes, it also has part of the flag. Here's part 2: h4ts_4_l0 */
```

h4ts_4_l0


There is a clue on how to get the 3rd part [myjs.js](#) page.

```
function openTab(tabName,elmnt,color) {
    var i, tabcontent, tablinks;
    tabcontent = document.getElementsByClassName("tabcontent");
    for (i = 0; i < tabcontent.length; i++) {
        tabcontent[i].style.display = "none";
    }
    tablinks = document.getElementsByClassName("tablink");
    for (i = 0; i < tablinks.length; i++) {
        tablinks[i].style.backgroundColor = "";
    }
    document.getElementById(tabName).style.display = "block";
    if(elmnt.style != null) {
        elmnt.style.backgroundColor = color;
    }
}

window.onload = function() {
    openTab('tabintro', this, '#222');
}

/* How can I keep Google from indexing my website? */
```

usually `robots.txt` is used to keep google from indexing website. I think typing `robots.txt` in the index would give the 3rd flag.

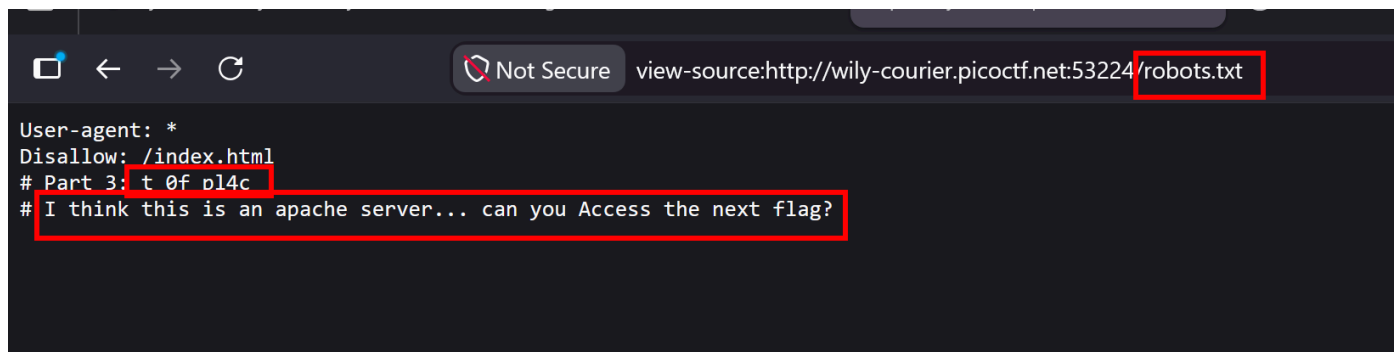


```
view-source:http://wily-courier.picoc.tf.net:53224/robots.txt

User-agent: *
Disallow: /index.html
# Part 3: t_0f_pl4c
# I think this is an apache server... can you Access the next flag?
```

t_0f_pl4c

There is also the clue for the part 4 of the flag. There should be `.htaccess` file on apache server.

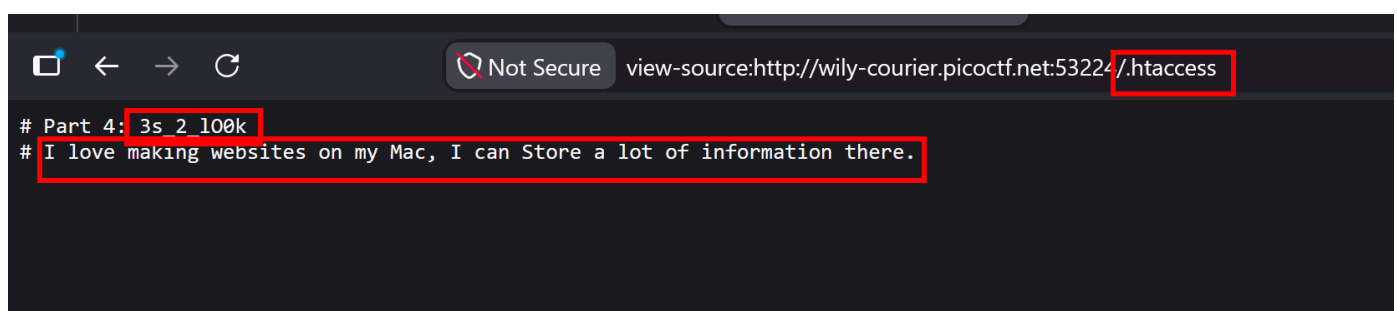


```
view-source:http://wily-courier.picoc.tf.net:53224/.htaccess

# Part 4: 3s 2 100k
# I love making websites on my Mac, I can Store a lot of information there.
```

3s_2_l00k

Theres a clue give for part 5 of the flag. `.DS_Store` is a file that normally gets generated when running something on mac. It should give the last part of the flag.

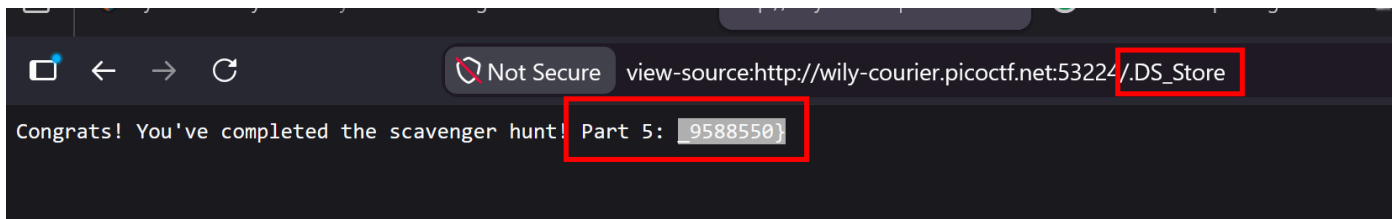

_9588550}

flag: picoCTF{th4ts_4_l0t_of_pl4c3s_2_l00k_9588550}