

# SYMPY: SYMBOLIC COMPUTING IN PYTHON

ONDŘEJ ČERTÍK\*, ISURU FERNANDO†, AND ASHUTOSH SABOO‡

## 1. Introduction.

## 2. Architecture.

**2.1. Basic Usage.** Being built on Python, SymPy requires that all variable names be defined before they can be used. The statement

```
>>> from sympy import *
```

will import all SymPy functions into the global Python namespace. All the examples in this paper assume that this has been run.

Additionally, symbolic variables, called symbols, must be assigned to Python variables before they can be used. This is typically done through the `symbols` function, which creates multiple symbols at once. For instance,

```
>>> x, y, z = symbols('x y z')
```

creates three symbols named `x`, `y`, and `z`, assigned to Python variables of the same name. The Python variable names that symbols are assigned to are immaterial—we could have just as well have written `a, b, c = symbol('x y z')`. All the examples in this paper will assume that the symbols `x`, `y`, and `z` have been assigned as above.

Expressions are created from symbols using Python syntax, which mirrors usual mathematical notation. Note that in Python, exponentiation is `**`.

```
>>> (x**2 - 2*x + 3)/y
```

```
(x**2 - 2*x + 3)/y
```

**2.2. The Core.** The core of a computer algebra system (CAS) refers to the module that is in charge of resending symbolic expressions and performing basic manipulations with them. In SymPy, every symbolic expression is an instance of a Python class. Expressions are represented by expression trees. The operators are represented by the type of an expression and the child nodes are stored in the `args` attribute. A leaf node in the expression tree has an empty `args`. The `args` attribute is provided by the class `Basic`, which is a superclass of all SymPy objects and provides common methods to all SymPy tree-elements. For example, consider the expression  $xy + 2$ :

```
>>> from sympy import *
```

```
>>> x, y = symbols('x y')
```

```
>>> expr = x*y + 2
```

The expression `expr` is an addition, so it is of type `Add`. The child nodes of `expr` are `x*y` and `2`.

```
>>> type(expr)
```

```
<class 'sympy.core.add.Add'>
```

```
>>> expr.args
```

```
(2, x*y)
```

We can dig further into the expression tree to see the full expression. For example, the first child node, given by `expr.args[0]` is `2`. Its class is `Integer`, and it has empty `args`, indicating that it is a leaf node.

---

\*Los Alamos National Laboratory ([ondrej.certik@gmail.com](mailto:ondrej.certik@gmail.com)).

†University of Moratuwa ([isuru.11@cse.mrt.ac.lk](mailto:isuru.11@cse.mrt.ac.lk)).

‡Birla Institute of Technology and Science, Pilani, K.K. Birla Goa Campus ([ashutosh.saboo@gmail.com](mailto:ashutosh.saboo@gmail.com)).

```

43 >>> expr.args[0]
44 2
45 >>> type(expr.args[0])
46 <class 'sympy.core.numbers.Integer'>
47 >>> expr.args[0].args
48 ()

```

The function `srepr` gives a string representing a valid Python code, containing all the nested class constructor calls to create the given expression.

```

51 >>> srepr(expr)
52 "Add(Mul(Symbol('x'), Symbol('y')), Integer(2))"

```

Every SymPy expression satisfies a key invariant, namely, `expr.func(*expr.args) == expr`.<sup>1</sup> This means that expressions are rebuildable from their `args`. Here, we note that in SymPy, the `==` operator represents exact structural equality, not mathematical equality. This allows one to test if any two expressions are equal to one another as expression trees.

Python allows classes to overload operators. The Python interpreter translates the above `x*y + 2` to, roughly, `(x.__mul__(y)).__add__(2)`. `x` and `y`, returned from the `symbols` function, are `Symbol` instances. The 2 in the expression is processed by Python as a literal, and is stored as Python's builtin `int` type. When 2 is called by the `__add__` method, it is converted to the SymPy type `Integer(2)`. In this way, SymPy expressions can be built in the natural way using Python operators and numeric literals.

One must be careful in one particular instance. Python does not have a builtin rational literal type. Given a fraction of integers such as `1/2`, Python will perform floating point division and produce `0.5`.<sup>2</sup> Python uses eager evaluation, so expressions like `x + 1/2` will produce `x + 0.5`, and by the time any SymPy function sees the `1/2` it has already been converted to `0.5` by Python. However, for a CAS like SymPy, one typically wants to work with exact rational numbers whenever possible. Working around this is simple, however: one can wrap one of the integers with `Integer`, like `x + Integer(1)/2`, or using `x + Rational(1, 2)`. SymPy provides a function `S` which can be used to convert objects to SymPy types with minimal typing, such as `x + S(1)/2`. This gotcha is a small downside to using Python directly instead of a custom domain specific language (DSL), and we consider it to be worth it for the advantages listed above.

**2.3. Assumptions.** An important feature of the SymPy core is the assumptions system. The assumptions system allows users to specify that symbols have certain common mathematical properties, such as being positive, imaginary, or integer. SymPy is careful to never perform simplifications on an expression unless the assumptions allow them. For instance, the identity  $\sqrt{x^2} = x$  holds if  $x$  is nonnegative ( $x \geq 0$ ). If  $x$  is real, the identity  $\sqrt{x^2} = |x|$  holds. However, for general complex  $x$ , no such identity holds.

By default, SymPy performs all calculations assuming that variables are complex valued. This assumption makes it easier to treat mathematical problems in full generality.

```

87 >>> x = Symbol('x')

```

<sup>1</sup>`expr.func` is used instead of `type(expr)` to allow the function of an expression to be distinct from its actual Python class. In most cases the two are the same.

<sup>2</sup>This is the behavior in Python 3. In Python 2, `1/2` will perform integer division and produce 0, unless one uses `from __future__ import division`.

```

88 >>> sqrt(x**2)
89 sqrt(x**2)

```

90 By assuming symbols are complex by default, SymPy avoids performing mathematically invalid operations. However, in many cases users will wish to simplify expressions containing terms like  $\sqrt{x^2}$ .

93 Assumptions are set on `Symbol` objects when they are created. For instance  
94 `Symbol('x', positive=True)` will create a symbol named `x` that is assumed to be  
95 positive.

```

96 >>> x = Symbol('x', positive=True)
97 >>> sqrt(x**2)
98 x

```

99 Some common assumptions that SymPy allows are `positive`, `negative`, `real`,  
100 `nonpositive`, `nonnegative`, `real`, `integer`, and `commutative`<sup>3</sup>. Assumptions on  
101 any object can be checked with the `is_assumption` attributes, like `x.is_positive`.

102 Assumptions are only needed to restrict a domain so that certain simplifications  
103 can be performed. It is not required to make the domain match the input of a function.  
104 For instance, one can create the object  $\sum_{n=0}^m f(n)$  as `Sum(f(n), (n, 0, m))` without  
105 setting `integer=True` when creating the `Symbol` object `n`.

106 The assumptions system additionally has deductive capabilities. The assump-  
107 tions use a three-valued logic using the Python builtin objects `True`, `False`, and  
108 `None`. `None` represents the “unknown” case. This could mean that the given as-  
109 sumption could be either true or false under the given information, for instance,  
110 `Symbol('x', real=True).is_positive` will give `None` because a real symbol might  
111 be positive or it might not. It could also mean not enough is implemented to compute  
112 the given fact, for instance, `(pi + E).is_irrational` gives `None`, because SymPy  
113 does not know how to determine if  $\pi + e$  is rational or irrational, indeed, it is an open  
114 problem in mathematics.

115 Basic implications between the facts are used to deduce assumptions. For in-  
116 stance, the assumptions system knows that being an integer implies being rational,  
117 so `Symbol('x', integer=True).is_rational` returns `True`. Furthermore, expres-  
118 sions compute the assumptions on themselves based on the assumptions of their  
119 arguments. For instance, if `x` and `y` are both created with `positive=True`, then  
120 `(x + y).is_positive` will be `True`.

121 SymPy also has an experimental assumptions system where facts are stored sep-  
122 arate from objects, and deductions are made with a SAT solver. We will not discuss  
123 this system here.

124 **2.4. Extensibility.** Extensibility is an important feature for SymPy. Because  
125 the same language, Python, is used both for the internal implementation and the  
126 external usage by users, all the extensibility capabilities available to users are also  
127 used by functions that are part of SymPy.

128 The typical way to create a custom SymPy object is to subclass an existing  
129 SymPy class, generally either `Basic`, `Expr`, or `Function`. All SymPy classes used for  
130 expression trees<sup>4</sup> should be subclasses of the base class `Basic`, which defines some  
131 basic methods for symbolic expression trees. `Expr` is the subclass for mathematical  
132 expressions that can be added and multiplied together. Instances of `Expr` typically

<sup>3</sup>If  $A$  and  $B$  are Symbols created with `commutative=False` then SymPy will keep  $A \cdot B$  and  $B \cdot A$  distinct.

<sup>4</sup>Some internal classes, such as those used in the polynomial module, do not follow this rule for efficiency reasons.

represent complex numbers, but may also include other “rings” like matrix expressions. Not all SymPy classes are subclasses of `Expr`. For instance, logic expressions, such as `And(x, y)` are subclasses of `Basic` but not of `Expr`.

The `Function` class is a subclass of `Expr` which makes it easier to define mathematical functions called with arguments. This includes named functions like `sin(x)` and `log(x)` as well as undefined functions like `f(x)`. Subclasses of `Function` should define a class method `eval`, which returns values for which the function should be automatically evaluated, and `None` for arguments that shouldn’t be automatically evaluated.

The behavior of classes in SymPy with various other SymPy functions is defined by defining a relevant `_eval_*` method on the class. For instance, an object can tell SymPy’s `diff` function how to take the derivative of itself by defining the `_eval_derivative(self, x)` method. The most common `_eval_*` methods relate to the assumptions. `_eval_is_assumption` defines the assumptions for *assumption*.

As an example of the notions presented in this section, we present below a stripped down version of the gamma function  $\Gamma(x)$  from SymPy, which evaluates itself on positive integer arguments, has the positive and real assumptions defined, can be rewritten in terms of factorial with `gamma(x).rewrite(factorial)`, and can be differentiated. `fdiff` is a convenience method for subclasses of `Function`. `fdiff` returns the derivative of the function without worrying about the chain rule. `self.func` is used throughout instead of referencing `gamma` explicitly so that potential subclasses of `gamma` can reuse the methods.

```
from sympy import Integer, Function, floor, factorial, polygamma

class gamma(Function)
    @classmethod
    def eval(cls, arg):
        if isinstance(arg, Integer) and arg.is_positive:
            return factorial(arg - 1)

    def _eval_is_real(self):
        x = self.args[0]
        # noninteger means real and not integer
        if x.is_positive or x.is_noninteger:
            return True

    def _eval_is_positive(self):
        x = self.args[0]
        if x.is_positive:
            return True
        elif x.is_noninteger:
            return floor(x).is_even

    def _eval_rewrite_as_factorial(self, z):
        return factorial(z - 1)

    def fdiff(self, argindex=1):
        from sympy.core.function import ArgumentIndexError
        if argindex == 1:
            return self.func(self.args[0])*polygamma(0, self.args[0])
```





278 converge numerically).

279 Due to this generic approach, particular combinations of hypergeometric functions  
 280 can be specified easily. The implementation of the Meijer G-function takes only a few  
 281 dozen lines of code, yet covers the whole input domain in a robust way. The Meijer  
 282 G-function instance  $G_{1,3}^{3,0}(0; \frac{1}{2}, -1, -\frac{3}{2}|x)$  is a good test case [34]; past versions of  
 283 both Maple and Mathematica produced incorrect numerical values for large  $x > 0$ .  
 284 Here, mpmath automatically removes the internal singularity and compensates for  
 285 cancellations (amounting to 656 bits of precision when  $x = 10000$ ), giving correct  
 286 values:

```
287 >>> mpmath.mp.dps = 15
288 >>> mpmath.meijerg([], [0], [[-0.5, -1, -1.5], []], 10000)
289 mpf('2.4392576907199564e-94')
```

290 Equivalently, with SymPy's interface this function can be evaluated as:

```
291 >>> meijerg([], [0], [[-S(1)/2, -1, -S(3)/2], []], 10000).evalf()
292 2.43925769071996e-94
```

293 We highlight the generalized hypergeometric functions and the Meijer G-function,  
 294 due to those functions' frequent appearance in closed forms for integrals and sums  
 295 [todo: crossref symbolic integration]. Via mpmath, SymPy has relatively good sup-  
 296 port for evaluating sums and integrals numerically, using two complementary ap-  
 297 proaches: direct numerical evaluation, or first computing a symbolic closed form  
 298 involving special functions. [example?]

299 **3.2. Numerical simplification.** The `nsimplify` function in SymPy (a wrapper  
 300 of `identify` in mpmath) attempts to find a simple symbolic expression that evaluates  
 301 to the same numerical value as the given input. It works by applying a few simple  
 302 transformations (including square roots, reciprocals, logarithms and exponentials) to  
 303 the input and, for each transformed value, using the PSLQ algorithm [16] to search  
 304 for a matching algebraic number or optionally a linear combination of user-provided  
 305 base constants (such as  $\pi$ ).

```
306 >>> x = 1 / (sin(pi/5)+sin(2*pi/5)+sin(3*pi/5)+sin(4*pi/5))*2
307 >>> nsimplify(x)
308 -2*sqrt(5)/5 + 1
309 >>> nsimplify(pi, tolerance=0.01)
310 22/7
311 >>> nsimplify(1.783919626661888, [pi], tolerance=1e-12)
312 pi/(-1/3 + 2*pi/3)
```

313 **4. Features.** SymPy has an extensive feature set that encompasses too much to  
 314 cover in-depth here. Bedrock areas, such as calculus, receive their own sub-sections  
 315 below. Additionally, Table 1 describes other capabilities present in the SymPy code  
 316 base. This gives a sampling from the breadth of topics and application domains that  
 317 SymPy services.

Table 1: SymPy Features and Descriptions

Feature	Description
---------	-------------

Discrete Math	Summations, products, binomial coefficients, prime number tools, integer factorization, Diophantine equation solving, and boolean logic representation, equivalence testing, and inference.
Concrete Math	Tools for determining whether summation and product expressions are convergent, absolutely convergent, hypergeometric, and other properties. May also compute Gosper's normal form [31] for two univariate polynomials.
Plotting	Hooks for visualizing expressions via matplotlib [?] or as text drawings when lacking a graphical back-end.
Geometry	Allows the creation of 2D geometrical entities, such as lines and circles. Enables queries on these entities, including asking the area of an ellipse, checking for collinearity of a set of points, or finding the intersection between two lines.
Statistics	Support for a random variable type as well as the ability to declare this variable from prebuilt distribution functions such as Normal, Exponential, Coin, Die, and other custom distributions.
Polynomials	Computes polynomial algebras over various coefficient domains ranging from the simple (e.g., polynomial division) to the advanced (e.g., Gröbner bases [7] and multivariate factorization over algebraic number domains).
Sets	Representations of empty, finite, and infinite sets. This includes special sets such as for all natural, integer, and complex numbers.
Series	Implements series expansion, sequences, and limit of sequences. This includes special series, such as Fourier and power series.
Vectors	Provides basic vector math and differential calculus with respect to 3D Cartesian coordinate systems.
Matrices	Tools for creating matrices of symbols and expressions. This is capable of both sparse and dense representations and performing symbolic linear algebraic operations (e.g., inversion and factorization).
Combinatorics & Group Theory	Implements permutations, combinations, partitions, subsets, various permutation groups (such as polyhedral, Rubik, symmetric, and others), Gray codes [27], and Prufer sequences [10].



Code Generation	Enables generation of compilable and executable code in a variety of different programming languages directly from expressions. Target languages include C, Fortran, Julia, JavaScript, Mathematica, Matlab and Octave, Python, and Theano.
Tensors	Symbolic manipulation of indexed objects.
Lie Algebras	Represents Lie algebras and root systems.
Cryptography	Represents block and stream ciphers, including shift, Affine, substitution, Vigenere's, Hill's, bifid, RSA, Kid RSA, linear-feedback shift registers, and Elgamal encryption
Special Functions	Implements a number of well known special functions, including Dirac delta, Gamma, Beta, Gauss error functions, Fresnel integrals, Exponential integrals, Logarithmic integrals, Trigonometric integrals, Bessel, Hankel, Airy, B-spline, Riemann Zeta, Dirichlet eta, polylogarithm, Lerch transcendent, hypergeometric, elliptic integrals, Mathieu, Jacobi polynomials, Gegenbauer polynomial, Chebyshev polynomial, Legendre polynomial, Hermite polynomial, Laguerre polynomial, and spherical harmonic functions.

**4.1. Simplification.** The generic way to simplify an expression is by calling the `simplify` function. It must be emphasized that simplification is not an unambiguously defined mathematical operation [14]. The `simplify` function applies several simplification routines along with some heuristics to make the output expression as “simple” as possible.

It is often preferable to apply more directed simplification functions. These apply very specific rules to the input expression, and are often able to make guarantees about the output (for instance, the `factor` function, given a polynomial with rational coefficients in several variables, is guaranteed to produce a factorization into irreducible factors). Table 2 lists some common simplification functions.

Table 2: SymPy Simplification Functions

<code>expand</code>	expand the expression
<code>factor</code>	factor a polynomial into irreducibles
<code>collect</code>	collect polynomial coefficients
<code>cancel</code>	rewrite a rational function as $p/q$ with common factors canceled
<code>apart</code>	compute the partial fraction decomposition of a rational function
<code>trigsimp</code>	simplify trigonometric expressions [17]

Substitutions are performed through the `.subs` method, which is sensible to some mathematical properties while matching, such as associativity, commutativity, additive and multiplicative inverses, and matching of powers.

331     **4.2. Calculus.** Derivatives can be computed with the `diff` function.

```
332 >>> diff(sin(x), x)
333 cos(x)
```

334     Unevaluated `Derivative` objects are also supported.

```
335 >>> expr = Derivative(sin(x), x)
336 >>> expr
337 Derivative(sin(x), x)
```

338     Unevaluated expressions can be evaluated with the `doit` method.

```
339 >>> expr.doit()
340 cos(x)
```

341     Integrals can be analogously calculated either with the `integrate` function, or the unevaluated `Integral` objects.

```
342 >>> integrate(sin(x), x)
343 -cos(x)
344 >>> expr = Integral(sin(x), x)
345 >>> expr
346 Integral(sin(x), x)
347 >>> expr.doit()
348 -cos(x)
```

349     Definite integration can be calculated with the same method, by specifying a range of the integration variable. The following computes  $\int_0^1 \sin(x) dx$ .

```
350 >>> integrate(sin(x), (x, 0, 1))
351 -cos(1) + 1
```

352     SymPy implements a combination of the Risch algorithm [13], table lookups, a reimplementation of Manuel Bronstein’s “Poor Man’s Integrator” [12], and an algorithm for computing integrals based on Meijer G-functions. These allow SymPy to compute a wide variety of indefinite and definite integrals.

353     Summations and products are also supported, via the evaluated `summation` and `product` and unevaluated `Sum` and `Product`, and use the same syntax as `integrate`. Summations are computed using a combination of Gosper’s algorithm and an algorithm that uses Meijer G-functions. Products are computed via some heuristics.

354     The limit module implements the Gruntz algorithm [19] for computing symbolic limits. For example, the following computes  $\lim_{x \rightarrow \infty} x \sin(\frac{1}{x}) = 1$  (note that  $\infty$  is `oo` in SymPy).

```
355 >>> limit(x*sin(1/x), x, oo)
356 1
```

357     As a more complicated example, SymPy computes  $\lim_{x \rightarrow 0} \left( 2e^{\frac{1-\cos(x)}{\sin(x)}} - 1 \right)^{\frac{\sinh(x)}{\operatorname{atan}^2(x)}} = e$ .

```
358 >>> limit((2*E**((1-cos(x))/sin(x))-1)**(sinh(x)/atan(x)**2), x, 0)
359 E
```

360     **4.3. Printers.** SymPy has a rich collection of expression printers for displaying expressions to the user. By default, an interactive Python session will render the `str` form of an expression, which has been used in all the examples in this paper so far.

```
361 >>> phi0 = Symbol('phi0')
362 >>> str(Integral(sqrt(phi0), phi0))
363 Integral(sqrt(phi0 + 1), x)
```

364     Expressions can be printed with 2D monospace text with `pprint`. This uses Unicode characters to render mathematical symbols such as integral signs, square roots, and parentheses. Greek letters and subscripts in symbol names are rendered

379 automatically.  
 380 Alternately, the `use_unicode=False` flag can be set, which causes the expression  
 381 to be printed using only ASCII characters.

```
382 >>> pprint(Integral(sqrt(phi0 + 1), phi0), use_unicode=False)
383 /
384 |
385 | -----
386 | \ / phi0 + 1 d(phi0)
387 |
388 /
```

389 The function `latex` returns a  $\text{\LaTeX}$  representation of an expression.

```
390 >>> print(latex(Integral(sqrt(phi0 + 1), phi0)))
391 \int \sqrt{\phi_0 + 1}\, d\phi_0
```

392 Users are encouraged to run the `init_printing` function at the beginning of  
 393 interactive sessions, which automatically enables the best pretty printing supported  
 394 by their environment. In the Jupyter notebook or `qtconsole` [29] the  $\text{\LaTeX}$  printer is  
 395 used to render expressions using MathJax or  $\text{\LaTeX}$  if it is installed on the system.  
 396 The 2D text representation is used otherwise.

397 Other printers such as MathML are also available. SymPy uses an extensible  
 398 printer subsystem which allows users to customize the printing for any given printer,  
 399 and for custom objects to define their printing behavior for any printer. SymPy's  
 400 code generation capabilities, which we will not discuss in-depth here, use the same  
 401 printer model.

402 **4.4. Solvers.** SymPy has module of equation solvers for symbolic equations.  
 403 There are two submodules to solve algebraic equations in SymPy, referred to as old  
 404 solve function, `solve`, and new solve function, `solveset`. `Solveset` is introduced with  
 405 several design changes with respect to old `solve` function to resolve the issues with  
 406 old `solve` function, for example old `solve` function's input API has many flags which  
 407 are not needed and they make it hard for the user and the developers to work on  
 408 solvers. In contrast to old solve function, the `solveset` has a clean input API, It  
 409 only asks for the much needed information from the user, following are the function  
 410 signatures of old and new solve function:

```
411 solve(f, *symbols, **flags) # old solve function
412 solveset(f, symbol, domain) # new solve function
```

413 The old `solve` function has an inconsistent output API for various types of inputs,  
 414 whereas the `solveset` has a canonical output API which is achieved using sets. It  
 415 can consistently return various types of solutions.

416 • Single solution

```
417 >>> solveset(x - 1)
418 >>> {1}
```

419 • Finite set of solution, quadratic equation

```
420 >>> solveset(x**2 - pi**2, x)
421 {-pi, pi}
```

422 • No Solution

```
423 >>> solveset(1, x)
424 EmptySet()
```

425 • Interval of solution

```
426 >>> solveset(x**2 - 3 > 0, x, domain=S.Reals)
427 (-oo, -sqrt(3)) U (sqrt(3), oo)
```

```

428     • Infinitely many solutions
429 >>> solveset(sin(x) - 1, x, domain=S.Reals)
430 ImageSet(Lambda(_n, 2*_n*pi + pi/2), Integers())
431 >>> solveset(x - x, x, domain=S.Reals)
432 (-oo, oo)
433 >>> solveset(x - x, x, domain=S.Complexes)
434 S.Complexes
435     • Linear system: finite and infinite solution for determined, under determined
436       and over determined problems.
437 >>> A = Matrix([[1, 2, 3], [4, 5, 6], [7, 8, 10]])
438 >>> b = Matrix([3, 6, 9])
439 >>> linsolve((A, b), x, y, z)
440 {(-1,2,0)}
441 >>> linsolve(Matrix([[1, 1, 1, 1], [1, 1, 2, 3]]), (x, y, z))
442 {(-y - 1, y, 2)}
443 The new solve i.e. solveset is under active development and is a planned replace-
444 ment for solve. Hence there are some features which are implemented in solve and is
445 not yet implemented in solveset. The table below show the current state of old and
446 new solve functions.
447

```

Solveset vs Solve		
Feature	solve	solveset
Consistent Output API	No	Yes
Consistent Input API	No	Yes
Univariate	Yes	Yes
Linear System	Yes	Yes (linsolve)
Non Linear System	Yes	Not yet
Transcendental	Yes	Not yet

```

448
449
450 Below are some of the examples of old solve function:
451     • Non Linear (multivariate) System of Equation: Intersection of a circle and a
452       parabola.
453
454 >>> solve([x**2 + y**2 - 16, 4*x - y**2 + 6], x, y)
455 [(-2 + sqrt(14), -sqrt(-2 + 4*sqrt(14))),
456  (-2 + sqrt(14), sqrt(-2 + 4*sqrt(14))),
457  (-sqrt(14) - 2, -I*sqrt(2 + 4*sqrt(14))),
458  (-sqrt(14) - 2, I*sqrt(2 + 4*sqrt(14)))]
459     • Transcendental Equation
460 >>> solve(x + log(x)**2 - 5*(x + log(x)) + 6, x)
461 [LambertW(exp(2)), LambertW(exp(3))]
462 >>> solve(x**3 + exp(x))
463 [-3*LambertW((-1)**(2/3)/3)]

```

```

464 4.5. Matrices. SymPy supports matrices with symbolic expressions as elements.■
465 >>> x, y = symbols('x y')
466 >>> A = Matrix(2, 2, [x, x + y, y, x])
467 >>> A
468 Matrix([
469 [  x, x + y],
470 [  y,  x]])

```

All SymPy matrix types can do linear algebra including matrix addition, multiplication, exponentiation, computing determinant, solving linear systems and computing inverses using LU decomposition, LDL decomposition, Gauss-Jordan elimination, Cholesky decomposition, Moore-Penrose pseudoinverse, and adjugate matrix.

All operations are computed symbolically. Eigenvalues are computed by generating the characteristic polynomial using the Berkowitz algorithm and then solving it using polynomial routines. Diagonalizable matrices can be diagonalized first to compute the eigenvalues.

```
>>> A.eigenvals()
{x - sqrt(y*(x + y)): 1, x + sqrt(y*(x + y)): 1}
```

Internally these matrices store the elements as a list making it a dense representation. For storing sparse matrices, the `SparseMatrix` class can be used. Sparse matrices store the elements in a dictionary of keys (DoK) format.

SymPy also supports matrices with symbolic dimension values. `MatrixSymbol` represents a matrix with dimensions  $m \times n$ , where  $m$  and  $n$  can be symbolic. Matrix addition and multiplication, scalar operations, matrix inverse and transpose are stored symbolically as matrix expressions.

```
>>> m, n, p = symbols("m, n, p", integer=True)
>>> R = MatrixSymbol("R", m, n)
>>> S = MatrixSymbol("S", n, p)
>>> T = MatrixSymbol("t", m, p)
>>> U = R*S + 2*T
>>> u.shape
(m, p)
>>> U[0, 1]
2*T[0, 1] + Sum(R[0, _k]*S[_k, 1], (_k, 0, n - 1))
```

Block matrices are also supported in SymPy. `BlockMatrix` elements can be any matrix expression which includes explicit matrices, matrix symbols, and block matrices. All functionalities of matrix expressions are also present in `BlockMatrix`.

```
>>> n, m, l = symbols('n m l')
>>> X = MatrixSymbol('X', n, n)
>>> Y = MatrixSymbol('Y', m, m)
>>> Z = MatrixSymbol('Z', n, m)
>>> B = BlockMatrix([[X, Z], [ZeroMatrix(m, n), Y]])
>>> B
Matrix([
 [X, Z],
 [0, Y]])
>>> B[0, 0]
X[0, 0]
>>> B.shape
(m + n, m + n)
```

**5. Domain Specific Features.** SymPy includes several packages that allow users to solve domain specific problems. For example, a comprehensive physics package is included that is useful for solving problems in classical mechanics, optics, and quantum mechanics along with support for manipulating physical quantities with units.

**5.1. Vector Algebra.** The `sympy.physics.vector` package provides reference frame, time, and space aware vector and dyadic objects that allow for three dimen-

sional operations such as addition, subtraction, scalar multiplication, inner and outer products, cross products, etc. Both of these objects can be written in very compact notation that make it easy to express the vectors and dyadics in terms of multiple reference frames with arbitrarily defined relative orientations. The vectors are used to specify the positions, velocities, and accelerations of points, orientations, angular velocities, and angular accelerations of reference frames, and force and torques. The dyadics are essentially reference frame aware  $3 \times 3$  tensors. The vector and dyadic objects can be used for any one-, two-, or three-dimensional vector algebra and they provide a strong framework for building physics and engineering tools.

The following Python interpreter session showing how a vector is created using the orthogonal unit vectors of three reference frames that are oriented with respect to each other and the result of expressing the vector in the  $A$  frame. The  $B$  frame is oriented with respect to the  $A$  frame using Z-X-Z Euler Angles of magnitude  $\pi$ ,  $\frac{\pi}{2}$ , and  $\frac{\pi}{3}$  rad, respectively whereas the  $C$  frame is oriented with respect to the  $B$  frame through a simple rotation about the  $B$  frame's X unit vector through  $\frac{\pi}{2}$  rad.

```
>>> from sympy import pi
>>> from sympy.physics.vector import ReferenceFrame
>>> A = ReferenceFrame('A')
>>> B = ReferenceFrame('B')
>>> C = ReferenceFrame('C')
>>> B.orient(A, 'body', (pi, pi / 3, pi / 4), 'zxz')
>>> C.orient(B, 'axis', (pi / 2, B.x))
>>> v = 1 * A.x + 2 * B.z + 3 * C.y
>>> v
A.x + 2*B.z + 3*C.y
>>> v.express(A)
A.x + 5*sqrt(3)/2*A.y + 5/2*A.z
```

**5.2. Classical Mechanics.** The `physics.mechanics` package utilizes the `physics.vector` package to populate time aware particle and rigid body objects to fully describe the kinematics and kinetics of a rigid multi-body system. These objects store all of the information needed to derive the ordinary differential or differential algebraic equations that govern the motion of the system, i.e., the equations of motion. These equations of motion abide by Newton's laws of motion and can handle any arbitrary kinematical constraints or complex loads. The package offers two automated methods for formulating the equations of motion based on Lagrangian Dynamics [23] and Kane's Method [22]. Lastly, there are automated linearization routines for constrained dynamical systems based on [30].

**5.3. Quantum Mechanics.** The `sympy.physics.quantum` package provides quantum functions, states, operators, and computation of standard quantum models.

**5.4. Optics.** The `physics.optics` package provides Gaussian optics functions.

**5.5. Units.** The `physics.units` module provides around two hundred predefined prefixes and SI units that are commonly used in the sciences. Additionally, it provides the `Unit` class which allows the user to define their own units. These prefixes and units are multiplied by standard SymPy objects to make expressions unit aware, allowing for algebraic and calculus manipulations to be applied to the expressions while the units are tracked in the manipulations. The units of the expressions can be easily converted to other desired units. There is also a new units system in

`sympy.physics.unitsystems` that allows the user to work in specified unit systems.

**5.6. Tensors.** Ongoing work to provide the capabilities of tensor computer algebra has so far produced the `tensor` module. It is composed of three separated submodules, whose purposes are quite different: `tensor.indexed` and `tensor.indexed_methods` support indexed symbols, `tensor.array` contains facilities to operator on symbolic  $N$ -dimensional arrays and finally `tensor.tensor` is used to define abstract tensors. The abstract tensors subsection is inspired by xAct[25] and Cadabra[28]. Canonicalization based on the Butler-Portugal[24] algorithm is supported in SymPy. It is currently limited to polynomial tensor expressions.

**6. Other Projects that use SymPy.** There are several projects that use SymPy as a library for implementing a part of their project, or even as a part of back-end for their application as well.

Some of them are listed below:

- **Cadabra:** Cadabra is a symbolic computer algebra system (CAS) designed specifically for the solution of problems encountered in field theory.
- **Octave Symbolic:** The Octave-Forge Symbolic package adds symbolic calculation features to GNU Octave. These include common Computer Algebra System tools such as algebraic operations, calculus, equation solving, Fourier and Laplace transforms, variable precision arithmetic and other features.
- **SymPy.jl:** Provides a Julia interface to SymPy using PyCall.
- **Mathics:** Mathics is a free, general-purpose online CAS featuring Mathematica compatible syntax and functions. It is backed by highly extensible Python code, relying on SymPy for most mathematical tasks.
- **Mathpix:** An iOS App, that uses Artificial Intelligence to detect handwritten math as input, and uses SymPy Gamma, to evaluate the math input and generate the relevant steps to solve the problem.
- **IKFast:** IKFast is a robot kinematics compiler provided by **OpenRAVE**. It analytically solves robot inverse kinematics equations and generates optimized C++ files. It uses SymPy for its internal symbolic mathematics.
- **Sage:** A CAS, visioned to be a viable free open source alternative to Magma, Maple, Mathematica and Matlab.
- **SageMathCloud:** SageMathCloud is a web-based cloud computing and course management platform for computational mathematics.
- **PyDy:** Multibody Dynamics with Python.
- **galgebra:** Geometric algebra (previously `sympy.galgebra`).
- **yt:** Python package for analyzing and visualizing volumetric data (`yt.units` uses SymPy).
- **SfePy:** Simple finite elements in Python.
- **Quameon:** Quantum Monte Carlo in Python.
- **Lcapy:** Experimental Python package for teaching linear circuit analysis.
- **Quantum Programming in Python:** Quantum 1D Simple Harmonic Oscillator and Quantum Mapping Gate.
- **LaTeX Expression project:** Easy LaTeX typesetting of algebraic expressions in symbolic form with automatic substitution and result computation.
- **Symbolic statistical modeling:** Adding statistical operations to complex physical models.

## 7. Conclusion and future work.

## 8. References.

## REFERENCES

- [1] <https://github.com/sympy/sympy/blob/master/doc/src/modules/polys/ringseries.rst>.
- [2] <https://reference.wolfram.com/language/ref/Flat.html>.
- [3] <https://reference.wolfram.com/language/ref/Orderless.html>.
- [4] <https://reference.wolfram.com/language/ref/OneIdentity.html>.
- [5] <https://reference.wolfram.com/language/tutorial/FlatAndOrderlessFunctions.html>.
- [6] *The software engineering of the wolfram system*, 2016, <https://reference.wolfram.com/language/tutorial/TheSoftwareEngineeringOfTheWolframSystem.html>.
- [7] W. W. ADAMS AND P. LOUSTAUNAU, *An introduction to Gröbner bases*, no. 3, American Mathematical Soc., 1994.
- [8] D. H. BAILEY, K. JEYABALAN, AND X. S. LI, *A comparison of three high-precision quadrature schemes*, *Experimental Mathematics*, 14 (2005), pp. 317–329.
- [9] C. M. BENDER AND S. A. ORSZAG, *Advanced Mathematical Methods for Scientists and Engineers*, Springer, 1st ed., October 1999.
- [10] N. BIGGS, E. K. LLOYD, AND R. J. WILSON, *Graph Theory, 1736-1936*, Oxford University Press, 1976.
- [11] R. P. BRENT AND P. ZIMMERMANN, *Modern Computer Arithmetic*, Cambridge University Press, version 0.5.1 ed.
- [12] M. BRONSTEIN, *Poor Man's Integrator*, <http://www-sop.inria.fr/cafe/Manuel.Bronstein/pmint>.
- [13] M. BRONSTEIN, *Symbolic Integration I: Transcendental Functions*, Springer-Verlag, New York, NY, USA, 2005.
- [14] J. CARETTE, *Understanding Expression Simplification*, in ISSAC '04: Proceedings of the 2004 International Symposium on Symbolic and Algebraic Computation, New York, NY, USA, 2004, ACM Press, pp. 72–79, <http://dx.doi.org/http://doi.acm.org/10.1145/1005285.1005298>.
- [15] R. J. FATEMAN, *A review of Mathematica*, *Journal of Symbolic Computation*, 13 (1992), pp. 545–579, [http://dx.doi.org/DOI:10.1016/S0747-7171\(10\)80011-2](http://dx.doi.org/DOI:10.1016/S0747-7171(10)80011-2).
- [16] H. R. P. FERGUSON, D. H. BAILEY, AND S. ARNO, *Analysis of PSLQ, an integer relation finding algorithm*, *Mathematics of Computation*, 68 (1999), pp. 351–369.
- [17] H. FU, X. ZHONG, AND Z. ZENG, *Automated and Readable Simplification of Trigonometric Expressions*, *Mathematical and Computer Modelling*, 55 (2006), pp. 1169–1177.
- [18] D. GOLDBERG, *What every computer scientist should know about floating-point arithmetic*, *ACM Computing Surveys (CSUR)*, 23 (1991), pp. 5–48.
- [19] D. GRUNTZ, *On Computing Limits in a Symbolic Manipulation System*, PhD thesis, Swiss Federal Institute of Technology, Zürich, Switzerland, 1996.
- [20] D. GRUNTZ AND W. KOEPF, *Formal power series*, (1993).
- [21] C. V. HORSSEN, *GMPY*, <https://pypi.python.org/pypi/gmpy2>, 2015.
- [22] T. R. KANE AND D. A. LEVINSON, *Dynamics, Theory and Applications*, McGraw Hill, 1985.
- [23] J. LAGRANGE, *Mécanique analytique*, no. v. 1 in *Mécanique analytique*, Ve Courcier, 1811.
- [24] L. R. U. MANSSUR, R. PORTUGAL, AND B. F. SVAITER, *Group-theoretic approach for symbolic tensor manipulation*, *Int. J. Mod. Phys. C*, 13 (2002), <http://dx.doi.org/http://dx.doi.org/10.1142/S0129183102004571>.
- [25] J. MARTÍN-GARCÍA, *xact, efficient tensor computer algebra*, 2002-2016, <http://metric.iem.csic.es/Martin-Garcia/xAct/>.
- [26] M. MOSKEWICZ, C. MADIGAN, AND S. MALIK, *Method and system for efficient implementation of boolean satisfiability*, Aug. 26 2008, <http://www.google.co.in/patents/US7418369>. US Patent 7,418,369.
- [27] A. NIJENHUIS AND H. S. WILF, *Combinatorial Algorithms: For Computers and Calculators*, Academic Press, New York, NY, USA, second ed., 1978.
- [28] K. PEETERS, *Cadabra: a field-theory motivated symbolic computer algebra system*, *Computer Physics Communications*, (2007).
- [29] F. PÉREZ AND B. E. GRANGER, *Ipynthon: a system for interactive scientific computing*, *Computing in Science & Engineering*, 9 (2007), pp. 21–29.
- [30] D. L. PETERSON, G. GEDE, AND M. HUBBARD, *Symbolic linearization of equations of motion of constrained multibody systems*, *Multibody System Dynamics*, 33 (2014), pp. 143–161, <http://dx.doi.org/10.1007/s11044-014-9436-5>.
- [31] M. PETKOVŠEK, H. S. WILF, AND D. ZEILBERGER, *A = bak peters*, Wellesley, MA, (1996).
- [32] M. SOFRONIOU AND G. SPALETTA, *Precise numerical computation*, *Journal of Logic and Algebraic Programming*, 64 (2005), pp. 113–134.
- [33] H. TAKAHASI AND M. MORI, *Double exponential formulas for numerical integration*, *Publica-*



tions of the Research Institute for Mathematical Sciences, 9 (1974), pp. 721–741.

[34] V. T. TOTH, *Maple and meijer's g-function: a numerical instability and a cure*. <http://www.vttoth.com/CMS/index.php/technical-notes/67>, 2007.

## 9. Supplement.

**9.1. Limits: The Gruntz Algorithm.** SymPy calculates limits using the Gruntz algorithm, as described in [19]. The basic idea is as follows: any limit can be converted to a limit  $\lim_{x \rightarrow \infty} f(x)$  by substitutions like  $x \rightarrow \frac{1}{x}$ . Then the most varying subexpression  $\omega$  (that converges to zero as  $x \rightarrow \infty$  the fastest from all subexpressions) is identified in  $f(x)$ , and  $f(x)$  is expanded into a series with respect to  $\omega$ . Any positive powers of  $\omega$  converge to zero. If there are negative powers of  $\omega$ , then the limit is infinite. The constant term (independent of  $\omega$ , but could depend on  $x$ ) then determines the limit (one might need to recursively apply the Gruntz algorithm on this term to determine the limit).

To determine the most varying subexpression, the comparability classes must first be defined, by calculating  $L$ :

$$(1) \quad L \equiv \lim_{x \rightarrow \infty} \frac{\log |f(x)|}{\log |g(x)|}$$

And then operations  $<$ ,  $>$  and  $\sim$  are defined as follows:  $f > g$  when  $L = \pm\infty$  (it is said that  $f$  is more rapidly varying than  $g$ , i.e.,  $f$  goes to  $\infty$  or 0 faster than  $g$ ,  $f$  is greater than any power of  $g$ ),  $f < g$  when  $L = 0$  ( $f$  is less rapidly varying than  $g$ ) and  $f \sim g$  when  $L \neq 0, \pm\infty$  (both  $f$  and  $g$  are bounded from above and below by suitable integral powers of the other). Here are some examples of comparability classes:

$$2 < x < e^x < e^{x^2} < e^{e^x}$$

$$2 \sim 3 \sim -5$$

$$x \sim x^2 \sim x^3 \sim \frac{1}{x} \sim x^m \sim -x$$

$$e^x \sim e^{-x} \sim e^{2x} \sim e^{x+e^{-x}}$$

$$f(x) \sim \frac{1}{f(x)}$$

The Gruntz algorithm is now illustrated on the following example:

$$(2) \quad f(x) = e^{x+2e^{-x}} - e^x + \frac{1}{x}.$$

The goal is to calculate  $\lim_{x \rightarrow \infty} f(x)$ . First the set of most rapidly varying subexpressions is determined, the so called *mrsv set*. For (2), the following mrsv set  $\{e^x, e^{-x}, e^{x+2e^{-x}}\}$  is obtained. These are all subexpressions of (2) and they all belong to the same comparability class. This calculation can be done using SymPy as follows:

```
>>> from sympy.series.gruntz import mrsv
>>> mrsv(exp(x+2*exp(-x))-exp(x) + 1/x, x)[0].keys()
dict_keys([exp(x + 2*exp(-x)), exp(x), exp(-x)])
```

Next any item  $\omega$  is taken from mrsv that converges to zero for  $x \rightarrow \infty$ . The item  $\omega = e^{-x}$  is obtained. If such a term is not present in the mrsv set (i.e., all terms converge to infinity instead of zero), the relation  $f(x) \sim \frac{1}{f(x)}$  can be used.

Next step is to rewrite the mrv in terms of  $\omega$ :  $\{\frac{1}{\omega}, \omega, \frac{1}{\omega}e^{2\omega}\}$ . Then the original subexpressions are substituted back into  $f(x)$  and expanded with respect to  $\omega$ :

$$(3) \quad f(x) = \frac{1}{x} - \frac{1}{\omega} + \frac{1}{\omega}e^{2\omega} = 2 + \frac{1}{x} + 2\omega + O(\omega^2)$$

Since  $\omega$  is from the mrv set, then in the limit  $x \rightarrow \infty$  it is  $\omega \rightarrow 0$  and so  $2\omega + O(\omega^2) \rightarrow 0$  in (3):

$$(4) \quad f(x) = \frac{1}{x} - \frac{1}{\omega} + \frac{1}{\omega}e^{2\omega} = 2 + \frac{1}{x} + 2\omega + O(\omega^2) \rightarrow 2 + \frac{1}{x}$$

Since the result  $(2 + \frac{1}{x})$  still depends on  $x$ , the above procedure is iterated on the result until just a number (independent of  $x$ ) is obtained, which is the final limit. In the above case the limit is 2, as can be verified by SymPy:

```
>>> limit(exp(x+2*exp(-x))-exp(x) + 1/x, x, oo)
2
```

In general, when  $f(x)$  is expanded in terms of  $\omega$ , it is obtained:

$$(5) \quad f(x) = \underbrace{O\left(\frac{1}{\omega^3}\right)}_{\infty} + \underbrace{\frac{C_{-2}(x)}{\omega^2}}_{\infty} + \underbrace{\frac{C_{-1}(x)}{\omega}}_{\infty} + \underbrace{C_0(x)}_0 + \underbrace{C_1(x)\omega}_{0} + \underbrace{O(\omega^2)}_0$$

The positive powers of  $\omega$  are zero. If there are any negative powers of  $\omega$ , then the result of the limit is infinity, otherwise the limit is equal to  $\lim_{x \rightarrow \infty} C_0(x)$ . The expression  $C_0(x)$  is simpler than  $f(x)$  and so the algorithm always converges. A proof of this, as well as further details are given in Gruntz's Ph.D. thesis [19].

## 9.2. Series.

**9.2.1. Series Expansion.** SymPy is able to calculate the symbolic series expansion of an arbitrary series or expression involving elementary and special functions and multiple variables. For this it has two different implementations- the **series** method and Ring Series.

The first approach stores a series as an object of the **Basic** class. Each function has its specific implementation of its expansion which is able to evaluate the Puiseux series expansion about a specified point. For example, consider a Taylor expansion about 0:

```
>>> from sympy import symbols, series
>>> x, y = symbols('x, y')
>>> series(sin(x+y) + cos(x*y), x, 0, 2)
1 + sin(y) + x*cos(y) + O(x**2)
```

The newer and much faster[1] approach called Ring Series makes use of the observation that a truncated Taylor series, is in fact a polynomial. Ring Series uses the efficient representation and operations of sparse polynomials. The choice of sparse polynomials is deliberate as it performs well in a wider range of cases than a dense representation. Ring Series gives the user the freedom to choose the type of coefficients he wants to have in his series, allowing the use of faster operations on certain types.

For this, several low level methods for expansion of trigonometric, hyperbolic and other elementary functions like inverse of a series, calculating  $n$ th root, etc, are implemented using variants of the Newton[11] Method. All these support Puiseux series expansion. The following example demonstrates the use of an elementary function that calculates the Taylor expansion of the **sine** of a series.

```

746 >>> from sympy import ring
747 >>> from sympy.polys.ring_series import rs_sin
748 >>> R, x = ring('x', QQ)
749 >>> rs_sin(x**2 + x, x, 5)
750 -1/2*x**4 - 1/6*x**3 + x**2 + x
751     The function sympy.polys.rs_series makes use of these elementary functions
752 to expand an arbitrary SymPy expression. It does so by following a recursive strategy
753 of expanding the lower most functions first and then composing them recursively to
754 calculate the desired expansion. Currently it only supports expansion about 0 and
755 is under active development. Ring Series is several times faster than the default
756 implementation with the speed difference increasing with the size of the series. The
757 sympy.polys.rs_series takes as input any SymPy expression and hence there is no
758 need to explicitly create a polynomial ring. An example:
759 >>> from sympy.polys.ring_series import rs_series
760 >>> from sympy.abc import a, b
761 >>> from sympy import sin, cos
762 >>> rs_series(sin(a + b), a, 4)
763 -1/2*(sin(b))*a**2 + (sin(b)) - 1/6*(cos(b))*a**3 + (cos(b))*a

```

764 **9.2.2. Formal Power Series.** SymPy can be used for computing the Formal  
765 Power Series of a function. The implementation is based on the algorithm described  
766 in the paper on Formal Power Series[20]. The advantage of this approach is that an  
767 explicit formula for the coefficients of the series expansion is generated rather than  
768 just computing a few terms.

769 The following example shows how to use `fps`:

```

770 >>> f = fps(sin(x), x, x0=0)
771 >>> f.truncate(6)
772 x - x**3/6 + x**5/120 + O(x**6)
773 >>> f[15]
774 -x**15/1307674368000

```

775 **9.2.3. Fourier Series.** SymPy provides functionality to compute Fourier Series  
776 of a function using the `fourier_series` function. Under the hood it just computes  
777  $a_0$ ,  $a_n$ ,  $b_n$  using standard integration formulas.

778 Here's an example on how to compute Fourier Series in SymPy:

```

779 >>> L = symbols('L')
780 >>> f = fourier_series(2 * (Heaviside(x/L) - Heaviside(x/L - 1)) - 1, (x, 0, 2*L))
781 >>> f.truncate(3)
782 4*sin(pi*x/L)/pi + 4*sin(3*pi*x/L)/(3*pi) + 4*sin(5*pi*x/L)/(5*pi)

```

783 **9.3. Logic.** SymPy supports construction and manipulation of boolean expres-  
784 sions through the `logic` module. SymPy symbols can be used as propositional vari-  
785 ables and also be substituted as `True` or `False`. A good number of manipulation  
786 features for boolean expressions have been implemented in the `logic` module.

787 **9.3.1. Constructing boolean expressions.** A boolean variable can be de-  
788 clared as a SymPy symbol. Python operators `&`, `|` and `~` are overloaded for logical  
789 `And`, `Or` and `negate`. Several others like `Xor`, `Implies` can be constructed with `^`, `»`  
790 respectively. The above are just a shorthand, expressions can also be constructed by  
791 directly calling `And()`, `Or()`, `Not()`, `Xor()`, `Nand()`, `Nor()`, etc.

```

792 >>> from sympy import *
793 >>> x, y, z = symbols('x y z')

```

```

794 >>> e = (x & y) | z
795 >>> e.subs({x: True, y: True, z: False})
796 True

```

797 **9.3.2. CNF and DNF.** Any boolean expression can be converted to conjunctive normal form, disjunctive normal form and negation normal form. The API also permits to check if a boolean expression is in any of the above mentioned forms.

```

800 >>> from sympy import *
801 >>> x, y, z = symbols('x y z')
802 >>> to_cnf((x & y) | z)
803 And(Or(x, z), Or(y, z))
804 >>> to_dnf(x & (y | z))
805 Or(And(x, y), And(x, z))
806 >>> is_cnf((x | y) & z)
807 True
808 >>> is_dnf((x & y) | z)
809 True

```

810 **9.3.3. Simplification and Equivalence.** The module supports simplification of given boolean expression by making deductions on it. Equivalence of two expressions can also be checked. If so, it is possible to return the mapping of variables of two expressions so as to represent the same logical behaviour.

```

814 >>> from sympy import *
815 >>> a, b, c, x, y, z = symbols('a b c x y z')
816 >>> e = a & (~a | ~b) & (a | c)
817 >>> simplify(e)
818 And(Not(b), a)
819 >>> e1 = a & (b | c)
820 >>> e2 = (x & y) | (x & z)
821 >>> bool_map(e1, e2)
822 (And(Or(b, c), a), {b: y, a: x, c: z})

```

823 **9.3.4. SAT solving.** The module also supports satisfiability checking of a given boolean expression. If satisfiable, it is possible to return a model for which the expression is satisfiable. The API also supports returning all possible models. The SAT solver has a clause learning DPLL algorithm implemented with watch literal scheme and VSIDS heuristic[26].

```

828 >>> from sympy import *
829 >>> a, b, c = symbols('a b c')
830 >>> satisfiable(a & (~a | b) & (~b | c) & ~c)
831 False
832 >>> satisfiable(a & (~a | b) & (~b | c) & c)
833 {b: True, a: True, c: True}

```

834 **9.4. Diophantine Equations.** Diophantine equations play a central and an important role in number theory. A Diophantine equation has the form,  $f(x_1, x_2, \dots, x_n) = 0$  where  $n \geq 2$  and  $x_1, x_2, \dots, x_n$  are integer variables. If we can find  $n$  integers  $a_1, a_2, \dots, a_n$  such that  $x_1 = a_1, x_2 = a_2, \dots, x_n = a_n$  satisfies the above equation, we say that the equation is solvable.

839 Currently, following five types of Diophantine equations can be solved using SymPy's Diophantine module.

- 841 • Linear Diophantine equations:  $a_1x_1 + a_2x_2 + \dots + a_nx_n = b$

- 842 • General binary quadratic equation:  $ax^2 + bxy + cy^2 + dx + ey + f = 0$
- 843 • Homogeneous ternary quadratic equation:  $ax^2 + by^2 + cz^2 + dxy + eyz + fzx = 0$
- 844 • Extended Pythagorean equation:  $a_1x_1^2 + a_2x_2^2 + \cdots + a_nx_n^2 = a_{n+1}x_{n+1}^2$
- 845 • General sum of squares:  $x_1^2 + x_2^2 + \cdots + x_n^2 = k$

846 When an equation is fed into Diophantine module, it factors the equation (if  
847 possible) and solves each factor separately. Then all the results are combined to create  
848 the final solution set. Following examples illustrate some of the basic functionalities  
849 of the Diophantine module.

```

850 >>> from sympy import symbols
851 >>> x, y, z = symbols("x, y, z", integer=True)
852
853 >>> diophantine(2*x + 3*y - 5)
854 set([(3*t_0 - 5, -2*t_0 + 5)])
855
856 >>> diophantine(2*x + 4*y - 3)
857 set()
858
859 >>> diophantine(x**2 - 4*x*y + 8*y**2 - 3*x + 7*y - 5)
860 set([(2, 1), (5, 1)])
861
862 >>> diophantine(x**2 - 4*x*y + 4*y**2 - 3*x + 7*y - 5)
863 set([(-2*t**2 - 7*t + 10, -t**2 - 3*t + 5)])
864
865 >>> diophantine(3*x**2 + 4*y**2 - 5*z**2 + 4*x*y - 7*y*z + 7*z*x)
866 set([(-16*p**2 + 28*p*q + 20*q**2, 3*p**2 + 38*p*q - 25*q**2, 4*p**2 - 24*p*q + 68*q**2)])
867
868 >>> from sympy.abc import a, b, c, d, e, f
869 >>> diophantine(9*a**2 + 16*b**2 + c**2 + 49*d**2 + 4*e**2 - 25*f**2)
870 set([(70*t1**2 + 70*t2**2 + 70*t3**2 + 70*t4**2 - 70*t5**2, 105*t1*t5, 420*t2*t5, 60*t3*t5, 210*t4*t5, 420*t5**2)])
871
872 >>> diophantine(a**2 + b**2 + c**2 + d**2 + e**2 + f**2 - 112)
873 set([(8, 4, 4, 4, 0, 0)])

```

874 **9.5. Sets.** SymPy supports representation of a wide variety of mathematical  
875 sets. This is achieved by first defining abstract representations of atomic set classes  
876 and then combining and transforming them using various set operations.

877 Each of the set classes inherits from the base class `Set` and defines methods to  
878 check membership and calculate unions, intersections, and set differences. When these  
879 methods are not able to evaluate to atomic set classes, they are represented as abstract  
880 unevaluated objects.

881 SymPy has the following atomic set classes:

- 882 • `EmptySet` represents the empty set  $\emptyset$ .
- 883 • `UniversalSet` is an abstract “universal set” for which everything is a member.  
884 The union of the universal set with any set gives the universal set and the  
885 intersection gives to the other set itself.
- 886 • `FiniteSet` is functionally equivalent to Python’s built `inset` object. Its mem-  
887 bers can be any SymPy object including other sets themselves.
- 888 • `Integers` represents the set of Integers  $\mathbb{Z}$ .
- 889 • `Naturals` represents the set of Natural numbers  $\mathbb{N}$ , i.e., the set of positive  
890 integers.

- **Naturals0** represents the whole numbers, which are all the non-negative integers.
- **Range** represents a range of integers. A range is defined by specifying a start value, an end value, and a step size. Range is functionally equivalent to Python's `range` except it supports infinite endpoints, allowing the representation of infinite ranges.
- **Interval** represents an interval of real numbers. It is specified by giving the start and end point and specifying if it is open or closed in the respective ends.

Other than unevaluated classes of Union, Intersection and Set Difference operations, we have following set classes.

- **ProductSet** defines the Cartesian product of two or more sets. The product set is useful when representing higher dimensional spaces. For example to represent a three-dimensional space we simply take the Cartesian product of three real sets.
- **ImageSet** represents the image of a function when applied to a particular set. In notation, the image set of a function  $F$  with respect to a set  $S$  is  $\{F(x)|x \in S\}$ . SymPy uses image sets to represent sets of infinite solutions equations such as  $\sin(x) = 0$ .
- **ConditionSet** represents subset of a set whose members satisfies a particular condition. In notation, the condition set of the set  $S$  with respect to the condition  $H$  is  $\{x|H(x), x \in S\}$ . SymPy uses condition sets to represent the set of solutions of equations and inequalities, where the equation or the inequality is the condition and the set is the domain being solved over.

A few other classes are implemented as special cases of the classes described above. The set of real numbers, **Reals** is implemented as a special case of **Interval**,  $(-\infty, \infty)$ . **ComplexRegion** is implemented as a special case of **ImageSet**. **ComplexRegion** supports both polar and rectangular representation of regions on the complex plane.

**9.6. SymPy Gamma.** SymPy Gamma is a simple web application that runs on Google App Engine. It executes and displays the results of SymPy expressions as well as additional related computations, in a fashion similar to that of Wolfram|Alpha. For instance, entering an integer will display its prime factors, digits in the base-10 expansion, and a factorization diagram. Entering a function will display its docstring; in general, entering an arbitrary expression will display its derivative, integral, series expansion, plot, and roots.

SymPy Gamma also has several additional features than just computing the results using SymPy.

- It displays integration steps, differentiation steps in detail, which can be viewed in Figure 1:

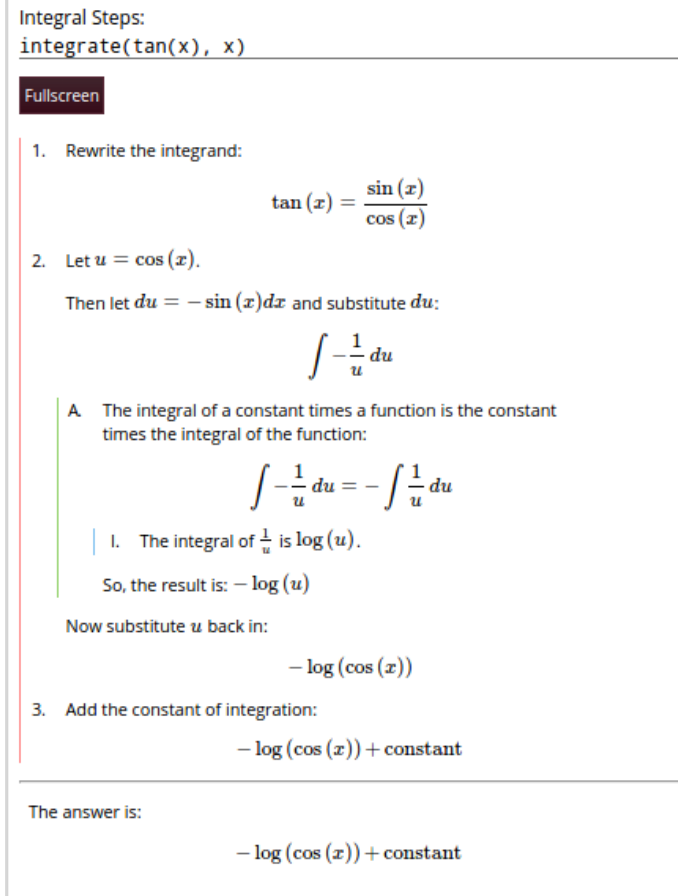


Fig. 1: Integral steps of  $\tan(x)$

- It also displays the factor tree diagrams for different numbers.
- SymPy Gamma also saves user search queries, and offers many such similar features for free, which Wolfram|Alpha only offers to its paid users.

Every input query from the user on SymPy Gamma is first, parsed by its own parser, which handles several different forms of function names, which SymPy as a library doesn't support. For instance, SymPy Gamma supports queries like `sin x`, whereas SymPy doesn't support this, and supports only `sin(x)`.

This parser converts the input query to the equivalent SymPy readable code, which is then eventually processed by SymPy and the result is finally formatted in LaTeX and displayed on the SymPy Gamma web-application.

**9.7. SymPy Live.** SymPy Live is an online Python shell, which runs on Google App Engine, that executes SymPy code. It is integrated in the SymPy documentation examples, located at this [link](#).

This is accomplished by providing a HTML/JavaScript GUI for entering source code and visualization of output, and a server part which evaluates the requested source code. It's an interactive AJAX shell, that runs SymPy code using Python on the server.

Certain Features of SymPy Live:

- It supports the exact same syntax as SymPy, hence it can be used easily, to test for outputs of various SymPy expressions.
- It can be run as a standalone app or in an existing app as an admin-only handler, and can also be used for system administration tasks, as an interactive way to try out APIs, or as a debugging aid during development.
- It can also be used to plot figures ([link](#)), and execute all kinds of expressions that SymPy can evaluate.
- SymPy Live also formats the output in LaTeX for pretty-printing the output.

**9.8. Comparison with Mathematica.** Wolfram Mathematica is a popular proprietary CAS. It features highly advanced algorithms. Mathematica has a core implemented in C++ [6] which interprets its own programming language (known as Wolfram language).

Analogously to Lisp’s S-expressions, Mathematica uses its own style of M-expressions, which are arrays of either atoms or other M-expression. The first element of the expression identifies the type of the expression and is indexed by zero, whereas the first argument is indexed by one. Notice that SymPy expression arguments are stored in a Python tuple (that is, an immutable array), while the expression type is identified by the type of the object storing the expression.

Mathematica can associate attributes to its atoms. Attributes may define mathematical properties and behavior of the nodes associated to the atom. In SymPy, the usage of static class fields is roughly similar to Mathematica’s attributes, though other programming patterns may also be used to achieve an equivalent behavior, such as class inheritance.

Unlike SymPy, Mathematica’s expressions are mutable, that is one can change parts of the expression tree without the need of creating a new object. The reactivity of Mathematica allows for a lazy updating of any references to that data structure.

Products in Mathematica are determined by some builtin node types, such as `Times`, `Dot`, and others. `Times` is overloaded by the `*` operator, and is always meant to represent a commutative operator. The other notable product is `Dot`, overloaded by the `.` operator. This product represents matrix multiplication, it is not commutative. SymPy uses the same node for both scalar and matrix multiplication, the only exception being with abstract matrix symbols. Unlike Mathematica, SymPy determines commutativity with respect to multiplication from the factor’s expression type. Mathematica puts the `Orderless` attribute on the expression type.

Regarding associative expressions, SymPy handles associativity by making associative expressions inherit the class `AssocOp`, while Mathematica specifies the `Flat` attribute on the expression type.

Mathematica relies heavily on pattern matching: even the so-called equivalent of function declaration is in reality the definition of a pattern matching generating an expression tree transformation on input expressions. Mathematica’s pattern matching is sensitive to associative[2], commutative[3], and one-identity[4] properties of its expression tree nodes[5]. SymPy has various ways to perform pattern matching. All of them play a lesser role in the CAS than in Mathematica and are basically available as a tool to rewrite expressions. The differential equation solver in SymPy somewhat relies on pattern matching to identify the kind of differential equation, but it is envisaged to replace that strategy with analysis of Lie symmetries in the future. Mathematica’s real advantage is the ability to add new overloading to the expression builder at runtime, or for specific subnodes. Consider for example

```
In[1] := Unprotect[Plus]
```



```

998
999 Out[1]= {Plus}
1000
1001 In[2]:= Sin[x_]^2 + Cos[y_]^2 := 1
1002
1003 In[3]:= x + Sin[t]^2 + y + Cos[t]^2
1004
1005 Out[3]= 1 + x + y
1006 This expression in Mathematica defines a substitution rule that overloads the func-
1007 tionality of the Plus node (the node for additions in Mathematica). The trailing
1008 underscore after a symbol means that it is to be considered a wildcard. This example
1009 may not be practical, one may wish to keep this identity unevaluated, nevertheless
1010 it clearly illustrates the potentiality to define one's own immediate transformation
1011 rules. In SymPy the operations constructing the addition node in the expression tree
1012 are Python class constructors, and cannot be modified at runtime5 The way SymPy
1013 deals with extending the missing runtime overloadability functionality is by subclass-
1014 ing the node types. Subclasses may overload the class constructor to yield the proper
1015 extended functionality.
1016 Unlike SymPy, Mathematica does not support type inheritance or polymorphism[15].
1017 SymPy relies heavily on class inheritance, but for the most part, class inheritance is
1018 used to make sure that SymPy objects inherit the proper methods and implement the
1019 basic hashing system. Associativity of expressions can be achieved by inheriting the
1020 class AssocOp, which may appear a more cumbersome operation than Mathematica's
1021 attribute setting.
1022 Matrices in SymPy are types on their own. In Mathematica, nested lists are
1023 interpreted as matrices whenever the sublists have the same length. The main differ-
1024 ence to SymPy is that ordinary operators and functions do not get generalized the
1025 same way as used in traditional mathematics. Using the standard multiplication in
1026 Mathematica performs an elementwise product, this is compatible with Mathemat-
1027 ica's convention of commutativity of Times nodes. Matrix product is expressed by
1028 the dot operator, or the Dot node. The same is true for the other operators, and
1029 even functions, most notably calling the exponential function Exp on a matrix returns
1030 an elementwise exponentiation of its elements. The real matrix exponentiationl is
1031 available through the MatrixExp function.
1032 Unevaluated expressions can be achieved in various ways, most commonly with
1033 the HoldForm or Hold nodes, that block the evaluation of subnodes by the parser.
1034 Note that such a node cannot be expressed in Python, because of greedy evaluation.
1035 Whenever needed in SymPy, it is necessary to add the parameter evaluate=False to
1036 all subnodes, or put the input expression in a string.
1037 The operator == returns a boolean whenever it is able to immediately evaluate
1038 the truthness of the equality, otherwise it returns an Equal expression. In SymPy ==
1039 means structural equality and is always guaranteed to return a boolean expression.
1040 To express an equality in SymPy it is necessary to explicitly construct the Equality
1041 class.
1042 SymPy, in accordance with Python and unlike the usual programming convention,
1043 uses ** to express the power operator, while Mathematica uses the more common ^.

```

---

<sup>5</sup>In reality, Python supports monkey patching, nonetheless it is a discouraged programming pattern.