

* Cheap Travel 466A

one side $\rightarrow$ a bubble


n sides $\rightarrow$ bubble

ntimes ~~App~~ should use

Number Logic Questions:

template:

$$d = n \% 10$$

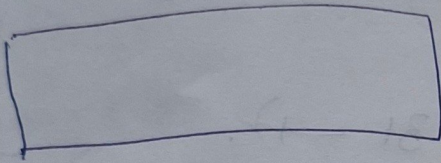

$$n = n // 10$$

Leet Code 7

Reverse Integer.

$$\text{constraint: } -2^{31} \leq x \leq 2^{31} - 1$$

$$\text{sign} = -1 \text{ if } x < 0 \text{ else } 1 \rightarrow x = \text{abs}(x)$$

$$r = 0$$

$$d = x \% 10$$

$$r = r * 10 + d$$

} for rev.

$$x = x // 10$$

$$x = x * \text{sign}$$

$$\text{if } x < -2^{31} \text{ or } x > 2^{31} - 1$$

return 0

return x

Alternate solution:

class Solution:

def reverse(self, x: int) -> int:

rev = 0

if (x < 0):

~~abs~~ x = abs(x)

while (x > 0):

d = x % 10

rev = rev * 10 + d

x = x // 10

if rev > (2**31 - 1):

return ~~rev~~

else:

return rev * -1

else:

while (x > 0):

d = x % 10

rev = rev * 10 + ~~rev~~

x = x // 10

if (rev > (2**31 - 1)):

return 0

else

return rev

Lists:

How to define:

```
a = list(map(int, input("Enter the numbers: ")
              .split(", ")))
print(*a)
```

separator.
You can use
any symbol (or)
space as per
the req.

List Methods:

append(): By default it
appends to the last of the list.

pop(), delete()
remove(): } diff?

clear()

insert(): have to specify the space to add
what to add.

*Take a ',' separated list from the user

1 → Print sum of all the elements in the list

2 → Print the alternate elements.

3 → Print the list in the rev. order.

Ans:

~~a = map(int, input()).split()~~

a = list(map(int, input("Enter the elements
").split(", ")))

print("Sum of elements:", sum(a))

print("Alternate elements:", a[::2])

print("Reverse order:", a[::-1])

for reversing:
↓
a.reverse() but not
for reversing: a[::-1] → change, print

a = list(map(int, input("Enter the elements").split()))

sum = 0

for i in range(0, len(a), 2):

sum += a[i]

print(sum)

for i in range(0, len(a), 2):

print(a[i], end = " ")

print() ← #next line

for i in range(len(a)-1, -1, -1):

print(a[i], end = " ")

print()

Missing Number: Leet Code 268

nums = ^{list}map(int, input().split())

0 1 2 4

n = len(nums)

original-sum = (n * (n+1)) // 2

act-sum = sum(nums)

return original-sum - act-sum

Dictionary:

How to define?

`d = {'a': 1, 'b': 2, 'c': 3}`

`print(d)` # `['a': 1, 'b': 2, 'c': 3]`

`print(d.keys())` # `['a', 'b', 'c']`

`print(d.values())` # `[1, 2, 3]`

`print(d.items())` # `[('a', 1), ('b', 2), ('c', 3)]`

★
v.v. imp.

`arr = [1, 12, 13, 14, 12, 13]`

`freq = {}`

for `i` in `arr`:

`freq[i] = freq.get(i, 0) + 1`

↓
To find
the freq
of elements
in `arr`.

LeetCode 169: Majority Element

`arr` → `nums`

`size` → `n`

Return majority element → that appears $n/2$ time.

Eg: `[3, 2, 3]`

3 - 2 ✓
2 - 1

`[2 - 1, 3 - 2]`

`freq = {}`
for `key, value` in `freq.items()`:
if `value > len(nums) / 2`:
return `key`.
for `i` in `nums`:
`freq[i] = freq.get(i, 0) + 1`
for `i` in `freq`:
if `freq[i] > len(nums) / 2`:
return `i`