

- element, 482–483
- values, 482
- padding properties, 461, 482
 - padding, 463, 482, 693
 - padding-bottom, 482, 693
 - padding-left, 482, 693
 - padding-right, 482, 693
 - padding-top, 482, 693
- page box formatting model, 556–558. *See also*
 - box formatting model
- page breaks, 560–562
- page-break-after, 560–562, 703
- page-break-before, 560–562, 703
- page-break-inside, 560–562, 703
- paged media module (CSS3), 573
- @page rule, 557–560, 564, 569
- Paint Shop Pro Photo X2, 318
- palettes
 - 8-bit, 194
 - extended named color palette, 189–191
 - 16 colors palette, 185, 188
 - 216 colors palette, 187, 188
 - Web-safe palette, 187–188
- paragraph sign, 244, 256, 676
- paragraph tags (<p>, </p>), 21–22, 49–51, 647–648
 - division tags and, 53
 - reference for, 647–648
 - table data tags and, 50
- <param> tags, 220, 222, 228, 648–649
- _parent value, 92, 153, 155
- parentNode, 277
- parents/children, 411
- parsing applications, XML, 347
- partial differential, 241, 674
- passive mode (PASV), 322
- password input boxes, 165
- PASV (passive mode), 322
- PCDATA, 342
- per mille sign, 245, 677
- percentage (vertical-align property value), 448
- percentage color values (RGB decimal format), 10–11, 186, 486
- percentage metric (CSS property values), 426–428
- percentage size (font size value metric), 441
- Perl, 182, 183, 262, 347, 362, 628
- perpendicular, 242, 675
- phi (Greek letter), 673
- Photoshop (Adobe), 11, 196, 197, 198, 318
- PHP, 169, 182, 183, 201, 262, 310, 353
- PHP Extension and Application Repository, 347
- pi (Greek letter), 672, 673, 674
- picas (CSS property values measure), 425
- pictures. *See* images
- pilcrow sign, 244, 676
- pitch, 429
- pixels, 426
- plug-ins (animation, video formats), 216–219. *See also* Flash
- plus-minus sign, 243, 256, 676
- PNG (Portable Network Graphics), 195–196
- pointer value (cursor property), 582
- points (CSS property values measure), 425
- polygonal regions, 209, 210, 211
- Portable Network Graphics. *See* PNG
- positioning
 - absolute positioning model, 506–507
 - background images, 501
 - captions, 468–470
 - elements (CSS), 503–523

positioning (*continued*)

- fixed positioning model, 507–508
- markers, 475–476
- relative positioning model, 504–505
- static positioning model, 503–504

positioning module (CSS3), 572

positioning properties (CSS 2.1), 508–511,
681, 695–698

- bottom, 508, 697
- left, 508, 697
- position, 696–697
- right, 508, 697
- top, 508, 697

POST (HTTP POST), 163, 173, 290, 367,
385

pound, English, 235, 255, 668

pragma no-cache meta tag, 42, 44

<pre>, </pre>. *See* preformatted tags

precedence rules

- CSS, 403–404
- styles, 435

preformatted tags (<pre>, </pre>), 26–27,
58–59, 649

preformatted text, 26–27

preloading images, 371–373

previousSibling, 277, 280

print (CSS media type), 554, 556

printing

- double-sided, 564
- setup, for documents, 556–564

printing properties (CSS 2.1), 682, 702–704

product sign = n-ary product, 674

profiles, 45–46

progress value (cursor property), 582

progressive JPEGs, 197–198

projection (CSS media type), 554

property values (CSS)

- keywords, 424
- metrics, 423–430
- real-world measures, 425
- relational measures, 426–428
- rules, 421–423
- screen measures, 426

proportional to (mathematical symbol entity),
242, 674

protecting e-mail addresses, 379–381

pseudo constructs (for CSS3), 709

pseudo-class selectors, 414

pseudo-classes, 709–710

- anchor, 551–552
 - :active, 413, 551, 600
 - :hover, 413, 551
 - :link, 413, 551
 - :visited, 413, 551
- for anchor tags, 413–414
- :first-child, 414
- :focus, 413
- :lang, 414, 417, 709
- :left, 564
- reference for, 710
- :right, 564
- using, 413–414

pseudo-elements, 415–418, 527–531,
709–710

- :after, 417–418, 419, 527, 530–531, 709
- :before, 417–418, 419, 527, 530–531, 709
- :first-letter, 416–417, 527, 528–530
- :first-line, 415–416, 527, 528
- generated content and, 525–537
- reference for, 710
- specificity and, 436

PSGML, 347

publishing

HTML documents and, 321–327

HTML5 publishing features and, 297

pull quotes, 600–602

Python, 182, 262, 347, 353, 362

Q

<q>, 624, 649–650

question mark, inverted/turned, 244, 256, 676

QuickTime, 218

quotation marks, 235–236, 531–532

auto-generation of, 531–532

double low-9, 244, 677

ISO-8559-1 HTML character, 255

left/opening double-quote, 236, 669

left/opening single-quote, 236, 669

left-pointing double angle (left pointing guillemet), 243, 256, 676

real, 235–236

right/closing double-quote, 236, 669

right/closing single-quote, 236, 669

right-pointing double angle (right pointing guillemet), 244, 256, 676

single left-pointing angle, 245, 677

single low-9, 244, 677

single right-pointing angle, 245, 677

quote mark special characters, 669

quoted text, 24

quotes, pull, 600–602

quotes property, 531–532, 686

R

radians (aural metric), 429

radical sign = square root, 242, 674

radio buttons, 165–166

Raggert, Dave, 362

raster-based editors, 318

readonly attribute, 175, 176, 617

real quotation marks, 235–236. *See also* quotation marks

RealOne, 218

real-world examples (table formatting), 131–134

real-world measures (CSS property values), 425

rectangle polygons, 209, 210

redirecting documents, 44

refresh meta tag, 44

refreshing documents, 43–44

registered trademark symbol, 234–235, 256, 668

rel (link destination detail), 98

relational measures (CSS property values), 426–428

relative links, 90–92

relative positioning, 504–505

relative size keywords (font size value metric), 441

removeChild(), 277

repeating images, 498–501

replaceChild(), 278

replaced content module (CSS3), 573

Reset button, 174

resizing. *See* sizing

rev (link destination detail), 98

RFC1766, 15

rgb(), 428–429

RGB decimal format, 10–11, 186, 486

rho (Greek letter), 672, 673

rhs (frame attribute value), 110

:right, 564

right (CSS property), 508, 697

right (page-break-before/after property value), 561

right arrow, 236, 669

right ceiling, 242, 675

right double arrow, 669

right floor, 243, 675

right justification, 447

right/closing double-quote, 236, 669

right/closing single-quote, 236, 669

right-pointing angle bracket, 243, 675

right-pointing double angle quotation mark (right pointing guillemet), 244, 256, 676

right-to-left mark, 244, 677

rightwards double arrow, 236

rollovers

- creating, 291–292
- menu buttons with, 549–552

rounded corners, 575–577, 605–608

row groups (header/body/footer), 117–119

rows. *See* table rows

rows (rules attribute value), 111

rowspan (table cell attribute), 114, 120, 122–123, 139–140, 379

RSS syndication format, 330, 332, 345

Ruby module (CSS3), 572

rules

- @import rule, 434, 556
- @media rule, 554, 555, 569
- @page rule, 557–560, 564, 569
- CSS precedence rules, 403–404
- horizontal rule tag, 56–57, 636
- !important rule, 403, 404, 434, 435
- precedence rules
 - CSS, 403–404
 - styles, 435

property values (CSS), 421–423

table, 110–111

table sections and, 118–119

for tag attributes, 9

text structuring and, 56–57

RWS Group, 249

S

Safari, 4, 368, 573

<samp>, 650

Sans-serif, 438, 439, 440

Scalable Vector Graphics (SVG), 573

schemas (XML), 343–345

scope (table cell attribute), 114

screen (CSS media type), 554

screen measures (CSS property values), 426

screen media (online) document, 565–568

script services, 183, 355

script sessions, 45

<script> tags, 38, 39, 45, 262–263, 264, 270, 650–651

script-hiding tags, 269–270

scripts (client-side scripting), 38–39, 261–270

- adding to document, 263–264
- external, calling, 264
- hiding, from older browsers, 269–270
- JavaScript and, 181, 261
- server-side scripting v., 261–262
- setting default, 262–263
- triggering, with events, 264–269

scroll (overflow property value), 516

Scrollbar (system color keyword), 584

scrollbar control (exercise), 387–393

- document with scrollbar control (listing 24–2), 390–391
- JavaScript functions in, 392–393

- JavaScript to control the scroll bar (listing 24–1), 388–390
- scrolling attribute, 148, 149, 150, 157
- scrolling images, 498–501
- section elements, HTML5, 297–298
- section sign, 243, 255, 676
- section/chapter auto-numbering system, 533–536
- `<select>` tag, 167, 651–652
- selected attribute (`<option>` tag), 167
- selectors (CSS selectors), 407–412, 705–708, 709. *See also* pseudo-classes; pseudo-elements
 - adjacent sibling, 280, 407, 410–412, 591, 707
 - attribute, 707, 708
 - child, 410–412, 706–707
 - class, 415, 561, 705, 707
 - CSS3, 574–575
 - descendant, 407, 410–412, 705, 706, 707
 - document hierarchy and, 411–412
 - element, 407, 705–706
 - ID, 707–708
 - matching with, 407–412
 - pseudo-class, 414
 - reference for, 705–708
 - universal, 407–480
- selectors module (CSS3), 572
- self object, 285–286
- `_self` value, 92, 153
- self-describing XML documents, 330
- send only, HTML and, 159
- se-resize (cursor property), 582
- Serif, 438, 439, 440
- server-side image maps, 208
- server-side scripting, 261–262. *See also* scripts
 - `setAttribute()`, 278
 - `setscroll()`, 393
- SGML (Standard Generalized Markup Language), 329, 330. *See also* XML
- shape attribute, 211
- shortcuts
 - background property, 502
 - border property, 486–487
 - keyboard shortcuts
 - for forms, 174–175
 - for links, 94–95
- shorthand expressions, 418–420
- showing/hiding text, 545–547
- siblings, 411
- sigma (Greek letter), 672, 673
- similar to (mathematical symbol entity), 242, 675
- simulating newspaper columns, 377–379
- single left-pointing angle quotation mark, 245, 677
- single low-9 quotation mark, 244, 677
- single right-pointing angle quotation mark, 245, 677
- 16 colors palette, 185, 188
- size property, 559
- sizing
 - buttons, 597–600
 - cursors, 582–583
 - fonts, 440–441
 - images, 205–206
- slash (/), 7
- sliding door approach (sizing buttons), 597, 598
- `<small>`, 29, 30, 652–653
- small a (special characters), 257–258
- small c, cedilla, 258

- small e (special characters), 258
- small eth, Icelandic, 258
- small i (special characters), 258
- small n, tilde, 258
- small o (special characters), 258
- `<small>` tag, 30, 235, 652
- small thorn, Icelandic, 258
- small tilde, 244, 677
- small u (special characters), 258
- small y, acute accent, 258
- small y, diaeresis or umlaut mark, 258
- small-caption (user interface font keyword), 587
- smart text editors, 310–311
- Smileycat Web Design Blog, 607
- SML (Synchronized Multimedia Integration Language), 573
- soft hyphen, 243, 256, 676
- sorting order, cascade, 435
- sound, added to Web pages, 228–229
- spacing, cell, 107–108
- spacing acute, 243, 676
- spacing cedilla, 244, 676
- spacing diaeresis, 243, 676
- spacing macron, 243, 676
- `` tags, 31, 68–69, 653
 - `<div>` tag v., 68
 - `` tag and, 62
 - inline elements grouped with, 68–69
- spanning columns/rows, 120–125
- special characters (entities/character entities), 31–32, 231–245
 - accented, 670–672
 - arrow, 236, 669
 - capital A, 256
 - capital E, 257
 - capital I, 257
 - capital O, 257
 - capital U, 257
 - character encodings, 231–232
 - code reference for, 32
 - currency, 235, 668
 - as entities, 232–233
 - essential, 667
 - Greek, 239–241, 672–674
 - ISO-8559-1, 255–258
 - Latin, 237–239, 670–672
 - list of, 667–677
 - mathematical, 241–243, 674–675
 - miscellaneous, 676–677
 - small a, 257–258
 - small e, 258
 - small i, 258
 - small o, 258
 - small u, 258
 - specifying, 32
 - W3C site and, 231
- specificity, 435–436
- spiders (electronic robots), 87
- spinning CD animation, 214, 215, 216
- square brackets [], 14, 169, 409. *See also* angle brackets
- square root = radical sign, 242, 674
- squared, 243, 676
- src attribute, 39, 148, 157, 200, 201, 264, 267, 549, 651
- s-resize, 582
- stacking elements, 517–522
- Staffin, Lennart, 347
- Standard Generalized Markup Language (SGML), 329, 330
- standards/guidelines, W3C and, 7
- static positioning, 503–504

- status-bar (user interface font keyword), 587
- stopscroll(), 393
- straight quotes, 235. *See also* quotation marks
- stretching title bars, 374–376
- strikethrough tag, 30
- (strong text), 29, 31, 653–654
- Studio Hyperset, 355
- style attribute, 13, 20, 45, 69, 295, 353, 541, 665
- style blocks, 45
- style definitions, 20–21, 400–402, 405–420
 - format, 405–406
 - property values
 - metrics, 423–430
 - rules, 421–423
 - selectors and. *See* selectors
- style inheritance, 412
- style sheets
 - aural
 - Alliance for Technology Access website and, 679
 - angles and, 423, 429–430
 - frequencies and, 423, 429–430
 - time values and, 423, 429–430
 - defined, 398
 - XML and, 337
- <style> tags, 401, 654–655
- style.fontSize, 286, 540, 541
- styles
 - anchor, 413–414
 - author, 433–434
 - caption formatting and, 117
 - cascading, 402–404
 - creation, testing syntax and, 589–591
 - defining, 400–402
 - HTML and, 398–400
 - precedence, 435
 - purpose of, 397–398
 - user, 434
 - user agent, 434
 - user interface, 581–587
- <sub> (subscripts), 67, 655
- sub (vertical-align property value), 448
- Submit button, 172, 174
- subscripts. *See* <sub>
- subset of, 242, 675
- subset of or equal to, 242, 675
- <sup> (superscripts), 67, 234, 655
- super (vertical-align property value), 448
- superscript one (superscript digit one), 244, 256, 676
- superscript three (superscript digit three), 243, 256, 676
- superscript two (superscript digit two), 243, 256, 676
- superscripts. *See* <sup>
- superset of, 242, 675
- superset of or equal to, 242, 675
- SuperSizeMe(), 540
- SVG (Scalable Vector Graphics), 573
- sw-resize, 582
- Synchronized Multimedia Integration Language (SMIL), 573
- SyncRO Soft Ltd., 347
- syntax checking, 589–591
- syntax/grammar module (CSS3), 572
- system color keywords, 583–584

T

- tab order
 - for forms, 174–175
 - for links, 95

- tabbed menus, 603–605
- tabindex attribute, 95, 174–175
- table attributes, CSS properties for, 460–467
- table border spacing, 462–464
- table captions. *See* captions
- table cells (cells), 112–114
 - attributes, 114
 - controlling text breaks in, 373
 - empty, 113, 465–467, 682, 702
 - padding, 107–108
 - spacing, 107–108
 - spanning, 122
- table cell/table data. *See* <td>
- table columns
 - grouping, 125–126
 - multiple format, 141–142
 - /rows, spanning, 120–125
- table header tag (<th>), 105, 659–660
- table module (CSS3), 573
- table properties (CSS 2.1), 682, 701–702
- table row ending tag (</tr>), 111
- table row tag attributes, 112
- table row tags. *See* <tr>
- table rows, 111–112
 - /columns, spanning, 120–125
 - groups (header/body/footer), 117–119
- table sections, 117–119
- <table> tags, 32, 656–657
 - border attribute, 9, 108, 110, 379, 409, 462
 - purpose of, 127
 - reference for, 656–657
 - width attribute, 104–105
- table-layout property, 461, 467, 701
- tables (HTML tables), 32–34, 101–142
 - alignment, 103–107
 - background colors, 119–120
 - borders, 108–110
 - captions. *See* captions
 - cell padding/cell spacing, 107–108
 - cells. *See* table cells
 - corporate website and, 131–132
 - formatting with, 127–142
 - multiple columns, 141–142
 - navigational menus/blocks, 139–141
 - odd graphics/text combinations, 134–139
 - real-world examples, 131–134
 - rudimentary, 127–131
 - headers. *See* headers
 - layout, 127–142
 - CSS layout v., 127
 - forms and, 127–131
 - newspaper columns, 377–379
 - nested, 103, 130
 - parts of, 101–103
 - rows. *See* table rows
 - rules, 110–111
 - width, 103–107
- tag attributes
 - common, 12–13
 - format for, 9–11
 - rules for, 9
 - values for, 10–11
- tag auto-completion tools, 17
- tags (HTML tags). *See also specific tags*
 - classes and, 12–13
 - identifiers for, 12–13
 - IDs and, 12
- target attribute, 92–93, 152–153, 164
- tau (Greek letter), 673
- <tbody>, 657
- <td> (table cell/table data tags), 32, 50, 103, 105, 657–658

- TechNote site (Adobe), 220
- teletype tag (`<tt>`), 29, 30, 66, 554, 662
- testing. *See also* validation
- CSS, 589–591
 - HTML, 368–369
- text
- alignment, 445–450
 - auto-completion, 590
 - autogenerated, 460
 - baseline alignment, 112
 - decorations, 458–459
 - flowing, 611–615
 - formatting (CSS), 445–470
 - fully justified, 447
 - hiding/showing, CSS and, 545–547
 - indenting, 450–451
 - justification, 447
 - markup, 5
 - structuring, 49–59
 - white space
 - float property and, 451–454, 511–514, 697
 - table formatting and, 113, 138
- text breaks, in table cells, 373
- text control methods, 61–65
- text direction, 15–16, 681, 691–692
- text input boxes, 164–165
- text module (CSS3), 572
- text properties. *See* font/text properties
- text value (cursor property), 582
- text-align property, 445–448, 461, 686–687
- `<textarea>` tags, 169–170, 658–659
- text-bottom (vertical-align property value), 448
- text-decoration property, 64, 458–459, 687
- text/graphics, in nonstandard format (table formatting), 134–139
- text-indent, 450–451, 534, 595, 597, 686
- text-oriented editors, 309–312
- TextPad, 310–311
- text-shadow property, 192, 458–459
- text-top (vertical-align property value), 448
- text-transform property, 64, 457–458, 687–688
- textual FTP clients. *See* FTP clients
- `<tfoot>`, 117, 659
- `<th>`. *See* table header tag
- `<thead>` tags, 117, 660–661. *See also* headers
- there exists (mathematical symbol entity), 241, 674
- therefore (mathematical symbol entity), 242, 675
- theta (Greek letter), 672, 673, 674
- thin space, 244, 677
- ThreeDDarkShadow, 584
- ThreeDFace, 584
- ThreeDHighlight, 584
- ThreeDLightShadow, 584
- ThreeDShadow, 584
- three-quarters (fraction), 244, 256, 676
- tidy code, 359–365
- TIF files, 196
- tilde operator, 242, 675
- tips/tricks
 - for CSS, 595–615
 - for HTML, 371–393
 - for mobile HTML, 349
 - for XHTML, 617
- title attribute, 93–94, 665
- title bars, expandable, 374–376
- `<title>` tag, 19, 20, 661
- tooltips, 37, 93, 94, 211, 584, 620
- top (CSS property), 508, 697

top (vertical-align property value), 448
–top value, 92, 153, 155
TopStyle Lite, 312
<tr> (table row tags), 32, 111–112, 661–662
trademark symbol, 234–235, 258, 668
translating Web sites, 249
transparency, 194, 198–199
traversing document's nodes, 278–280
tricks. *See* tips/tricks
triggering scripts, with events, 264–269
TrueDoc standard, 443
<tt>. *See* teletype tag
tty (CSS media type), 554
Tucows, 216
turned question mark, 244, 676
tv (CSS media type), 554
216 colors palette, 187, 188
type (link destination detail), 98
typewriter (monospace) fonts, 58, 61, 66, 455, 649, 662. *See also* teletype tag

U

UIMode settings (Windows Media Player), 226
. *See* unordered lists
umlaut, 255, 258. *See also* diaeresis
(Un)Check All check box, 290–291, 382, 383
underline tag, 30
Unicode, 249–260
 alphabets in, 250–254
 ISO-8859-1, 42, 254–258, 259, 260
 text direction and, 16
unicode-bidi, 291
uniform resource indicators. *See* URIs
uniform resource locators. *See* URLs
union, 242, 675
United States map, 208, 212
units/values module (CSS3), 572

universal selector, 407–408
unordered (bulleted) lists (), 24, 77–81, 471–472
untidy code, 359–360
up arrow, 236, 669
up double arrow, 669
up tack, 242, 675
upper-alpha, 74, 75, 473, 684
upper-latin, 75, 473, 684
upper-roman, 75, 473, 684
upsilon (Greek letter), 673, 674
upwards double arrow, 236
<uri> (cursor property value), 582
URIs (uniform resource indicators), 14–15
 defined, 14
 format of, 15
 URLs v., 14
url(), 423, 429, 527, 682, 685, 704
URLs (uniform resource locators)
 components of, 90
 URIs v., 14
user agent styles, 434
user experience, importance of, 272
user interface colors, 583–586
user interface fonts, 587
user interface module (CSS3), 573
user interface styles, 581–587
user styles, 434
UTF-8 encoding, 250, 254, 259, 260

V

valid document, 337
validation
 CSS, 591–592
 form input, 384–387
 HTML, 365–369

validation output, 367–368
 validation tools, 366
 valign
 table cell attribute, 114
 table row tag attribute, 112
 value assignment/cascade/inheritance module (CSS3), 572
 value attribute (<option> tag), 167
 values/units module (CSS3), 572
 <var>, 663
 varies with (mathematical symbol entity), 242, 675
 VBScript, 45, 261
 vector product = circled times, 242, 675
 vector-based editors, 318
 vee (logical or), 242, 675
 vertical collapsible menus, 292–295
 vertical module/box model module (CSS3), 572
 vertical text alignment, 448–450
 vertical-align property, 448–450, 451, 461, 695
 VGA (Video Graphics Array), 185
 vi (text editor), 309–310
 Video Graphics Array (VGA), 185
 video/animation formats, 216–219
 vim (text editor), 310
 visibility property, 522–523, 696
 visible (overflow property value), 516
 :visited, 413, 551
 visited (link status mode), 96–97
 void (frame attribute value), 110
 vsides (frame attribute value), 110
 vspacer, 612, 614
 vulgar fraction one-half, 244, 256, 676
 vulgar fraction one-quarter, 244, 256, 676
 vulgar fraction three-quarters, 244, 256, 676

W

W3C (World Wide Web Consortium)
 cascade sorting order, 435
 CSS validation tool, 367
 DOM. *See* DOM
 guidelines/standards and, 7
 HTML validation tool, 366
 HTML5 and, 297
 HTTP 1.1 headers, 43
 Jigsaw tool, 591–592, 593
 “Mobile Web Best Practices” document, 353
 pseudo constructs (for CSS3), 709
 special characters and, 231
 specificity specification and, 436
 Web-safe palette of colors, 187–188
 XML recommendations, 330
 wait value (cursor property), 582
 WAP (Wireless Access Protocol), 350
 WAV file, 228
 WDG (Web Design Group) validation tool, 366
 Web browsers. *See* browsers
 Web colors. *See* colors
 Web Design Group (WDG) validation tool, 366
 Web development tools, 309–320
 mobile, 356–357
 Web documents. *See* HTML documents
 Web fonts module (CSS3), 573
 Web pages/Web sites
 file organization, 326–327
 sound added to, 228–229
 translating, 249
 Web server file organization, 326–327
 Web server names, www and, 90

Index

Webkit framework, 573
-webkit prefix, 573
“Web-like content,” 350
Web-safe palette (of colors), 187–188
wedge (logical and), 242, 675
white space
 float property and, 451–454, 511–514, 697
 table formatting and, 113, 138
white-space property, 454–455, 691
widows, 562–564, 703–704
width (table width), 103–107
width attribute
 image tag, 205
 inline frame tag, 157
 table tag, 104–105
width property, 57, 461, 470, 511, 514–515, 694
Wiley
 JavaScript Bible, 295, 387
 XML Programming Bible, 329
 XML Weekend Crash Course, 329
Window (system color keyword), 584
window object, 281–283
WindowFrame, 584
window.getComputedStyle, 541, 542, 543
window.open(), 93, 281–283
Windows Explorer, 143, 144
Windows Media Developer Center site, 224
Windows Media Player, 218–219
 embedding, 223–226
 object parameters, 224, 225
 UIMode settings, 226
Windows Notepad, 309–310, 346

WindowText, 584
Winfiles.com, 216
Wireless Access Protocol (WAP), 350
Wireless Markup Language (WML), 350, 351, 355
WML (Wireless Markup Language), 350, 351, 355
word-spacing property, 455–457, 691
World Wide Web Consortium. *See* W3C
wrap attribute, 170
w-resize (cursor property), 582
WROX
 Beginning XML, Third Edition, 329
 XSLT 2.0 Programmer's Reference, Third Edition, 329
WS-FTP, 326
www, Web server names and, 90
WYSIWYG HTML editors, 312–317

X

x-height (font characteristic), 438
XHTML 1.1
 HTML5 and, 301
 Mobile Profile standard, 351
 syntax, 331
 tips, 617
 XML and, 331
XHTML Basic 1.1, 351, 352–356
 elements, 352–353
 modules, 351–352
 special considerations, 353–356
XHTML Modularization, 352
xi (Greek letter), 672, 673
XMetal, 347

XML (Extensible Markup Language),

329–347

attributes, 333–334

basics, 329–331

books on, 329

declaration, 331–332

DTDs and, 332, 337–342

editing, 346–347

elements, 332–333, 338–340

entities, 335, 342

namespaces, 336

non-parsed data, 334–335

parsing applications, 347

schemas, 343–345

stylesheets and, 337

syntax, 331–337

using, 345–347

W3C recommendations, 330

XHTML and, 331

XML Programming Bible (Wiley), 329

XML Weekend Crash Course (Wiley), 329

XMLSpy, 347

XSLT (Extensible Stylesheet Language
Transformations), 346

XSLT 2.0 Programmer's Reference, Third Edition
(WROX), 329

Y

Yahoo's Babel Fish, 249

yen, 235, 255, 668

YouTube

embedding, 226–228

Flash plug-in and, 227

platform, 218

Z

zero width joiner, 244, 677

zero width non-joiner, 244, 677

zero-width space, 373

zeta (Greek letter), 672, 673

z-index property, 517–522, 697–698


zooming images, 548–549

The books you read to succeed.


Get the most out of the latest software and leading-edge technologies with a Wiley Bible—your one-stop reference.



978-0-470-45264-6

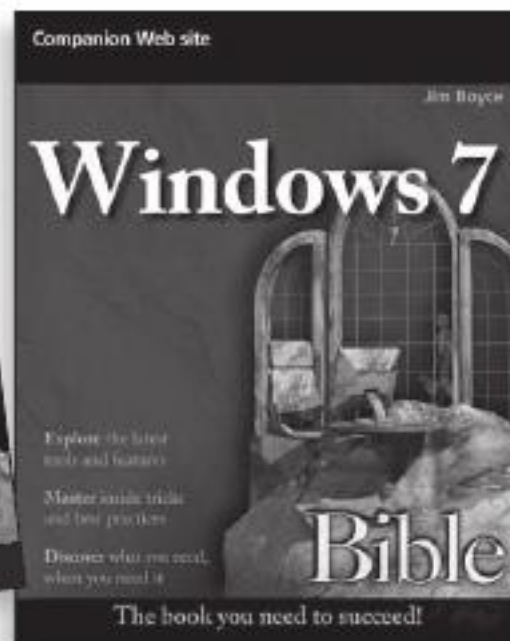

978-0-470-50909-8

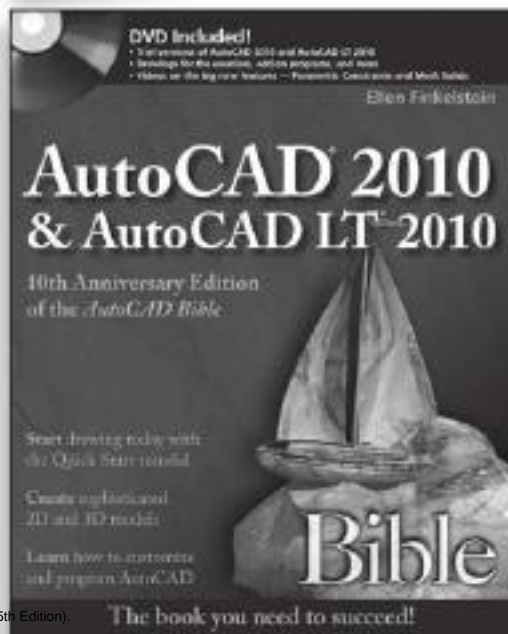

978-0-470-43640-0



978-0-470-47191-3

Master the essential building blocks of the Web

The first step to any Web document is to build a strong foundation. This comprehensive book focuses on the essential building blocks of the Web: HyperText Markup Language (HTML), extensible HTML (XHTML), and Cascading Style Sheets (CSS). You'll learn basic scripting and coding standards; how to use tags, tables, forms, and links; the best ways to test and validate pages; and many more techniques that help you take full advantage of these essential tools.

- Explore the basics of HTML such as tags, attributes, and how to structure content to create specialized document formatting
- Learn how multimedia and scripting can be used to make your content dynamic
- Author, validate, and troubleshoot your coding and documents
- Enable content for multiple devices—from the standard PC browser to various mobile devices
- Understand values, lists, colors, fonts, and other CSS metrics and formatting basics
- Get up to speed on advanced document formatting

Companion Web Site

Code samples and examples from the book, as well as extra material, can be found at www.wiley.com/go/htmlbible5e.

Steven M. Schafer

has broad experience in technology and is a veteran of publishing. He's been in and around technology as a programmer, an editor, a product specialist, a technical manager, and a Web developer. Steve employs both open-source and proprietary technologies and has worked with the Internet since the mid-1990s. He can be reached by e-mail at sschafer@synergy-tech.com.

www.wiley.com/go/htmlbible5e



Shelving Category:
COMPUTERS / Programming
Languages / HTML, SGML

Reader Level:
Beginning to Advanced

\$39.99 USA
\$47.99 Canada

ISBN 978-0-470-52396-4



Schafer, Steven M. HTML, XHTML, and CSS Bible (5th Edition).
Hoboken, NJ, USA: Wiley, 2010. p. 795
<http://site.ebrary.com/lib/anthem/Doc?id=10369774&ppg=795>
Copyright © 2010, Wiley. All rights Reserved.
May not be reproduced in any form without permission from the publisher, except fair uses permitted under U.S. or applicable copyright law.