


# Introduction to computing

- Importing library functions

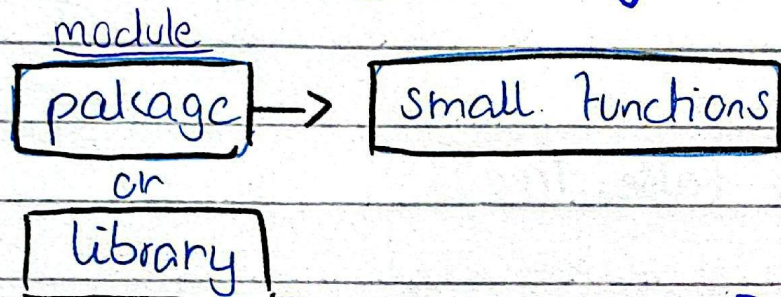

```
[import math  
math.sqrt(256)]
```

↓  
all functions in  
math library  
are for use-

```
[From math import sqrt  
sqrt(256)]
```

↓  
just sqrt available  
for use

→ Math ki library ma kia kia kar sakta hu  
for this:-

**help(math)** → tells documentation of math

help(math.sqrt) → tells " " math.

help(pow) sqrt and tell how much  
variable it can get



- Naming the number:

in  $x = 24$   $\rightarrow$  Assignment operator

in  $x \rightarrow$  variable  $\rightarrow$  it can be change at anytime  
out 24

- programming constant  $\rightarrow$  one time you can change it at first than you not be able to change

In C:

```
int y;
```

```
y = x * 2;
```

Note:

In python the type of variable change at any time but in C you cannot change it after defining once. but value can change at anytime in Both.



## Importing variable from libraries

from math import pi

pi

out: 3.14159...

Naming Functions:-

f

out: ''

sqrt(25)

5.0

in sqrt → means sqrt kia ha

out <function math.sqrt>

in f = sqrt → now sqrt and f same

in f(25)

out 5.0

### Note

- Read documentation by `help(x)` and use them-
- Also read errors which are identify by your machine-



From math import sqrt

s = sqrt(25)

f = sqrt

Side Effects:-

print(f(25))

"a"

Function

