

```
1 class Dog:
    def __init__(self, newColor):
       self.color = newColor
                                                                    color="白"
    def bark(self):
5
       print("----旺旺叫-----")
6
    def printColor(self):
8
       print("颜色为: %s"%self.color)
10
                                                                     color="黑"
12 wangcai = Dog("白")
13 wangcai.printColor()
14
15
16 xiaoqiang - Dog("黑")
17 xiaoqiang.printColor()
```


printColor(xiaoqiang)

class Dog:

```
def __init__(self, color="白"):
    self.color = "白"

def bark(self):
    print("-----旺旺叫------")

def changeColor(self,newColor="黑"):
```

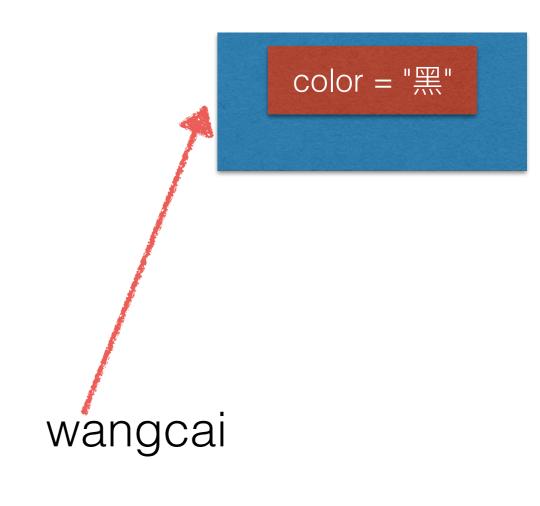

```
wangcai = Dog("白")
#wangcai.color = "白"
#a = wangcai.color
wangcai.changeColor("黑")
```

self.color ="黑"