

Programming ASP.NET MVC 5

A Problem Solution Approach

Nimit Joshi

Programming ASP.NET MVC 5

A Problem Solution Approach

This free book is provided by courtesy of [C# Corner](#) and Mindcracker Network and its authors. Feel free to share this book with your friends and co-workers.

Please do not reproduce, republish, edit or copy this book.



Nimit Joshi
Software Developer

Sam Hobbs
Editor, C# Corner

This book is a basic introduction to **Programming ASP.NET MVC 5**, basically for beginners who want to learn complete basic with example of **ASP.NET MVC 5**.

Table of Contents

1. Getting Started with ASP.NET MVC 5

- 1.1 Adding a Controller
- 1.2 Adding a View
- 1.3 Adding a Model

2. Working with Database

- 2.1 Creating Connection String
- 2.2 CRUD Operations
- 2.3 Working with LocalDB

3. Editing Application

- 3.1 Introduction of Code First Migration and Adding new field
- 3.2 Searching Panel
- 3.3 View Editing
- 3.4 Working with Validation

4. Working with External Authentication

- 4.1 Configure the Login Options
- 4.2 Google and Facebook Authentication
- 4.3 Twitter Authentication

5. Entity Framework Database First Approach


- 5.1 Working with Existing Database
- 5.2 Associating Database with Application
- 5.3 Application Modification and Validation

6. IIS Hosting and Publishing of Application

7. Introduction of ASP.NET SignalR

1 Getting Started with ASP.NET MVC 5

Microsoft has released Visual Studio 2013 Preview. There are many new features introduced with this release of Visual Studio. One of them is MVC 5, it is the latest version of MVC. I would like to tell you something about the MVC. MVC is an architectural pattern that separates an application into three major parts called the Model, the View and the Controller. MVC is a recognized way to develop applications.

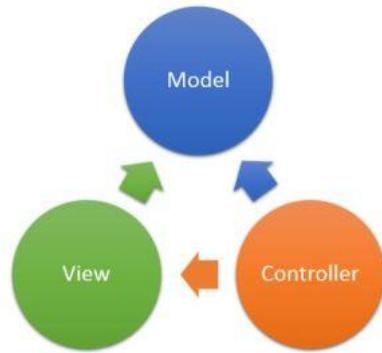

Now, I am describing ASP.NET MVC 5 in here. As you know MVC 5 is the latest update with the popular Visual Studio with which you can build dynamic, data-driven websites. It adds cool features such as single page applications, mobile optimization and adaptive rendering.

There are some important characteristics in MVC 5 as given below:

- One ASP.NET
- ASP.NET Identity
- Bootstrap
- Authentication Filters
- Filter Overrides

One ASP.NET

As you know, there are many project templates available to develop web applications. One of them is the MVC project template. It coordinates flawlessly with the new One ASP.NET experience. Using the One ASP.NET project creation wizard you can personalize your MVC application and you can configure your authentication also. The MVC applications are now standard Web Applications and it does not use their own project GUID (Globally Unique Identifier). It helps you to mix and match various technologies of your preferred app. Any developer would love ASP.NET now because One ASP.NET makes the things very easier and useful in ASP.NET.

ASP.NET Identity

There is a new characteristic used for building ASP.NET Web applications called ASP.NET Identity. Now, when you'll create an application using a MVC project template, you can use an ASP.NET Identity for authentication and identity management. It helps you to integrate the individual profile data of the user with the application data. You can also store the data into the SQL Server database or another persistence store.

There are the following two main features that we can use in it:

- **Claims-based authentication**

ASP.NET Identity supports claim-based authentication in which the identity of any user is defined as a set of claims from a trusted issuer. The user needs to be authenticated with their login credentials and they may login with their social identity providers, such as Facebook, Google, Twitter or they can login with an organizational account like Windows Azure Active Directory.

- **OAuth 2.0**


If you want to authorize requests from client applications to your Web API, now it can be done by OAuth 2.0 bearer tokens. The client authorizations is also done by organizational authorization servers like Windows Azure Active Directory or by custom authorization.

- **Use of WAAD and WSAD**

You can now create your ASP.NET project with the advantages of Windows Azure Active Directory (WAAD) and Windows Server Active Directory (WSAD) for authentication.

Bootstrap

As you know, there are many themes and CSS templates used in web applications to look and feel better for the user. Microsoft now uses the Bootstrap technology to provide a polished, spontaneous and powerful mobile-first front end framework for faster and easier web development. This Bootstrap technology is used in MVC project templates. Now the home page of your MVC project looks as in the picture shown below:

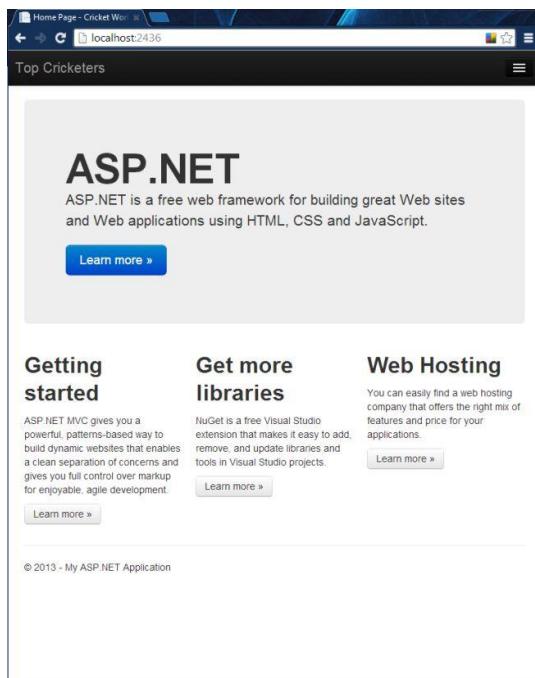

Authentication Filters

As the name Authentication Filters indicates, it is a kind of filter in ASP.NET MVC that runs prior to authorization filters in the ASP.NET MVC pipeline and it also allows you to determine authentication logic per-action, per-controller or globally for all controllers. It can also add authentication challenges in response to unauthorized requests.

Filter Overrides

Override filters determine a set of filter types that should not be run for a given scope. With this you can allow configuration of filters that apply globally but then exclude certain global filters from applying to specific actions or controllers.

1.1 Adding a Controller

In here, I am creating MVC 5 Web Application in which I introduce you the all aspects of MVC 5. As you know that MVC stands for Model View Controller and here we also create a new controller for the web application.

Prerequisites


There are some prerequisites to start the MVC 5 application. Given below:

- Visual Studio 2013 Preview or later
- ASP.NET Web Tools for Visual Studio 2013
- NuGet Package Manager for Visual Studio 2013


Create Application in MVC 5

So let's start to create an ASP.NET Web Application with the MVC 5 Project template. Follow the steps given below:


Step 1: Open Visual Studio 2013. (I am using Visual Studio 2013 RC)

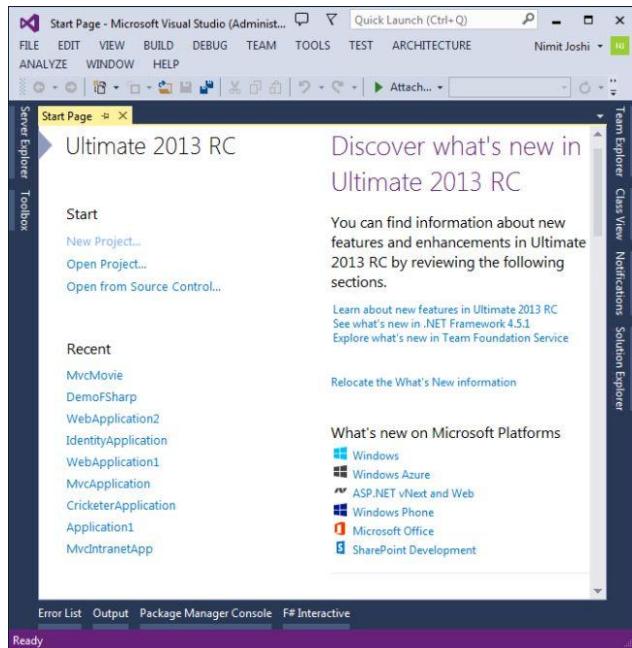

Step 2: Click on New Project to create a web application

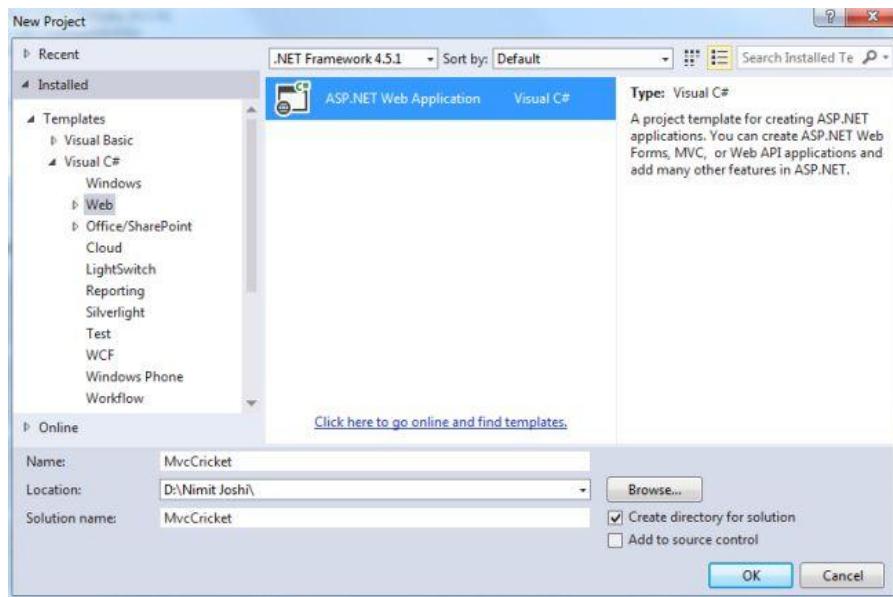


Step 3: Select the MVC template

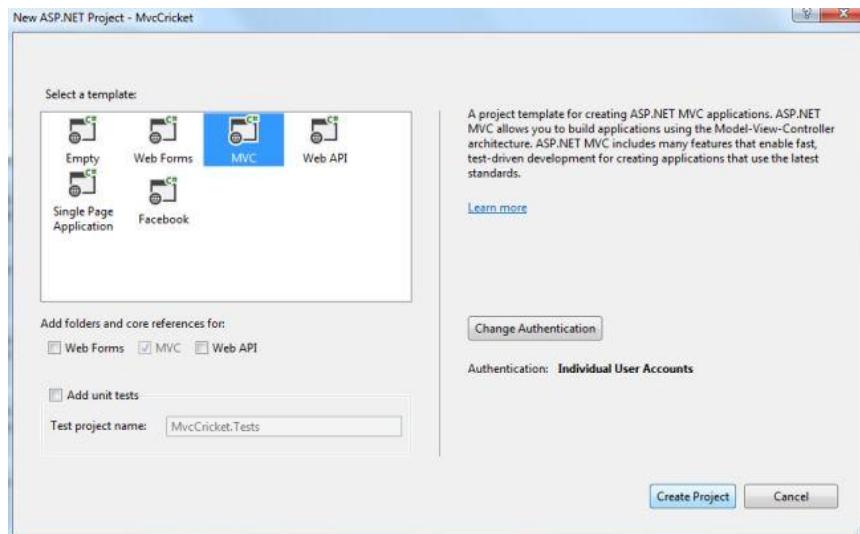


Step 4: Click on Create Project.

When you click on Create Project, Visual Studio automatically creates a MVC web application in which you can see the folders like Models, Controllers and Views. There are two files named Account and Home present in Controller and View folders. As you can see in the following figure that *HomeController.cs* file have the corresponding view in the Views folder.

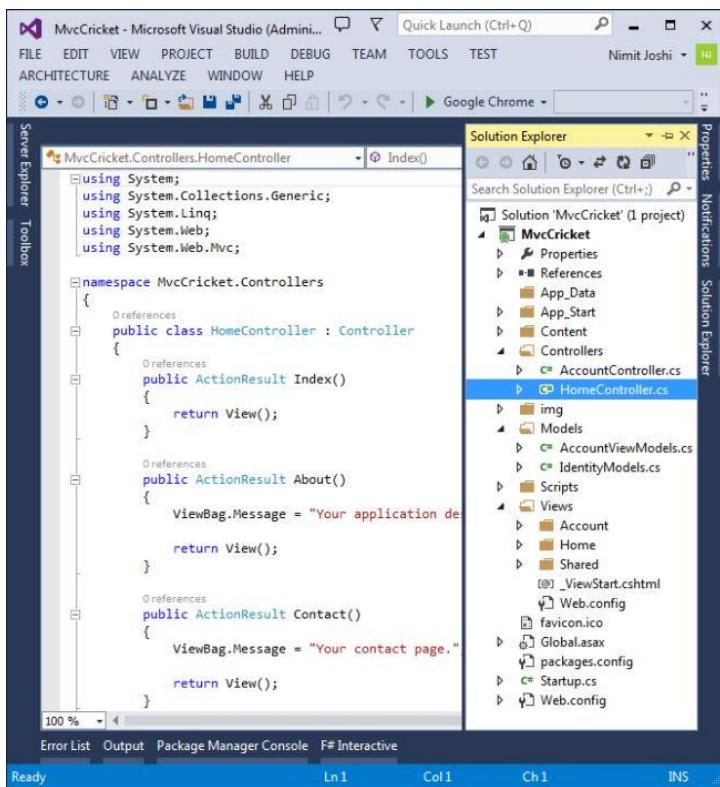

Debug Application

Now, you have created an application, so its time to debug the application. Press F5 to debug your application. Visual Studio allows IIS Express to debug the application. Browser will open and show the application's home page.

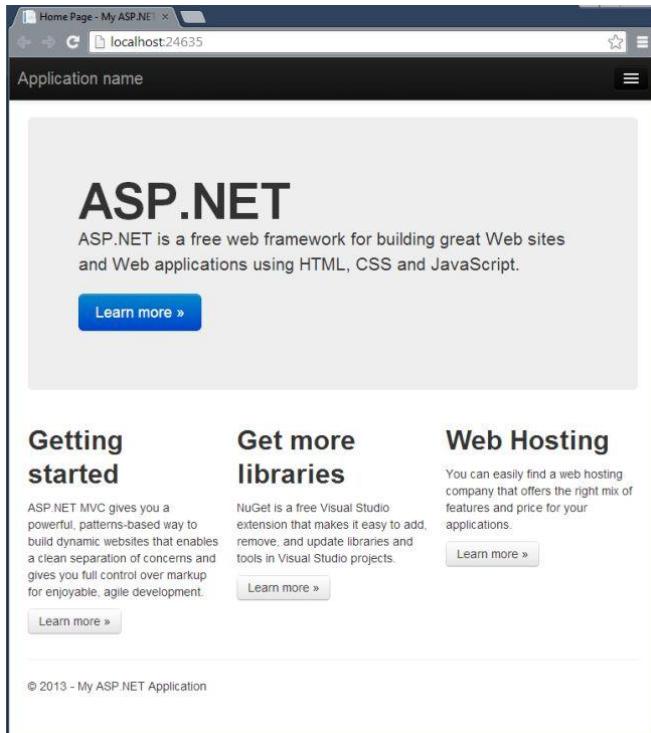


In the browser's URL, you will see the localhost and a port number. Localhost represents that you are running it on local computer and port number generated by Visual Studio which is used for the web server.


Working with Controller

As you know that there are different controller already present in the application. So, let's start to create a new controller with the following steps:

Step 1: Right click on your Controller folder

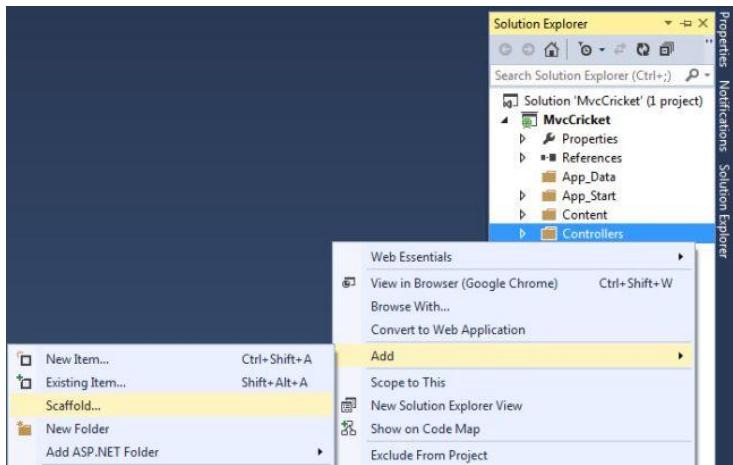


Step 2: Click on Add Scaffold

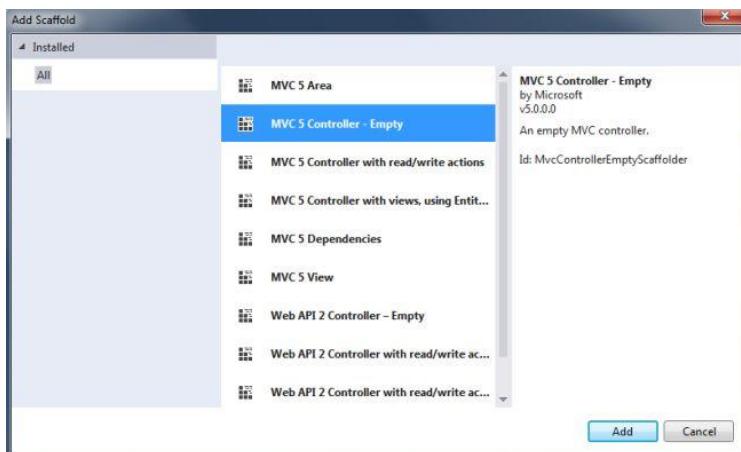

Step 3: In the next wizard, enter your Controller name as "MYCrikceters"



Visual Studio will create the *MYCrikcetersController.cs* file and display your new controller

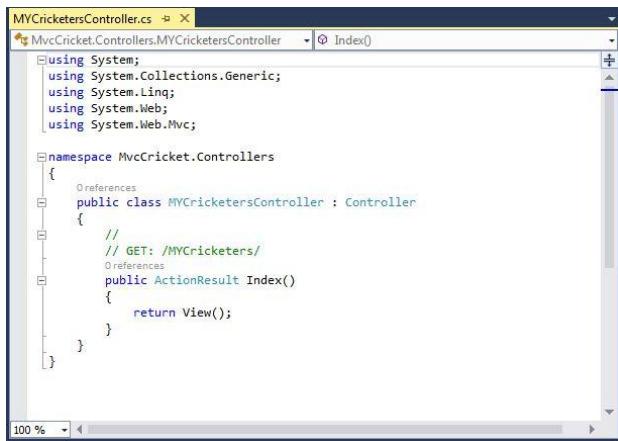

```
MYCricketersController.cs  X
MvcCricket.Controllers.MYCricketersController  Index()

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.Mvc;

namespace MvcCricket.Controllers
{
    public class MYCricketersController : Controller
    {
        // GET: /MYCricketers/
        public ActionResult Index()
        {
            return View();
        }
    }
}
```

Step 4: Modify your code with the following code:


```
using System.Web.Mvc;

namespace MvcCricket.Controllers
{
    public class MYCricketersController : Controller
    {
        // GET: /MYCricketers/
        public string Index()
        {
            return "Hello this is My First Controller";
        }

        public string Welcome()
        {
            return "Welcome to My Cricketer Controller";
        }
    }
}
```

There are two controller methods used in here. These methods will return a string .

Step 5: Debug your application



Visual Studio by default opens HomeController. You have to provide your controller name with the localhost like localhost:1234/MYCricketers. Enter your controller name with the localhost. In here, *MYCricketersController* is the first method named as Index.



Similarly open the Welcome method will open by providing it with the url as shown below:




1.2 Adding a View

before starting replace your previous code (as shown in Step 3) in the *MYCricketersController.cs* file.


I am creating an app to add a view in my MVC Project.

Step 1: Open Visual Studio 2013 Preview.

Step 2: "File" -> "New" -> "Project..."

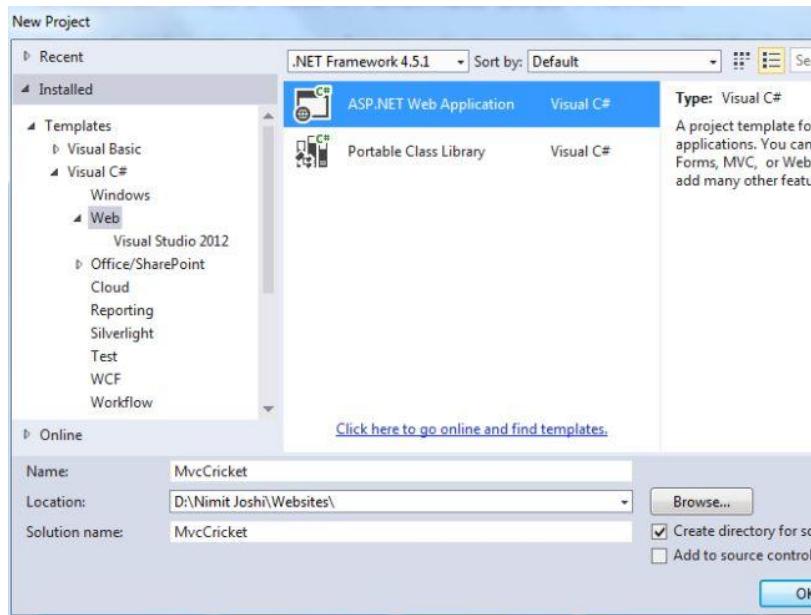


Step 3: Select MVC Project Template and click "Create Project".

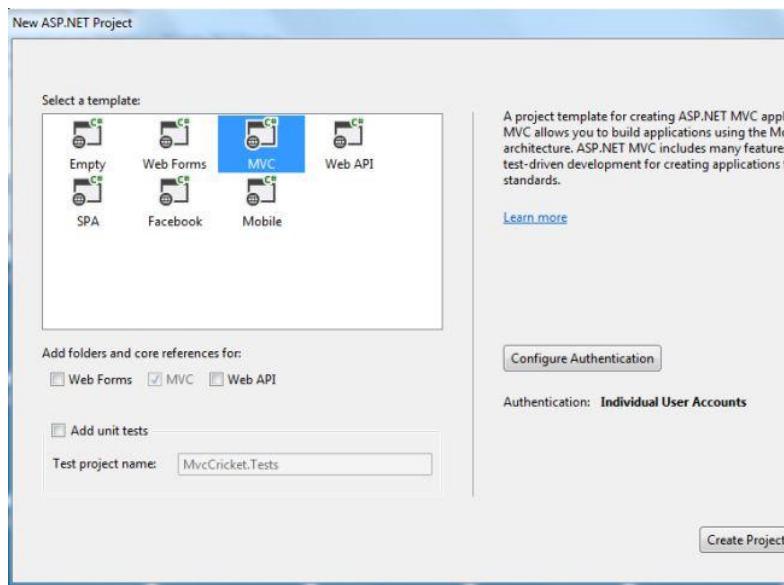


Note: Ensure you have a Controller class to generate a responsive view. You must have the same name as the Controller class and view. If you don't have the controller class then make a controller class and provide the same name as the view name.

Step 4: In Solution Explorer, go to the view and create a new folder.


Step 5: Select your folder, right-click to add a Scaffold.

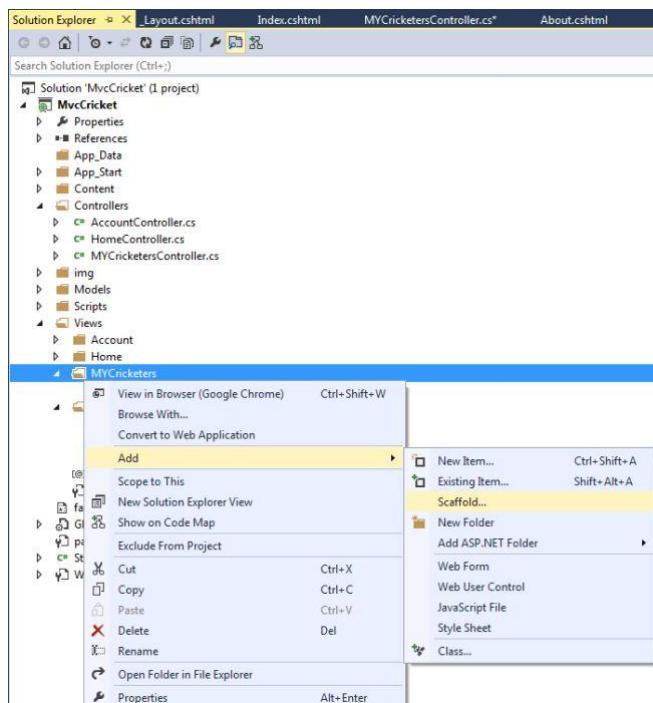


Step 6: Select "MVC 5 View- Empty Without Model" in the Add Scaffold wizard.

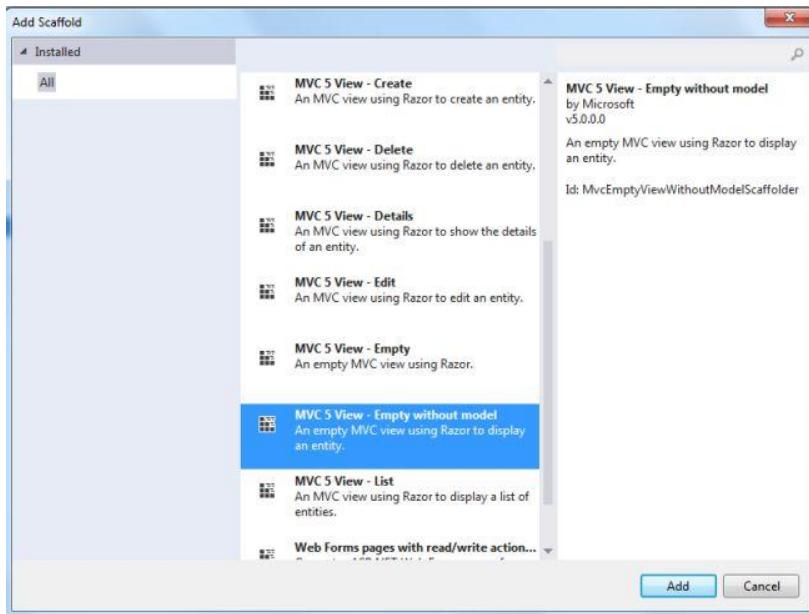


Step 7: Enter your View name in the next Add View wizard.

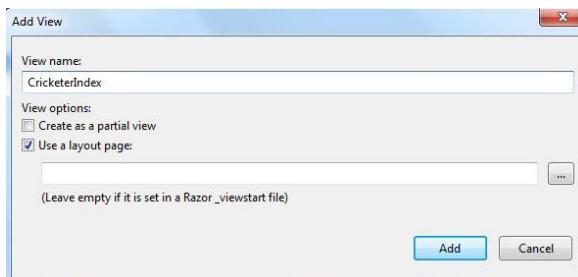

Step 8: Select and open your view in Solution Explorer.

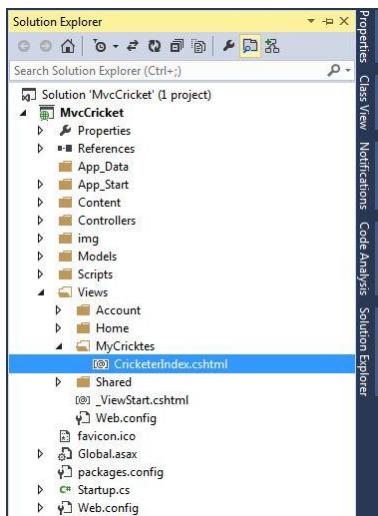

Step 9: Provide your description of the app in your view.

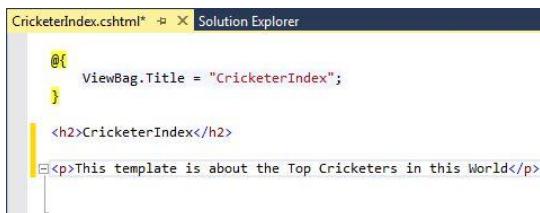

```
CricketerIndex.cshtml* × Solution Explorer

@{
    ViewBag.Title = "CricketerIndex";
}




## CricketerIndex



This template is about the Top Cricketers in this World



```

Step 10: Inspect your view from the Page Inspector.

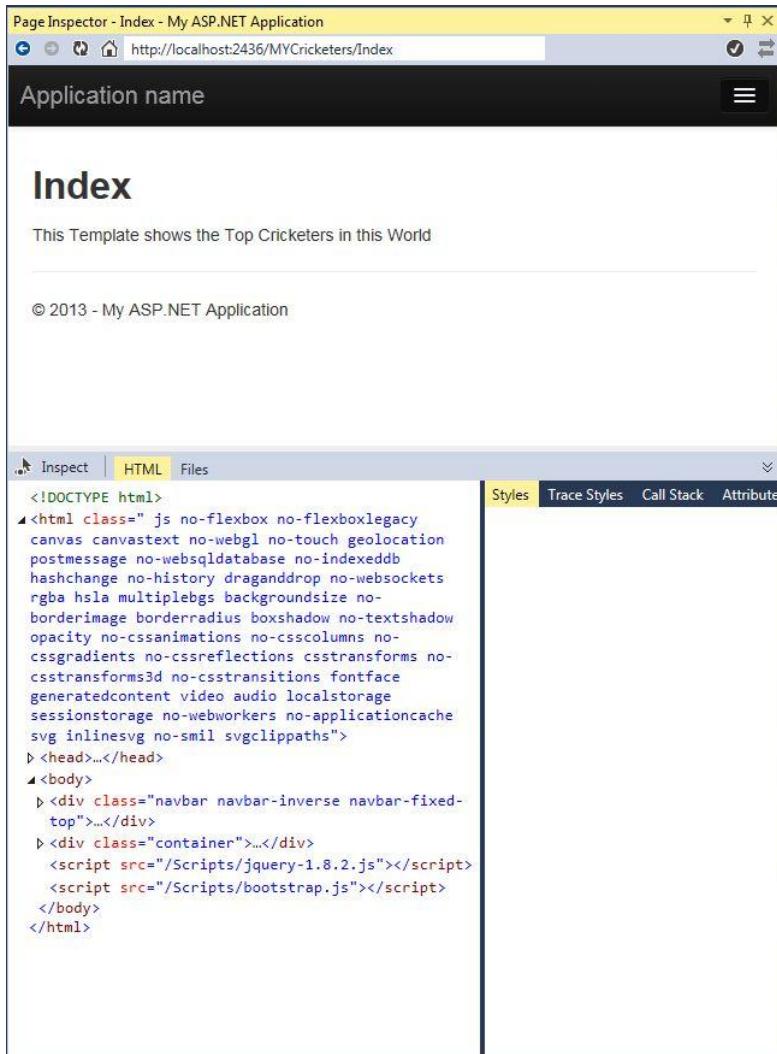

The screenshot shows the Page Inspector tool for an ASP.NET application. The title bar says "Page Inspector - Index - My ASP.NET Application". The address bar shows "http://localhost:2436/MYCricketers/Index". The main content area displays the "Index" page with the heading "Index" and the text "This Template shows the Top Cricketers in this World". At the bottom, there is a copyright notice: "© 2013 - My ASP.NET Application". On the left side, there is a sidebar with tabs: "Inspect" (selected), "HTML" (highlighted in yellow), and "Files". The "HTML" tab shows the source code of the page, which includes the DOCTYPE declaration, the HTML element with various CSS classes and attributes, and the body containing the navbar and script tags. On the right side, there are four tabs: "Styles", "Trace Styles", "Call Stack", and "Attribute".


Step 11: Debug your application and append your view name after the / sign in URL.

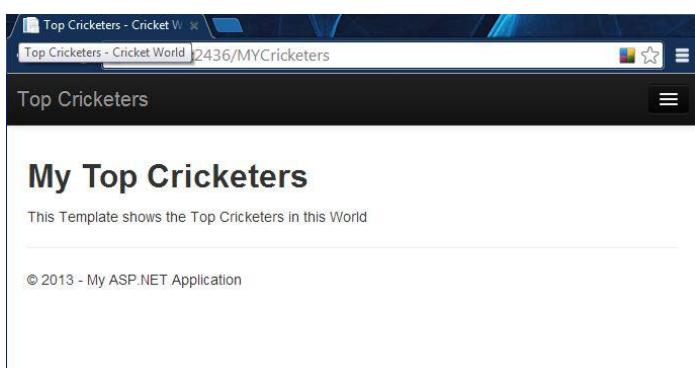

The screenshot shows a web browser window with the title "Top Cricketers - Cricket World". The URL bar shows "Top Cricketers - Cricket World 2436/MYCricketers". The page content includes a header "Top Cricketers", a section titled "My Top Cricketers" with the subtext "This Template shows the Top Cricketers in this World", and a footer "© 2013 - My ASP.NET Application".

Change View and Layout Pages

Step 1: Go to your Layout page in the Shared Folder.

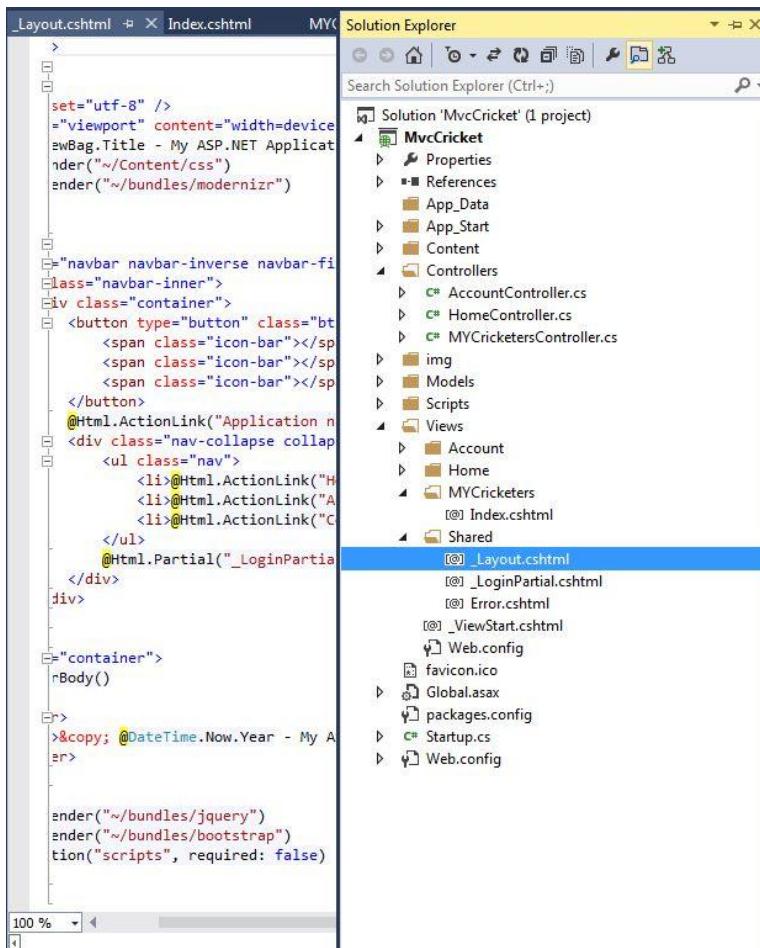

The screenshot shows the Visual Studio IDE. On the left is the code editor with the file `_Layout.cshtml` open. The code defines a layout page with a header, a navigation bar, and a body section. On the right is the Solution Explorer showing the project structure for "MvcCricket". The `Shared` folder is expanded, and the `_Layout.cshtml` file is selected.

```

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
@{
    Layout = "~/Content/css/_Layout.cshtml";
    ViewBag.Title = "My ASP.NET Application";
    ViewBag.Render("~/bundles/modernizr");
}

<nav class="navbar navbar-inverse navbar-fixed-top" style="margin-bottom: 0;">
    <div class="container">
        <button type="button" class="navbar-toggle" data-toggle="collapse" data-target="#mainNav">
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
        </button>
        @Html.ActionLink("Application n", "Index", "Home", null, new { @class = "navbar-brand" })
        <div class="nav-collapse collapse" id="mainNav">
            <ul class="nav">
                <li>@Html.ActionLink("Home", "Index", "Home")</li>
                <li>@Html.ActionLink("About", "About", "Home")</li>
                <li>@Html.ActionLink("Contact", "Contact", "Home")</li>
            </ul>
            @Html.Partial("_LoginPartial")
        </div>
    </div>
</nav>

<div class="container">
    @Body()
</div>

</div>
<script src="~/bundles/jquery" type="text/javascript">
<script src="~/bundles/bootstrap" type="text/javascript">
<script type="text/javascript">$.fn.loadScripts = function (options) {
```

Step 2: To change your application name and title with your own app name, you need to go to ActionLink and change it with yours in the "layout.cshtml" file.




```

<!DOCTYPE html>
<html>
<head>
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>@ViewBag.Title - Cricket World</title>
    @Styles.Render("~/Content/css")
    @Scripts.Render("~/bundles/modernizr")
</head>
<body>
    <div class="navbar navbar-inverse navbar-fixed-top">
        <div class="navbar-inner">
            <div class="container">
                <button type="button" class="btn btn-navbar" data-toggle="collapse" data-target="#nav-collapse">
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                </button>
                @Html.ActionLink("Top Cricketers", "Index", "Home", null)
                <div class="nav-collapse collapse">
                    <ul class="nav">
                        <li>@Html.ActionLink("Home", "Index", "Home")</li>
                        <li>@Html.ActionLink("About", "About", "Home")</li>
                        <li>@Html.ActionLink("Contact", "Contact", "Home")</li>
                    </ul>
                    @Html.Partial("_LoginPartial")
                </div>
            </div>
        </div>
        <div class="container">
            @RenderBody()
            <hr />
            <footer>
                <p>© &copy; @DateTime.Now.Year - My ASP.NET Application</p>
            </footer>
        </div>
    </div>
    <@Scripts.Render("~/bundles/jquery")>
    <@Scripts.Render("~/bundles/bootstrap")>
    <@RenderSection("scripts", required: false)>
</body>
</html>

```

Step 3: Debug your app and see your App name.

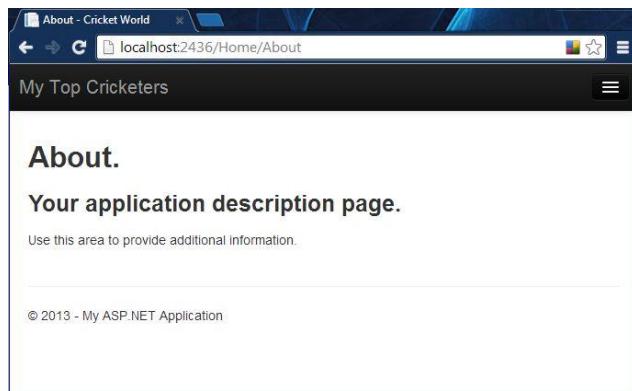


Step 4: In your "Index.cshtml" file code, change your view title and heading. Just type yours in as in the following:

```
@{
    ViewBag.Title = "Top Cricketers";
}

<h2>My Top Cricketers</h2>

<p>This Template shows the Top Cricketers in this World</p>
```

Step 3: Debug your app and see your App name with changes.

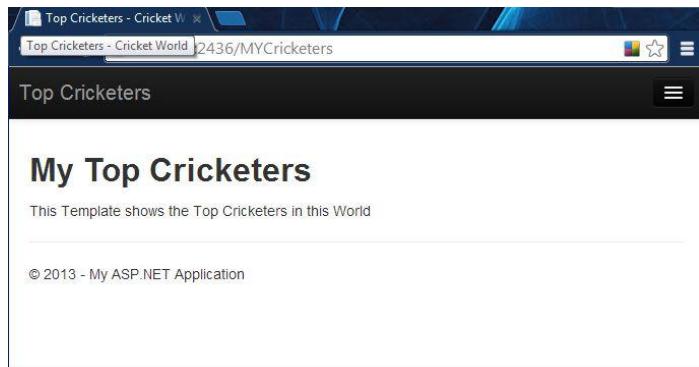


Step 4: Now add an another Method to show your work in the Controller class.

```
public class MYCricketersController : Controller
{
    //
    // GET: /MYCricketers/
    public ActionResult Index()
    {
        return View();
    }


    public ActionResult Welcome()
    {
        ViewBag.Message = "Sachin Tendulkar";
        return View();
    }
}
```


Step 5: Build your app to ensure that your app builds successfully.

Step 6: Go to your folder and add a Scaffold.

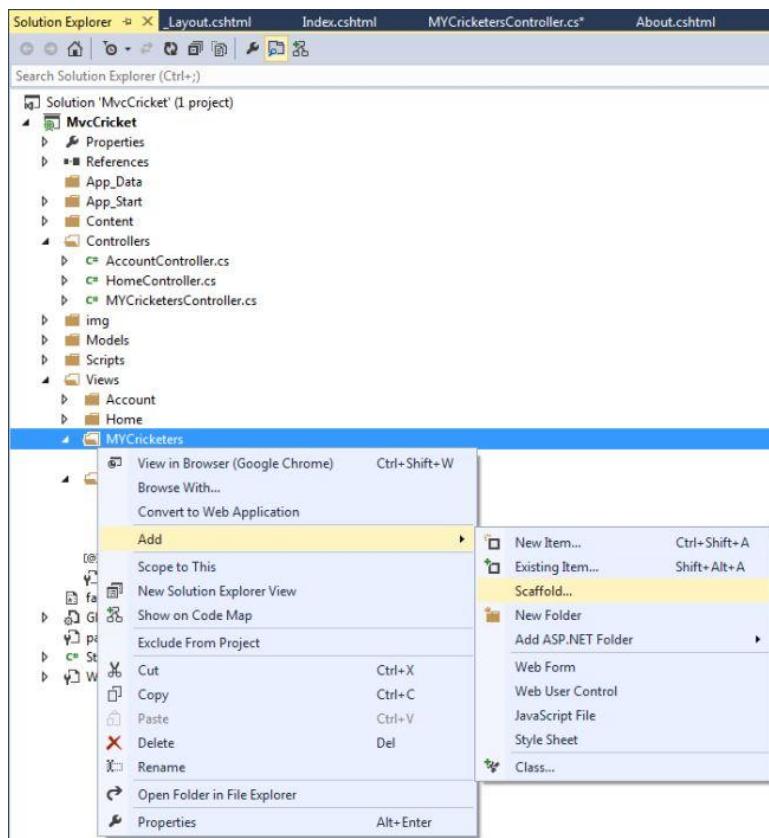

Step 7: Provide your view name.

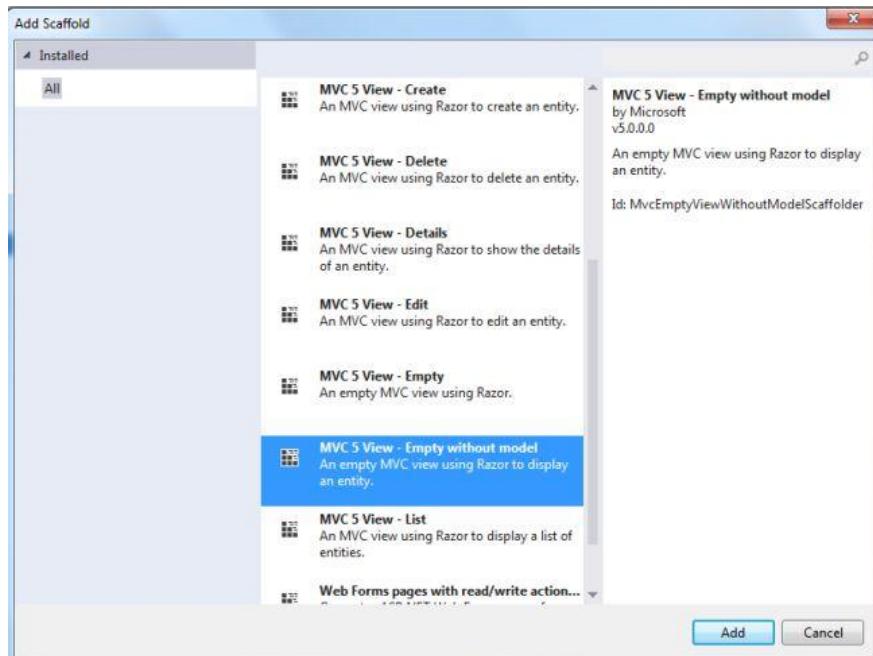


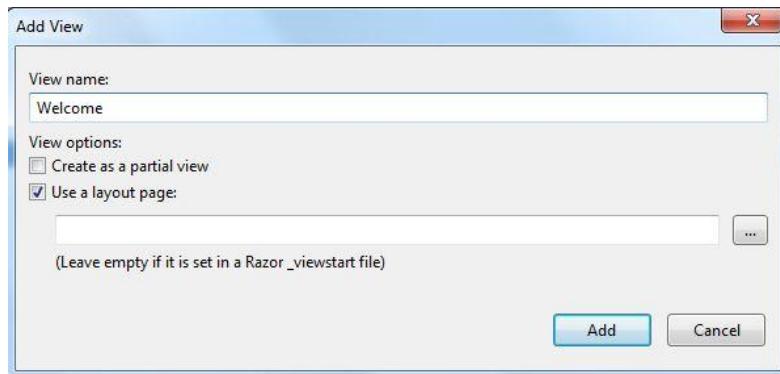

Step 8: Go to your "Welcome.cshtml" file and write the code as in the following:

```
@{
    ViewBag.Title = "Welcome";
}
<h2>Welcome</h2>
<ul>
    <li>@ViewBag.Message</li>
</ul>
```

Step 9: Debug your app with the "Welcome.cshtml" page.

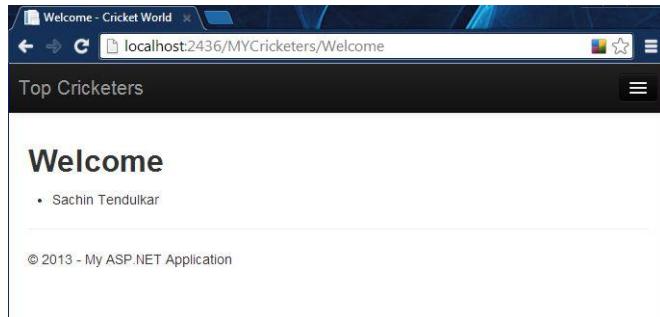

1.3 Adding a Model

This part introduces how to work with Models and Connection Strings. This topic will help you to add some classes for the application that help manage databases and to create or maintain the Connection Strings that provide the path to connect to a database.


Let's start first by adding a class in the Model. The class will be the "model" part of the ASP.NET MVC application. The prerequisites for working in Model are the following:

- MVC 5 template for creating project
- Visual Studio 2013 Preview
- Entity Framework


Model Classes

In this section you will learn about adding a Model Class in a MVC 5 application. You should have an MVC 5 application for working in it.


Step 1: Go to Solution Explorer and select your app.

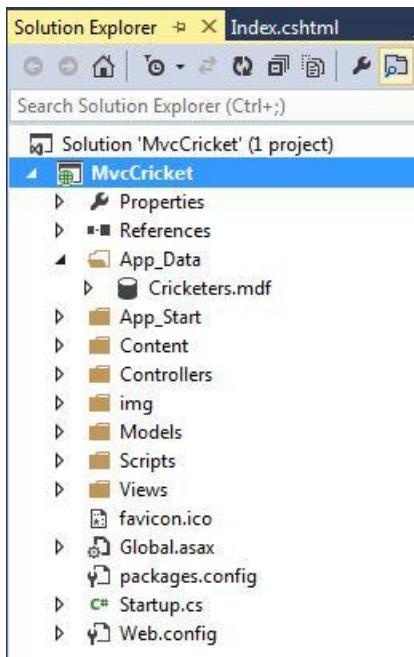

Step 2: Right-click on Model and select go "Add" then "Class".

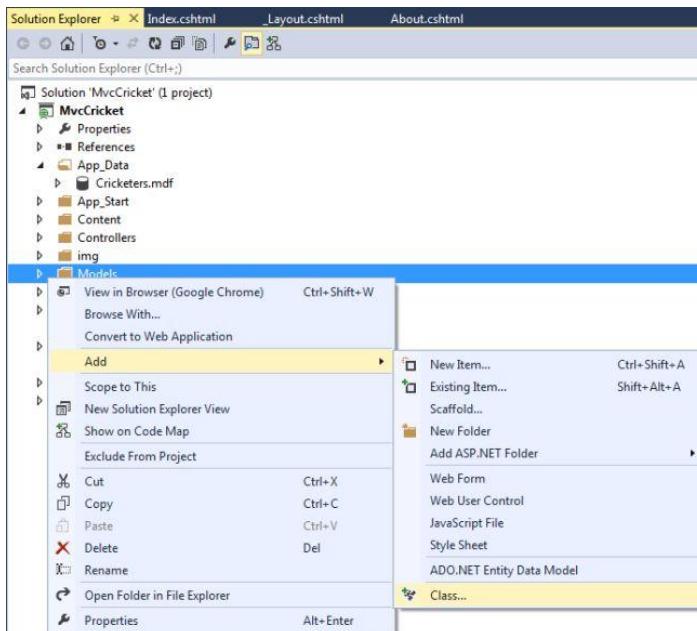

Step 3: Enter your class name.

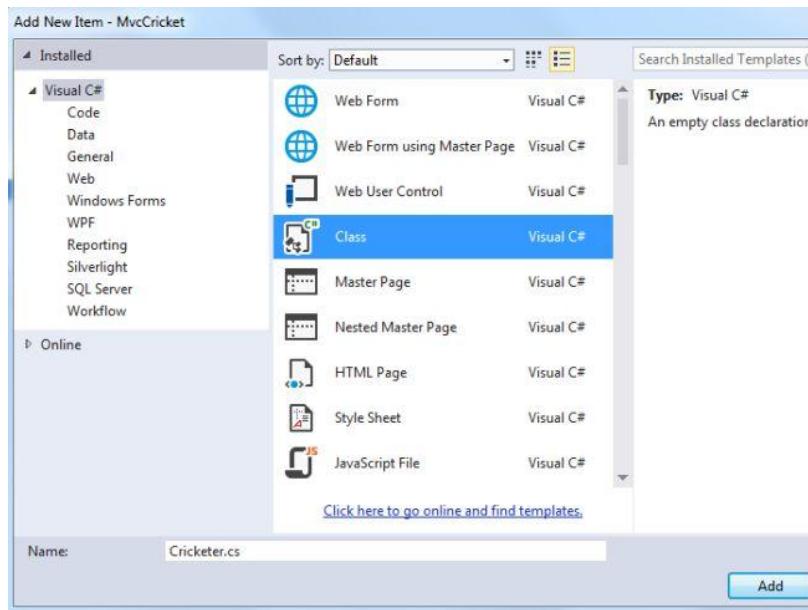

You can see your new class as in the following:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
```

```
namespace MvcCricket.Models
{
    public class Cricketer
    {
    }
}
```

After adding the class in the Model, let's add some properties:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
```

```
namespace MvcCricket.Models
{
    public class Cricketer
    {
        public int ID { get; set; }
        public string Name { get; set; }
        public int ODI { get; set; }
        public int Test { get; set; }
    }
}
```

The Cricketer class represents Cricketers in the database. In the preceding example, each instance of the Cricketer object represents a row element within a database table and each property of this Cricketer class will map to a column in the table.

Now, after adding the Model class add the CricketerDBContext class in the same Cricketer class file:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;

namespace MvcCricket.Models
{
    public class Cricketer
    {
        public int ID { get; set; }
        public string Name { get; set; }
        public int ODI { get; set; }
        public int Test { get; set; }
    }

    public class CricketerDBContext : DbContext
    {
        public DbSet<Cricketer> Cricketers { get; set; }
    }
}
```

The class named CricketerDBContext class corresponds to the Entity Framework cricketer database context. That is helpful for retrieving, storing and updating the Cricketer class instances in the database. The DbContext class that is provided by the Entity Framework is the base class of CricketerDBConetext.

For using the Entity Framework in this app or accessing the DbContext and DbSet, you need to add the following statement:

```
using System.Data.Entity;
```

Visual Studio 2013 Preview also provides the facility to manually add an assembly reference. For adding manually review the following statements:

Right-click on the red squiggly lines and select "Resolve" and then click the corresponding assembly reference.

or

Click on the red squiggly lines and move your cursor to the starting point and you'll notice that it'll show you how to resolve the problem.

Cricketer.cs* Solution Explorer Index.cshtml _Layout.cshtml About.cshtml

MvcCricket.Models.CricketerDBContext


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;

namespace MvcCricket.Models
{
    public class Cricketer
    {
        public int ID { get; set; }
        public string Name { get; set; }
        public int ODI { get; set; }
        public int Test { get; set; }
    }

    public class CricketerDBContext : DbContext
    {
        public DbSet<Cricketer> Cricketer { get; set; }
    }
}
```

using System.Data.Entity;
System.Data.Entity.DbContext
Generate class for 'DbContext'
Generate new type...

Note: In the application there are many using statements that are unused. So, you can remove the unused using statements by right-clicking on your app and select "Organize Usings" and click "Remove Unused Usings":

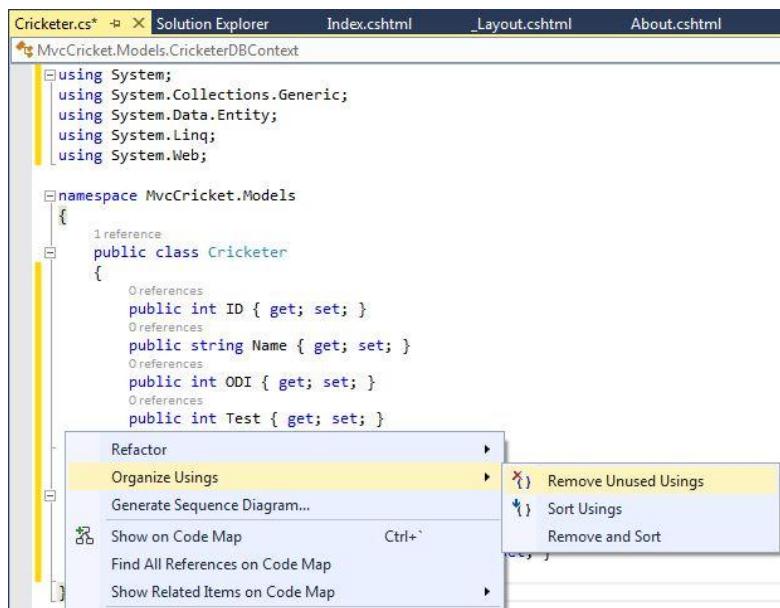

```

Cricketer.cs*  X  Solution Explorer  Index.cshtml  _Layout.cshtml  About.cshtml
MvcCricket.Models.CricketerDBContext

using System;
using System.Collections.Generic;
using System.Data.Entity;
using System.Linq;
using System.Web;

namespace MvcCricket.Models
{
    public class Cricketer
    {
        public int ID { get; set; }
        public string Name { get; set; }
        public int ODI { get; set; }
        public int Test { get; set; }
    }
}


```

You can add a model using the preceding information.

2. Working with Database

2.1 Creating Connection String

In the application, the CricketerDBConetext class is responsible for handling the task of connecting the database and to map the Cricketer objects to database records. The Entity Framework automatically connects the database and uses it. The default database is LocalDB. Now, I am adding a connection string explicitly in the *Web.Config* file in the application.

Working with SQL Server Express LocalDB


The SQL Server Express Database Engine has the LocalDB. It is very lightweight that automatically starts on demand and runs in the user mode. SQL Server Express has the special execution mode in which LocalDB runs that facilitates you to work with the database as *.mdf* files. The *.mdf* file of any database is stored in the *App_data* folder in the application.

You should not use the LocalDB in particular for production with a web application because it is designed to work with Internet Information Services (IIS). You can easily migrate your LocalDB database to SQL Server or SQL Azure. It is installed by default in Visual Studio 2012 and 2013 Preview versions of Visual Studio.


You can add a connection string to your app using the following procedure.

Step 1: Open your project

Step 2: In Solution Explorer open the *Web.Config* file

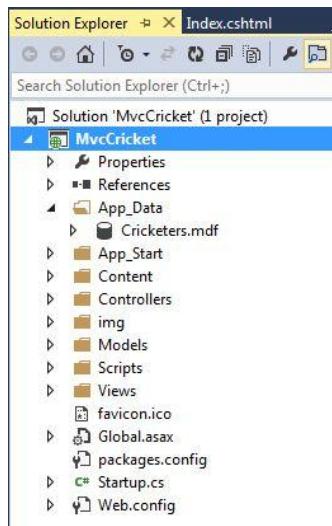

Step 3: Find the <connectionStrings> element in the file.

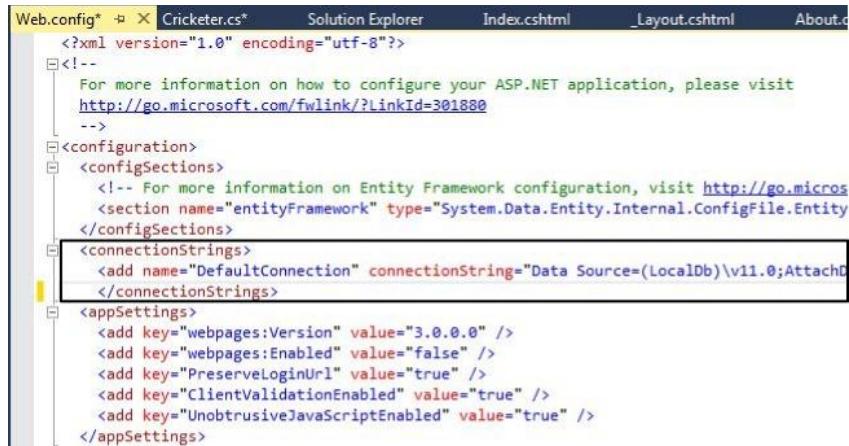

```

<?xml version="1.0" encoding="utf-8"?>
<!-- For more information on how to configure your ASP.NET application, please visit
     http://go.microsoft.com/fwlink/?LinkId=301880
-->
<configuration>
  <configSections>
    <!-- For more information on Entity Framework configuration, visit http://go.micros
        <section name="entityFramework" type="System.Data.Entity.Internal.ConfigFile.Entity
    </configSections>
  <connectionStrings>
    <add name="DefaultConnection" connectionString="Data Source=(LocalDb)\v11.0;AttachD
  </connectionStrings>
  <appSettings>
    <add key="webpages:Version" value="3.0.0.0" />
    <add key="webpages:Enabled" value="false" />
    <add key="PreserveLoginUrl" value="true" />
    <add key="ClientValidationEnabled" value="true" />
    <add key="UnobtrusiveJavaScriptEnabled" value="true" />
  </appSettings>

```

Step 4: Add the following connection string to the <connectionStrings> element after the previous connection string:


```

<add name="CricketerDBContext" connectionString="Data
Source=(LocalDB)\v11.0;AttachDbFileName=|DataDirectory|\Cricketers.mdf;Integrated
Security=True" providerName="System.Data.SqlClient" />

```

Now there are two connection strings available in your Web.Config file. The connection string named DefaultConnection is used for the membership database and the connection string named CricketerDBConetext determines a LocalDB database that is located in the App_Data folder as Cricketers.mdf.

Note: You need to note that the connection string must match the name of DbContext class.

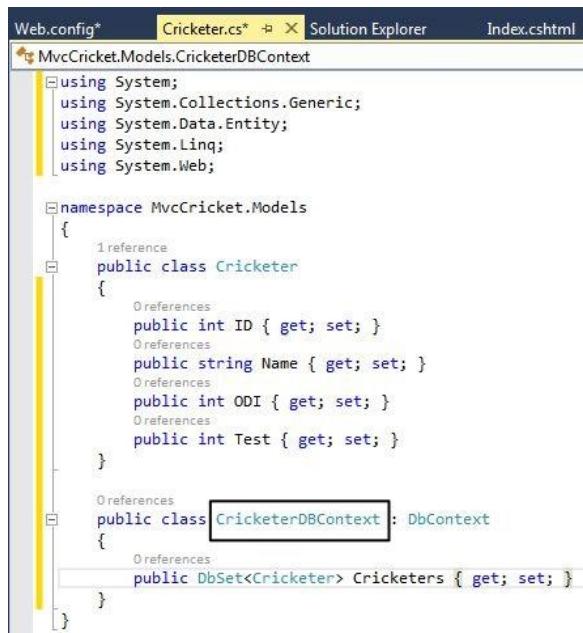

```

Web.config* Cricketer.cs* > X Solution Explorer Index.cshtml
MvcCricket.Models.CricketerDBContext
using System;
using System.Collections.Generic;
using System.Data.Entity;
using System.Linq;
using System.Web;

namespace MvcCricket.Models
{
    public class Cricketer
    {
        public int ID { get; set; }
        public string Name { get; set; }
        public int ODI { get; set; }
        public int Test { get; set; }
    }

    public class CricketerDBContext : DbContext
    {
        public DbSet<Cricketer> Cricketers { get; set; }
    }
}

```

2.2 CRUD Operations


Microsoft released MVC 5 with Visual Studio 2013 Preview. As you know, CRUD Operations are done with MVC 4 in previous versions of Visual Studio. Now, in this part I'll introduce you to how to create CRUD Operations by MVC 5. There are some changes in Visual Studio 2013 Preview for CRUD Operations by MVC 5.

In that context, I am developing an app in which you will learn how to access your Model's data from a Controller. For accessing your Model's Data from a Controller, you need to follow the sections given below:


- Scaffold
- Create
- Read
- Update
- Delete
- Connect with SQL Server LocalDB

Scaffold


Step 1: Before proceeding to the next step please build your solution. If you do not build your application then you might get an error when you add the Controller.

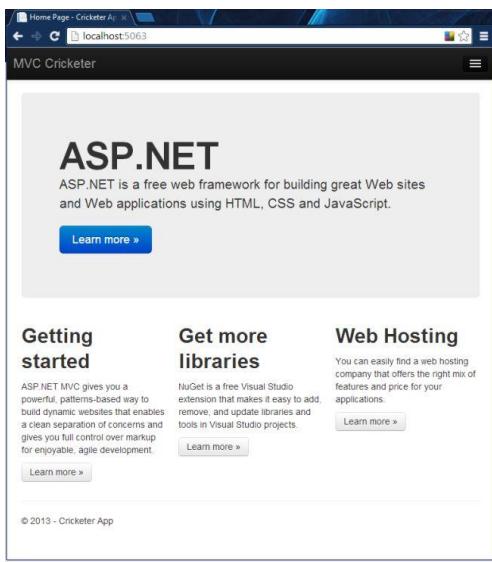


Step 2: Select your application in Solution Explorer.

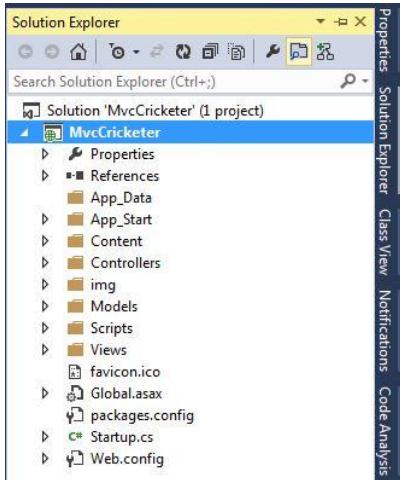

Step 3: Right-click on your Controllers folder to add a Controller.

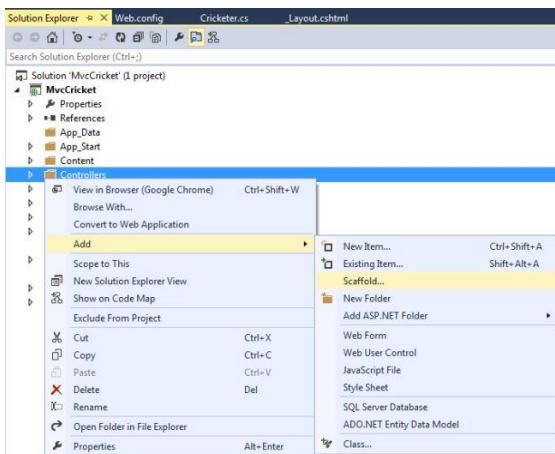


Step 4: After selecting scaffold, select MVC 5 Controller with read/write.

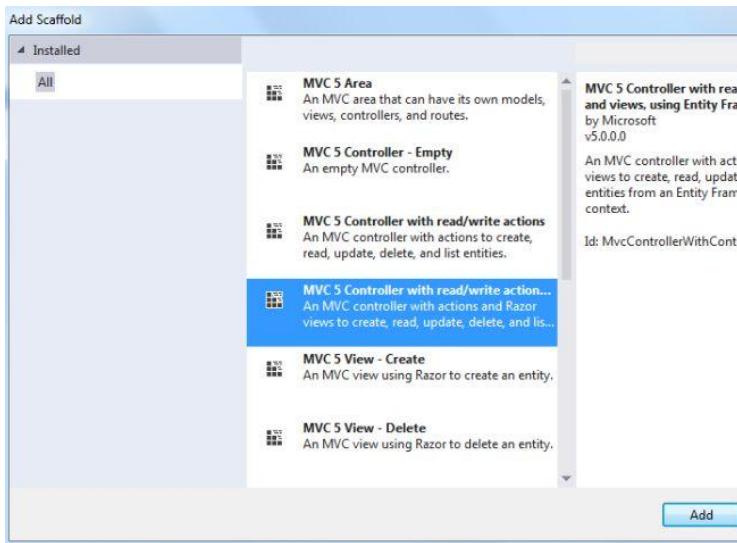

Step 5: Enter your Controller name as CricketersController, select your Model Class and Data context class.



Click the "Add" button to add a Controller named CricketersController. (If you get an error then maybe you did not build your solution before adding the Controller.) When you click on "Add", Visual Studio automatically creates and adds many files and folders to your application. You can view files and folders in your Solution Explorer.

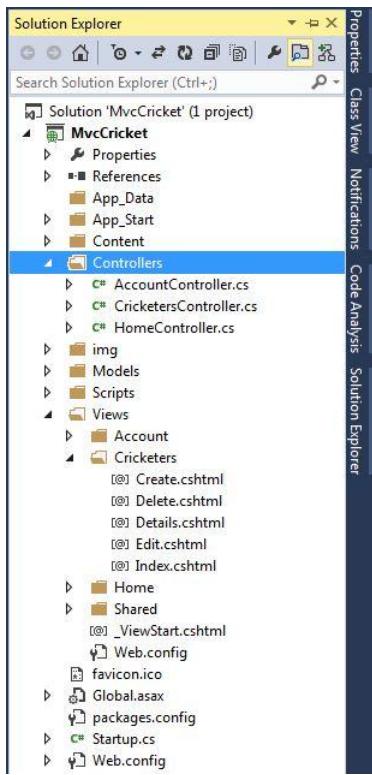

You can also view your CRUD action methods like Create, Read, Update and Delete in your *CricketersController.cs* file. When you debug your application, open your application in the browser in URL format like "http://localhost:(your port number)/Cricketers". In that page you can Create, Read, Update and Delete your data as you want.

```

CricketersController.cs  ✘ CricketerDBContext.cs      Web.config      Cricketer.cs
MvcCricket.Controllers.CricketersController
public ActionResult Create(Cricketer cricketer)
{
    if (ModelState.IsValid)
    {
        db.Cricketers.Add(cricketer);
        db.SaveChanges();
        return RedirectToAction("Index");
    }
    return View(cricketer);
}

// GET: /Cricketers/Edit/5
[HttpGet]
public ActionResult Edit(Int32 id)
{
    Cricketer cricketer = db.Cricketers.Find(id);
    if (cricketer == null)
    {
        return HttpNotFound();
    }
    return View(cricketer);
}

// POST: /Cricketers/Edit/5
[HttpPost]
[ValidateAntiForgeryToken]
public ActionResult Edit(Cricketer cricketer)
{
    if (ModelState.IsValid)
    {
        db.Entry(cricketer).State = EntityState.Modified;
        db.SaveChanges();
        return RedirectToAction("Index");
    }
    return View(cricketer);
}

// GET: /Cricketers/Delete/5
[HttpGet]
public ActionResult Delete(Int32 id)
{
    Cricketer cricketer = db.Cricketers.Find(id);
    if (cricketer == null)
    {
        return HttpNotFound();
    }
}


```

Now, let's move to the CRUD Operations.

Create


Now it's time to create some data in the application. Please follow the steps given below.

Step 1: Click on "Create New link".

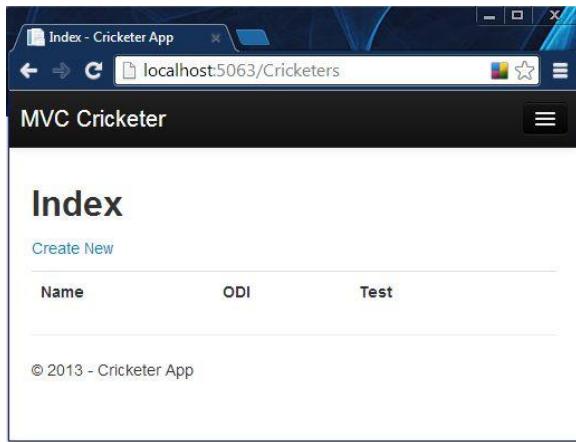

The screenshot shows a browser window titled "Index - Cricketer App" with the URL "localhost:5063/Cricketers". The page is titled "MVC Cricketer" and contains a section titled "Index". Below it is a table with three columns: "Name", "ODI", and "Test". A link "Create New" is visible above the table. At the bottom, there is a copyright notice: "© 2013 - Cricketer App".

Step 2: In the next window enter your data.

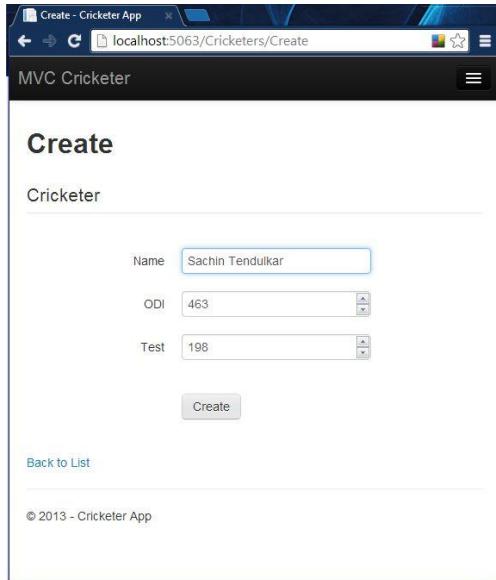


The screenshot shows a browser window titled "Create - Cricketer App" with the URL "localhost:5063/Cricketers/Create". The page is titled "MVC Cricketer" and contains a section titled "Create". Below it is a form for creating a "Cricketer" with fields: "Name" (Sachin Tendulkar), "ODI" (463), and "Test" (198). A "Create" button is at the bottom of the form. At the bottom, there is a link "Back to List" and a copyright notice: "© 2013 - Cricketer App".

Step 3: Provide more data for edit and delete.

Read

It's time to read your data. To read the data, review the following steps.

Step 1: Click on "Create" after filling in the information.

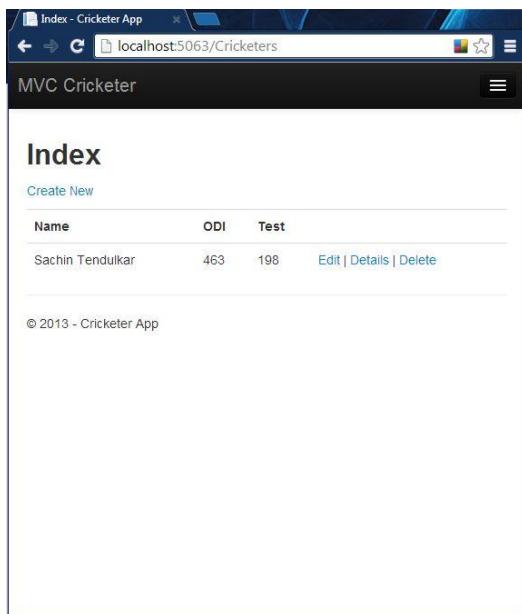


The screenshot shows a browser window titled "Index - Cricketer App" with the URL "localhost:5063/Cricketers". The page is titled "MVC Cricketer" and has a header "Index". Below the header is a "Create New" button. A table displays one record:

Name	ODI	Test
Sachin Tendulkar	463	198

Below the table are "Edit | Details | Delete" links. At the bottom of the page is the copyright notice "© 2013 - Cricketer App".

Step 2: You can view your all data after entering.

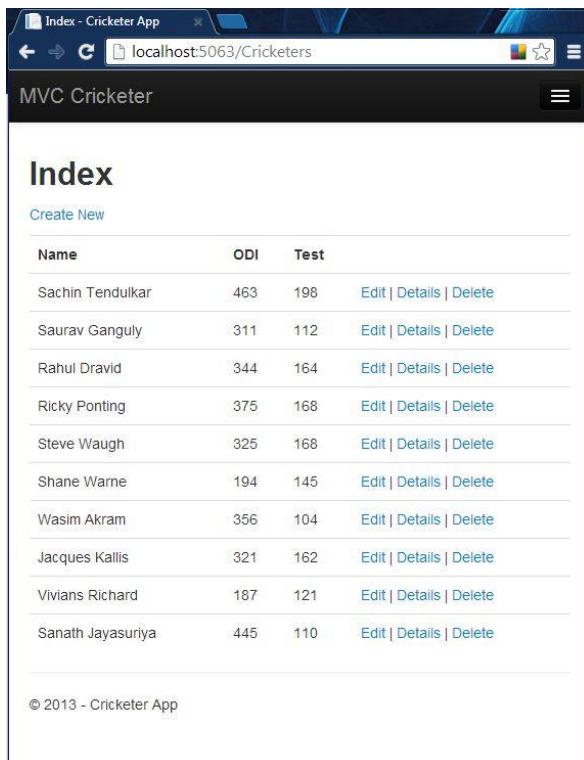

The screenshot shows a browser window titled "Index - Cricketer App" with the URL "localhost:5063/Cricketers". The page is titled "MVC Cricketer" and has a header "Index". Below the header is a "Create New" button. A table displays ten records:


Name	ODI	Test
Sachin Tendulkar	463	198
Saurav Ganguly	311	112
Rahul Dravid	344	164
Ricky Ponting	375	168
Steve Waugh	325	168
Shane Warne	194	145
Wasim Akram	356	104
Jacques Kallis	321	162
Vivians Richard	187	121
Sanath Jayasuriya	445	110

Below the table are "Edit | Details | Delete" links for each row. At the bottom of the page is the copyright notice "© 2013 - Cricketer App".

Update

If you want to edit your data then use the following procedure.

Step 1: Choose your data and click on "Edit".

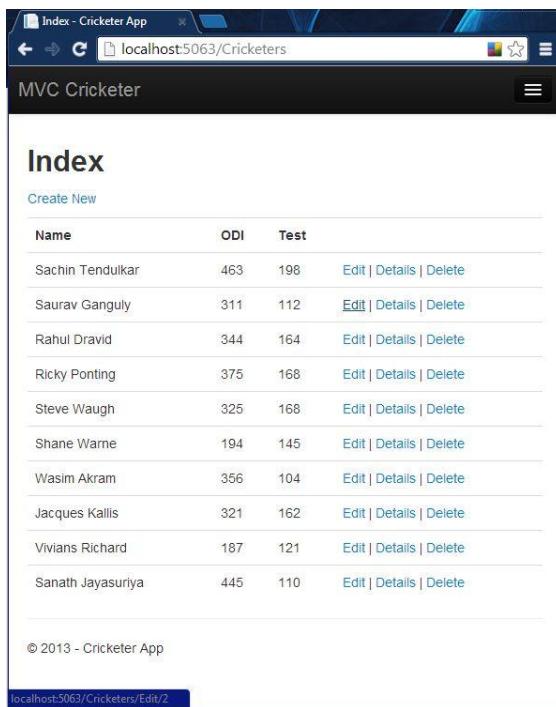


The screenshot shows a browser window titled "Index - Cricketer App" with the URL "localhost:5063/Cricketers". The page is titled "MVC Cricketer" and has a header "Index". Below the header is a "Create New" button. A table lists ten cricketers with their names, ODI, and Test statistics, along with edit, details, and delete links for each row.

Name	ODI	Test
Sachin Tendulkar	463	198
Saurav Ganguly	311	112
Rahul Dravid	344	164
Ricky Ponting	375	168
Steve Waugh	325	168
Shane Warne	194	145
Wasim Akram	356	104
Jacques Kallis	321	162
Vivians Richard	187	121
Sanath Jayasuriya	445	110


At the bottom left is a copyright notice "© 2013 - Cricketer App" and at the bottom right is the URL "localhost:5063/Cricketers/Edit/2".

Step 2: Update your information and click on "Save".

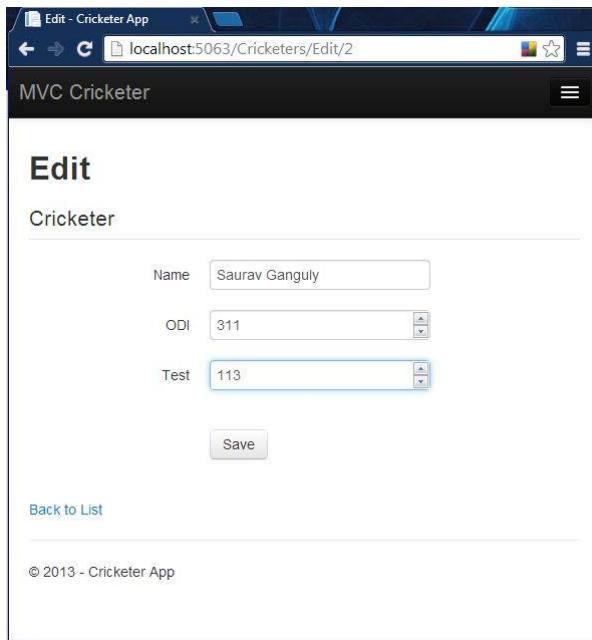

The screenshot shows a browser window titled "Edit - Cricketer App" with the URL "localhost:5063/Cricketers/Edit/2". The page is titled "MVC Cricketer" and has a header "Edit". Below the header is a "Cricketer" section. It contains three input fields: "Name" (Saurav Ganguly), "ODI" (311), and "Test" (113). At the bottom is a "Save" button and a link "Back to List".

Step 3: You can view your data with the updated values.

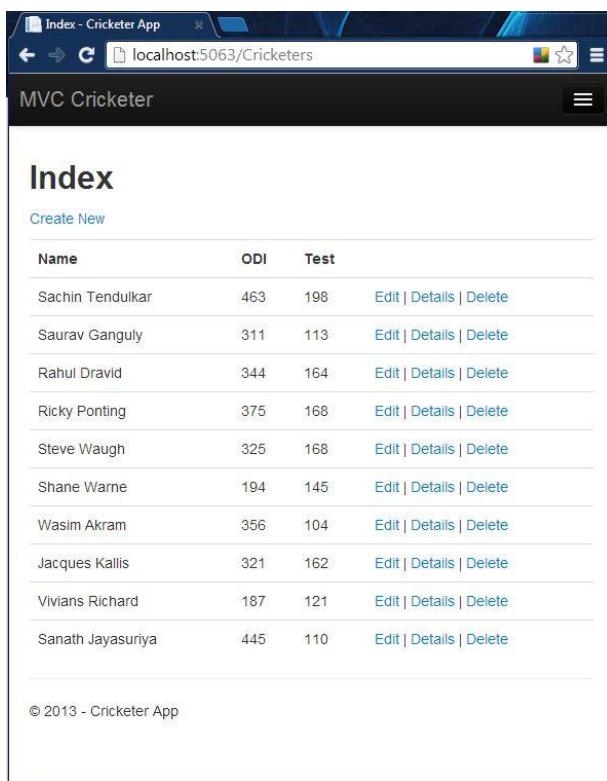

The screenshot shows the 'Index' view of the 'MVC Cricketer' application. The page title is 'Index - Cricketer App'. The URL in the browser is 'localhost:5063/Cricketers'. The main content area is titled 'Index' and contains a table with the following data:


Name	ODI	Test	
Sachin Tendulkar	463	198	Edit Details Delete
Saurav Ganguly	311	113	Edit Details Delete
Rahul Dravid	344	164	Edit Details Delete
Ricky Ponting	375	168	Edit Details Delete
Steve Waugh	325	168	Edit Details Delete
Shane Warne	194	145	Edit Details Delete
Wasim Akram	356	104	Edit Details Delete
Jacques Kallis	321	162	Edit Details Delete
Vivians Richard	187	121	Edit Details Delete
Sanath Jayasuriya	445	110	Edit Details Delete

At the bottom left of the page, there is a copyright notice: '© 2013 - Cricketer App'.

Delete


Let us delete some data.

Step 1: Choose your data and click on "Delete".

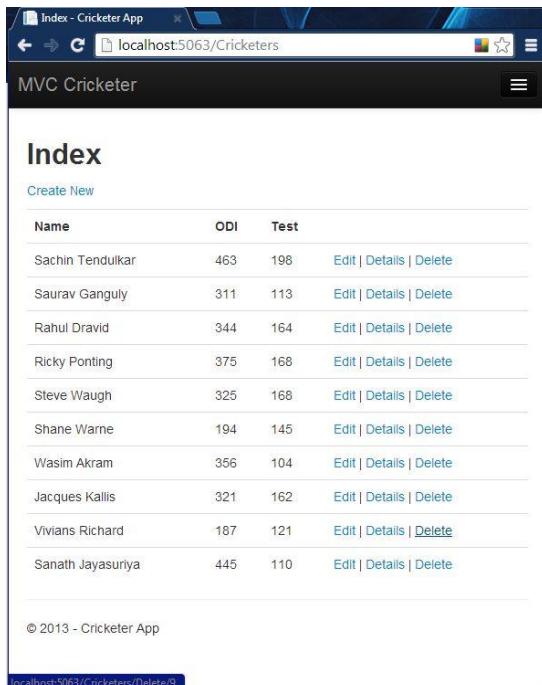

This screenshot is identical to the one above, showing the 'Index' view of the 'MVC Cricketer' application. The main difference is the URL in the browser: 'localhost:5063/Cricketers/Delete/9'. This indicates that the user has selected the 'Delete' link for the ninth row in the table, which corresponds to Steve Waugh.

Step 2: In the next window click on "Delete" to delete the data permanently.

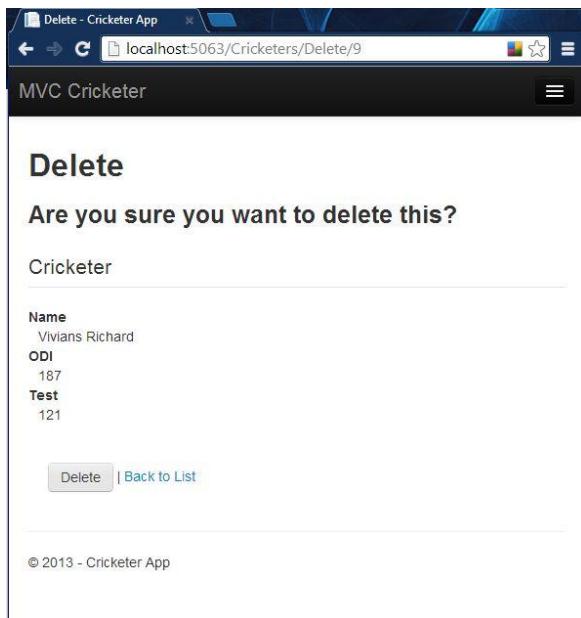


The screenshot shows a web browser window titled 'Delete - Cricketer App'. The URL is 'localhost:5063/Cricketers/Delete/9'. The page has a header 'MVC Cricketer'. Below it, the word 'Delete' is prominently displayed in a large font. A question 'Are you sure you want to delete this?' follows. Underneath, there is a section labeled 'Cricketer' containing a table with the following data:

Name	ODI	Test
Vivians Richard	187	121

At the bottom of the page are two buttons: 'Delete' and 'Back to List'.

You can view your updated list.

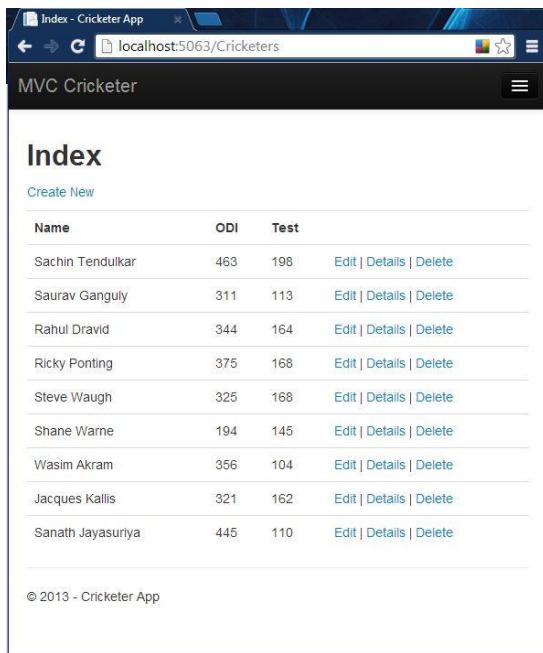

The screenshot shows a web browser window titled 'Index - Cricketer App'. The URL is 'localhost:5063/Cricketers'. The page has a header 'MVC Cricketer'. Below it, the word 'Index' is displayed. A 'Create New' link is visible. The main content is a table listing various cricketers with their statistics and actions:


Name	ODI	Test	Action
Sachin Tendulkar	463	198	Edit Details Delete
Saurav Ganguly	311	113	Edit Details Delete
Rahul Dravid	344	164	Edit Details Delete
Ricky Ponting	375	168	Edit Details Delete
Steve Waugh	325	168	Edit Details Delete
Shane Warne	194	145	Edit Details Delete
Wasim Akram	356	104	Edit Details Delete
Jacques Kallis	321	162	Edit Details Delete
Sanath Jayasuriya	445	110	Edit Details Delete

At the bottom of the page is a copyright notice: '© 2013 - Cricketer App'.


2.3 Working with LocalDB

SQL Server LocalDB is the data source used by default by Visual Studio. When you work with the Entity Framework Code First approach, it automatically creates a database, if the database did not exist. You can view it from the "App_Data" folder in the Solution Explorer. Let's work with LocalDB using the following procedure.


Step 1: Click on the "Show All Files" button in the Solution Explorer and expand the "App_Data" Folder .

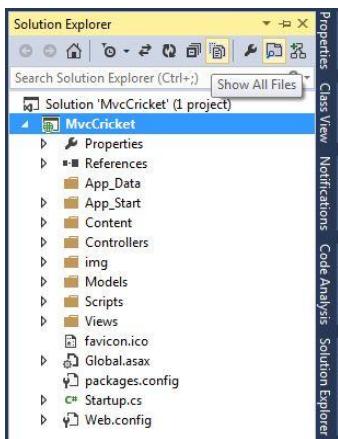


Step 2: After clicking, you can view your mdf file in the "App_Data" Folder.

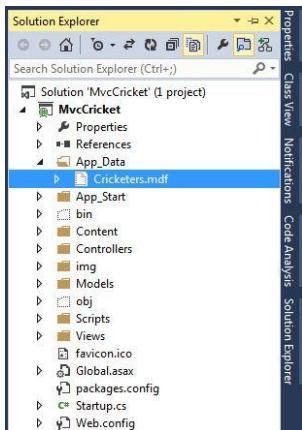

Step 3: Open the mdf file by double-clicking. It will be opened in the Server Explorer.

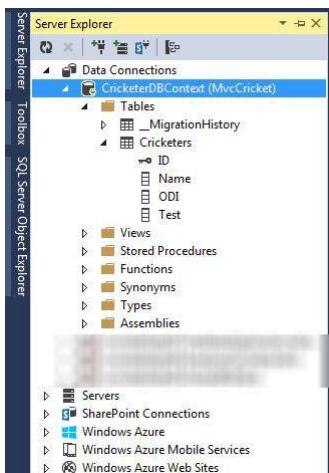


Step 4: If you want to show your Table data then right-click on your table and select "Show Table Data".

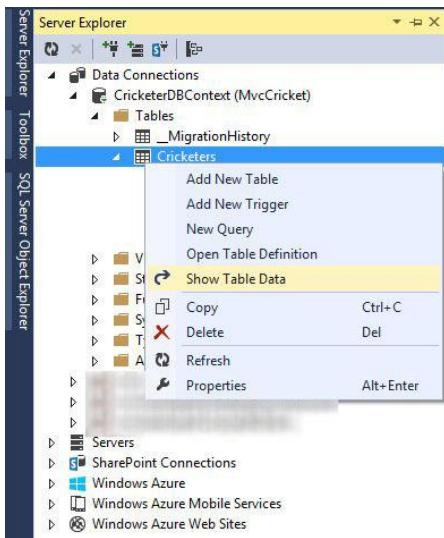


After clicking on "Show Data":

ID	Name	ODI	Test
1	Sachin Tendulkar	463	198
2	Saurav Ganguly	311	113
3	Rahul Dravid	344	164
4	Ricky Ponting	375	168
5	Steve Waugh	325	168
6	Shane Warne	194	145
7	Wasim Akram	356	104
8	Jacques Kallis	321	162
10	Sanath Jayasuriya	445	110
*	NULL	NULL	NULL


Step 5: You can view your table structure by right-clicking on the table and select "Table Definition".

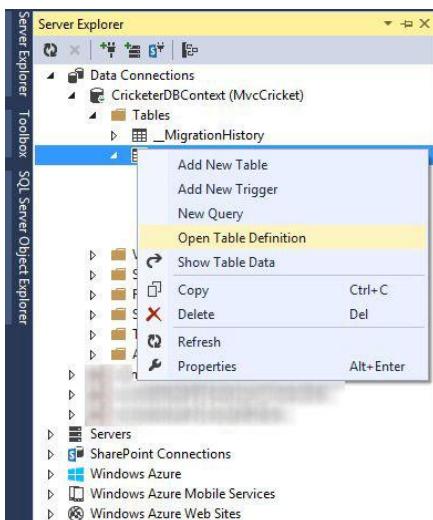

After clicking on "Table Definition":

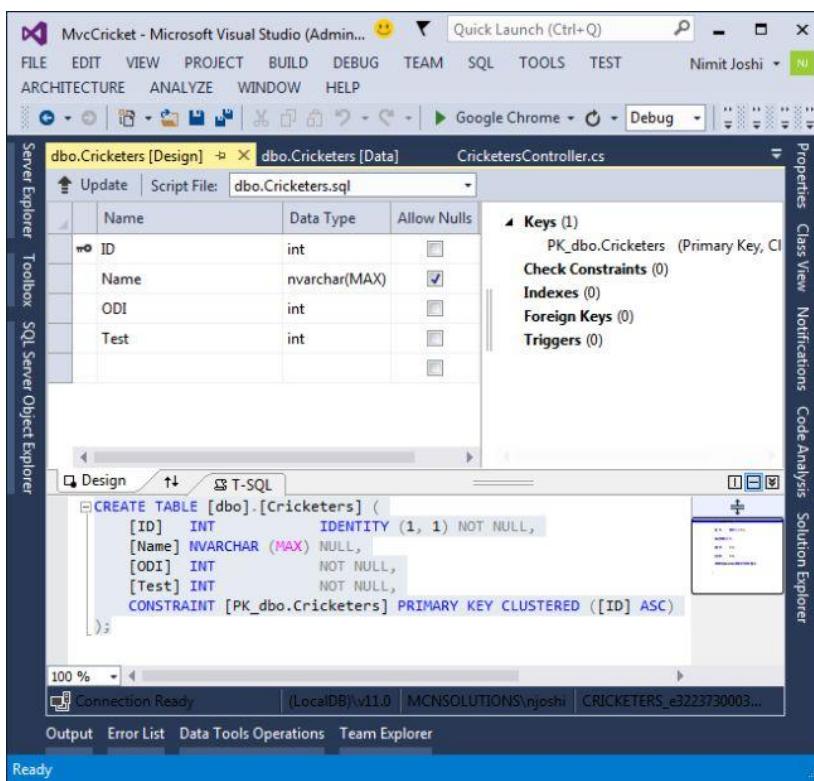

Step 6: Click on "Close Connection" by right-clicking on your DbContext. You need to close the connection otherwise you might receive an error when you work with your project in the future.

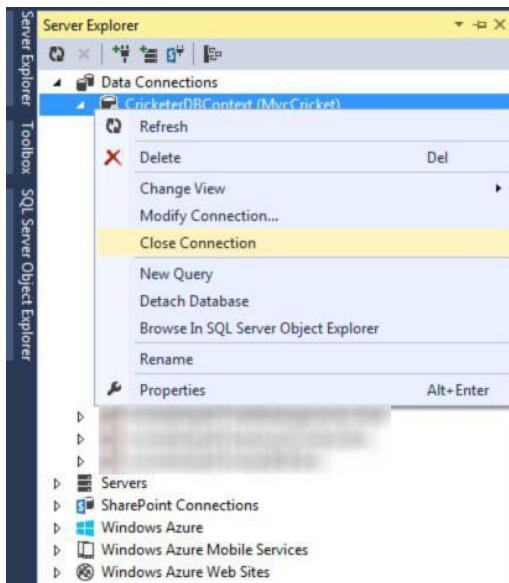

3. Editing Application

3.1 Introduction of Code First Migration and Adding new field

In here, I am introducing you to migration of your code for changes in the Model Class. Now in here you will learn to work with Entity Framework Code First Migration that will help you to convert any type of change in the Model Class and the change will implement the database also.


In that context, here I am describing my work in two main parts as given below:

- Migration in Entity Framework Code First
- Adding New Property

Migration in Entity Framework Code First


Let's proceed to the procedure.

Step 1: At first, delete your mdf file located in your "App_Data" Folder in Solution Explorer.

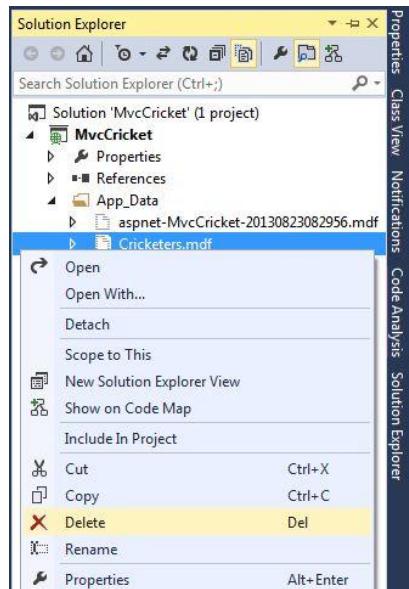


Step 2: Debug your application to ensure that there are no errors.

Step 3: Go to "Package Manager Console" in the "Library Package Manager".

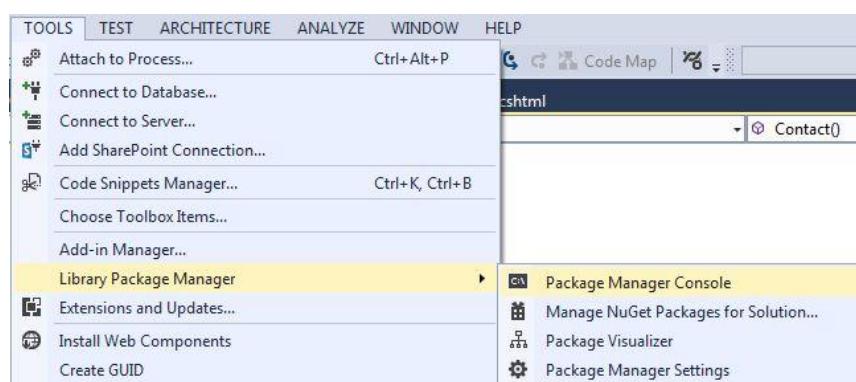


Step 4: In the Package Manager Console window enter the following command:

```
Enable-Migrations -ContextTypeName MvcCricket.Models.CricketerDBContext
```

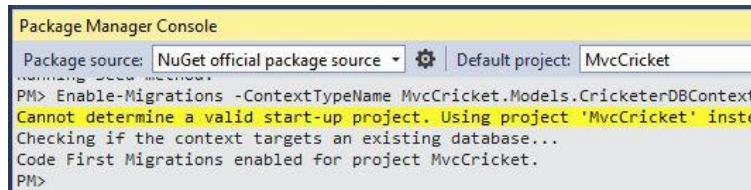

So, what does it do? It creates a "Configurations.cs" file in the new folder (named Migrations folder) in your Solution Explorer. Check it out here:

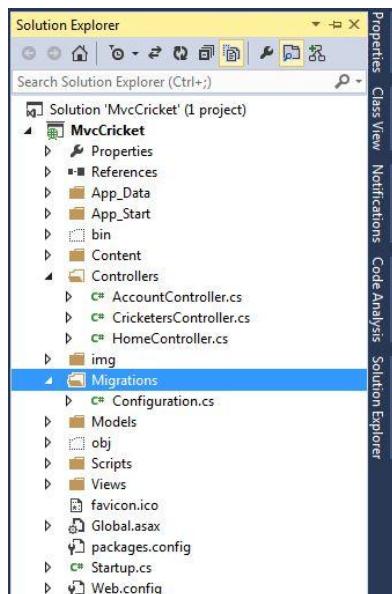

Step 5: As you know, your database mdf file has been deleted, so open your "Configuration.cs" file to insert some cricketers details.

Replace the code in Seed Method with the following code:

```
protected override void Seed(MvcCricket.Models.CricketerDBContext context)
{
    context.Cricketers.AddOrUpdate(i => i.Name,
        new Cricketer
        {
            Name = "Sachin Tendulkar",
            ODI = 463,
            Test = 198
        },
        new Cricketer
        {
```

```
Name = "Saurav Ganguly",
ODI = 311,
Test = 113
},
new Cricketer
{
    Name = "Rahul Dravid",
    ODI = 344,
    Test = 164
},
new Cricketer
{
    Name = "Ricky Ponting",
    ODI = 375,
    Test = 168
},
new Cricketer
{
    Name = "Wasim Akram",
    ODI = 356,
    Test = 104
},
new Cricketer
{
    Name = "Jacques Kallis",
    ODI = 321,
    Test = 162
},
new Cricketer
{
    Name = "Sanath Jayasuriya",
    ODI = 445,
    Test = 110
}
);
}
```

Note: You will receive an error when you create Cricketer, please resolve it by adding the following library:


```
using MvcCricket.Models;
```

Step 6: Build your application

Step 7: Now, you need to start the migration, called Initial Migration. For this you need to create a DbMigration class. What does it do? The Migration class you create helps to create a database, this is the reason for deleting your database mdf file.


In that context, go to your Package Manager Console and enter the following command:

```
add-migration Initial
```

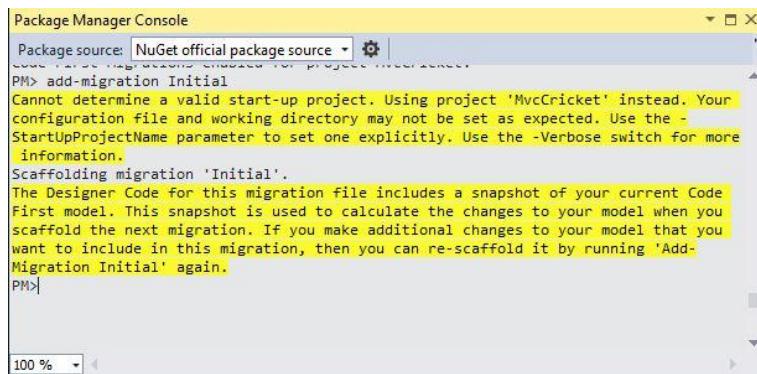


```
Package Manager Console
PM> add-migration Initial
Cannot determine a valid start-up project. Using project 'MvcCricket' instead. Your
configuration file and working directory may not be set as expected. Use the -
StartUpProjectName parameter to set one explicitly. Use the -Verbose switch for more
information.
Scaffolding migration 'Initial'.
The Designer Code for this migration file includes a snapshot of your current Code
First model. This snapshot is used to calculate the changes to your model when you
scaffold the next migration. If you make additional changes to your model that you
want to include in this migration, then you can re-scaffold it by running 'Add-
Migration Initial' again.
PM>
```

The add-migration Initial command creates a new class file in your Migration folder. The new class named "(DataStamp)_initial.cs code" helps to create a schema for the database. This file's code implements the Cricketers table in your Cricketer database.

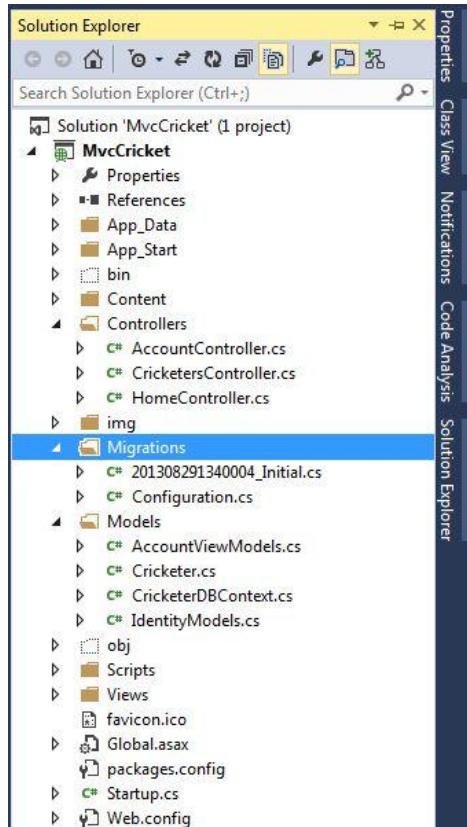

Step 8: Enter the following command in your Package Manager Console:


```
update-database
```

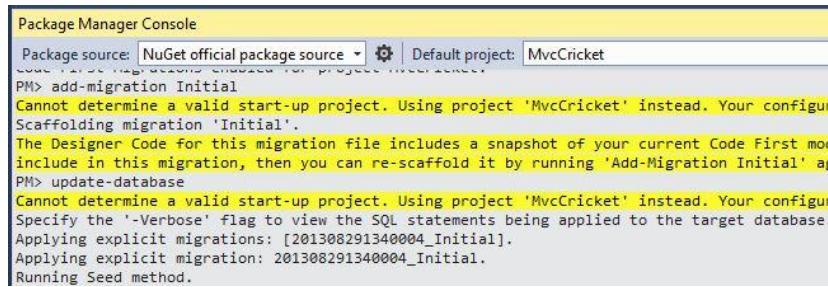

```
Package Manager Console
Package source: NuGet official package source | Default project: MvcCricket
PM> add-migration Initial
Cannot determine a valid start-up project. Using project 'MvcCricket' instead. Your configuration specifies 'Scaffolding' migration 'Initial'.
The Designer Code for this migration file includes a snapshot of your current Code First model. If you have made changes to your model since this migration was generated, then you can re-scaffold it by running 'Add-Migration Initial' again.
PM> update-database
Cannot determine a valid start-up project. Using project 'MvcCricket' instead. Your configuration specifies the '-Verbose' flag to view the SQL statements being applied to the target database.
Applying explicit migrations: [201308291340004_Initial].
Applying explicit migration: 201308291340004_Initial.
Running Seed method.
```

Note: If you receive an error then you need to ensure that the mdf file is deleted permanently from the App_Data folder. Otherwise you can go to the SQL Server Object Explorer, expand the localDb server and in the Database option ensure that the mdf file is deleted.

Step 9: Debug your application. You can see your Cricketers Details (that you inserted into "Configuration.cs") in your index file of Cricketers.

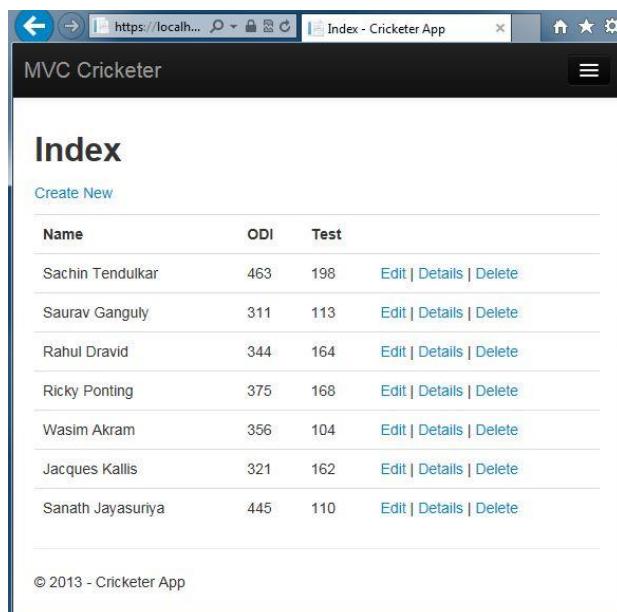

Name	ODI	Test	
Sachin Tendulkar	463	198	Edit Details Delete
Saurav Ganguly	311	113	Edit Details Delete
Rahul Dravid	344	164	Edit Details Delete
Ricky Ponting	375	168	Edit Details Delete
Wasim Akram	356	104	Edit Details Delete
Jacques Kallis	321	162	Edit Details Delete
Sanath Jayasuriya	445	110	Edit Details Delete

© 2013 - Cricketer App

Adding New Property

We have mainly three properties in our CricketerDBContext. Let's add a new Grade property to our context. For adding the new property, please follow the procedure given below.

Step 1: Open your "Cricketer.cs" file and add the following property:


```
public string Grade { get; set; }
```

Your Cricketer.cs file will now look like the following code:

```
namespace MvcCricket.Models
{
    public class Cricketer
    {
        public int ID { get; set; }
        public string Name { get; set; }
        public int ODI { get; set; }
        public int Test { get; set; }
        public string Grade { get; set; }
    }
}
```

Step 2: Build your solution by pressing "Ctrl+Shift+B".

Step 3: You have successfully added a new property but you need to change your "Index.cshtml" and "Create.cshtml" files to view the Grade field in the browser. So, let's first change your "Index.cshtml" file.

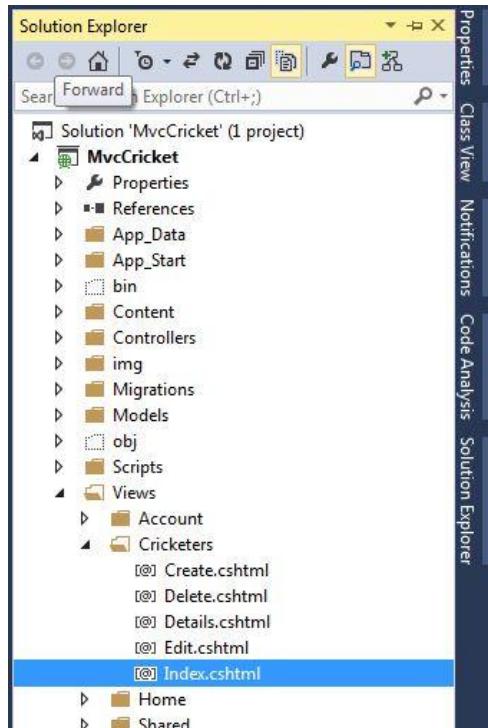

Change your "Index.cshtml" file with the following code. There are some changes.

```
<table class="table">
<tr>
<th>
    @Html.DisplayNameFor(model => model.Name)
</th>
<th>
    @Html.DisplayNameFor(model => model.ODI)
</th>
<th>
```

```

        @Html.DisplayNameFor(model => model.Test)
    </th>
<th>
    @Html.DisplayNameFor(model=>model.Grade)
</th>
<th></th>
</tr>

@foreach (var item in Model) {
    <tr>
        <td>
            @Html.DisplayFor(modelItem => item.Name)
        </td>
        <td>
            @Html.DisplayFor(modelItem => item.ODI)
        </td>
        <td>
            @Html.DisplayFor(modelItem => item.Test)
        </td>
        <td>
            @Html.DisplayFor(modelItem=>item.Grade)
        </td>
        <td>
            @Html.ActionLink("Edit", "Edit", new { id=item.ID }) |
            @Html.ActionLink("Details", "Details", new { id=item.ID }) |
            @Html.ActionLink("Delete", "Delete", new { id=item.ID })
        </td>
    </tr>
}
</table>

```

Change your "Create.cshtml" file with the following code. There are some changes.

```

<div class="control-group">
    @Html.LabelFor(model => model.Test, new { @class = "control-label" })
    <div class="controls">
        @Html.EditorFor(model => model.Test)
        @Html.ValidationMessageFor(model => model.Test, null, new { @class = "help-inline" })
    </div>
</div>


<div class="control-group">
    @Html.LabelFor(model => model.Grade, new { @class = "control-label" })
    <div class="controls">
        @Html.EditorFor(model=>model.Grade)
        @Html.ValidationMessageFor(model => model.Grade, null, new { @class = "help-inline" })
    </div>
</div>

```

```
<div class="form-actions no-color">
    <input type="submit" value="Create" class="btn" />
</div>
```

Step 4: You have successfully added a new property, now debug your application.

Note: You will receive an error when accessing your Cricketers folder in the browser URL.

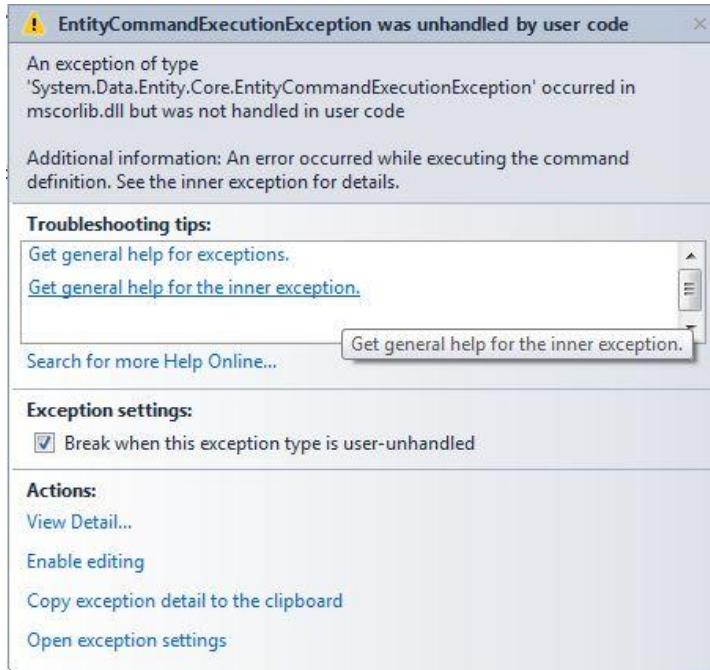

To solve this error, I am using Code First Migration. Update your Seed method in the "Configurion.cs" file and add a Grade field in each Cricketer object. For example:

```
new Cricketer
{
    Name = "Sachin Tendulkar",
    ODI = 463,
    Test = 198,
    Grade="A"
},
new Cricketer
{
    Name = "Saurav Ganguly",
    ODI = 311,
    Test = 113,
    Grade="A"
},
```

Step 5: Build your solution by pressing "Ctrl+Shift+B".

Step 6: Open Package Manager Console and enter the following command:

```
add-migration Grade
```

When the command completes, the new DbMigration class will open automatically. In that code you can see that the new column has been added. For example:

```
namespace MvcCricket.Migrations
{
    using System;
    using System.Data.Entity.Migrations;


    public partial class Grade : DbMigration
    {
        public override void Up()
        {
            AddColumn("dbo.Cricketers", "Grade", c => c.String());
        }

        public override void Down()
        {
            DropColumn("dbo.Cricketers", "Grade");
        }
    }
}
```

Step 7: Build your solution by pressing "Ctrl+Shift+B".

Step 8: Enter the following command in your Package Manager Console:


```
update-database
```

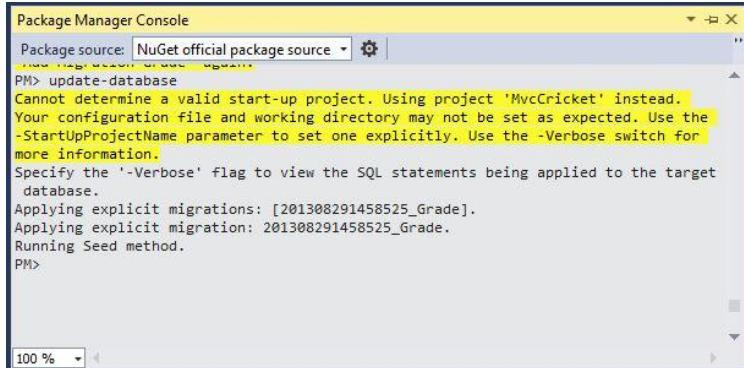

The screenshot shows the Package Manager Console window. The command entered is "PM> update-database". The output message indicates that it cannot determine a valid start-up project and suggests using the "-StartUpProjectName" parameter or the "-Verbose" switch for more information. It also shows the application of explicit migrations and the running of the Seed method.

```
Package Manager Console
Package source: NuGet official package source | ⚙ |
PM> update-database
Cannot determine a valid start-up project. Using project 'MvcCricket' instead.
Your configuration file and working directory may not be set as expected. Use the
-StartUpProjectName parameter to set one explicitly. Use the -Verbose switch for
more information.
Specify the '-Verbose' flag to view the SQL statements being applied to the target
database.
Applying explicit migrations: [201308291458525_Grade].
Applying explicit migration: 201308291458525_Grade.
Running Seed method.
PM>
```

Step 9: Debug your application. Move to the Cricketers folder.

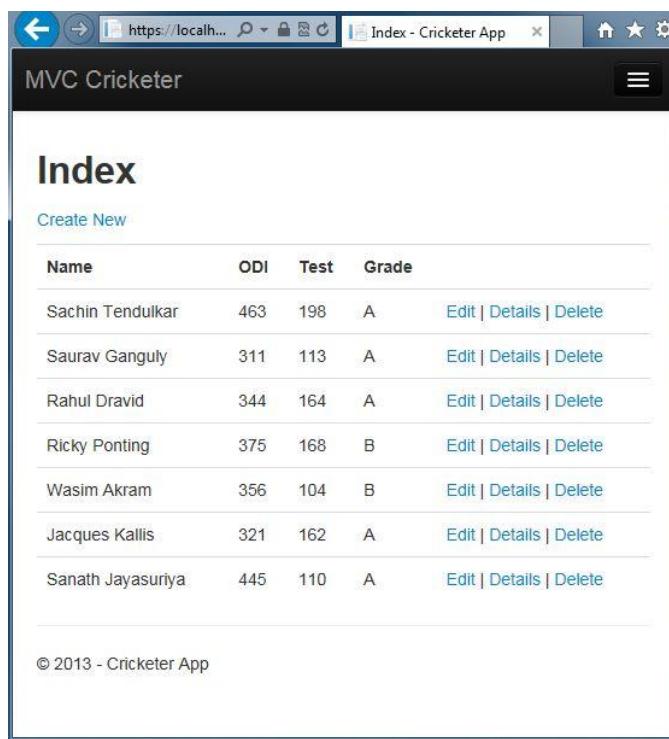


Index

Create New

Name	ODI	Test	Grade	
Sachin Tendulkar	463	198	A	Edit Details Delete
Saurav Ganguly	311	113	A	Edit Details Delete
Rahul Dravid	344	164	A	Edit Details Delete
Ricky Ponting	375	168	B	Edit Details Delete
Wasim Akram	356	104	B	Edit Details Delete
Jacques Kallis	321	162	A	Edit Details Delete
Sanath Jayasuriya	445	110	A	Edit Details Delete

© 2013 - Cricketer App

Step 10: Click on the "CreateNew" link to add more Cricketers.

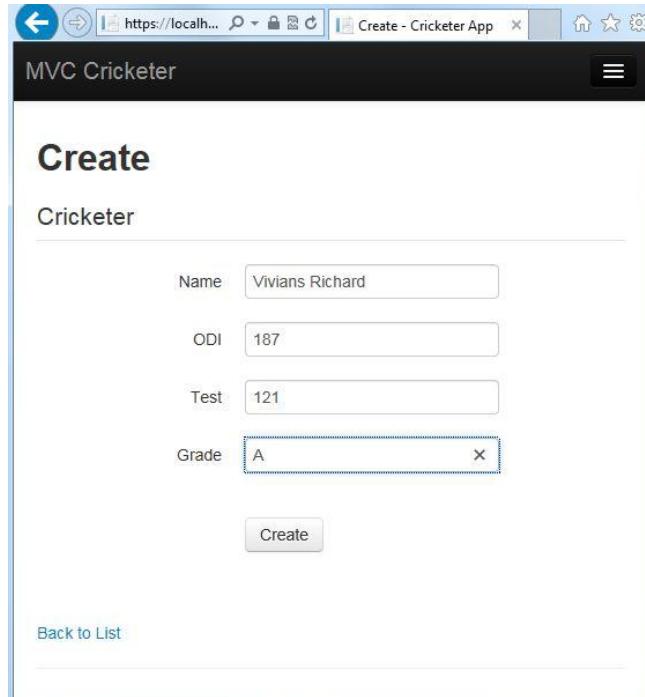

Create


Cricketer

Name	<input type="text" value="Vivians Richard"/>
ODI	<input type="text" value="187"/>
Test	<input type="text" value="121"/>
Grade	<input style="border: 1px dashed #ccc; padding: 2px 10px; width: 150px; height: 20px; border-radius: 5px; text-align: center; margin-left: 10px;" type="text" value="A"/> ×

[Create](#)

[Back to List](#)

Click on "Create".

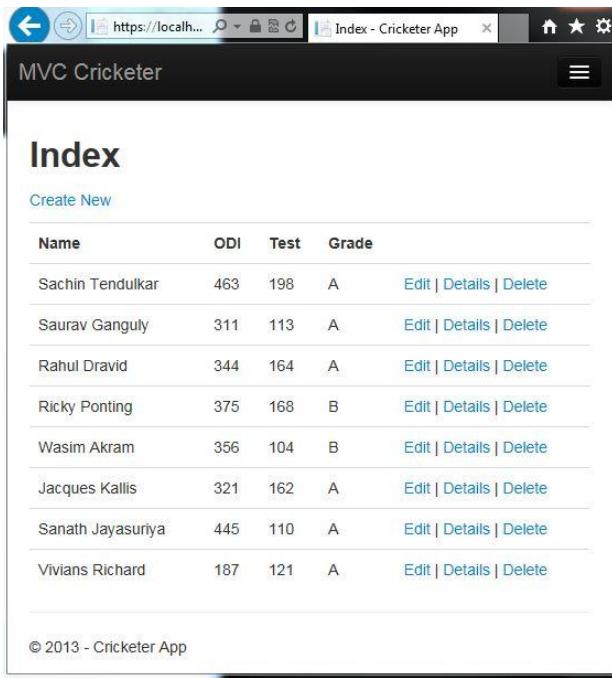

MVC Cricketer

Index

Create New

Name	ODI	Test	Grade	
Sachin Tendulkar	463	198	A	Edit Details Delete
Saurav Ganguly	311	113	A	Edit Details Delete
Rahul Dravid	344	164	A	Edit Details Delete
Ricky Ponting	375	168	B	Edit Details Delete
Wasim Akram	356	104	B	Edit Details Delete
Jacques Kallis	321	162	A	Edit Details Delete
Sanath Jayasuriya	445	110	A	Edit Details Delete
Vivians Richard	187	121	A	Edit Details Delete

© 2013 - Cricketer App

3.2 Searching Panel

I developed an ASP.NET MVC Application in which I used CRUD Operations, working process of LocalDB, [Adding View](#), [Working with Model Class](#) and adding a new field using MVC 5 in Visual Studio 2013 Preview. Today I am adding a Search Panel in it to retrieve the information of Cricketers. You can search the information of Cricketer.


In that context, I am developing a search in two ways as in the following:

1. By Name
2. By Grade

Search By Name

Let's start with searching Cricketer by name with the following procedure.


Step 1: At first debug your application and open Cricketers in your browser URL.

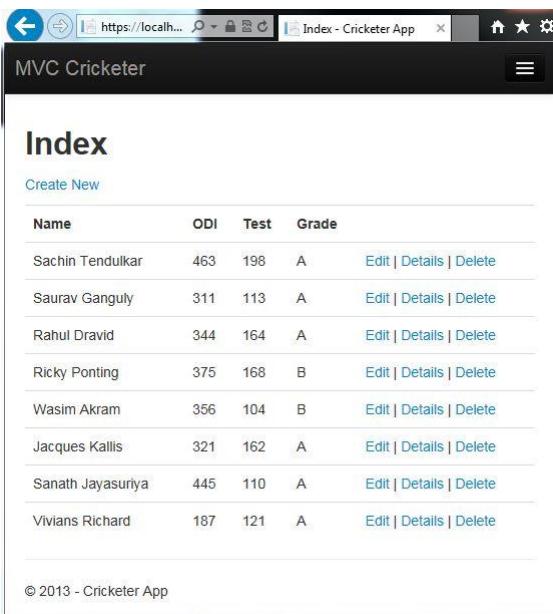

Name	ODI	Test	Grade
Sachin Tendulkar	463	198	A
Saurav Ganguly	311	113	A
Rahul Dravid	344	164	A
Ricky Ponting	375	168	B
Wasim Akram	356	104	B
Jacques Kallis	321	162	A
Sanath Jayasuriya	445	110	A
Vivians Richard	187	121	A

© 2013 - Cricketer App

Step 2: Open your "CricketersController.cs" file and change the Index method code with the following code:

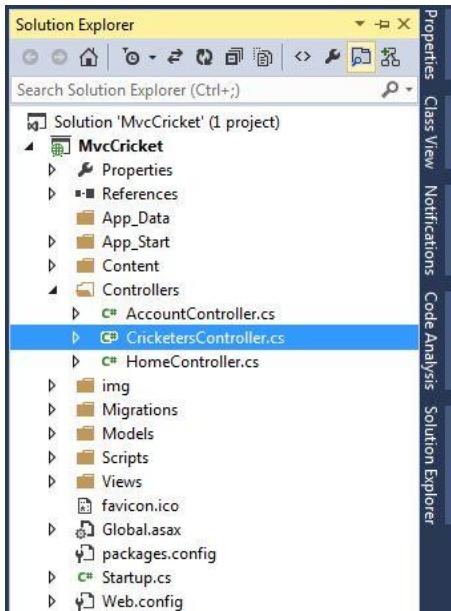

```
public ActionResult Index(string SearchName)
{
    var cricketers = from cr in db.Cricketers select cr;

    if (!String.IsNullOrEmpty(SearchName))
    {
        cricketers = cricketers.Where(c => c.Name.Contains(SearchName));
    }
}
```

```
return View(cricketers);
}
```


In the code above I used a LINQ query that will select the name of Cricketers:

```
var cricketers = from cr in db.Cricketers select cr;
```

There is a Lambda Expression ("c=>c.Name") in the code above that is used in the method-based queries of LINQ. This LINQ query is executed in the "index.cshtml" file.

Note: If you want to learn more about Query Execution, [Click Here](#).

Step 3: Go to your "Views\Cricketers\Index.cshtml" file to represent the search.

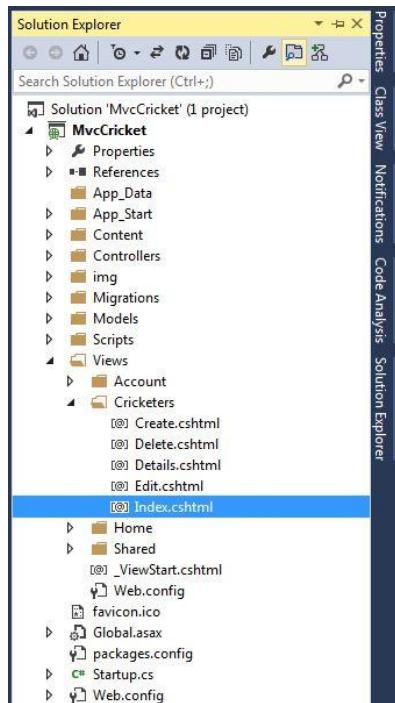


Modify your code to be as shown below:

```
<p>
    @Html.ActionLink("Create New", "Create")

    @using (Html.BeginForm())
    {
        <p>Name: @Html.TextBox("SearchName")<br />
            <input type="submit" value="Search" />
        </p>
    }
</p>
```


Step 4: Debug your application.

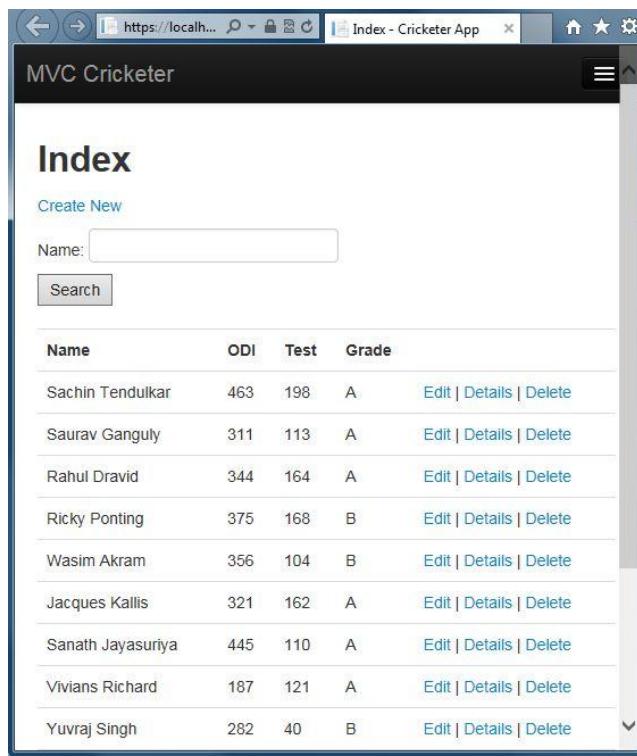

The screenshot shows the 'Index' view of the 'MVC Cricketer' application. At the top, there is a navigation bar with links for 'Create New', 'Name: [input field]', and a 'Search' button. Below this is a table listing cricketers with columns for Name, ODI, Test, and Grade. Each row contains a 'Edit | Details | Delete' link. The table lists the following data:

Name	ODI	Test	Grade	Action
Sachin Tendulkar	463	198	A	Edit Details Delete
Saurav Ganguly	311	113	A	Edit Details Delete
Rahul Dravid	344	164	A	Edit Details Delete
Ricky Ponting	375	168	B	Edit Details Delete
Wasim Akram	356	104	B	Edit Details Delete
Jacques Kallis	321	162	A	Edit Details Delete
Sanath Jayasuriya	445	110	A	Edit Details Delete
Vivians Richard	187	121	A	Edit Details Delete
Yuvraj Singh	282	40	B	Edit Details Delete

Search the Cricketer.

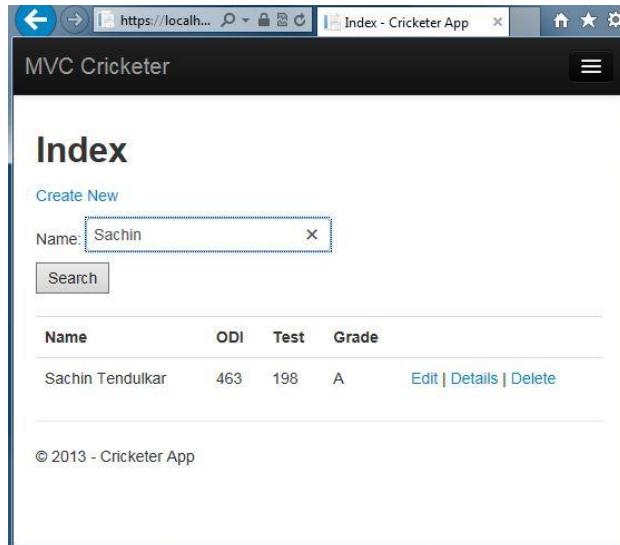

The screenshot shows the 'Index' view of the 'MVC Cricketer' application after a search for 'Sachin'. The search results table shows one entry for Sachin Tendulkar with the following details:


Name	ODI	Test	Grade	Action
Sachin Tendulkar	463	198	A	Edit Details Delete

At the bottom of the page, there is a copyright notice: © 2013 - Cricketer App.

Search By Grade

In the preceding option we were searching Cricketer by name, here we'll search Cricketer by grade also. For searching for a grade use the following procedure.

Step 1: Open your "CricketersController.cs" file and change the Index method code so it has the following code:

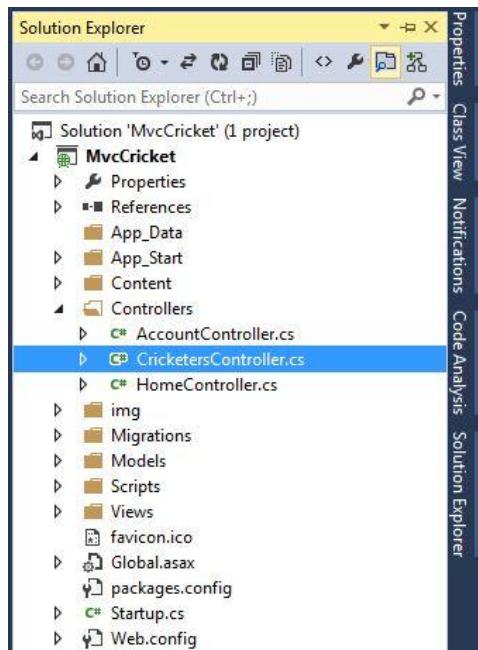

```
public ActionResult Index(string CricketerGrade, string SearchName)
{
    var GradeList = new List<string>();

    var GradeQuery = from qq in db.Cricketers orderby qq.Grade select qq.Grade;

    GradeList.AddRange(GradeQuery.Distinct());
    ViewBag.CricketerGrade = new SelectList(GradeList);

    var cricketers = from cr in db.Cricketers select cr;

    if (!String.IsNullOrEmpty(SearchName))
    {
        cricketers = cricketers.Where(c => c.Name.Contains(SearchName));
    }

    if (!string.IsNullOrEmpty(CricketerGrade))
    {
        cricketers = cricketers.Where(g => g.Grade == CricketerGrade);
    }

    return View(cricketers);
}
```

In the code above there are two parameters passed in the Index method. The following code elaborates that a List object is created that will hold the grade of cricketers from the database:


```
var GradeList = new List<string>();
```

There is again a LINQ query used to retrieve all grades of cricketers from the database as in the following:

```
var GradeQuery = from qq in db.Cricketers orderby qq.Grade select qq.Grade;
```

The preceding query is not run on the database until the movie list is iterated over.

Step 2: Now to add code to the UI layer by adding markup. Go to your "Views\Cricketers\Index.cshtml" file and change the code as in the following:

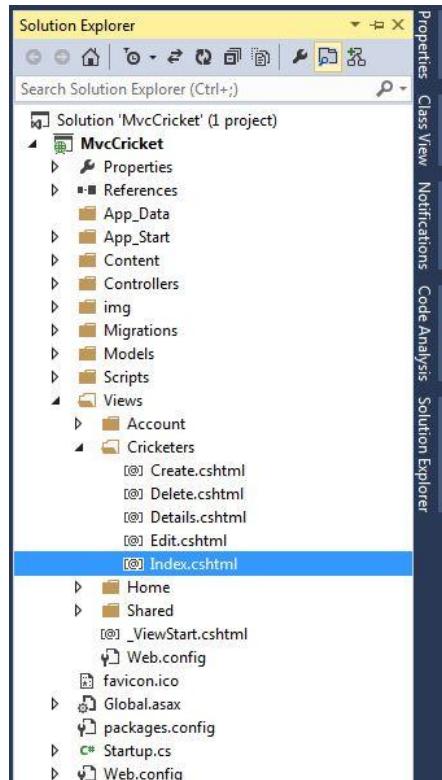


```
<p>
@Html.ActionLink("Create New", "Create")

@using (Html.BeginForm("Index", "Cricketers", FormMethod.Get))
{
    <p>
        Name: @Html.TextBox("SearchName")
        Grade:@Html.DropDownList("CricketerGrade", "All")
        <input type="submit" value="Search" />
    </p>
}
</p>
```


In the code above, I designed a DropDownList and a TextBox to search Cricketer. From the code above the following line contains a parameter named "CricketerGrade". The code above provides the key for the DropDownList helper to find an "IEnumerable<ListItem>" in the ViewBag.

Step 3: Debug your application.

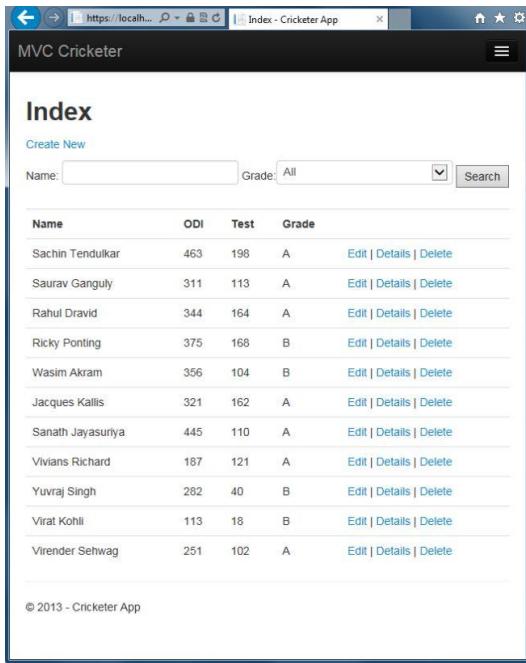

The screenshot shows the 'Index' view of an MVC application. At the top, there is a search bar with fields for 'Name' and 'Grade'. A dropdown menu under 'Grade' is set to 'All'. Below the search bar is a table listing cricketers with columns for Name, ODI, Test, and Grade. Each row contains links for Edit, Details, and Delete. The table lists names like Sachin Tendulkar, Saurav Ganguly, Rahul Dravid, etc., along with their statistics and grade. At the bottom left, there is a copyright notice: © 2013 - Cricketer App.


Select your grade from the DropDownList and click on "Search".

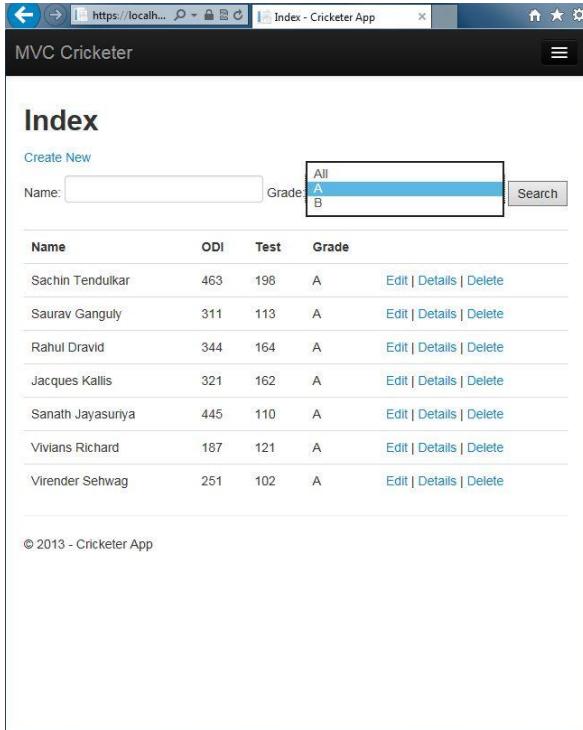

This screenshot shows the same 'Index' view as above, but with a specific grade selected in the dropdown. The dropdown menu is open, and the option 'A' is highlighted with a blue background. The rest of the interface and data remain the same as in the previous screenshot.

Step 4: You can also provide a specific grade like "A". If you provide "A" in the code as I did in the following code then only A Grade will display at first:

Grade:@Html.DropDownList("CricketerGrade", "A")

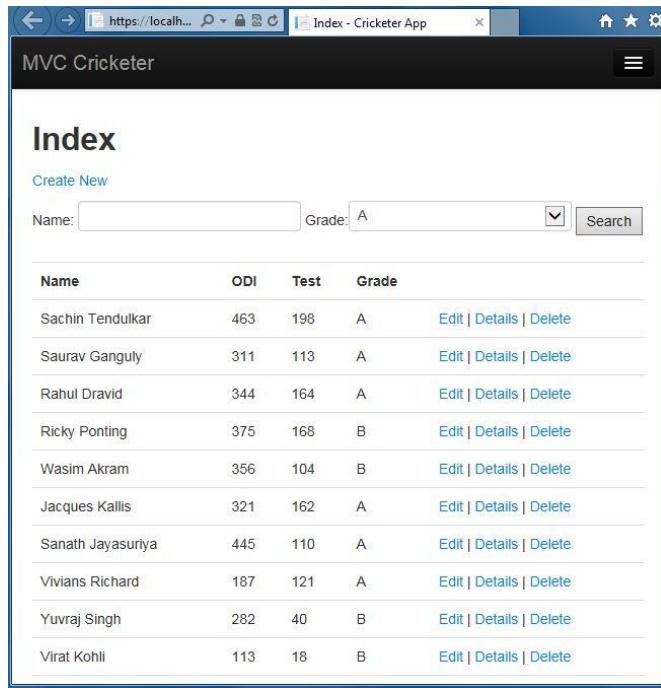

Name	ODI	Test	Grade	
Sachin Tendulkar	463	198	A	Edit Details Delete
Saurav Ganguly	311	113	A	Edit Details Delete
Rahul Dravid	344	164	A	Edit Details Delete
Ricky Ponting	375	168	B	Edit Details Delete
Wasim Akram	356	104	B	Edit Details Delete
Jacques Kallis	321	162	A	Edit Details Delete
Sanath Jayasuriya	445	110	A	Edit Details Delete
Vivians Richard	187	121	A	Edit Details Delete
Yuvraj Singh	282	40	B	Edit Details Delete
Virat Kohli	113	18	B	Edit Details Delete

3.3 View Editing


In here, I am introducing you to adding information in Edit, Details and Delete links. So now in here you will learn to add information related to the property in an Edit link, Details link and Delete link.

In that context, we need to change some code in the following files:

- *Edit.cshtml* file
- *Details.cshtml* file
- *Delete.cshtml* file

Update in Edit link

As you can see in the following image that the new property named Grade that is present in the Index page, isn't present when the user clicks on the Edit link, because we didn't change the *Edit.cshtml* file.

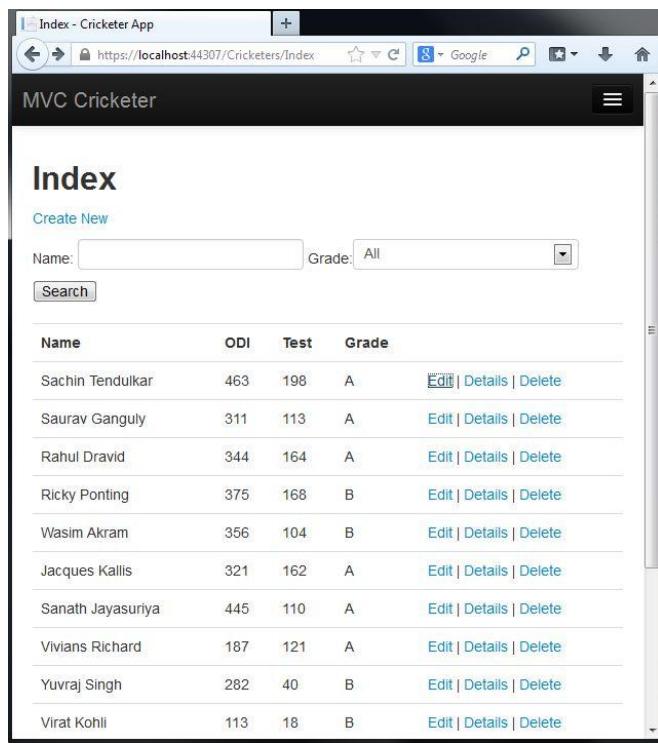


Index

Create New

Name	ODI	Test	Grade	
Sachin Tendulkar	463	198	A	Edit Details Delete
Saurav Ganguly	311	113	A	Edit Details Delete
Rahul Dravid	344	164	A	Edit Details Delete
Ricky Ponting	375	168	B	Edit Details Delete
Wasim Akram	356	104	B	Edit Details Delete
Jacques Kallis	321	162	A	Edit Details Delete
Sanath Jayasuriya	445	110	A	Edit Details Delete
Vivians Richard	187	121	A	Edit Details Delete
Yuvraj Singh	282	40	B	Edit Details Delete
Virat Kohli	113	18	B	Edit Details Delete

Click on the Edit link.

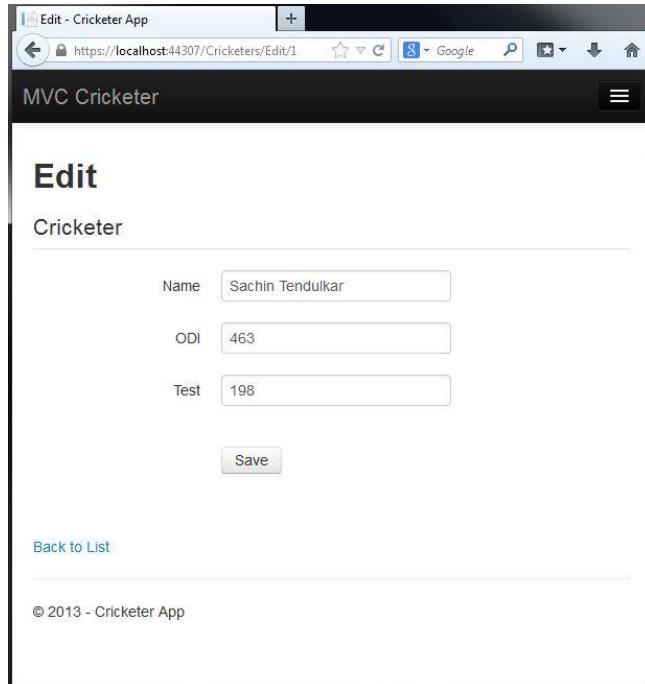

Edit

Cricketer

Name	Sachin Tendulkar
ODI	463
Test	198


[Save](#)

[Back to List](#)

© 2013 - Cricketer App

So, let's start with the following procedure.

Step 1: Select the *Edit.cshtml* file from the Solution Explorer.

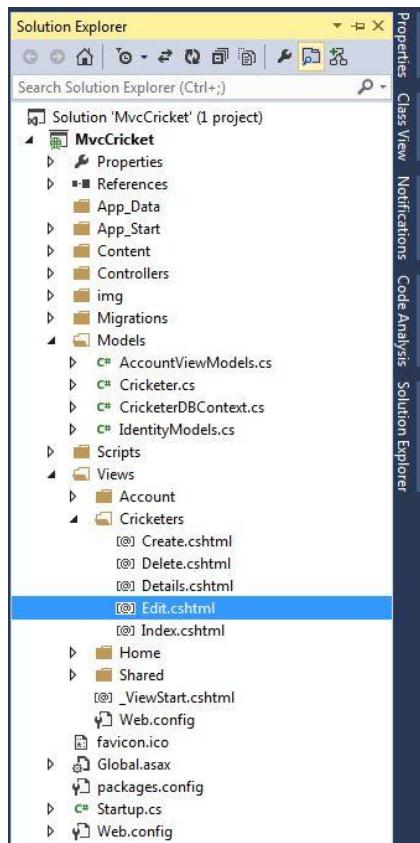

Step 2: Change your code with the following code. I have added some extra code in my previous code:

<h2>Edit</h2>

```
@using (Html.BeginForm()) {
    @Html.AntiForgeryToken()
    @Html.ValidationSummary(true)

    <fieldset class="form-horizontal">
        <legend>Crickester</legend>

        @Html.HiddenFor(model => model.ID)

        <div class="control-group">
            @Html.LabelFor(model => model.Name, new { @class = "control-label" })
            <div class="controls">
                @Html.EditorFor(model => model.Name)
                @Html.ValidationMessageFor(model => model.Name, null, new { @class = "help-inline" })
            </div>
        </div>

        <div class="control-group">
            @Html.LabelFor(model => model.ODI, new { @class = "control-label" })
            <div class="controls">
```

```

        @Html.EditorFor(model => model.ODI)
        @Html.ValidationMessageFor(model => model.ODI, null, new { @class = "help-inline" })
    </div>
</div>


<div class="control-group">
    @Html.LabelFor(model => model.Test, new { @class = "control-label" })
    <div class="controls">
        @Html.EditorFor(model => model.Test)
        @Html.ValidationMessageFor(model => model.Test, null, new { @class = "help-inline" })
    </div>
</div>

<div class="control-group">
    @Html.LabelFor(model => model.Grade, new { @class = "control-label" })
    <div class="controls">
        @Html.EditorFor(model=>model.Grade)
        @Html.ValidationMessageFor(model => model.Grade, null, new { @class="help-inline" })
    </div>
</div>

<div class="form-actions no-color">
    <input type="submit" value="Save" class="btn" />
</div>
</fieldset>
}


```

Step 3: Debug your application.

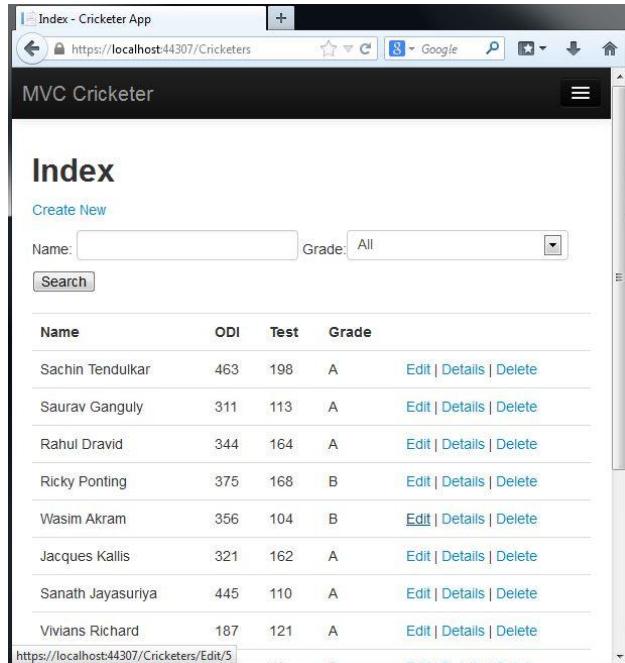

Name	ODI	Test	Grade	
Sachin Tendulkar	463	198	A	Edit Details Delete
Saurav Ganguly	311	113	A	Edit Details Delete
Rahul Dravid	344	164	A	Edit Details Delete
Ricky Ponting	375	168	B	Edit Details Delete
Wasim Akram	356	104	B	Edit Details Delete
Jacques Kallis	321	162	A	Edit Details Delete
Sanath Jayasuriya	445	110	A	Edit Details Delete
Vivians Richard	187	121	A	Edit Details Delete

Step 4: Click on the Edit link.

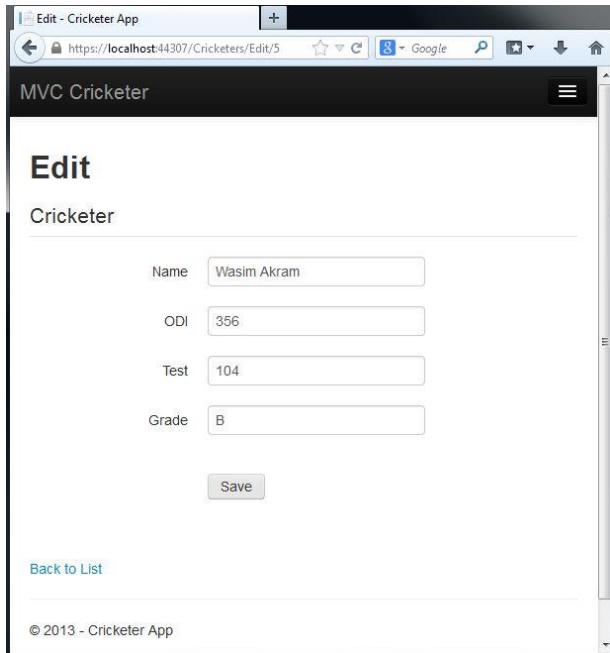


The screenshot shows a browser window titled "Edit - Cricketer App" with the URL <https://localhost:44307/Cricketers/Edit/5>. The page is titled "Edit" and has a header "MVC Cricketer". It contains a form for editing a cricketer's details. The "Name" field is populated with "Wasim Akram". The "ODI" field contains "356". The "Test" field contains "104". The "Grade" field contains "B". Below the form is a "Save" button. At the bottom left is a "Back to List" link, and at the bottom right is a copyright notice "© 2013 - Cricketer App".

You can now see that the Grade field is present on the Edit Page.

Update in Details link


As you can see in the following image, the new property named Grade in the Index page, isn't present when a user clicks on the Details link, because we didn't change the *Details.cshtml* file.

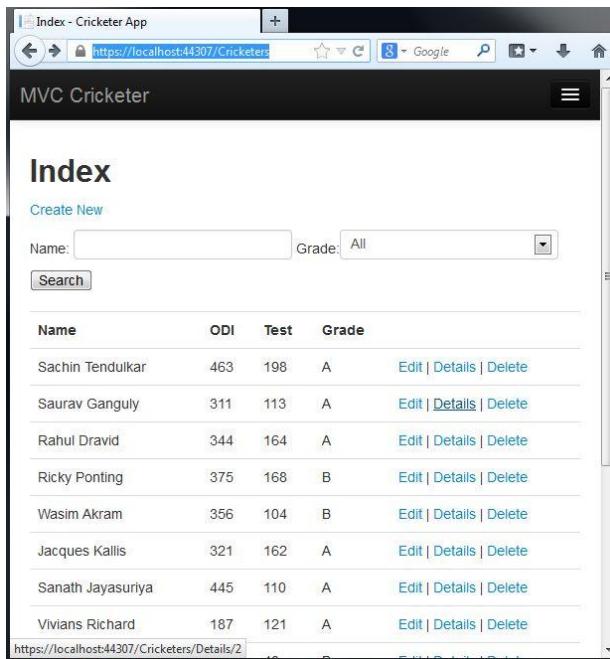

The screenshot shows a browser window titled "Index - Cricketer App" with the URL <https://localhost:44307/Cricketers>. The page is titled "Index" and has a header "MVC Cricketer". It contains a search form with fields for "Name" and "Grade" (set to "All") and a "Search" button. Below the form is a table listing cricketers with columns for Name, ODI, Test, and Grade. The table includes links for Edit, Details, and Delete. The "Grade" column is present in the table. The "Details" link for Wasim Akram (Grade B) does not include the "Grade" parameter in its href attribute.

Name	ODI	Test	Grade
Sachin Tendulkar	463	198	A
Saurav Ganguly	311	113	A
Rahul Dravid	344	164	A
Ricky Ponting	375	168	B
Wasim Akram	356	104	B
Jacques Kallis	321	162	A
Sanath Jayasuriya	445	110	A
Vivians Richard	187	121	A

Click on the Details link.

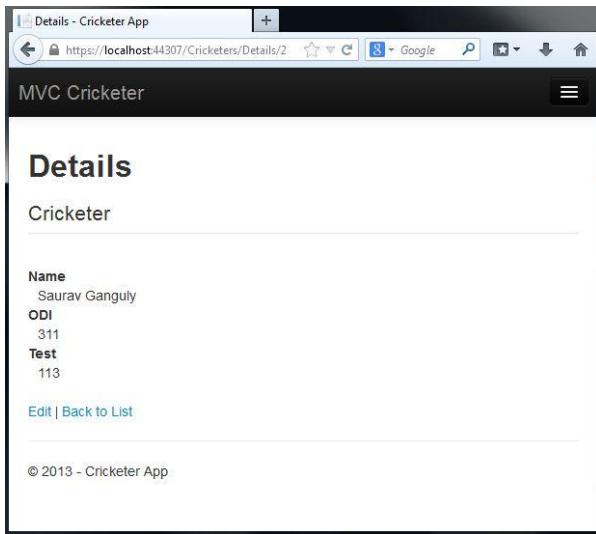


The screenshot shows a browser window with the title "Details - Cricketer App". The URL is https://localhost:44307/Cricketers/Details/2. The page content is titled "MVC Cricketer" and "Details". It displays the following data:

Name	Saurav Ganguly
ODI	311
Test	113

At the bottom, there are links for "Edit" and "Back to List". The footer says "© 2013 - Cricketer App".

So, let's start with the following procedure.

Step 1: Select the *Details.cshtml* file from the Solution Explorer.

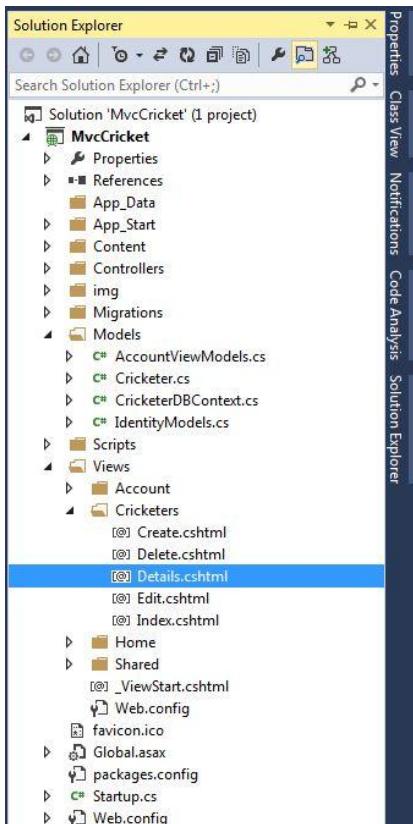

The Solution Explorer shows the project structure for 'MvcCricket'. The 'Views' folder contains a 'Cricketers' folder with four files: Create.cshtml, Delete.cshtml, Index.cshtml, and Details.cshtml. The 'Details.cshtml' file is currently selected.

Step 2: Change your code with the following code. I have added some extra code in my previous code:

```
<h2>Details</h2>

<fieldset>
    <legend>Cricketer</legend>
    <dl>
        <dt>
            @Html.DisplayNameFor(model => model.Name)
        </dt>

        <dd>
            @Html.DisplayFor(model => model.Name)
        </dd>

        <dt>
            @Html.DisplayNameFor(model => model.ODI)
        </dt>

        <dd>
            @Html.DisplayFor(model => model.ODI)
        </dd>


        <dt>
            @Html.DisplayNameFor(model => model.Test)
        </dt>

        <dd>
            @Html.DisplayFor(model => model.Test)
        </dd>

        <dt>
            @Html.DisplayNameFor(model => model.Grade)
        </dt>


        <dd>
            @Html.DisplayFor(model => model.Grade)
        </dd>
    </dl>
</fieldset>
```

Step 3: Debug your application.

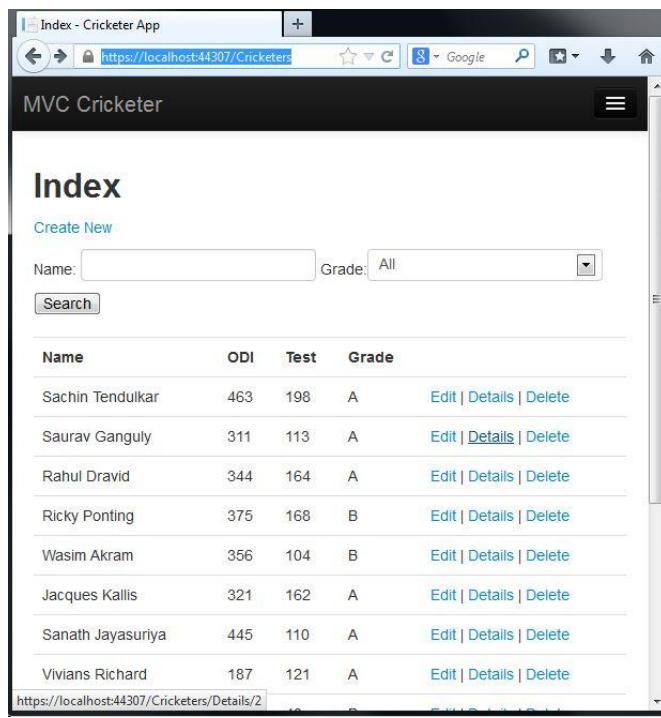

The screenshot shows the 'Index' view of the MVC Cricketer App. At the top, there is a search bar with fields for 'Name' and 'Grade' (set to 'All') and a 'Search' button. Below the search bar is a table listing eight cricketers. Each row contains the cricketer's name, their ODI and Test scores, and their grade. To the right of each row are three links: 'Edit', 'Details', and 'Delete'. The table has columns labeled 'Name', 'ODI', 'Test', and 'Grade'. The cricketers listed are Sachin Tendulkar, Saurav Ganguly, Rahul Dravid, Ricky Ponting, Wasim Akram, Jacques Kallis, Sanath Jayasuriya, and Vivians Richard.

Step 4: Click on the Details link.

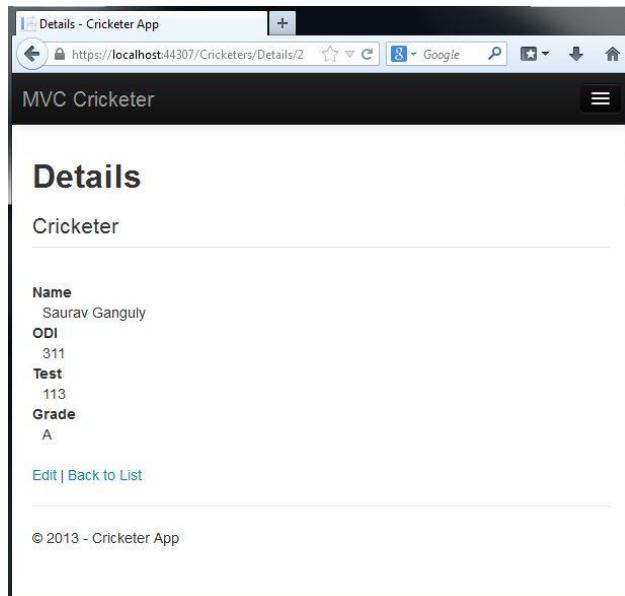


The screenshot shows the 'Details' view of the MVC Cricketer App for the cricketer with ID 2, Saurav Ganguly. The page title is 'Details'. The main content area is titled 'Cricketer' and displays the cricketer's name, ODI score, Test score, and grade. Below this, there are 'Edit' and 'Back to List' links. At the bottom of the page, there is a copyright notice: '© 2013 - Cricketer App'.

You can now see that the Grade field is present on the Details Page.

Update in Delete link


As you can see in the following image, the new property named Grade in the Index page, isn't present when a user clicks on the Delete link, because we didn't change the *Delete.cshtml* file.

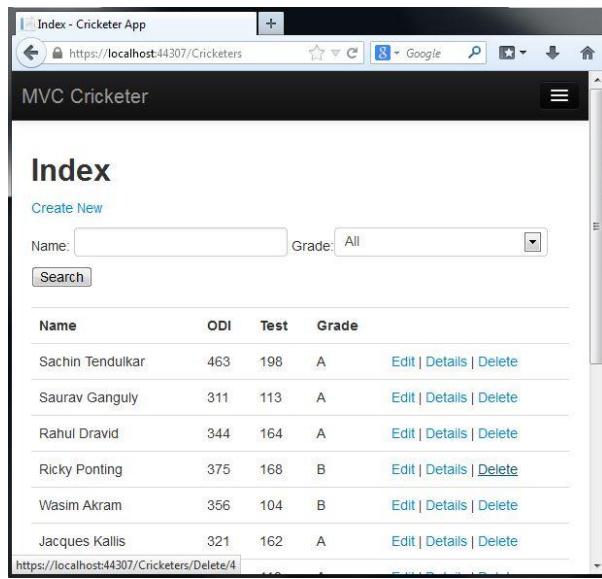

The screenshot shows the 'Index' view of an MVC application. At the top, there is a search bar with fields for 'Name' and 'Grade' (set to 'All') and a 'Search' button. Below the search bar is a table listing cricketers with columns for Name, ODI, Test, and Grade. Each row contains links for 'Edit', 'Details', and 'Delete'. The table data is as follows:

Name	ODI	Test	Grade	Action
Sachin Tendulkar	463	198	A	Edit Details Delete
Saurav Ganguly	311	113	A	Edit Details Delete
Rahul Dravid	344	164	A	Edit Details Delete
Ricky Ponting	375	168	B	Edit Details Delete
Wasim Akram	356	104	B	Edit Details Delete
Jacques Kallis	321	162	A	Edit Details Delete


Click on the Delete link.

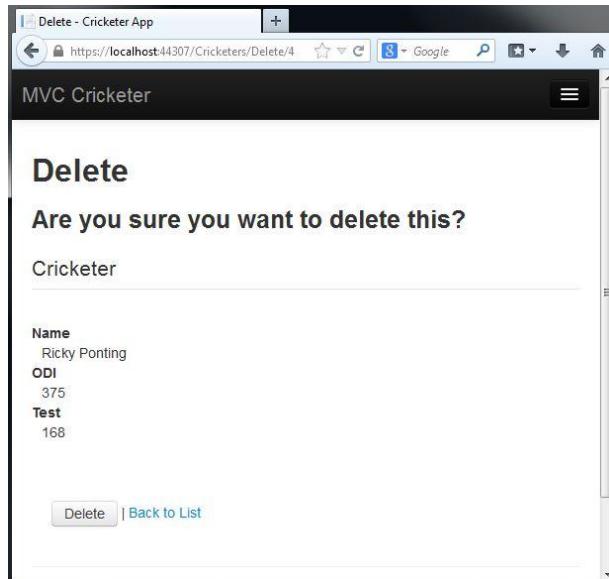

The screenshot shows the 'Delete' view for a cricketer. The title is 'Delete'. The main content asks 'Are you sure you want to delete this?'. Below it, the cricketer's details are listed: Name (Ricky Ponting), ODI (375), and Test (168). At the bottom are 'Delete' and 'Back to List' buttons.

So, let's start with the following procedure.

Step 1: Select the *Delete.cshtml* file from the Solution Explorer

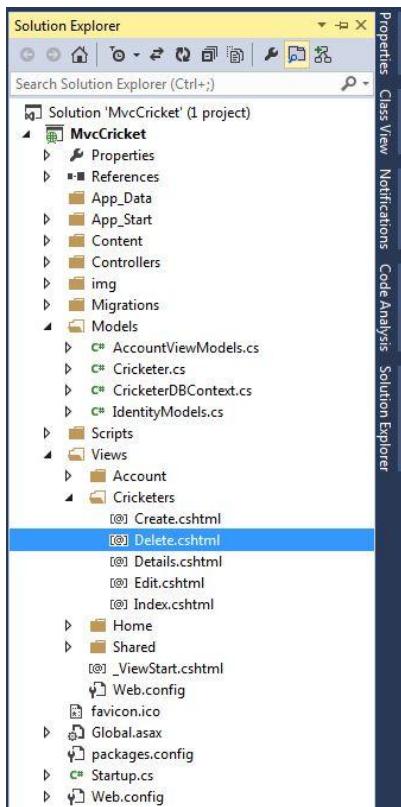

Step 2: Change your code with the following code. I have added some extra code in my previous code:

```

<h3>Are you sure you want to delete this?</h3>
<fieldset>
    <legend>Cricketer</legend>

    <dl>
        <dt>
            @Html.DisplayNameFor(model => model.Name)
        </dt>

        <dd>
            @Html.DisplayFor(model => model.Name)
        </dd>

        <dt>
            @Html.DisplayNameFor(model => model.ODI)
        </dt>

        <dd>
            @Html.DisplayFor(model => model.ODI)
        </dd>

        <dt>
            @Html.DisplayNameFor(model => model.Test)
        </dt>
    
```

```

</dt>
<dd>
    @Html.DisplayFor(model => model.Test)
</dd>


<dt>
    @Html.DisplayNameFor(model=>model.Grade)
</dt>

<dd>
    @Html.DisplayFor(model=>model.Grade)
</dd>

</dl>
</fieldset>


```

Step 3: Debug your application.

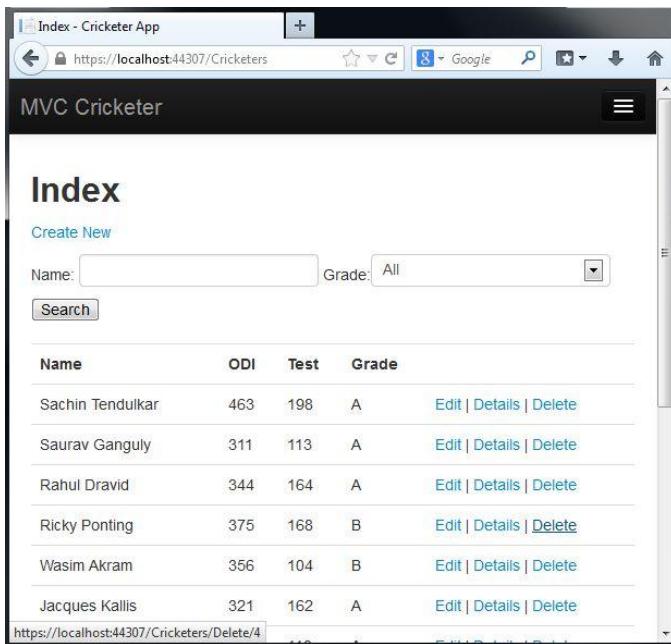

Name	ODI	Test	Grade	
Sachin Tendulkar	463	198	A	Edit Details Delete
Saurav Ganguly	311	113	A	Edit Details Delete
Rahul Dravid	344	164	A	Edit Details Delete
Ricky Ponting	375	168	B	Edit Details Delete
Wasim Akram	356	104	B	Edit Details Delete
Jacques Kallis	321	162	A	Edit Details Delete

Step 4: Click on the Delete link.

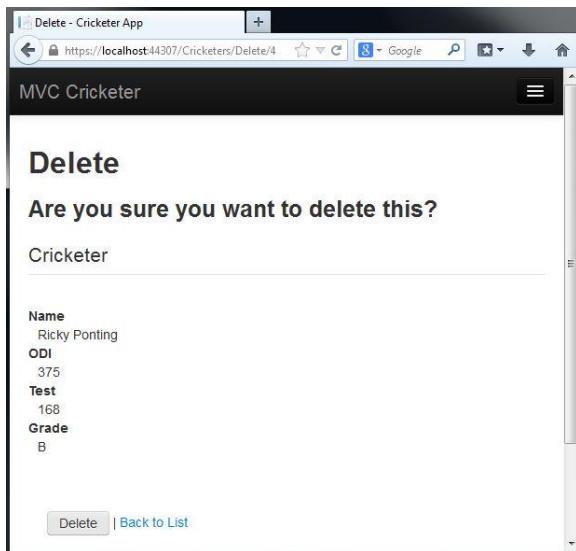


3.4 Working with Validations

In here, I am introducing the use of Data Annotations in MVC 5 using Microsoft Visual Studio 2013 Preview. As you know I previously deployed a MVC Application in which I used various types of techniques like [Adding View](#), [Adding Model](#), [Login](#), [CRUD Operations](#), [Code Migration](#), [Searching](#). These are very necessary in MVC Applications but when you develop applications, it is necessary to apply validations on that app. So, here you will learn how to validate an app in MVC 5.

In that context, validations are applied in MVC applications by the following assembly:

```
using System.ComponentModel.DataAnnotations;
```

Here I will tell you that I am creating validation logic in my Cricketers Model. When a user creates or edits any cricketer. You can see the validation on my page in the following image:

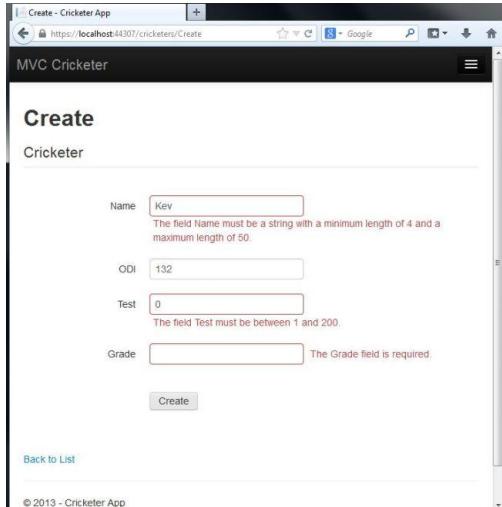

Don't Repeat Yourself

Whenever you design an ASP.NET MVC application, Don't Repeat Yourself (DRY) is the basic assumption that you need to use. This makes your code clean, reduces the amount of code and easy to maintain because the more code you write with fewer errors the more your code functions better.


In ASP.NET MVC applications, validations are defined in the Model Class and applied all over the application. The Entity Framework Code First approach and MVC are the pillar for the validation.

So, let's begin to take advantage of Data Annotation of MVC in your application with the following criteria.

Use of Data Annotation

You need to add some logic for validation in your MVC application. For adding let's start step-by-step.

Step 1: Open *Cricketers.cs* from the Solution Explorer.

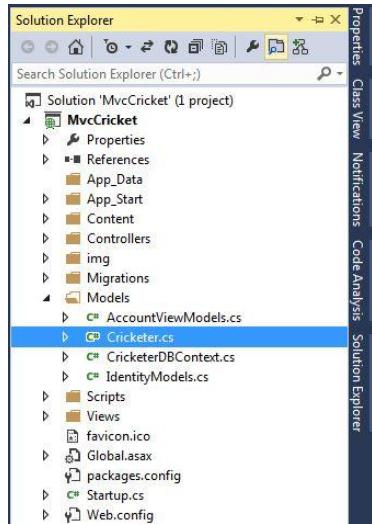

Step 2: Add the following assembly reference at the top of your *Cricketers.cs* file:

```
using System.ComponentModel.DataAnnotations;
```

Step 3: Change your code with the following code (depends on your logic):

```
using System.ComponentModel.DataAnnotations;
using System.Data.Entity;
```

```
namespace MvcCricket.Models
```

```
{
```

```
    public class Cricketer
```

```
{
```

```
    public int ID { get; set; }
```

```
    [Required]
```

```
    [StringLength(50, MinimumLength=4)]
```

```
    public string Name { get; set; }
```

```
    [Required]
```

```
    [Range(1,500)]
```

```

public int ODI { get; set; }

[Required]
[Range(1,200)]
public int Test { get; set; }

[Required]
public string Grade { get; set; }
}
}


```

In the code above, you can see that the Required attribute is used in each property. That means that the user needs to enter the value in it. In the Name property the StringLength attribute defines the min and max length of the Name. In the ODI and TEST property the Range attribute is defined to min and max length.

Step 4: Open a Library Package Manager Console and write the following command in it:

add-migration DataAnnotations

After pressing Enter:

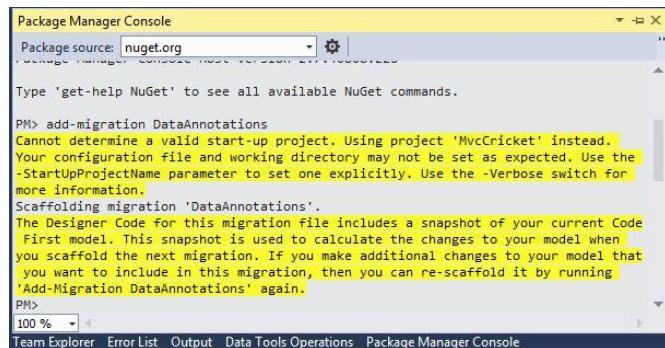

```

PM> add-migration DataAnnotations
Cannot determine a valid start-up project. Using project 'MvcCricket' instead.
Your configuration file and working directory may not be set as expected. Use the
-StartUpProjectName parameter to set one explicitly. Use the -Verbose switch for
more information.
Scaffolding migration 'DataAnnotations'.
The Designer Code for this migration file includes a snapshot of your current Code
First model. This snapshot is used to calculate the changes to your model when
you scaffold the next migration. If you make additional changes to your model that
you want to include in this migration, then you can re-scaffold it by running
'Add-Migration DataAnnotations' again.
PM>

```

Step 5: Again write the following command in the Library Package Manager Console:

update-database

What does Visual Studio do? Visual Studio opens the DataAnnotations.cs file and you will see the DbMigration class is the base class of DataAnnotations. There are two methods in it. In the Up() and Down(), you will see the updated database schema. Check it out with the following code:

```

namespace MvcCricket.Migrations
{
    using System;
    using System.Data.Entity.Migrations;

    public partial class DataAnnotations : DbMigration
    {
        public override void Up()
        {
            AlterColumn("dbo.Cricketers", "Name", c => c.String(nullable: false, maxLength: 50));
            AlterColumn("dbo.Cricketers", "Grade", c => c.String(nullable: false));
        }
    }
}


```

```
}
```

```
public override void Down()
{
    AlterColumn("dbo.Cricketers", "Grade", c => c.String());
    AlterColumn("dbo.Cricketers", "Name", c => c.String());
}
}
```


You can see in the code above that the Name and Grade property are no longer nullable. You need to enter values in it. Code First ensures that the validation rules you specify on a model class are enforced before the application saves changes in the database.

Step 6: Debug your application and open the Cricketers folder.

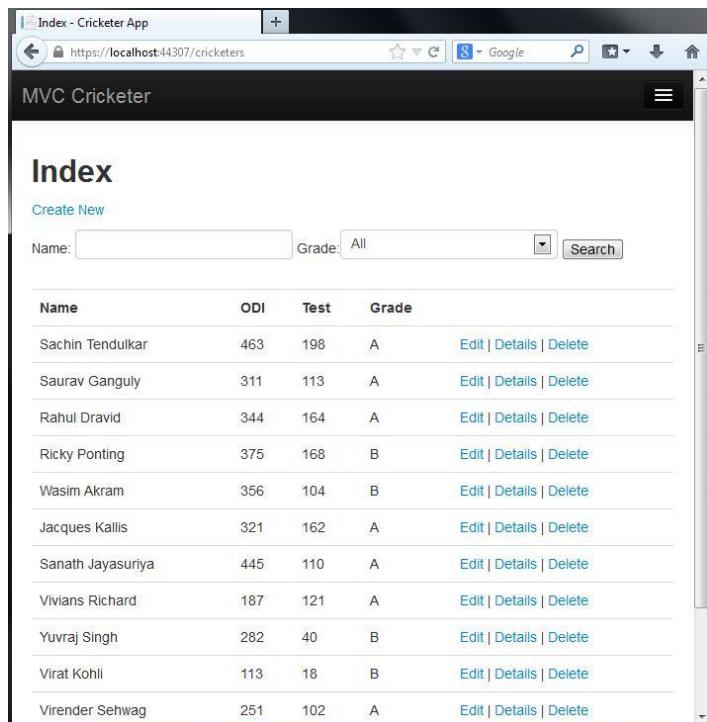

Name	ODI	Test	Grade
Sachin Tendulkar	463	198	A
Saurav Ganguly	311	113	A
Rahul Dravid	344	164	A
Ricky Ponting	375	168	B
Wasim Akram	356	104	B
Jacques Kallis	321	162	A
Sanath Jayasuriya	445	110	A
Vivians Richard	187	121	A
Yuvraj Singh	282	40	B
Virat Kohli	113	18	B
Virender Sehwag	251	102	A

Click on Create New Link to create some new cricketer.

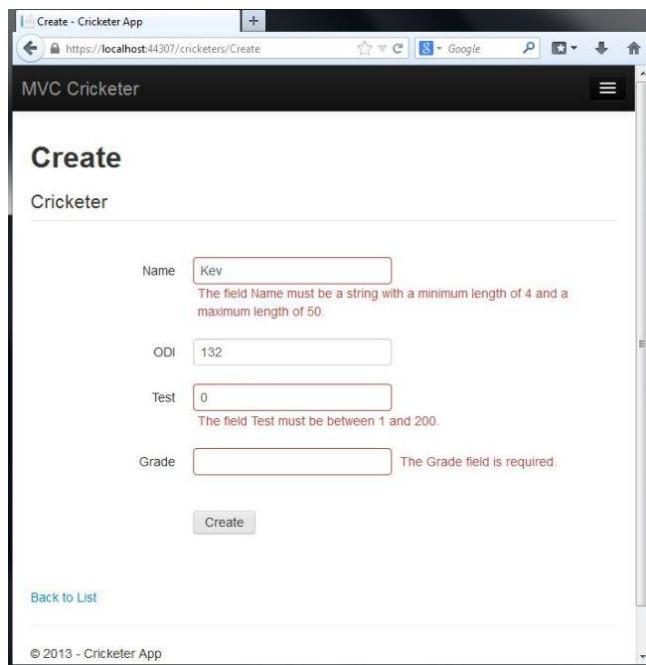

The screenshot shows a browser window titled "Create - Cricketer App" with the URL "https://localhost:44307/cricketers/Create". The page is titled "MVC Cricketer" and has a "Create" heading. It contains four input fields: "Name" (value "Kev"), "ODI" (value "132"), "Test" (value "0"), and "Grade" (empty). Below the Grade field is a validation error message: "The Grade field is required.". At the bottom is a "Create" button.

That's It. If you want to know the working process of validation process then you to notice my following paragraph.

Validation Process

```
public ActionResult Create()
{
    return View();
}

// 
// POST: /Cricketers/Create
[HttpPost]
[ValidateAntiForgeryToken]
public ActionResult Create(Cricketer cricketer)
{
    if (ModelState.IsValid)
    {
        db.Cricketers.Add(cricketer);
        db.SaveChanges();
        return RedirectToAction("Index");
    }


    return View(cricketer);
}
```

In the code above when the form opens in the browser the HTTP GET method is called and in the Create action method initiates. The second method `HttpPost` handles the post method. This method checks that the validation errors in the form and if the object finds the errors then the Create method re-creates the form, otherwise the method saves the data


in the database. In here, the form is not posted to the server, because the validation error occurs in the client-side. You can also disable your JavaScript to see the error using a breakpoint.

The following is an example of that.

In Internet Explorer

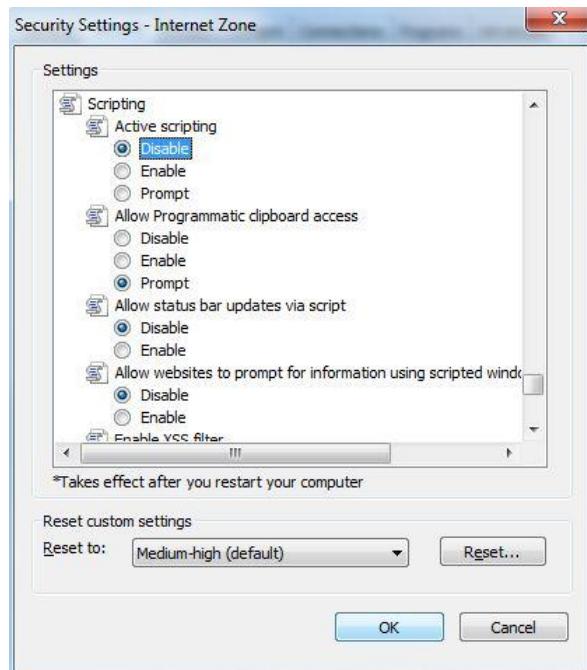

In Google Chrome

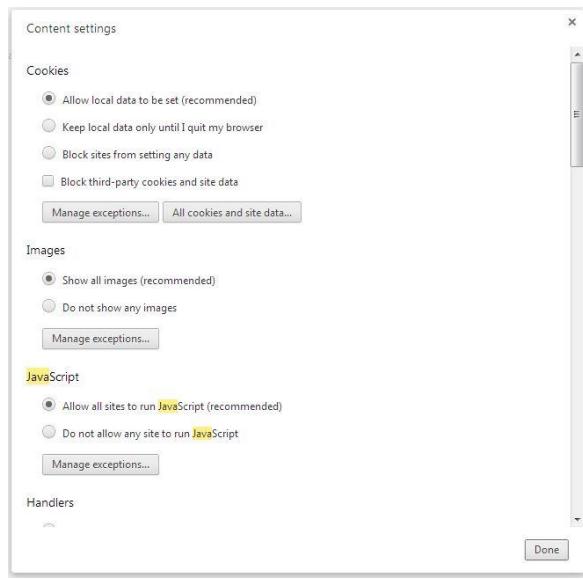

Validation Summary

You can also see the changes in your *Create.cshtml* file when you apply the Validation in your application. Check it out in my file:

```
@using (Html.BeginForm())
{
    @Html.AntiForgeryToken()
    @Html.ValidationSummary(true)

    <fieldset class="form-horizontal">
        <legend>Cricketer</legend>

        <div class="control-group">
            @Html.LabelFor(model => model.Name, new { @class = "control-label" })
            <div class="controls">
                @Html.EditorFor(model => model.Name)
                @Html.ValidationMessageFor(model => model.Name, null, new { @class = "help-inline" })
            </div>
        </div>

        <div class="control-group">
            @Html.LabelFor(model => model.ODI, new { @class = "control-label" })
            <div class="controls">
                @Html.EditorFor(model => model.ODI)
                @Html.ValidationMessageFor(model => model.ODI, null, new { @class = "help-inline" })
            </div>
        </div>

        <div class="control-group">
            @Html.LabelFor(model => model.Test, new { @class = "control-label" })
            <div class="controls">

```

```

        @Html.EditorFor(model => model.Test)
        @Html.ValidationMessageFor(model => model.Test, null, new { @class = "help-inline" })
    </div>
</div>

<div class="control-group">
    @Html.LabelFor(model => model.Grade, new { @class = "control-label" })
    <div class="controls">
        @Html.EditorFor(model=>model.Grade)
        @Html.ValidationMessageFor(model => model.Grade, null, new { @class = "help-inline" })
    </div>
</div>

<div class="form-actions no-color">
    <input type="submit" value="Create" class="btn" />
</div>
</fieldset>
}


```

4 Working with External Authentication

4.1 Configure the Login Options

This topic explains configuration of various login options for logging into your ASP.NET Web Application developed in MVC Project Templates. I will use Visual Studio 2013 Preview and MVC 5 in my ASP.NET Web Application. Here, I am telling you that there are various login options to login your MVC app.


In that context, you will see in the following image that there is no login option available in my application:

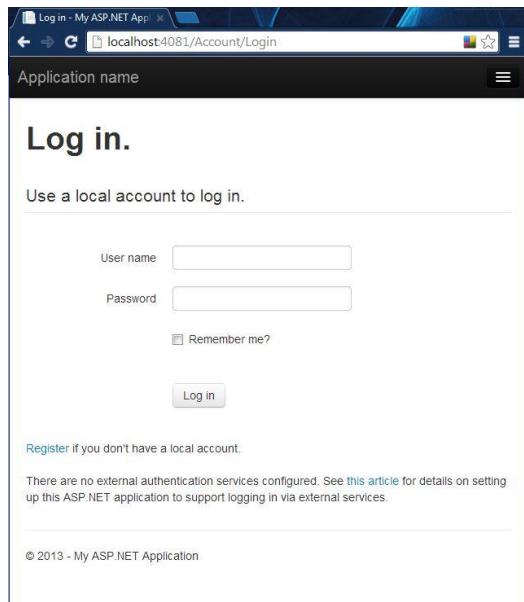


So, let's start to design and configure the MVC app. If you have not created a MVC 5 app with Visual Studio then use the procedure given below.

Step 1: Open Visual Studio 2013 Preview.


Step 2: "File" -> "New" -> "Project...".

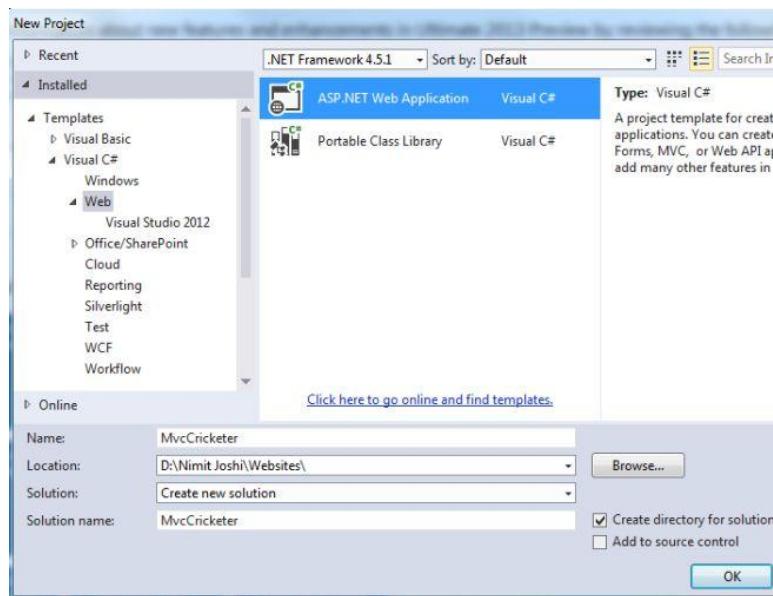

Step 3: Select "MVC Project template for MVC application".

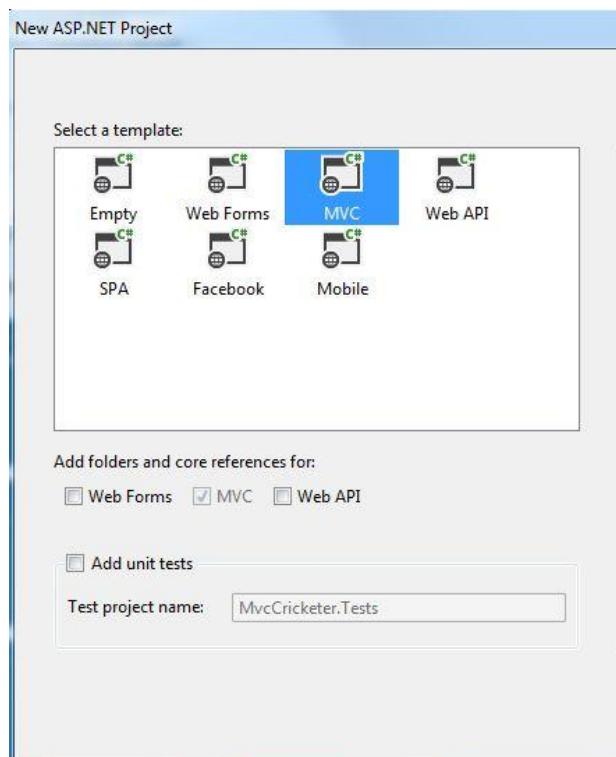

Step 4: In Solution Explorer, go to Views and open "_Layout.cshtml" to design your own app.

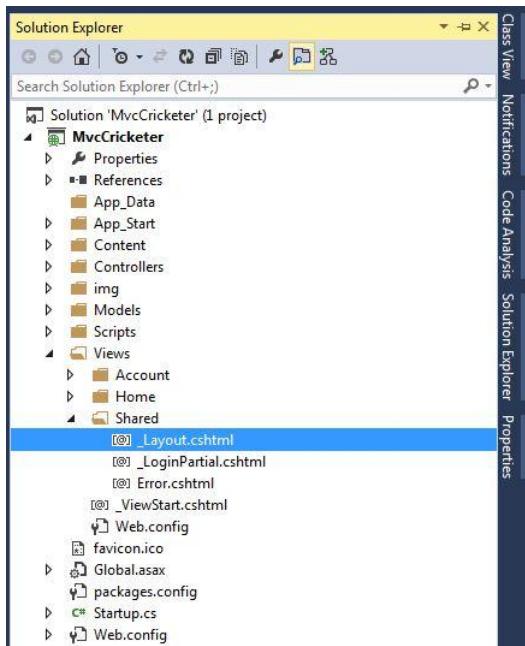

Step 5: Change your "_Layout.cshtml" with your own app name.

```

<html>
  <head>
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>@ViewBag.Title - My ASP.NET Application</title>
    @Styles.Render("~/Content/css")
    @Scripts.Render("~/bundles/modernizr")
  </head>
  <body>
    <div class="navbar navbar-inverse navbar-fixed-top">
      <div class="navbar-inner">
        <div class="container">
          <button type="button" class="btn btn-navbar" data-toggle="collapse"
                  data-target="#mainNav">
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
          </button>
          @Html.ActionLink("Application name", "Index", "Home", null, new
                           { @class = "navbar-brand" })
          <div class="nav-collapse collapse">
            <ul class="nav">
              <li>@Html.ActionLink("Home", "Index", "Home")</li>
              <li>@Html.ActionLink("About", "About", "Home")</li>
              <li>@Html.ActionLink("Contact", "Contact", "Home")</li>
            </ul>
            @Html.Partial("_LoginPartial")
          </div>
        </div>
      </div>
    </div>
    <div class="container">
      @RenderBody()
      <hr />
      <footer>
        <p>© &copy; DateTime.Now.Year - My ASP.NET Application</p>
      </footer>
    </div>
  </body>
</html>

```

The code block shows the structure of the '_Layout.cshtml' file. Three specific sections are highlighted with boxes and arrows pointing to them:

- A box labeled "Your App Title" surrounds the title element: <title>@ViewBag.Title - My ASP.NET Application</title>
- A box labeled "Your App Name" surrounds the button element: <button type="button" class="btn btn-navbar" data-toggle="collapse" data-target="#mainNav">...</button>
- A box labeled "Your Copyright Title" surrounds the footer element: <footer>...</footer>

You need to change the following three lines:

<title>@ViewBag.Title - My ASP.NET Application</title>

```
@Html.ActionLink("Application name", "Index", "Home", null, new { @class = "brand" })
```

```
<p>&copy; @DateTime.Now.Year - My ASP.NET Application</p>
```


into the following lines:

```
<title>@ViewBag.Title - Cricketer App</title>
```

```
@Html.ActionLink("MVC Cricketer", "Index", "Home", null, new { @class = "brand" })
```

```
<p>&copy; @DateTime.Now.Year - Cricketer Application</p>
```

Step 6: Debug your application.

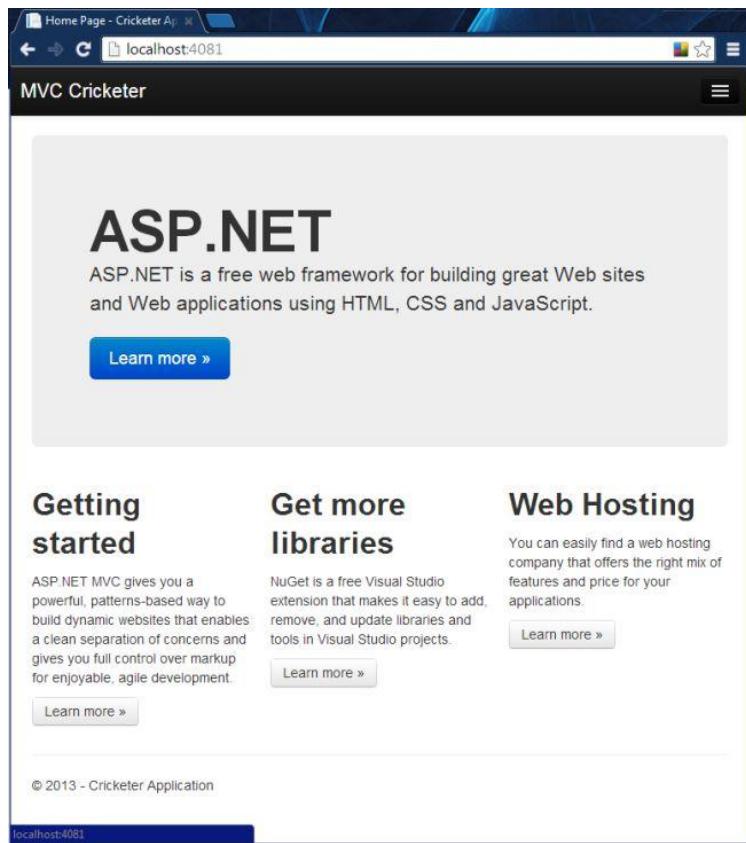


Now you will see the changes like your Title Bar, your logo and your copyright name.

Let's proceed to the next step in which we configure the Login options. I am using two login options here. They are:

- Facebook
- Google

Configure app to Login with Facebook

Step 1: In Solution Explorer, expand "App_Start" and open the "Startup.Auth.cs" file.

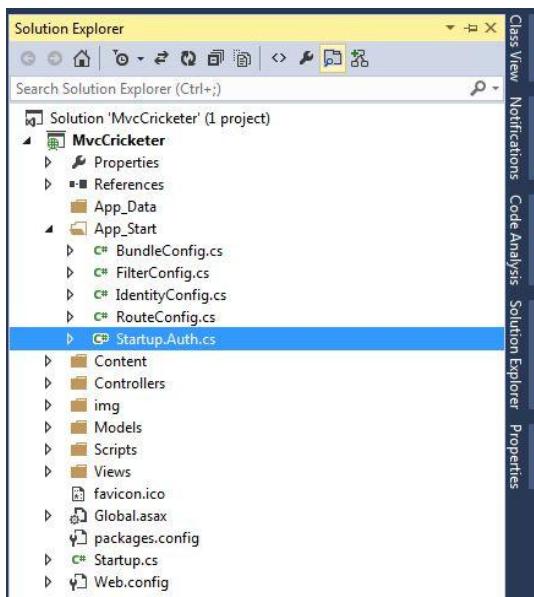

Step 2: You can see in the following image that both Facebook and Google options are disabled. Uncomment the Facebook one at first.

```
namespace MvcCricketer
{
    public partial class Startup
    {
        // For more information on configuring
        // references
        public void ConfigureAuth(IAppBuilder app)
        {
            // Enable the application to use a
            app.UseApplicationSignInCookie();

            // Enable the application to use a
            app.UseExternalSignInCookie();

            // Uncomment the following lines to
            // app.UseMicrosoftAccountAuthentication(
            //     clientId: "",
            //     clientSecret: "");

            // app.UseTwitterAuthentication(
            //     consumerKey: "",
            //     consumerSecret: "");

            // app.UseFacebookAuthentication(
            //     appId: "",
            //     appSecret: "");

            // app.UseGoogleAuthentication();
        }
    }
}
```

Add your Facebook app id and app secret into the Facebook option.

```

namespace MvcCricketer
{
    public partial class Startup
    {
        // For more information on configuring authentication, please see https://go.microsoft.com/fwlink/?LinkId=340656
        public void ConfigureAuth(IApplicationBuilder app)
        {
            // Enable the application to use a cookie to store information about the user
            app.UseApplicationSignInCookie();

            // Enable the application to use a cookie to temporarily sign in users
            app.UseExternalSignInCookie();

            // Uncomment the following lines to enable logging in with
            // app.UseMicrosoftAccountAuthentication(
            //     clientId: "",
            //     clientSecret: "");


            // app.UseTwitterAuthentication(
            //     consumerKey: "",
            //     consumerSecret: "");

            // app.UseFacebookAuthentication(
            //     appId: "████████████████",
            //     appSecret: "████████████████");


            // app.UseGoogleAuthentication();
        }
    }
}

```

Step 3: Enter your App Id and App Secret and debug your application.

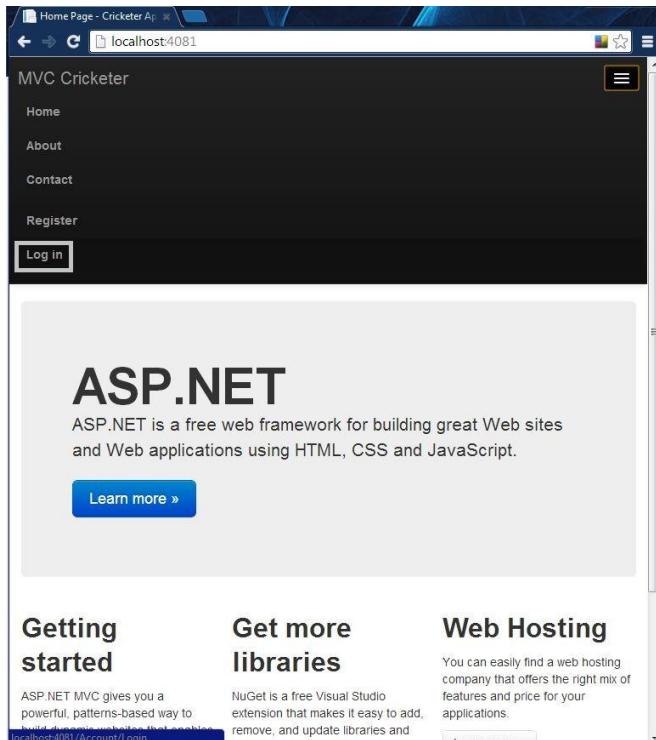

Follow the preceding image to go to the Login page.

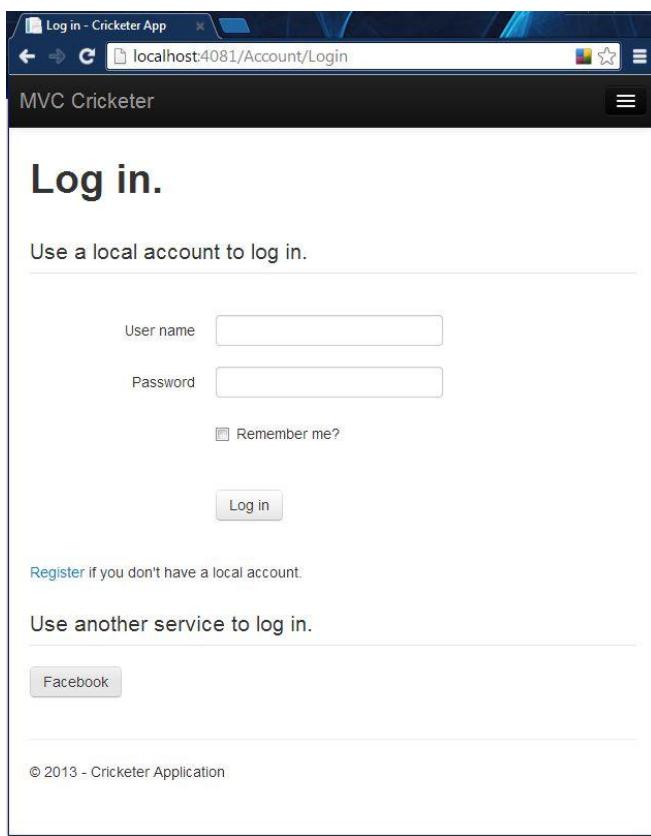

Log in.

Use a local account to log in.

User name

Password

Remember me?

[Register](#) if you don't have a local account.

Use another service to log in.


[Facebook](#)

© 2013 - Cricketer Application

Now you can login with your Facebook Credentials.

Configure app to Login with Google

Step 1: In Solution Explorer, expand "App_Start" and open the "Startup.Auth.cs" file.

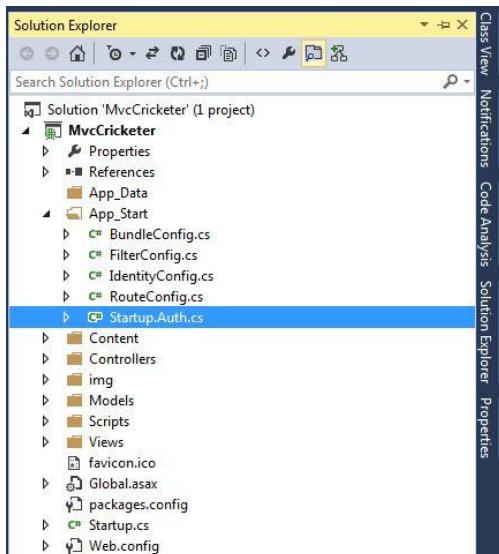

Step 2: You can see in the following image that both Facebook and Google options are disabled. Uncomment the Google option.

```

namespace MvcCricketer
{
    public partial class Startup
    {
        // For more information on configuring authentication
        public void ConfigureAuth(IAppBuilder app)
        {
            // Enable the application to use a cookie to store in
            app.UseApplicationSignInCookie();

            // Enable the application to use a cookie to temporary store in
            app.UseExternalSignInCookie();

            // Uncomment the following lines to enable logging in
            // app.UseMicrosoftAccountAuthentication(
            //     clientId: "",
            //     clientSecret: "");

            // app.UseTwitterAuthentication(
            //     consumerKey: "",
            //     consumerSecret: "");

            // app.UseFacebookAuthentication(
            //     appId: "",
            //     appSecret: "");

            // app.UseGoogleAuthentication();
        }
    }
}

```

After the uncomment:

```

namespace MvcCricketer
{
    public partial class Startup
    {
        // For more information on configuring authentication, please
        // refer to http://go.microsoft.com/fwlink/?LinkId=301869
        public void ConfigureAuth(IAppBuilder app)
        {
            // Enable the application to use a cookie to store in
            app.UseApplicationSignInCookie();

            // Enable the application to use a cookie to temporary store in
            app.UseExternalSignInCookie();

            // Uncomment the following lines to enable logging in
            // app.UseMicrosoftAccountAuthentication(
            //     clientId: "",
            //     clientSecret: "");


            // app.UseTwitterAuthentication(
            //     consumerKey: "",
            //     consumerSecret: "");

            // app.UseFacebookAuthentication(
            //     appId: "████████████████",
            //     appSecret: "████████████████");


            app.UseGoogleAuthentication();
        }
    }
}

```

Step 3: That's it. Debug your application .

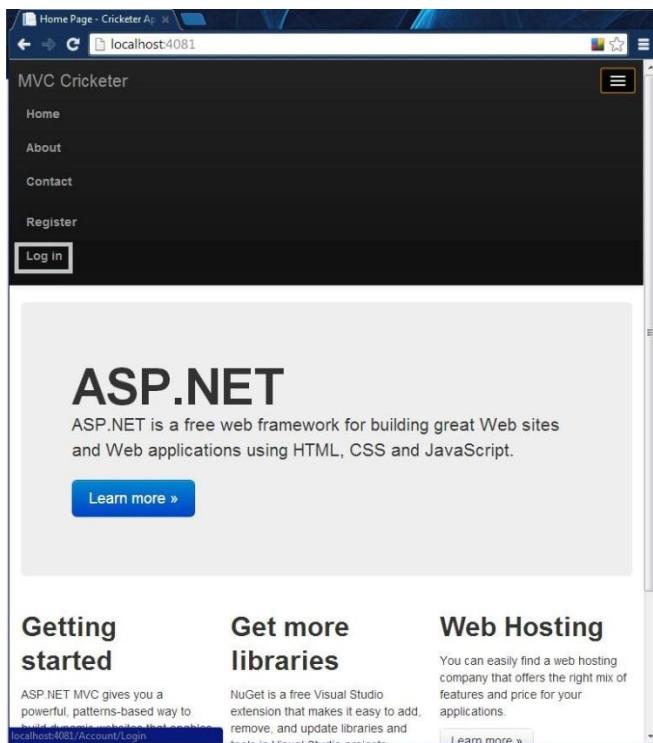

Follow the preceding image to go to the Login page.

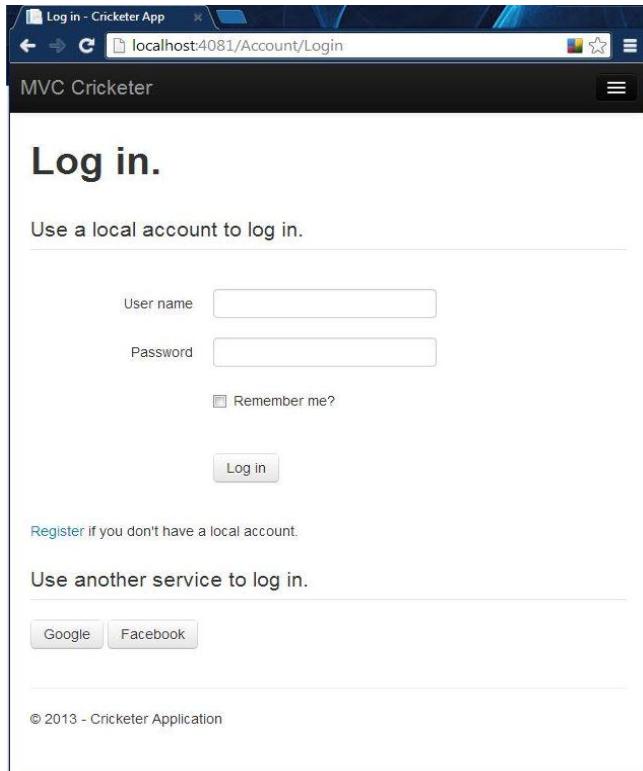


Now you can login with your Google Credentials.

4.2 Google and Facebook Authentication

This topic explains how to login with various login options to login to your ASP.NET Web Application developed in MVC Project Templates. I will use Visual Studio 2013 Preview and MVC 5 in my ASP.NET Web Application. As I described in my earlier I introduced you to the configuration of various login options available in MVC 5 applications. Here, I am explaining how to login with your login options to login your MVC app.

In that context, you can see in the following image that there are two login options available in the sample application showing how to login.

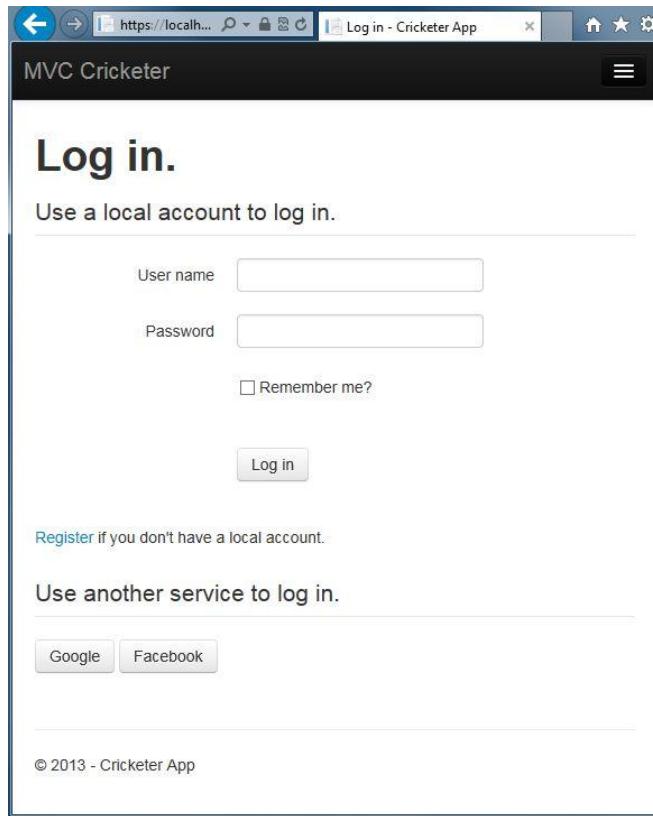


I am using the following two login options for the login:

1. Google
2. Facebook

Google Login in MVC 5

Let's start with Google authorization for login. Since you already know the configuration, let's start with the login using the following procedure.

Step 1: Click on the "Google" button for login.

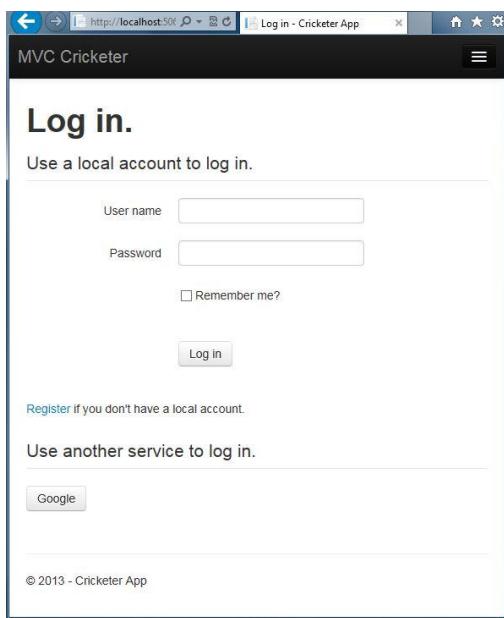

MVC Cricketer

Log in.

Use a local account to log in.

User name

Password

Remember me?

Log in


[Register](#) if you don't have a local account.

Use another service to log in.

[Google](#)

© 2013 - Cricketer App

Step 2: Enter your Google Account Credentials for login.

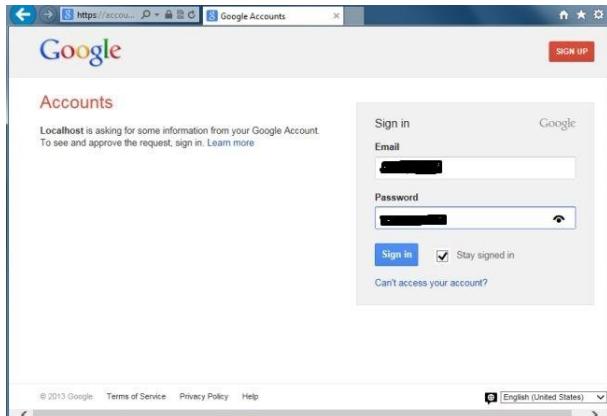

Google

Accounts

localhost is asking for some information from your Google Account. To see and approve the request, sign in. Learn more

Sign in Google

Email


Password

Sign in Stay signed in

[Can't access your account?](#)

© 2013 Google [Terms of Service](#) [Privacy Policy](#) [Help](#) English (United States) ▾

Step 3: Authorize your app because it is requesting your permission to authorize.

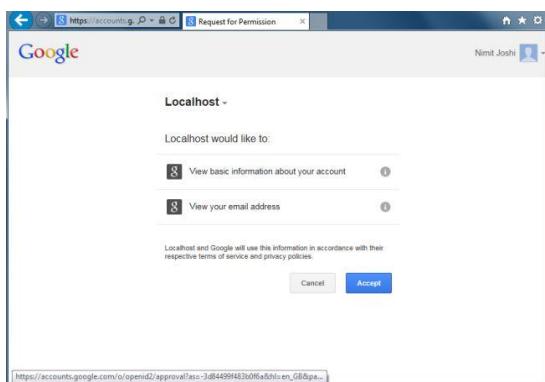

localhost

localhost would like to

View basic information about your account (optional)


View your email address (optional)

localhost and Google will use this information in accordance with their respective terms of service and privacy policies.


Accept **Cancel**

https://accounts.google.com/o/oauth2/approval?access_token=3d84499483b0f6a&hl=en_GB&pa...


Step 4: Register yourself and enter a unique user name for registration.

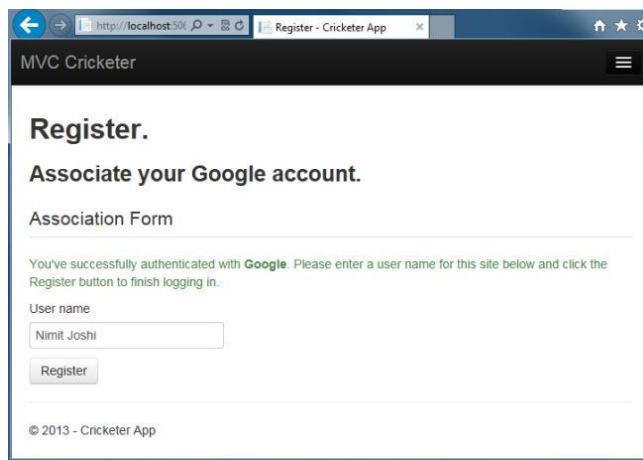

Step 5: You will see your user name in your MVC app.

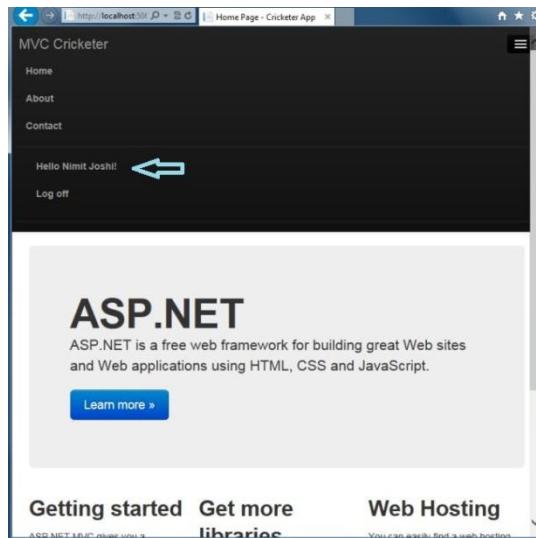


Step 6: Please log off after finishing your work.

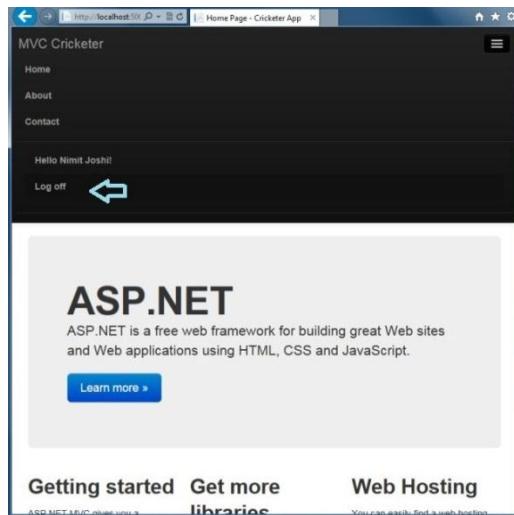


Facebook Login in MVC 5

I am using Facebook authorization for the login. Since you know the configuration of Facebook authorization in a MVC app, let's start using the following procedure.

Step 1: Click on the "Facebook" button to login.

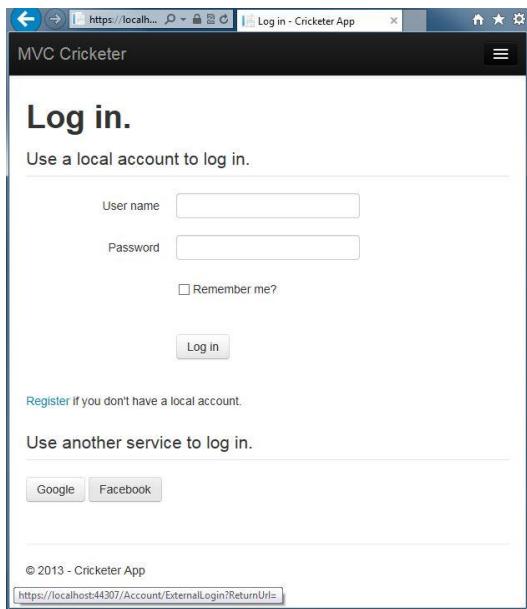


Step 2: Enter your Facebook Account Credentials for login.

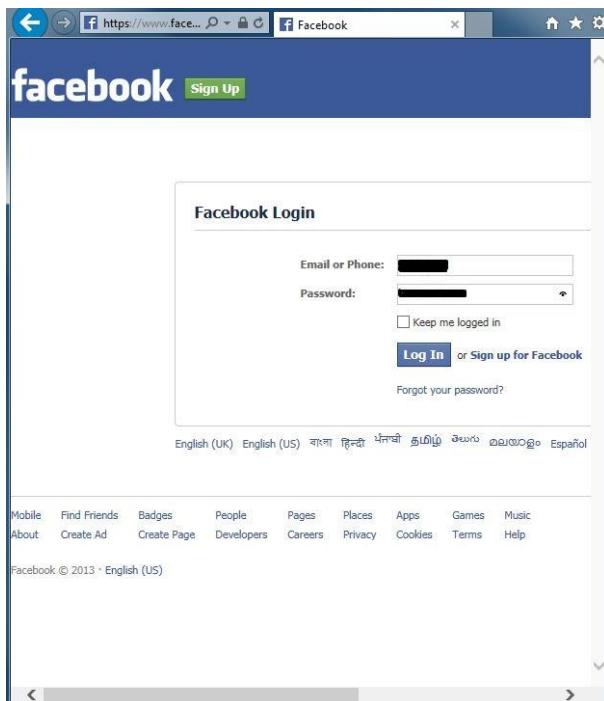


Step 3: Since you have already registered yourself as a developer in Facebook and configured your app in your MVC app, there is no authentication required.

86


Step 4: Register yourself and enter a unique user name for registration in the MVC app.

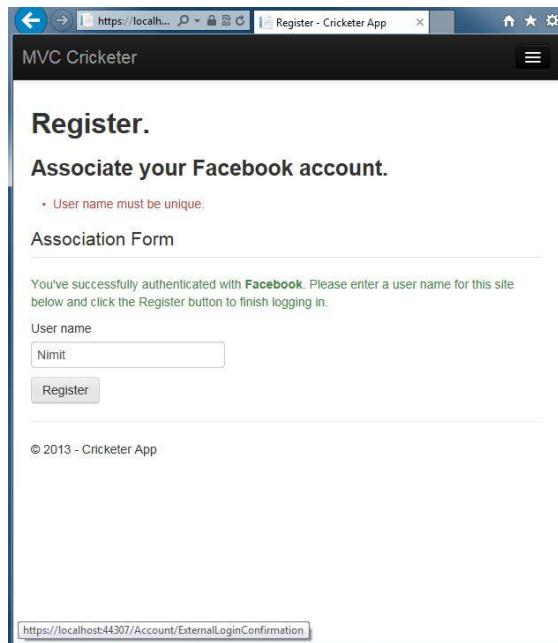

Step 5: You will see your user name in your MVC app.

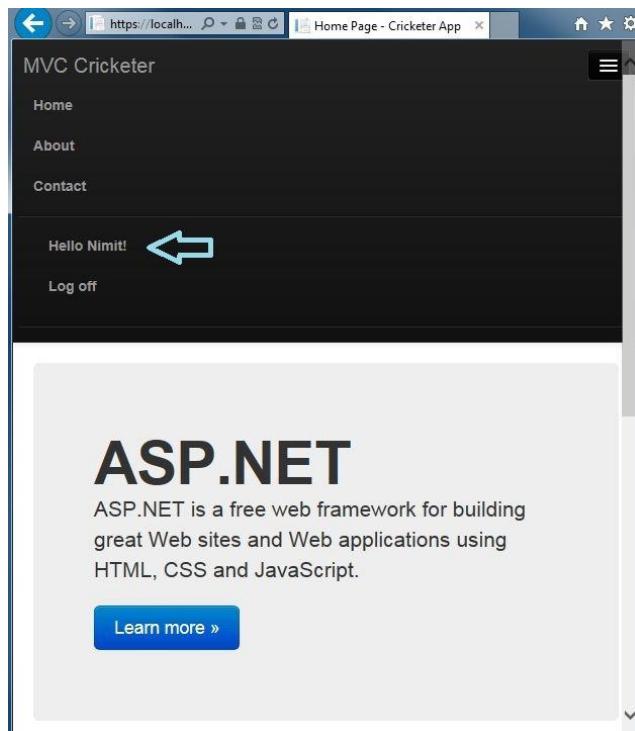


Step 6: Please log off after finishing your work.

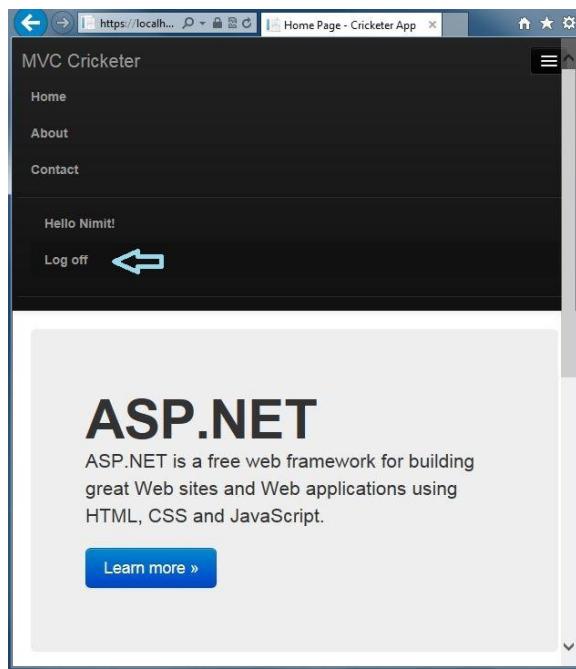

4.3 Twitter Authentication

This topic explains Twitter Authentication for logging into your ASP.NET Web Application developed in MVC Project Templates. I will use Visual Studio 2013 Preview and MVC 5 in my ASP.NET Web Application. Here, I am describing for you how to authenticate your MVC Application with Twitter.

In that context, you will see in the following image that there are three login options available in my application with which you can login:

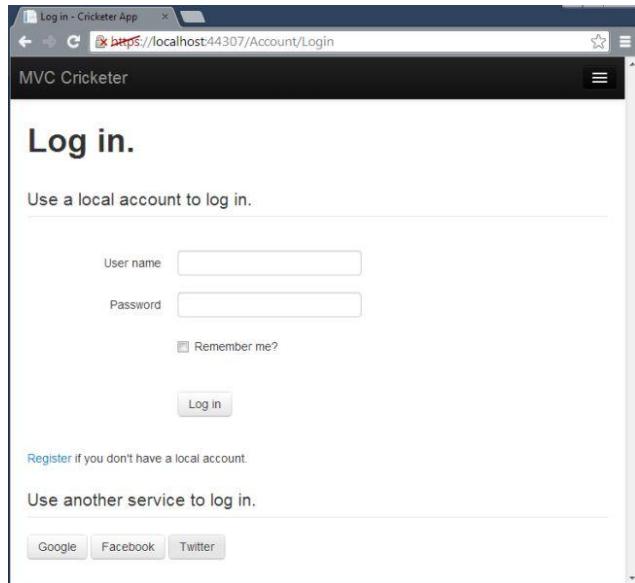

As you can see, the following are the login options available in my MVC Application and I am using Twitter Authentication in my application:

- Facebook
- Google
- Twitter


Twitter Authentication for MVC Application

So, let's start to authenticate the MVC Application with Twitter using the following sections:

- Twitter App Creation
- MVC App Creation

Twitter App Creation

Register yourself as a App Developer in Twitter.

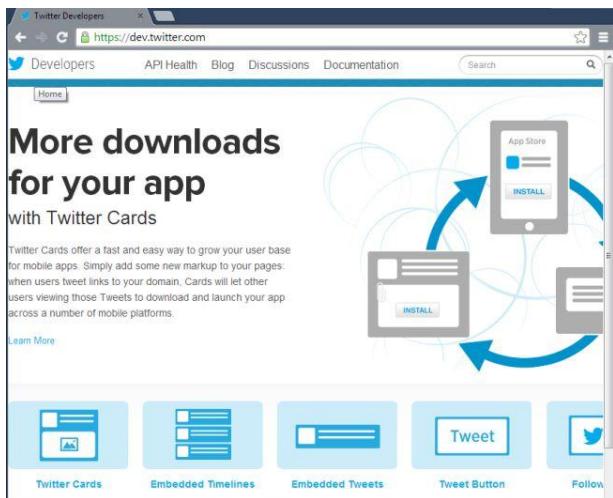


Let's start to create an Twitter app with the following procedure.

Step 1: At first, create an app in Twitter as a developer by <https://dev.twitter.com/apps>




Step 2: After login, create an app by clicking on "Create a New Application".

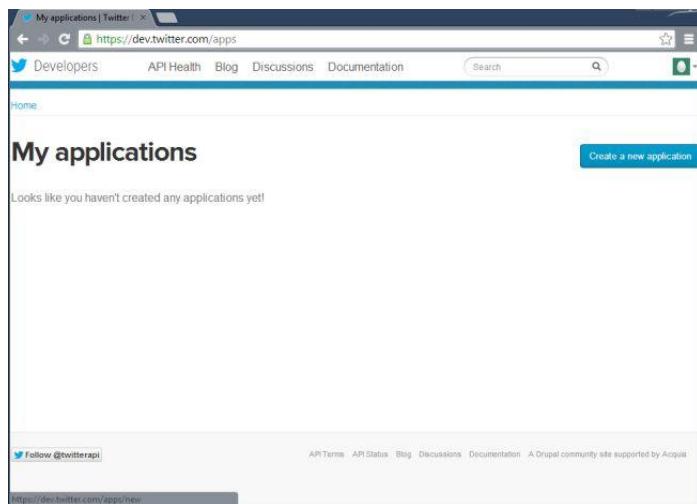


Step 3: Enter your unique App name and other necessary details.

Note: You need to enter the CallBack URL and choose Read and Write options to authorize . If you do not have any domain then you can enter an URL like <http://www.website.com/>

Step 4: After accepting the license agreement, click on "Create your Twitter Application".

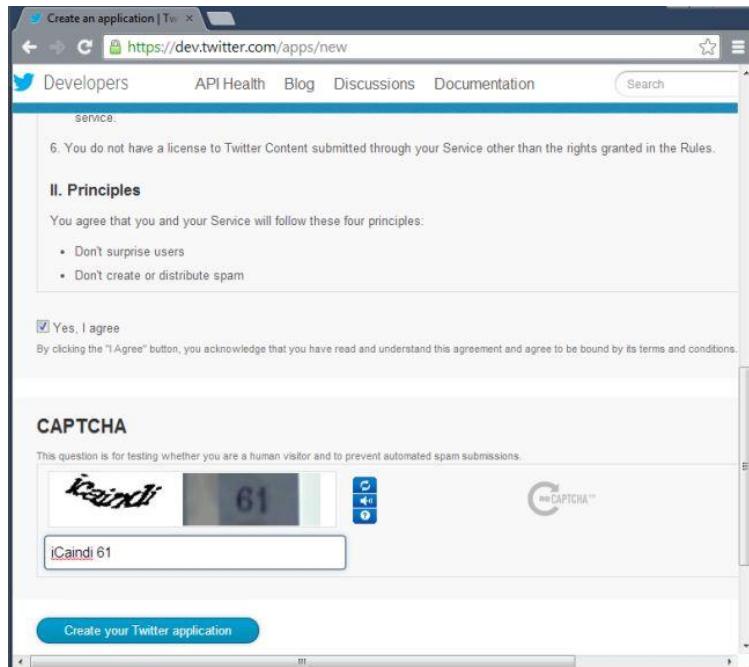

Step 5: Copy your Consumer Key and Consumer Secret values from the next window.

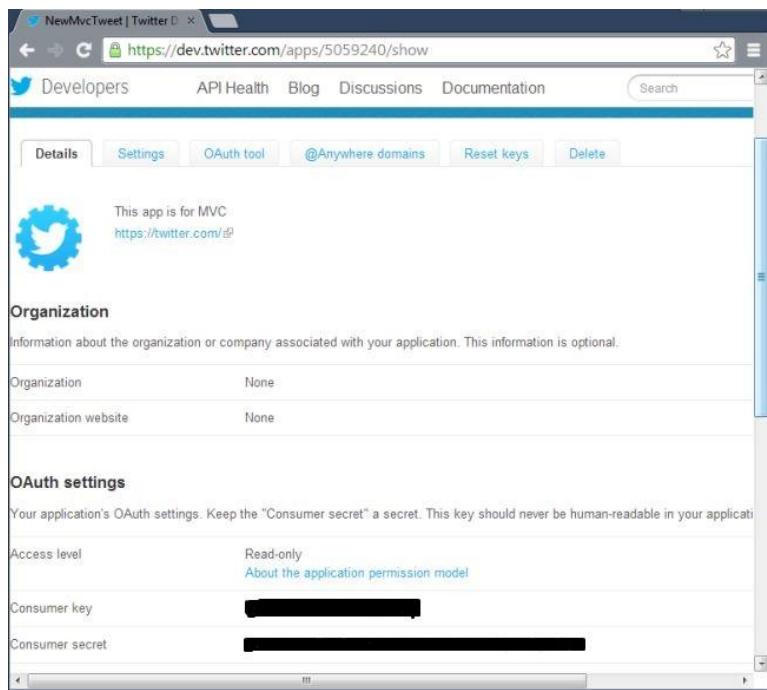

This app is for MVC
<https://twitter.com/i/flow/login>

Organization
Information about the organization or company associated with your application. This information is optional.

Organization	None
Organization website	None

OAuth settings
Your application's OAuth settings. Keep the "Consumer secret" a secret. This key should never be human-readable in your application.


Access level	Read-only
About the application permission model	
Consumer key	[REDACTED]
Consumer secret	[REDACTED]

That's it. Now, move to the next session.

MVC App Creation

Let's start to create an MVC app with the following procedure.

Step 1: Create an ASP.NET MVC Application.

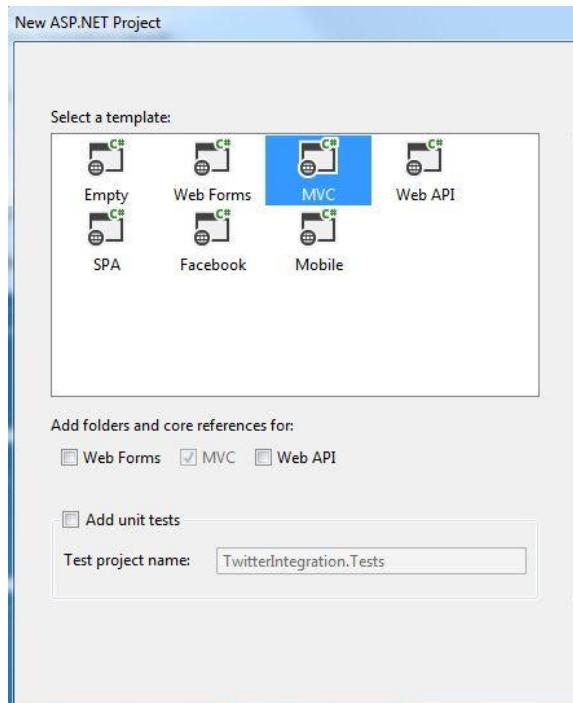

New ASP.NET Project

Select a template:

- Empty
- Web Forms
- MVC**
- Web API
- SPA
- Facebook
- Mobile


Add folders and core references for:

Web Forms MVC Web API


Add unit tests

Test project name: TwitterIntegration.Tests

Step 2: In your Solution Explorer, open the "Startup.Auth.cs" file .

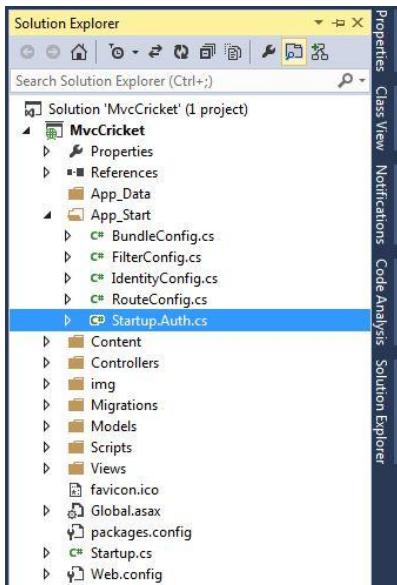

Step 3: As you can see in the following figure, my Twitter authentication is disabled:

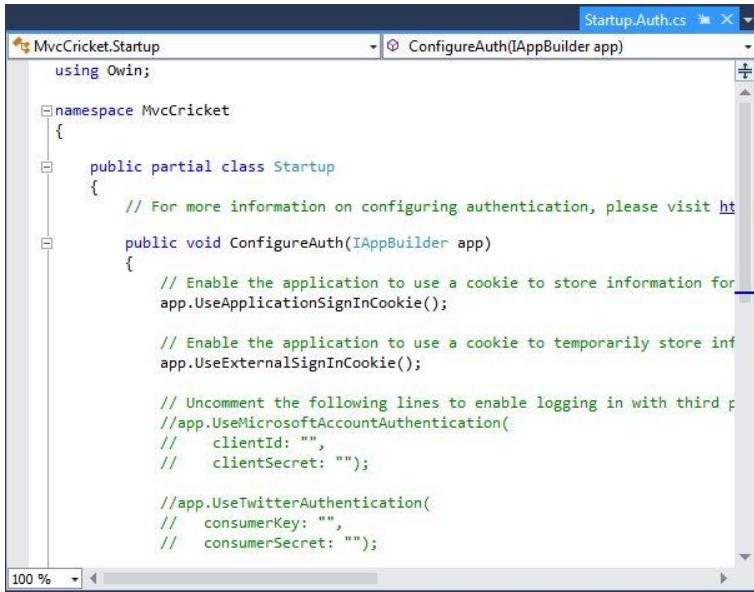

```
MvcCricket.Startup    ConfigureAuth(IAppBuilder app)
using Owin;


namespace MvcCricket
{
    public partial class Startup
    {
        // For more information on configuring authentication, please visit ht
        public void ConfigureAuth(IAppBuilder app)
        {
            // Enable the application to use a cookie to store information for
            app.UseApplicationSignInCookie();

            // Enable the application to use a cookie to temporarily store inf
            app.UseExternalSignInCookie();

            // Uncomment the following lines to enable logging in with third p
            //app.UseMicrosoftAccountAuthentication(
            //    clientId: "",
            //    clientSecret: "");

            //app.UseTwitterAuthentication(
            //    consumerKey: "",
            //    consumerSecret: "");
        }
    }
}
```

Please un-comment it and paste your Consumer Key value and Consumer Secret value in the file as I mentioned below:

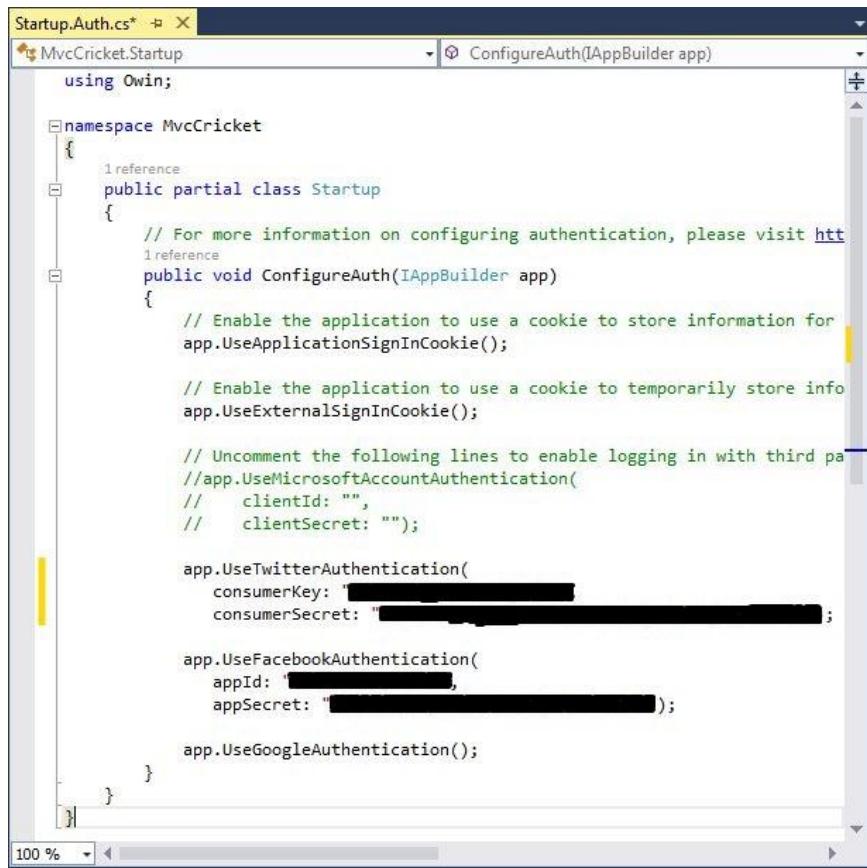

```

Startup.Auth.cs*  X
MvcCricket.Startup  ConfigureAuth(IAppBuilder app)
using Owin;

namespace MvcCricket
{
    public partial class Startup
    {
        // For more information on configuring authentication, please visit http://go.microsoft.com/fwlink/?LinkId=301864
        public void ConfigureAuth(IAppBuilder app)
        {
            // Enable the application to use a cookie to store information for
            app.UseApplicationSignInCookie();

            // Enable the application to use a cookie to temporarily store info
            app.UseExternalSignInCookie();

            // Uncomment the following lines to enable logging in with third pa
            //app.UseMicrosoftAccountAuthentication(
            //    clientId: "",
            //    clientSecret: "");

            app.UseTwitterAuthentication(
                consumerKey: "REDACTED",
                consumerSecret: "REDACTED");


            app.UseFacebookAuthentication(
                appId: "REDACTED",
                appSecret: "REDACTED");

            app.UseGoogleAuthentication();
        }
    }
}


```

Save the changes.


Step 4: Debug your application and move to the Login link.

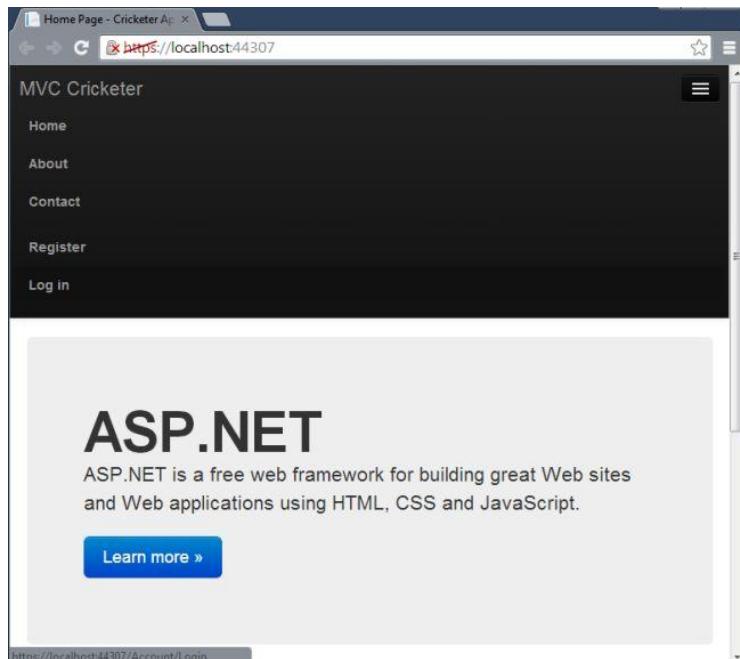


Step 5: Click on the Twitter Login option.

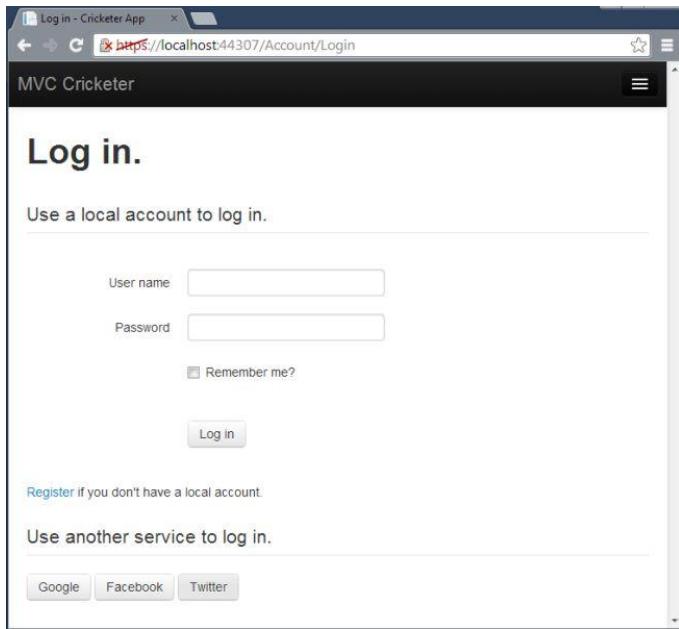


Step 6: After clicking the "Twitter" link, it'll automatically move to authenticate your app from Twitter.

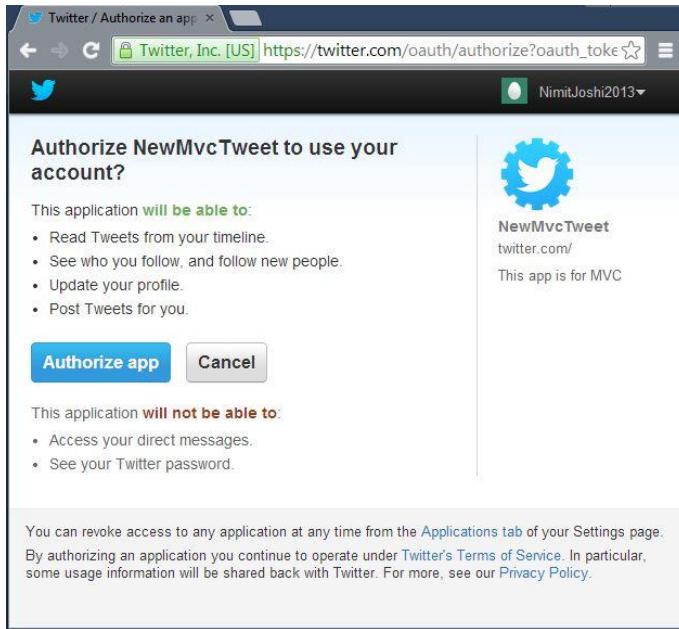


Step 7: Click on "Authorize App" and it'll redirect you back to your application.

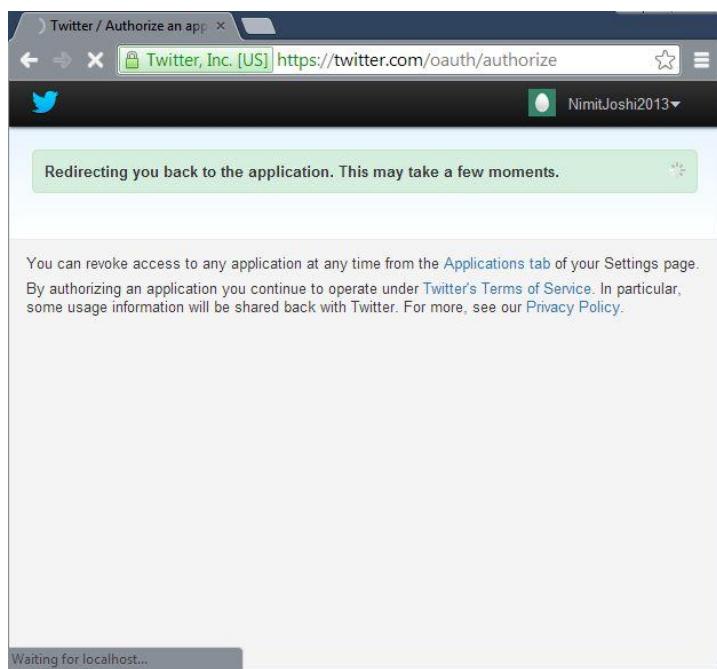


Step 8: Register yourself to associate with a Twitter account.

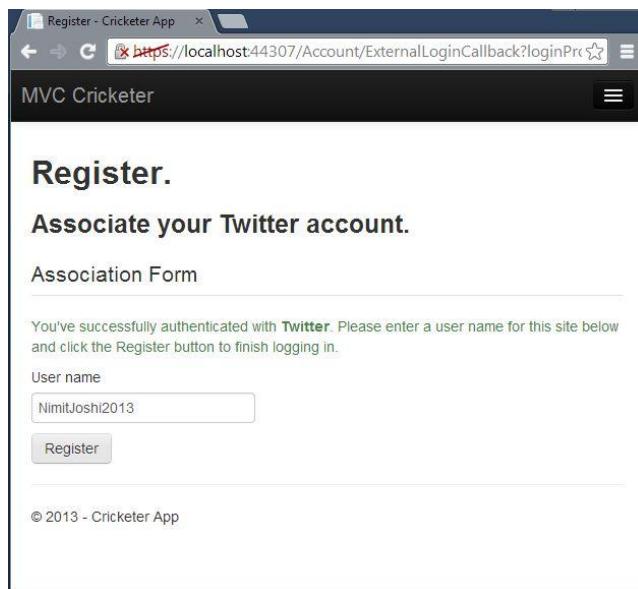

Step 9: Now, you will see your User Name in your MVC Application.

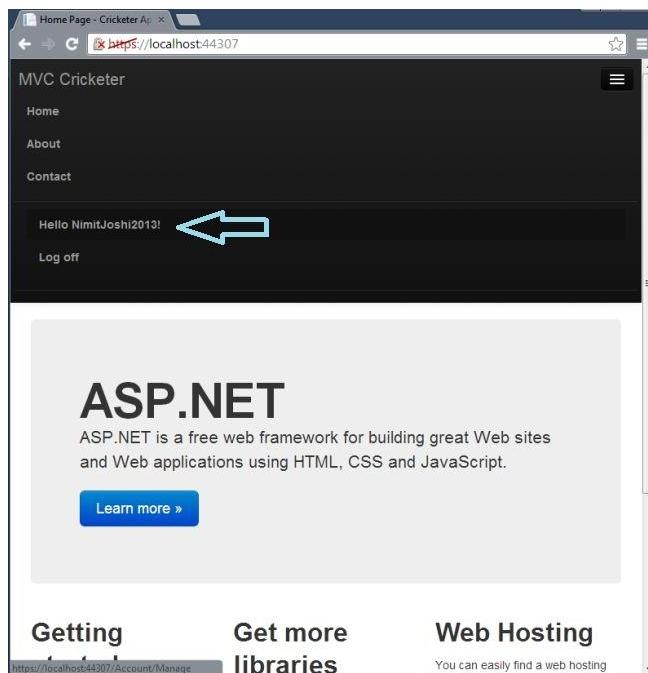

Step 10: Log yourself out.

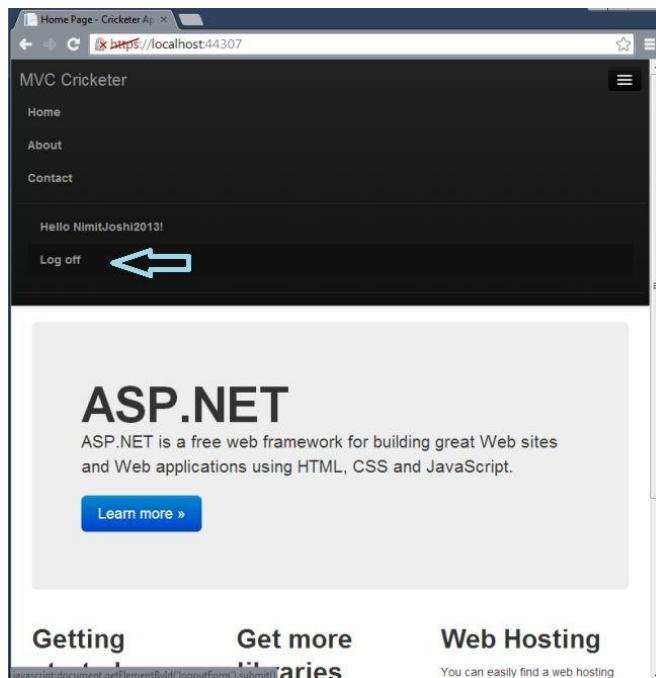

5 Entity Framework Database First Approach

5.1 Working with Existing Database

This topic describes the development of an ASP.NET Web application in a MVC 5 project template that connects with a database that exists already and allows the users to interact with the data. It is all possible using MVC, Entity Framework and Scaffolding in Visual Studio 2013. I am describing this in various parts.

In that context, I am describing here the database connectivity with the Entity Framework Database First Approach. Using Scaffolding, we can generate code for Create, Read, Update, Delete (CRUD) Operations automatically. In this part we will explain the Database composition with the web application. I am using Visual Studio 2013 RC in which MVC 5 and Entity Framework 6 is used.

Prerequisites


There are the following prerequisites to start this:

- Visual Studio 2013
- Database Source

Database Interaction


Before starting, you need to have a database with which you can interact with the web application based on MVC 5. If you don't have the database then create a database first and create some tables in that database. Now, let's start the setup of the database in the Visual Studio 2013 using the following procedure.

Step 1: Open Visual Studio 2013 and in it open the Server Explorer to add a new Data Connection.

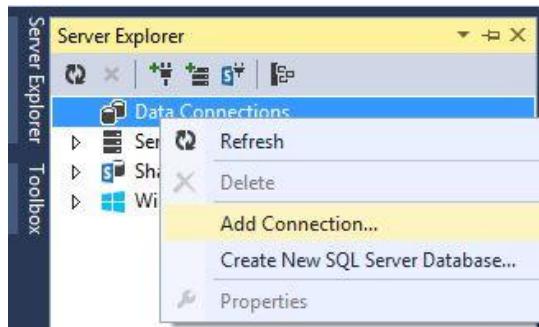


Note: If you are creating a new data connection the first time, a Choose Data Source wizard will open and you need to choose Microsoft SQL Server from that menu.

Step 2: In the next wizard enter the server name and database name as entered in the following image:

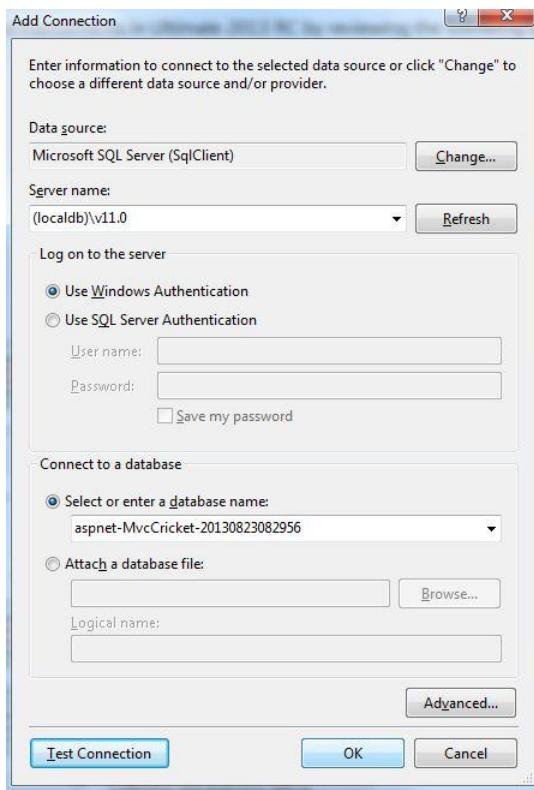

Step 3: A new data connection is added in your Server Explorer. Now right-click on your connection and click on New Query.

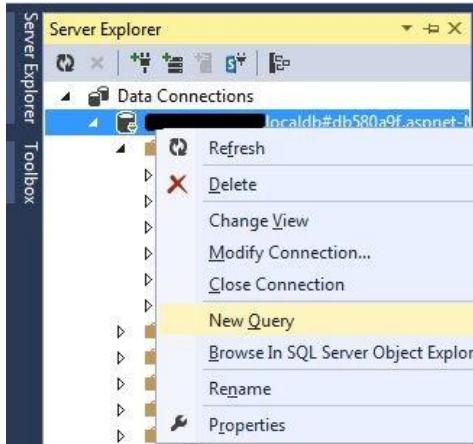

Step 4: In the New Query window, enter the following queries:

```
CREATE TABLE Cricketers
(
    ID int primary key identity (1,1),
    Name varchar(50),
    ODI int,
    Test int
)
```

```
CREATE TABLE Cricketer_ODI_Statistics
(
    ODI_ID int primary key Identity (1,1),
    Cricketer_ID int foreign key references Cricketers (ID),
    Name varchar(50),
    Half_Century int,
    Century int
)
```

```
CREATE TABLE Cricketer_Test_Statistics
(
    Test_ID int primary key Identity (1,1),
    Cricketer_ID int foreign key references Cricketers (ID),
    Name varchar(50),
    Half_Century int,
    Century int
)
```

```
CREATE TABLE Cricketer_Details
(
    Details_ID int primary key identity (1,1),
    Cricketer_ID int foreign key references Cricketers (ID),
    Team varchar(50),
    ODI_Runs int,
    Test_Runs int,
    Wickets int
)
```

```
Insert into Cricketers (Name, ODI, Test)
values ('Sachin Tendulkar', 463, 198),
('Saurav Ganguly', 311, 113),
('Rahul Dravid', 344, 164),
('Ricky Ponting', 375, 168),
('Wasim Akram', 356, 104),
('Jacques Kallis', 321, 162)
```

```
Insert into Cricketer_ODI_Statistics (Cricketer_ID, Name, Half_Century, Century)
Values (1,'Sachin Tendulkar', 96, 49 ),
(2,'Saurav Ganguly',72,22),
(3,'Rahul Dravid',83,12),
(4,'Ricky Ponting',82,30),
(5,'Wasim Akram',6,3),
(6,'Jacques Kallis',85,17)
```


```
Insert into Cricketer_Test_Statistics (Cricketer_ID, Name, Half_Century, Century)
Values (1,'Sachin Tendulkar', 67, 51),
(2,'Saurav Ganguly',35,16),
(3,'Rahul Dravid',63,36),
```

```
(4,'Ricky Ponting',62,41),
(5,'Wasim Akram',7,3),
(6,'Jacques Kallis',58,44)
```


Insert into Cricketer_Details (Cricketer_ID, Team, ODI_Runs, Test_Runs, Wickets)

```
Values (1, 'India', 18426, 15837, 199),
(2, 'India', 11363, 7212, 132),
(3, 'India', 10889, 13288, 5),
(4, 'Australia', 13704, 13378, 8),
(5, 'Pakistan', 3717, 2898, 916),
(6, 'South Africa', 11498, 13128, 558)
```

Step 5: Confirm that all tables now exist in your data connection.

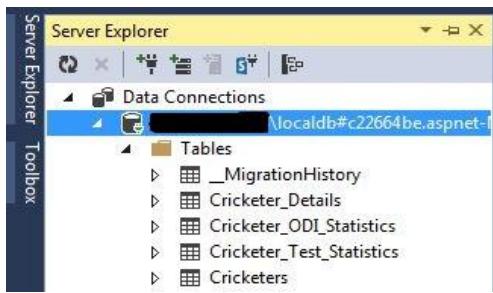

Step 6: Right-click on any table to show the table data.

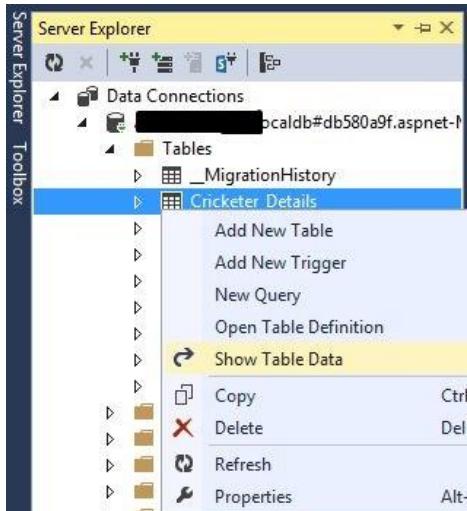

You can see your table data that can also be edited.

dbo.Cricketer_Details [Data]					
	Details_ID	Cricketer_ID	Team	ODI_Runs	Test_Runs
1	1	India	India	18426	15837
2	2	India	India	11363	7212
3	3	India	India	10889	13288
4	4	Australia	Australia	13704	13378
5	5	Pakistan	Pakistan	3717	2898
6	6	South Africa	South Africa	11498	13128
*	NULL	NULL	NULL	NULL	558
					NULL


5.2 Associating Database with Application

This topic describes the development of an ASP.NET Web application in a MVC 5 project template that connects with an existing database. I have a database with which we can create a model that supports interaction with the application and the performance of Create, Read, Update, Delete (CRUD) operations.


Web Application in MVC

Let's create an ASP.NET Web Application with the MVC 5 project template with the following procedure.


Step 1: Open Visual Studio 2013 and create a new project.

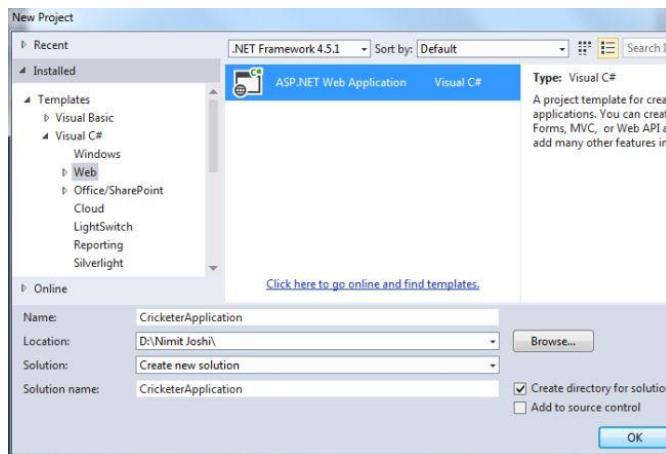


Step 2: Select MVC project template to create an application.

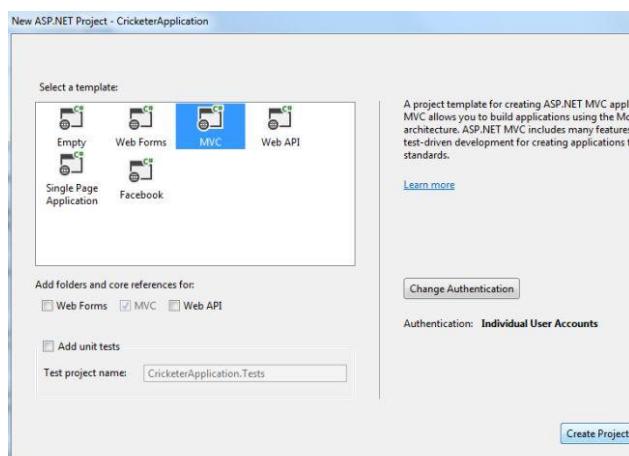


Step 3: In your Solution Explorer, right-click on your Models to add a New Item.

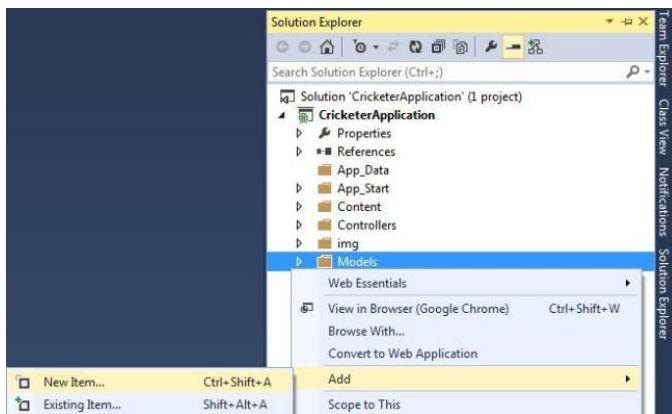


Step 4: Select ADO.NET Entity Data Model.

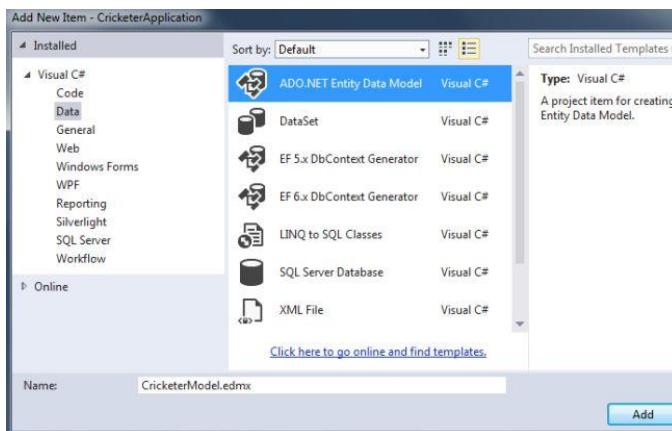


Step 5: In the next wizard, select the data connection that was created earlier. Provide also the Connection String name.

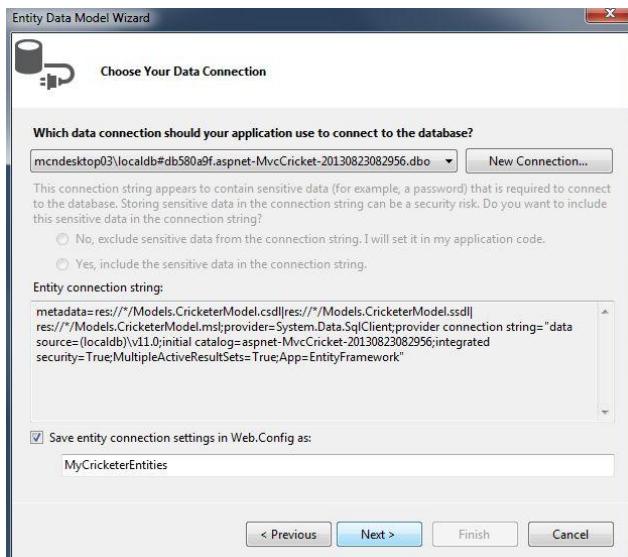


Step 6: The next wizard will help you to choose the tables.

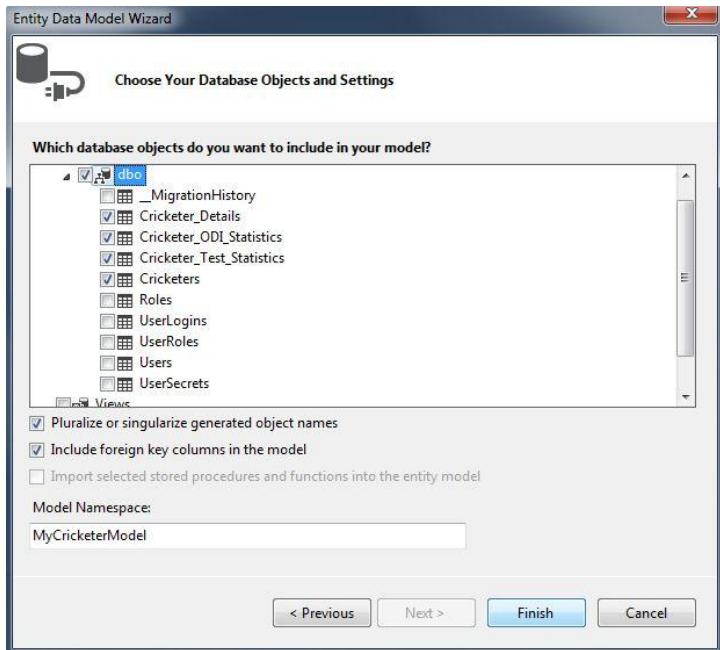

Step 7: Visual Studio automatically creates the Model and generates a view for the model.

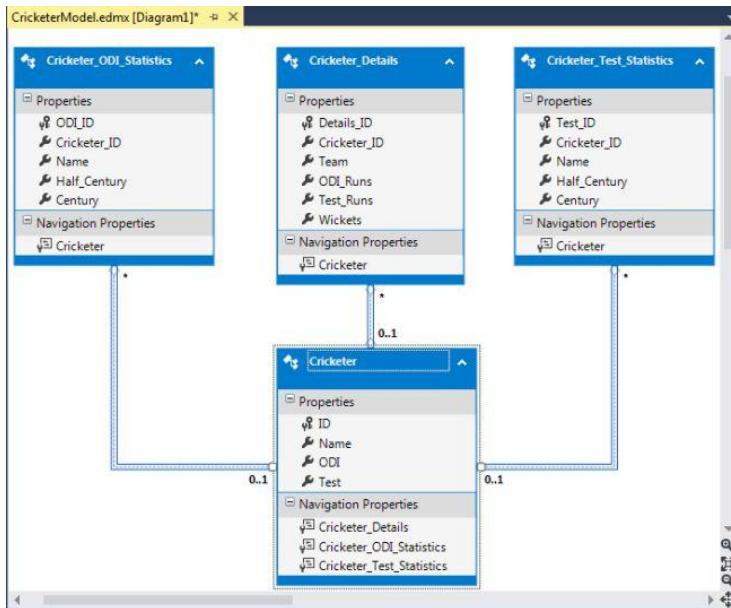

You can also see in your Solution Explorer that the CricketerModel has many new files related with the database.

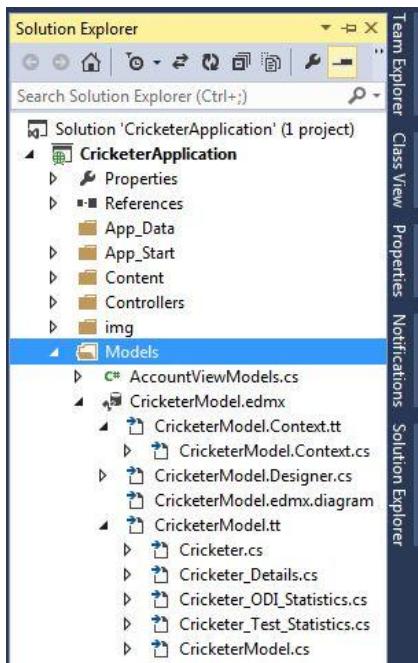


So far we have created a model, now we move to add the Controllers and Views for our Model. So Let's proceed with the following section:

- Adding Controller & View
- Working with View


Adding Controller & View

MVC 5 can create a Controller with the corresponding views using Entity Framework 6. We need to just use Scaffolding. So let's start with the following procedure.


Step 1: In your Solution Explorer, Right-click on your Controller to Scaffold

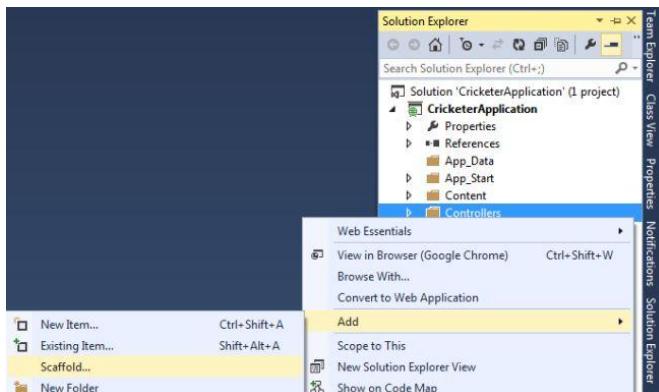

Step 2: In the next wizard, select the controller with the views option as shown below:

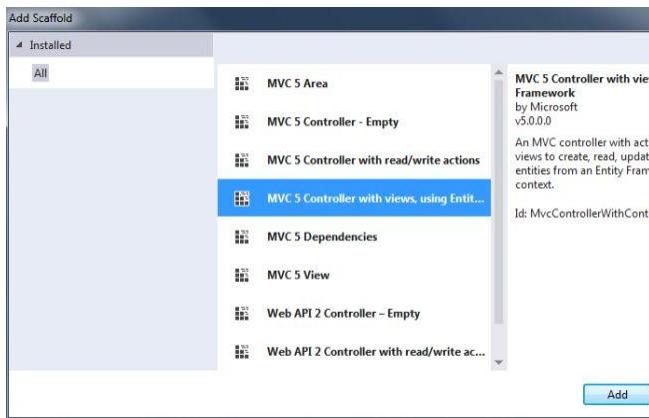


Step 3: In the next wizard enter the controller name and choose the corresponding model and the DbContext class as shown below:

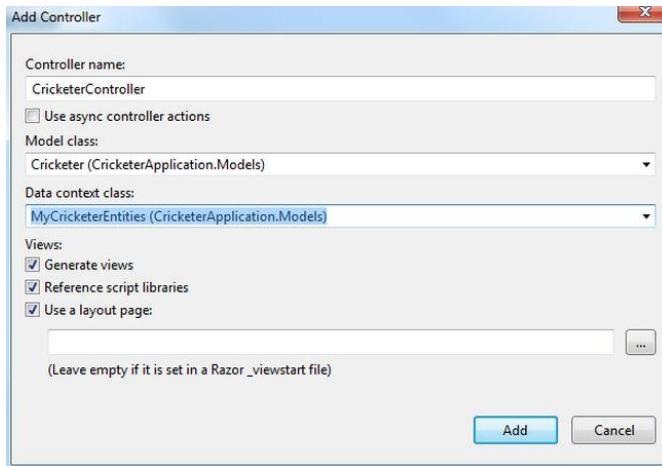


Click on Add. You might get an error, if you didn't build your project. So build your solution and again follow the step.

After adding the controller, Visual Studio automatically creates a Cricketer Controller and the corresponding Cricketer View. You can see that in the following image:

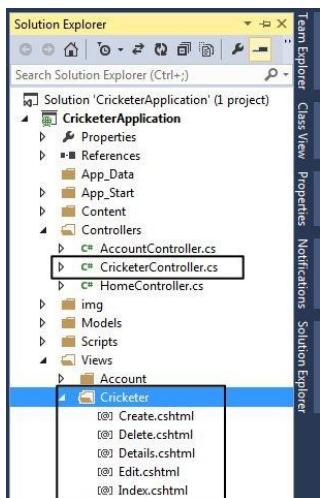

Step 4: Now, add a controller for your remaining classes, like Cricker_Details, Cricketer_ODI_Statistics, Cricketer_Test_Statistics by performing the same steps as above. You can see all controller and corresponding views in the following image:

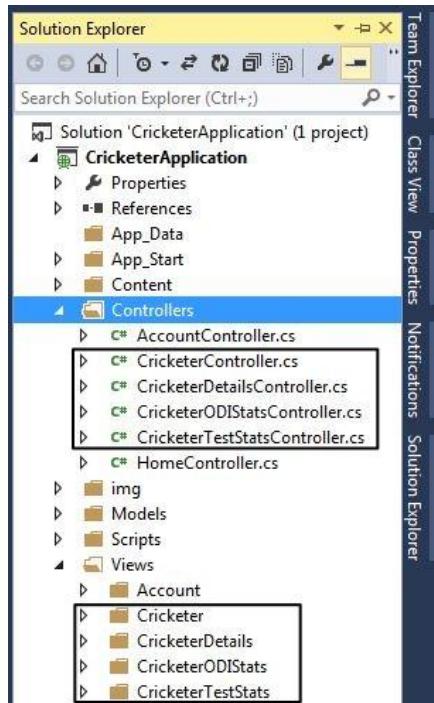

Working with View


Now your controller and view are ready. You can create and view all your data (added in the database) in the browser. To work with them use the following procedure.

Create and Read Operations


- **Cricketer**

Let's add some Cricketer with the following procedure:


Step 1: To work with the Cricketer, select the Index.cshtml in the Cricketer view and open it in the browser

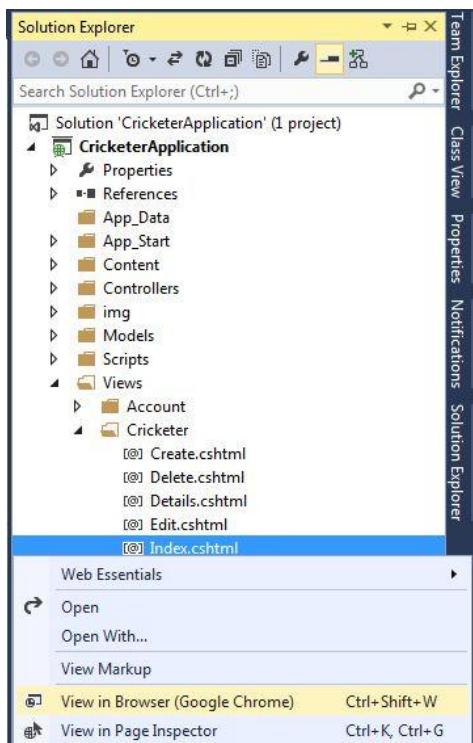

Step 2: Click on Create New. Enter some new cricketers.

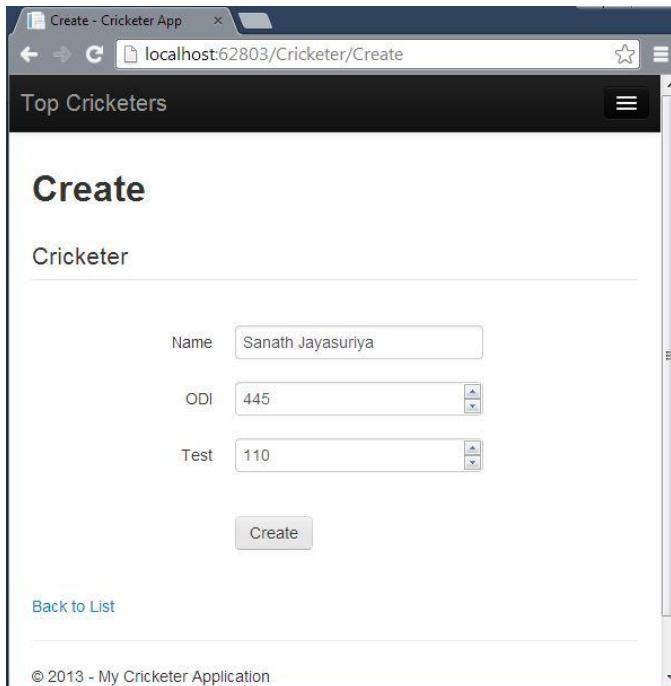

Step 3: You can see your Cricketer as shown below:

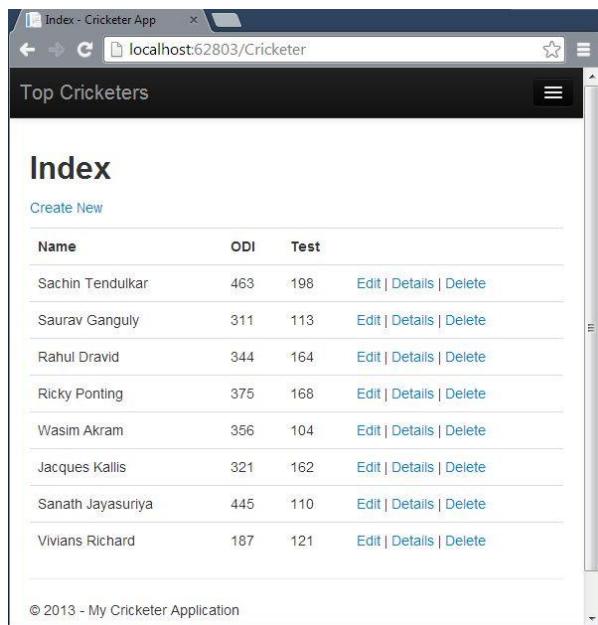

The screenshot shows a web browser window titled "Index - Cricketer App" with the URL "localhost:62803/Cricketer". The page has a header "Top Cricketers" and a section titled "Index". It contains a table with the following data:

Name	ODI	Test
Sachin Tendulkar	463	198
Saurav Ganguly	311	113
Rahul Dravid	344	164
Ricky Ponting	375	168
Wasim Akram	356	104
Jacques Kallis	321	162
Sanath Jayasuriya	445	110
Vivians Richard	187	121


At the bottom, there is a copyright notice: "© 2013 - My Cricketer Application".

- **Cricketer Details**

Add some Cricketer Details with the following procedure.

Step 1: Open Index.cshtml of the CricketerDetails view.

Step 2: Add the details for the new cricketers.

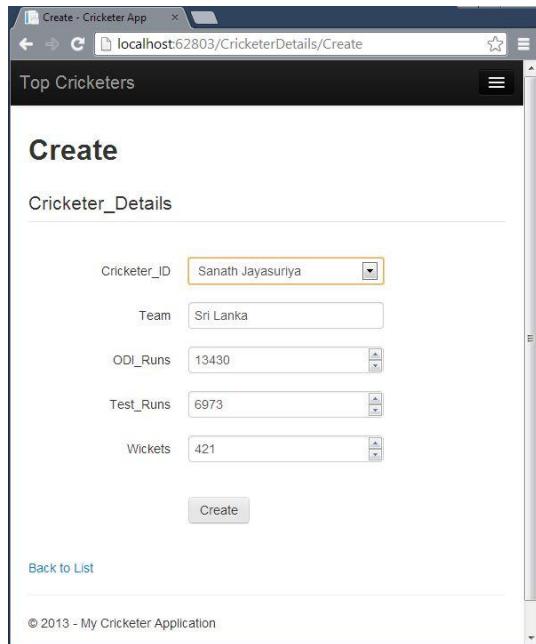


The screenshot shows a web browser window titled "Create - Cricketer App" with the URL "localhost:62803/CricketerDetails/Create". The page has a header "Top Cricketers" and a section titled "Create". It contains a form for "Cricketer_Details" with the following fields:

Cricketer_ID	Sanath Jayasuriya
Team	Sri Lanka
ODI_Runs	13430
Test_Runs	6973
Wickets	421

Below the form is a "Create" button and a "Back to List" link. At the bottom, there is a copyright notice: "© 2013 - My Cricketer Application".

Step 3: You can see the added details as shown below:

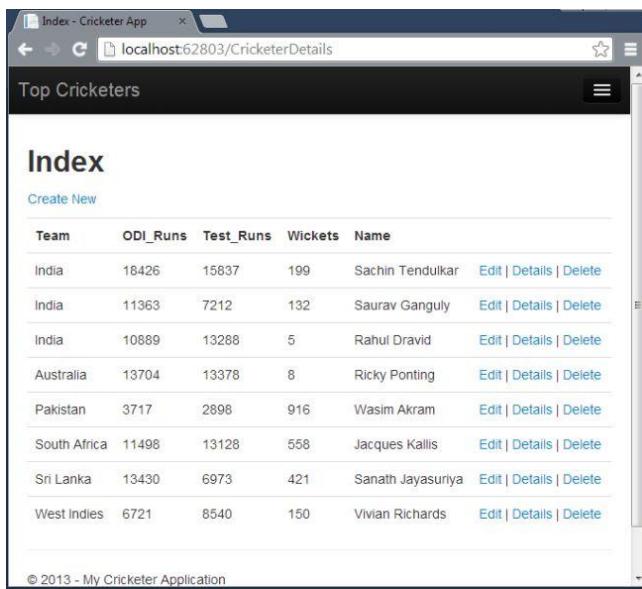

Team	ODI_Runs	Test_Runs	Wickets	Name	
India	16426	15837	199	Sachin Tendulkar	Edit Details Delete
India	11363	7212	132	Saurav Ganguly	Edit Details Delete
India	10889	13288	5	Rahul Dravid	Edit Details Delete
Australia	13704	13378	8	Ricky Ponting	Edit Details Delete
Pakistan	3717	2898	916	Wasim Akram	Edit Details Delete
South Africa	11498	13128	558	Jacques Kallis	Edit Details Delete
Sri Lanka	13430	6973	421	Sanath Jayasuriya	Edit Details Delete
West Indies	6721	8540	150	Vivian Richards	Edit Details Delete

© 2013 - My Cricketer Application

Note: Perform the same steps for the remaining views to create the cricketer details and information.


In the preceding steps you have performed Create and Read operations. Now let's do Edit and Delete operations.

Edit & Delete Operations

- **Edit**

To edit or update the information use the following procedure.


Step 1: Click on Edit on which you need to edit the information

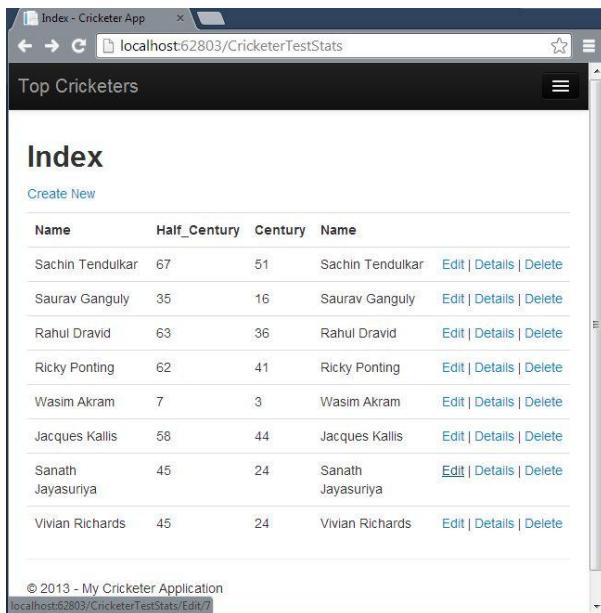

Name	Half_Century	Century	Name	
Sachin Tendulkar	67	51	Sachin Tendulkar	Edit Details Delete
Saurav Ganguly	35	16	Saurav Ganguly	Edit Details Delete
Rahul Dravid	63	36	Rahul Dravid	Edit Details Delete
Ricky Ponting	62	41	Ricky Ponting	Edit Details Delete
Wasim Akram	7	3	Wasim Akram	Edit Details Delete
Jacques Kallis	58	44	Jacques Kallis	Edit Details Delete
Sanath Jayasuriya	45	24	Sanath Jayasuriya	Edit Details Delete
Vivian Richards	45	24	Vivian Richards	Edit Details Delete

© 2013 - My Cricketer Application
localhost:62803/CricketerTestStats/Edit/7

Step 2: Edit the information

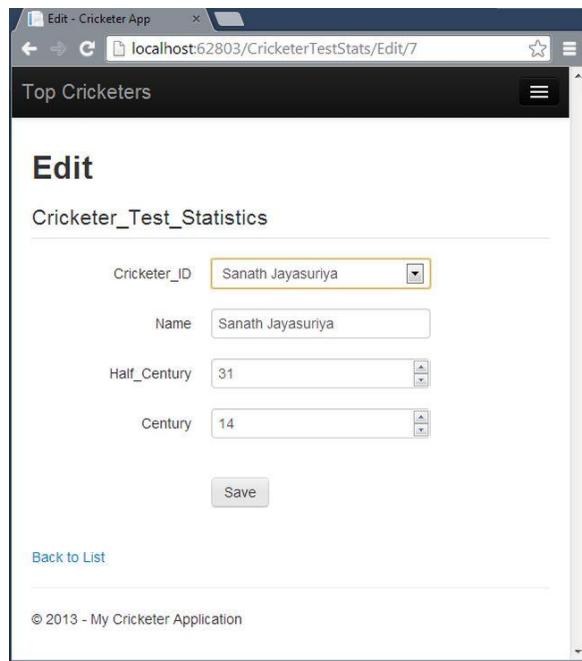

The screenshot shows a web browser window titled "Edit - Cricketer App" with the URL "localhost:62803/CricketerTestStats/Edit/7". The page has a header "Top Cricketers" and a title "Edit". Below it is a section titled "Cricketer_Test_Statistics" containing the following fields:


Cricketer_ID	Sanath Jayasuriya
Name	Sanath Jayasuriya
Half_Century	31
Century	14

At the bottom are "Save" and "Back to List" buttons, and a copyright notice "© 2013 - My Cricketer Application".

- **Delete**

To delete the information use the following procedure.


Step 1: Click on Delete on which you need to delete the cricketer.

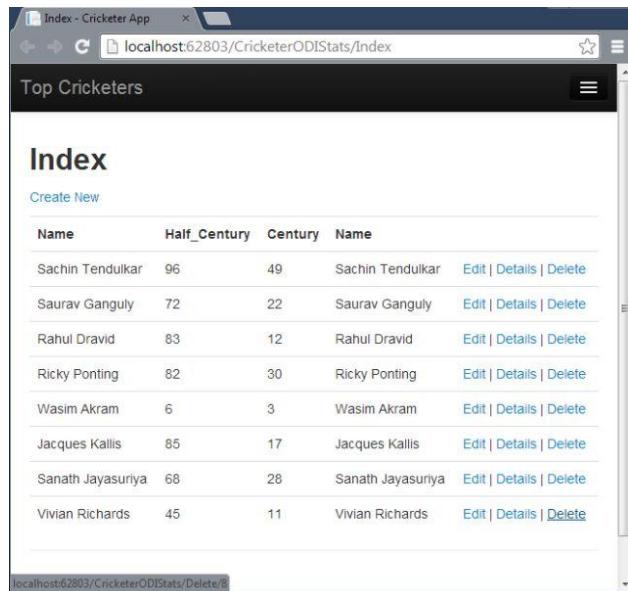

The screenshot shows a web browser window titled "Index - Cricketer App" with the URL "localhost:62803/CricketerODISStats/Index". The page has a header "Top Cricketers" and a title "Index". It contains a table with the following data:

Name	Half_Century	Century	Name	Action
Sachin Tendulkar	96	49	Sachin Tendulkar	Edit Details Delete
Saurav Ganguly	72	22	Saurav Ganguly	Edit Details Delete
Rahul Dravid	83	12	Rahul Dravid	Edit Details Delete
Ricky Ponting	82	30	Ricky Ponting	Edit Details Delete
Wasim Akram	6	3	Wasim Akram	Edit Details Delete
Jacques Kallis	85	17	Jacques Kallis	Edit Details Delete
Sanath Jayasuriya	68	28	Sanath Jayasuriya	Edit Details Delete
Vivian Richards	45	11	Vivian Richards	Edit Details Delete

Step 2: Choose Yes if you want to delete it permanently.

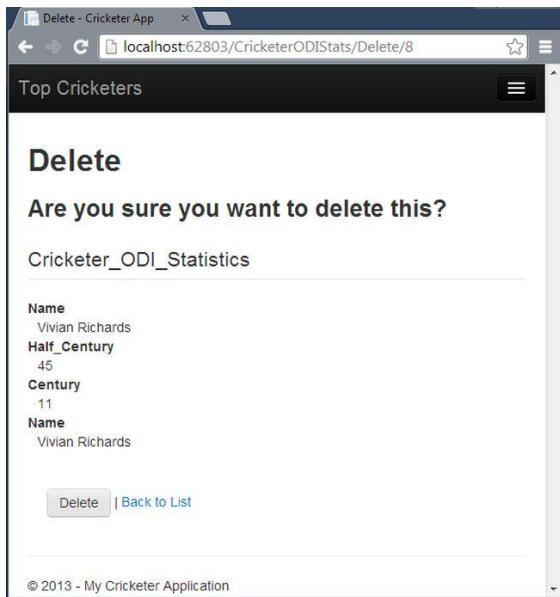

5.3 Application Modification and Validation

In this part I will make some changes in my database and enhance my web application to interact with the database. This is the third part of the Database First Approach in MVC 5 series that follows Part 1 and Part 2.


In that context, I have divided this part into the following 3 sections:

- Database and Application Modification
- Data Annotation
- View Enhancement

Database and Application Modification

In this section we will add another field in the database table and generate the field in the web application. To generate the added field in the web application, we need to do some changes in our web application. We will see it later. So, let's start with the following procedure.


Step 1: Open the New Query wizard from your Data Connection in the Server Explorer.

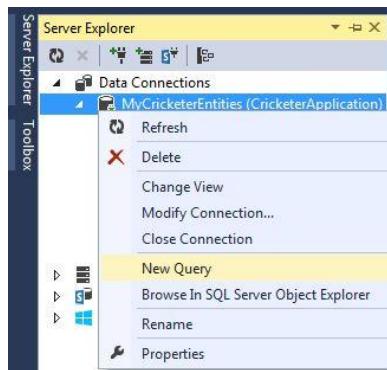

Step 2: Enter the following command:


```
ALTER TABLE Cricketers
ADD Grade varchar(5)
```

Step 3: Execute the command and check out the changes in the table.

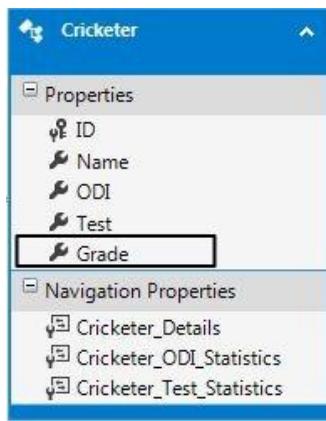


Now, you have added the new field in the database. This new field will not be present in your model in the application, you must improve your model for this new added field. Use the following procedure for that.

Step 4: Select your *Cricketers* Model from the *CricketerModel.edmx* file. Now, right-click on your workspace and select "Update Model from Database".

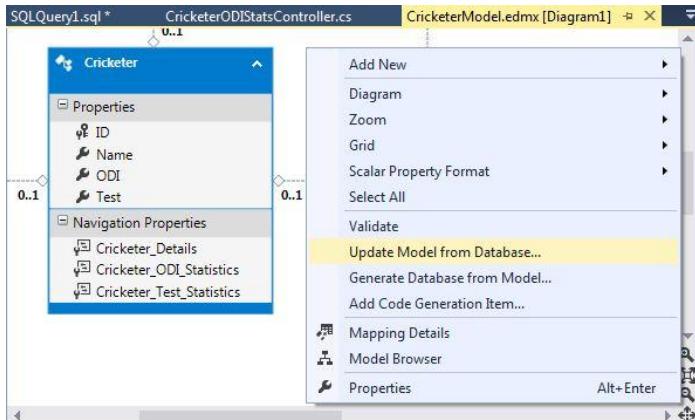


You can see that the Grade field is not present.

Step 5: In the next wizard, click on the Refresh Tab and select your table.

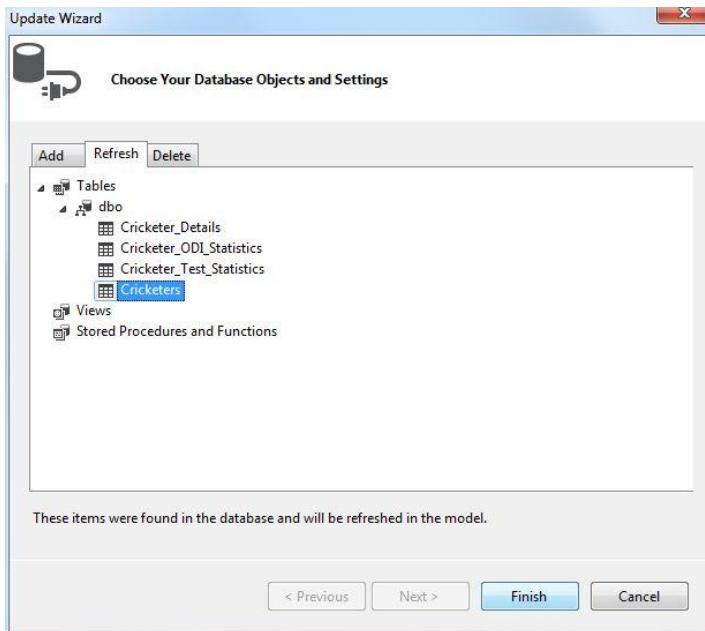


Step 6: The new field added in the *CricketerModel*.

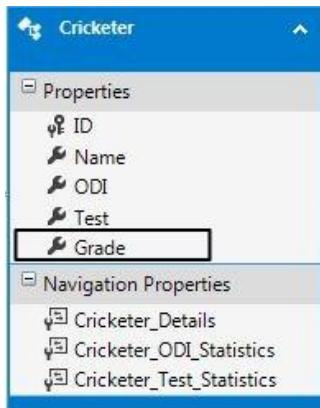


Step 4: Save the file and build your solution.

You have successfully updated your field in the model, but this new field is not present in the corresponding view. There are two options for updating the view; either Re-Scaffolding or Manually adding the property in the view. I am here using Re-Scaffolding.

Step 5: Remove the Cricketer from the View.

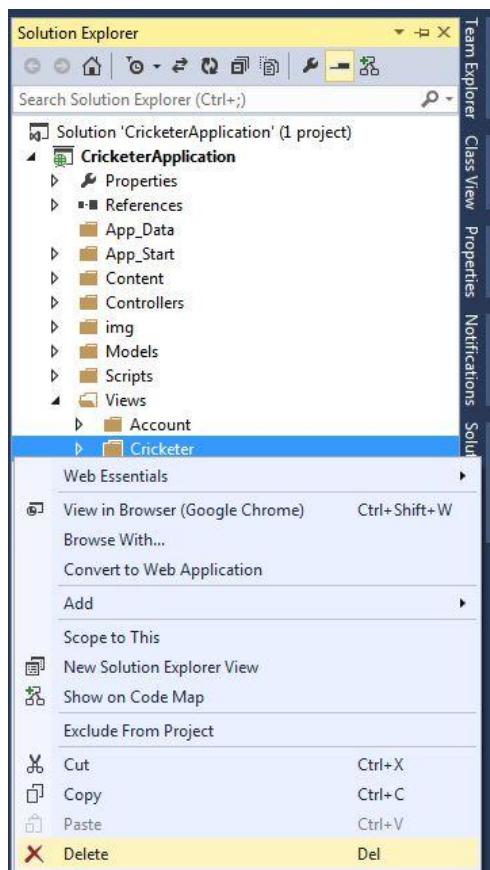


Step 6: Add Scaffold again from the Controller folder named *CricketerController*. Click OK for replacing the existing file.

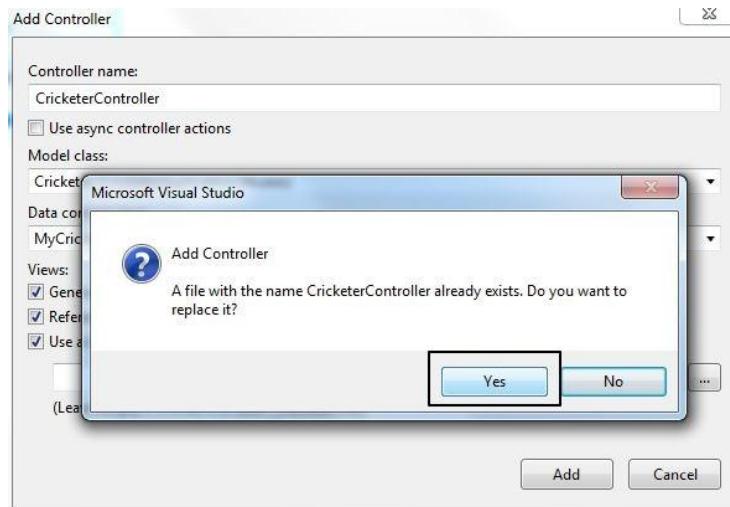

Visual Studio automatically replaces the existing file with the new *CricketerController*. It also creates the Cricketer folder in the View folder.

Step 7: Open the *Index.cshtml* file in the browser. Click on "Create New" to enter details.

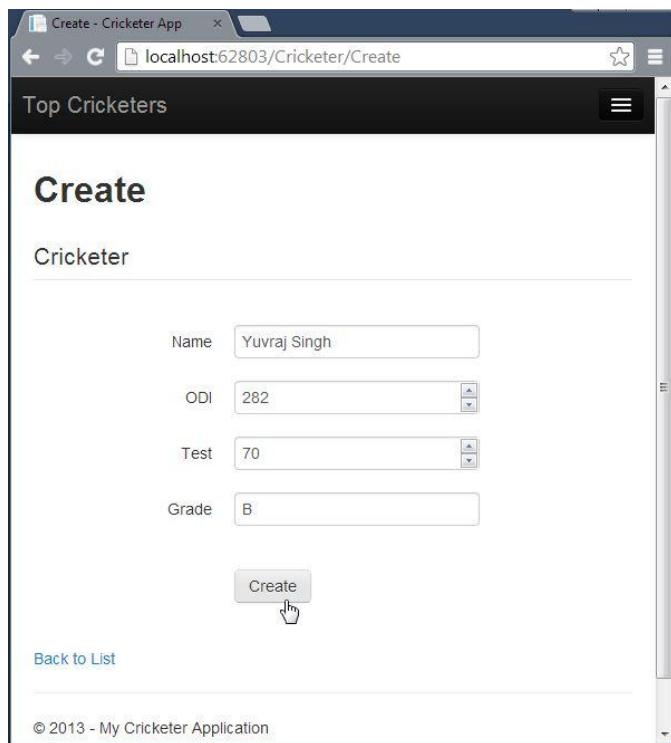

The screenshot shows a web application titled "Create - Cricketer App" at the URL "localhost:62803/Cricketer/Create". The page is titled "Top Cricketers" and has a "Create" section for a "Cricketer". The form contains four fields: "Name" (Yuvraj Singh), "ODI" (282), "Test" (70), and "Grade" (B). Below the form is a "Create" button with a cursor hovering over it. At the bottom left is a "Back to List" link, and at the bottom center is a copyright notice: "© 2013 - My Cricketer Application".

Data Annotation

In this section we apply the validations rules using Data Annotation. This is to be applied to the specific property. Use the following procedure.

Step 1: Open the Cricketer.cs file from the Model folder in Solution Explorer and modify your code with the following code:

```
namespace CricketerApplication.Models
{
    using System;
    using System.Collections.Generic;
    using System.ComponentModel.DataAnnotations;

    public partial class Cricketer
    {
        public Cricketer()
        {
            this.Cricketer_Details = new HashSet<Cricketer_Details>();
            this.Cricketer_ODI_Statistics = new HashSet<Cricketer_ODI_Statistics>();
            this.Cricketer_Test_Statistics = new HashSet<Cricketer_Test_Statistics>();
        }

        public int ID { get; set; }

        [Required]
        [StringLength(50, MinimumLength = 4)]
```

```

public string Name { get; set; }

[Required]
[Range(1, 500)]
public Nullable<int> ODI { get; set; }


[Required]
[Range(1, 500)]
public Nullable<int> Test { get; set; }

[Required]
public string Grade { get; set; }

public virtual ICollection<Cricketer_Details> Cricketer_Details { get; set; }
public virtual ICollection<Cricketer_ODI_Statistics> Cricketer_ODI_Statistics { get; set; }
public virtual ICollection<Cricketer_Test_Statistics> Cricketer_Test_Statistics { get; set; }
}
}
}

```

Step 2: Build your solution. Browse the page and see the validation as shown below:

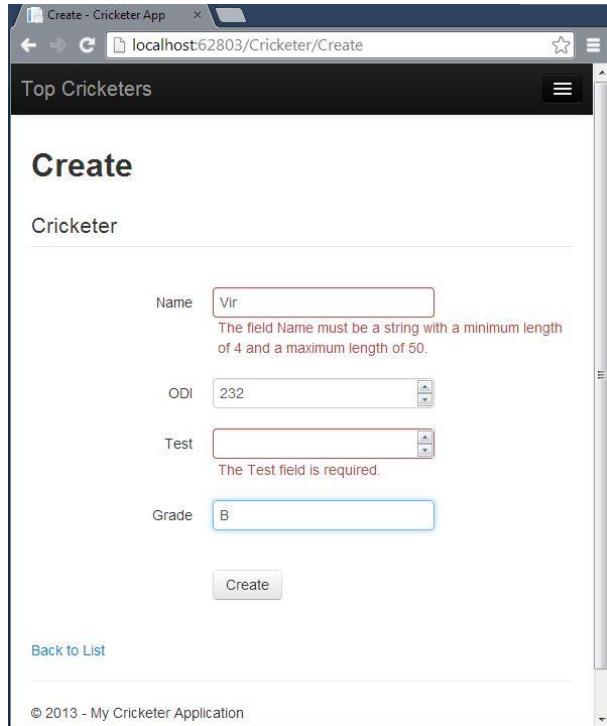

The screenshot shows a browser window titled "Create - Cricketer App" with the URL "localhost:62803/Cricketer/Create". The page is titled "Top Cricketers" and has a "Create" section. The "Cricketer" form contains four fields: "Name" (with value "Vir"), "ODI" (with value "232"), "Test" (empty), and "Grade" (with value "B"). Validation messages are displayed: "The field Name must be a string with a minimum length of 4 and a maximum length of 50." for the Name field, and "The Test field is required." for the Test field. A "Create" button is at the bottom of the form.

View Enhancement

We are watching the view that was created automatically by Visual Studio. Now let's make some changes to enhance the view depending on our condition. Suppose we want to see the Cricketer Details in the Cricketer page, then we need to do some changes in our application. Start with the following procedure.

Step 1: Open the *Cricketer/Details.cshtml* file. Add the following code before the *</fieldset>* and below the *</dl>* tag:


```

<table class="table">
<tr>
    <th>Team</th>
    <th>Odi Runs</th>
    <th>Test Runs</th>
    <th>Wickets</th>
</tr>

@foreach (var item in Model.Cricketer_Details)
{
    <tr>
        <td>
            @Html.DisplayFor(ModelItem => item.Team)
        </td>
        <td>
            @Html.DisplayFor(ModelItem => item.ODI_Runs)
        </td>
        <td>
            @Html.DisplayFor(ModelItem => item.Test_Runs)
        </td>
        <td>
            @Html.DisplayFor(ModelItem => item.Wickets)
        </td>
    </tr>
}
</table>

```

Step 2: Build the solution and Open the *Index.cshtml* file in the browser and click on the Details link of any Cricketer.

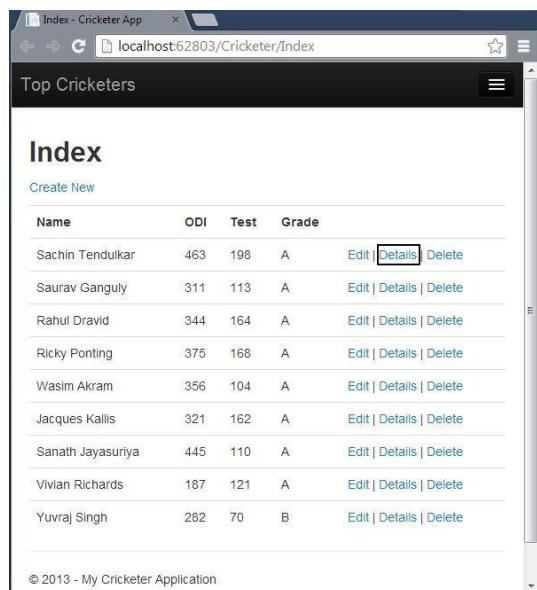

Name	ODI	Test	Grade	
Sachin Tendulkar	463	198	A	Edit Details Delete
Saurav Ganguly	311	113	A	Edit Details Delete
Rahul Dravid	344	164	A	Edit Details Delete
Ricky Ponting	375	168	A	Edit Details Delete
Wasim Akram	356	104	A	Edit Details Delete
Jacques Kallis	321	162	A	Edit Details Delete
Sanath Jayasuriya	445	110	A	Edit Details Delete
Vivian Richards	187	121	A	Edit Details Delete
Yuvraj Singh	282	70	B	Edit Details Delete

© 2013 - My Cricketer Application

Click on Details.

117



The screenshot shows a web application titled "Top Cricketers". The current page is "Details" for a cricketer. The details listed are:

- Name: Sachin Tendulkar
- ODI:
 - 463
- Test:
 - 198
- Grade:
 - A

A table below shows career statistics:

Team	Odi Runs	Test Runs	Wickets
India	18426	15837	199

At the bottom of the page are links "Edit" and "Back to List".

6. IIS Hosting and Publishing of Application

This part explains how to host your MVC 5 App in IIS Express and store the data and information in the database created in SQL Server. Visual Studio uses the ASP.NET Development Server as a default and here I am using IIS Server to host a MVC 5 App. As you know, in Visual Studio 2013 Preview the ASP.NET Web Application uses a MVC5 project template **and** MVC5 uses the Bootstrap theme to display the application, so here I am using the Visual Studio 2013 Preview to develop an application using the MVC project template.

Prerequisites


The following are the prerequisites to develop a MVC 5 application:

- Visual Studio 2013 Preview
- SQL Server 2008 or 2012


Creating MVC 5 Application

Let's start to develop an application in MVC 5 using the following procedure.


Step 1: Open Visual Studio 2013 Preview

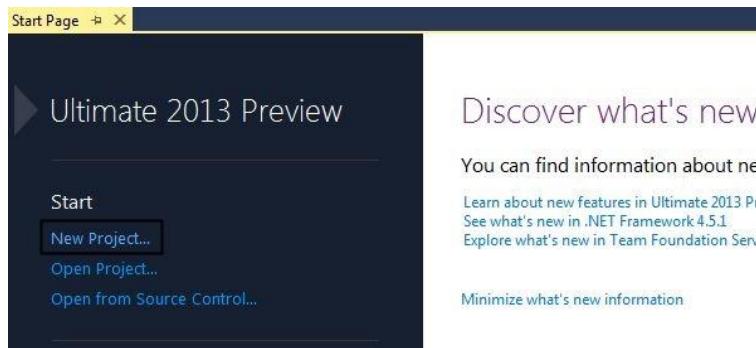

Step 2: Click on "New Project" and enter the application name.

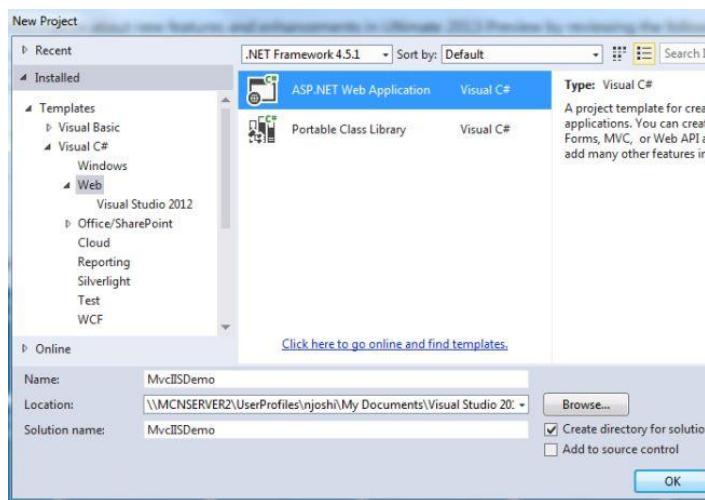

Step 3: Select MVC project template to create the project.

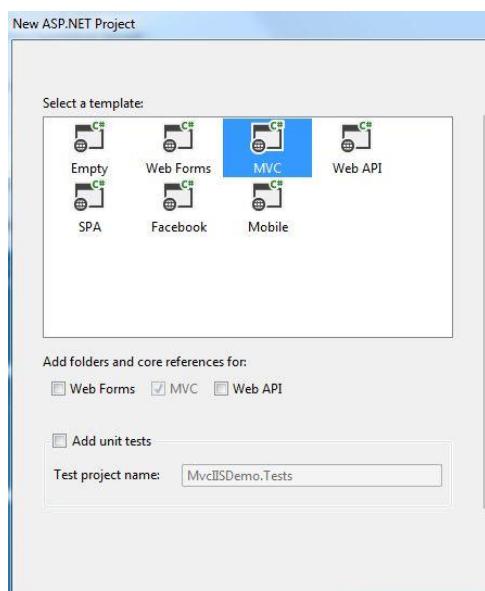


Step 4: In your Solution Explorer, open the Web.Config file.

As you can see, the connection property is available on my file:

```
<add name="DefaultConnection"
      connectionString="Data Source=(LocalDb)\v11.0;AttachDbFilename=|DataDirectory|\aspnet-MvcIISDemo-
20130911053147.mdf;Initial Catalog=aspnet-MvcIISDemo-20130911053147;Integrated Security=True"
      providerName="System.Data.SqlClient" />
```


Now, change the code above as shown below:

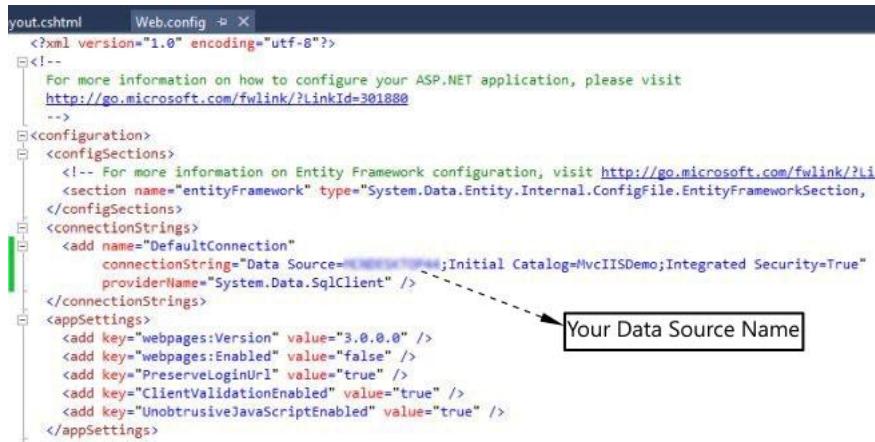


```
Web.config
<?xml version="1.0" encoding="utf-8"?>
<!--
  For more information on how to configure your ASP.NET application, please visit
  http://go.microsoft.com/fwlink/?LinkId=301880
-->
<configuration>
  <configSections>
    <!-- For more information on Entity Framework configuration, visit http://go.microsoft.com/fwlink/?Li
    <section name="entityFramework" type="System.Data.Entity.Internal.ConfigFile.EntityFrameworkSection,
  </configSections>
  <connectionStrings>
    <add name="DefaultConnection"
          connectionString="Data Source=Your Data Source Name;Initial Catalog=MvcIISDemo;Integrated Security=True"
          providerName="System.Data.SqlClient" />
  </connectionStrings>
  <appSettings>
    <add key="webpages:Version" value="3.0.0.0" />
    <add key="webpages:Enabled" value="false" />
    <add key="PreserveLoginUrl" value="true" />
    <add key="ClientValidationEnabled" value="true" />
    <add key="UnobtrusiveJavaScriptEnabled" value="true" />
  </appSettings>

```

Step 5: Debug your application and click on the "Register Link" as shown below:

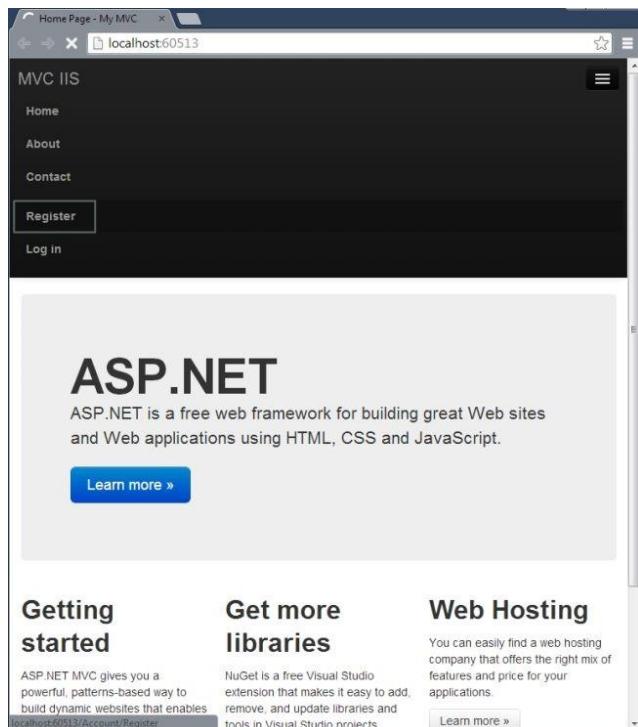

Step 6: Enter the details and click on the "Register" button.

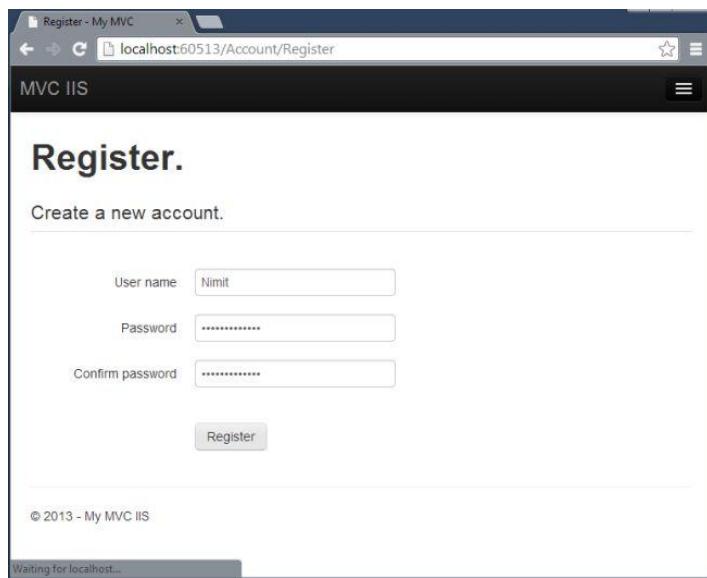

Register - My MVC

localhost:60513/Account/Register

MVC IIS

Register.

Create a new account.

User name:


Password:

Confirm password:

© 2013 - My MVC IIS

Waiting for localhost...

You will see your UserName in your next page window:

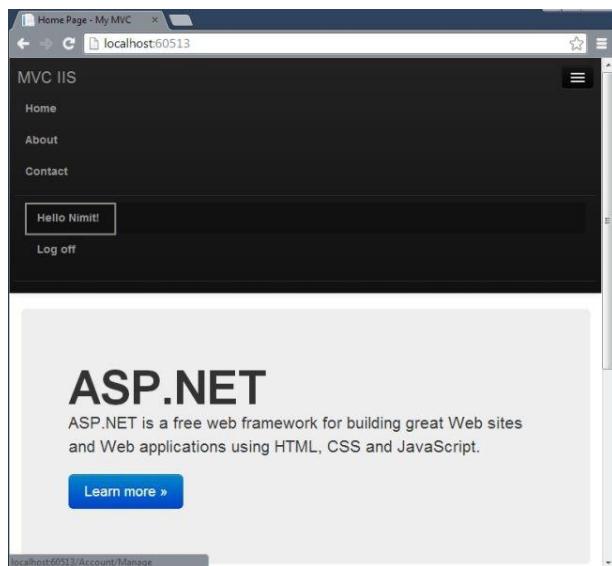

Home Page - My MVC

localhost:60513

MVC IIS

Home

About

Contact

Hello Nimit!

Log off

ASP.NET

ASP.NET is a free web framework for building great Web sites and Web applications using HTML, CSS and JavaScript.


[Learn more »](#)

localhost:60513/Account/Manage

Verify in SQL Server 2012

As you can see, I did not create a database nor any table in my SQL Server 2012. When I declared my connection string, it automatically created a database and table in my SQL Server. You do not need to worry about that.

Let's see my database in my SQL Server Object Explorer.

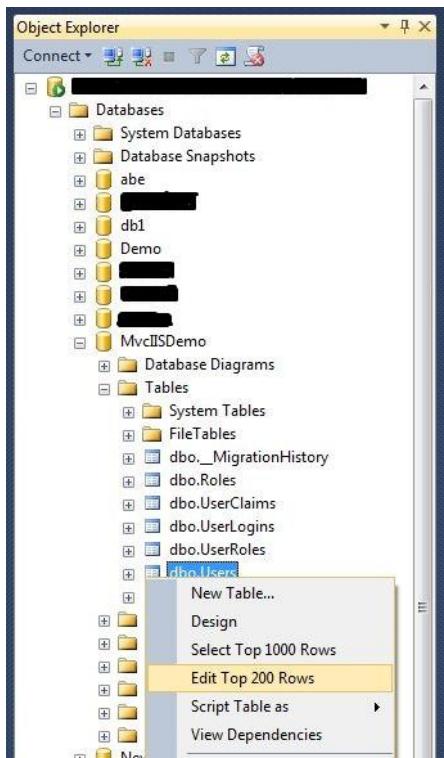


Select your database and open the Users Table. You can see the user information as shown below:

	Id	UserName
▶	059b5229-3148-467c-80d4-5ba846039517	Nimit
*	NULL	NULL


Publish Application

The next step is to host in IIS 8 (IIS Express). For that use the following procedure:


Step 1: In your Solution Explorer select your project and right-click to select Publish.

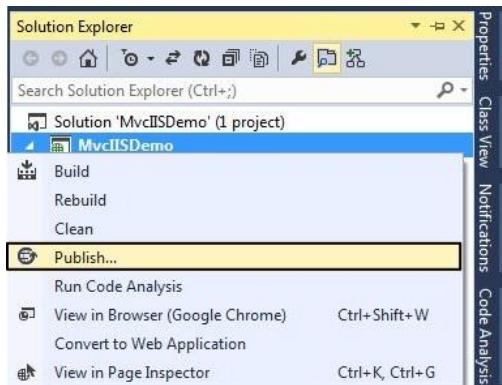


Step 2: Select NewProfile and click Next as shown below:

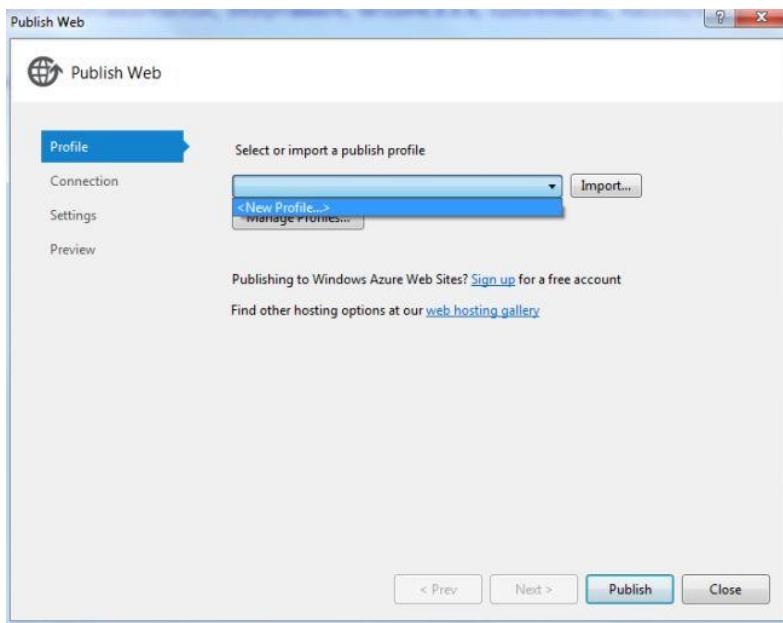


Step 3: Enter Profile Name and click OK.

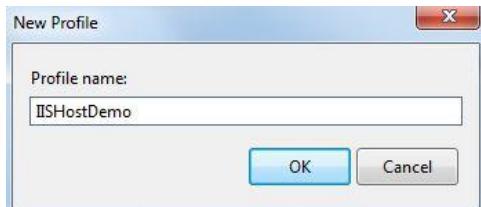


Step 4: Select File System in Publish Method and select your preferred location in the Target Folder.

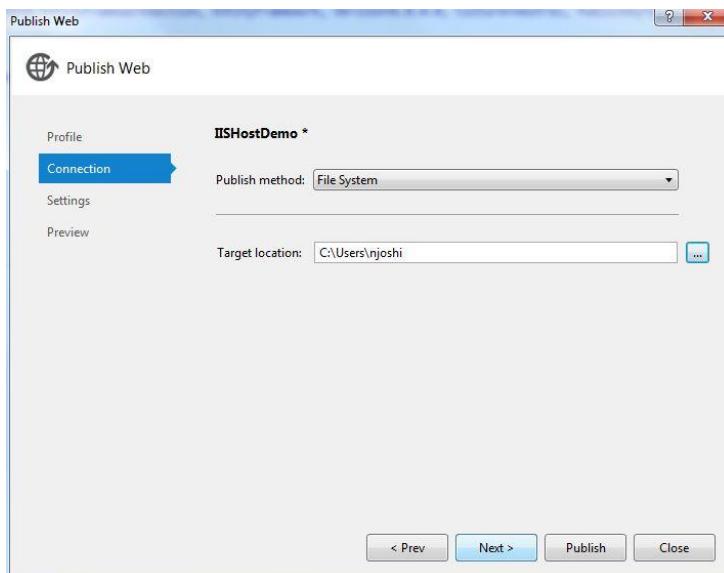


Step 5: Select Release in Configuration in the next window and click "Next".

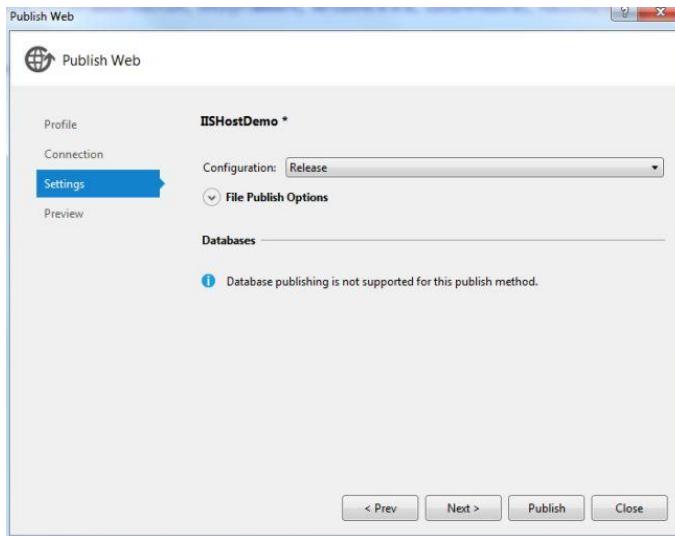

Step 6: Click on "Publish" in the next wizard.

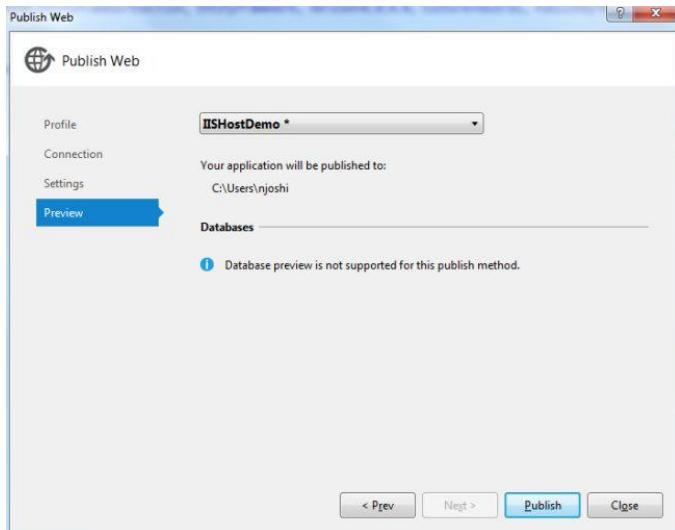


You will see that the application will publish successfully.

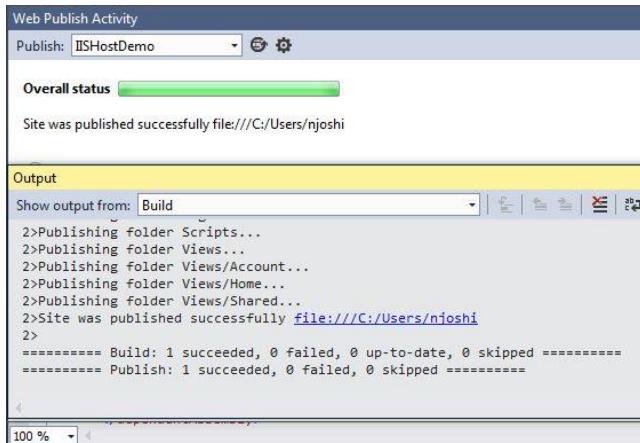


Open the Internet Information Services (IIS) Manager and follow the procedure given below.

Step 1: Select your Profile in the Default Site.

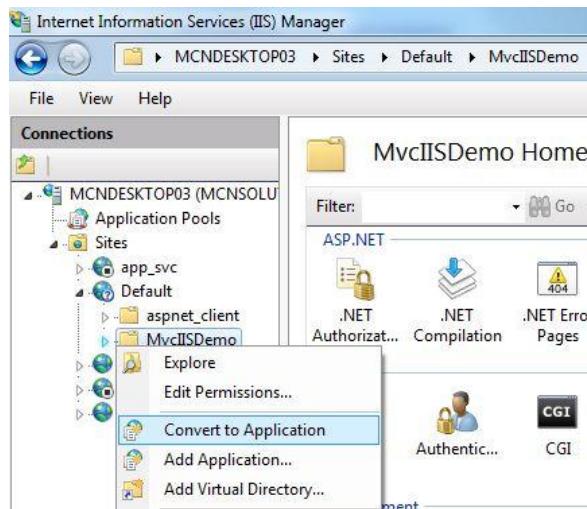


Step 2: Just click "OK" in the next Add Application wizard.

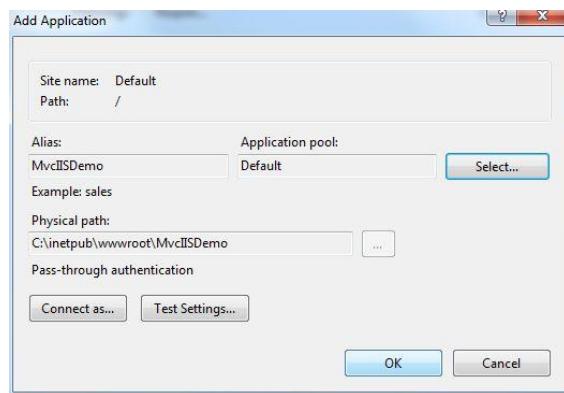


Step 3: Ensure your Default Site Status is Started in Application Pools.

Name	Status	.NET Fram...	Managed Pipel...	Identity	Applications
app_svc	Stopped	v4.0	Integrated	ApplicationPoolId...	1
ASP.NET v4.0	Stopped	v4.0	Integrated	ApplicationPoolId...	0
ASP.NET v4.0 Cl...	Stopped	v4.0	Classic	ApplicationPoolId...	0
Default	Started	v4.0	Classic	ApplicationPoolId...	2
DefaultAppPool	Stopped	v4.0	Integrated	ApplicationPoolId...	0
File	Stopped	v4.0	Integrated	ApplicationPoolId...	0
MVCApp	Started	v4.0	Integrated	ApplicationPoolId...	0
Test	Stopped	v4.0	Integrated	ApplicationPoolId...	0
Testing	Stopped	v4.0	Integrated	ApplicationPoolId...	1
Testing1	Stopped	v4.0	Integrated	ApplicationPoolId...	1
UploadApplicati...	Stopped	v4.0	Integrated	ApplicationPoolId...	1

Step 4: Right-click your Profile in the Select Browse in Manage Application.

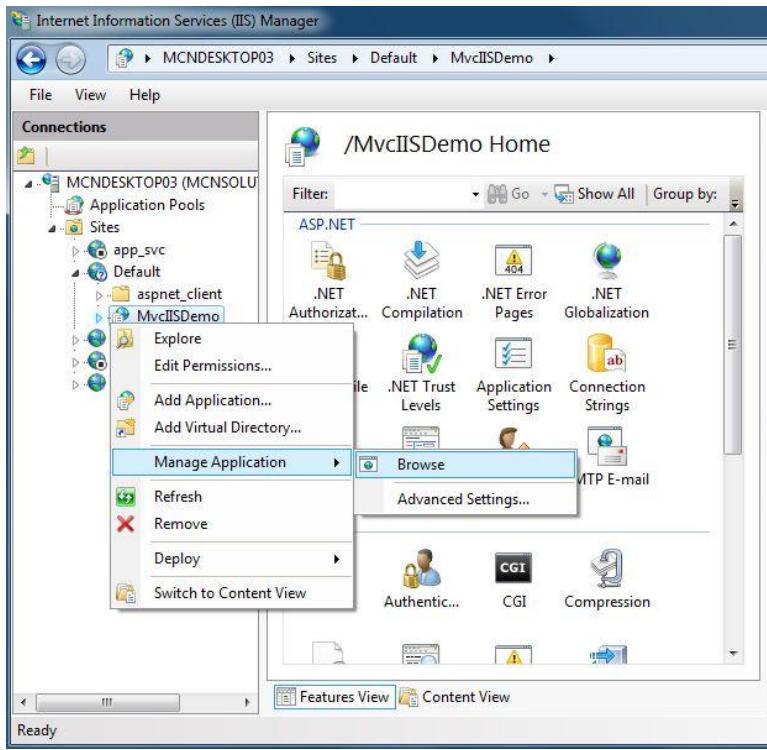


Step 5: You will see an error such as "This Operation requires IIS integrated pipeline mode" in your browser.

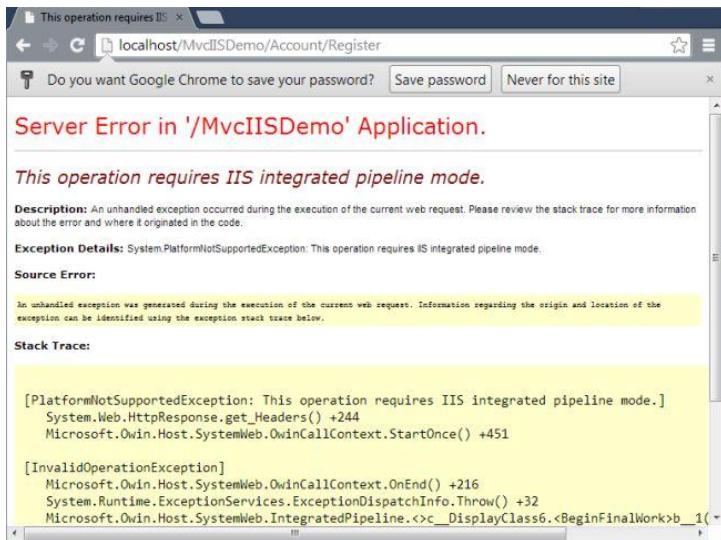

Note: Please don't close the browser.

Step 6: Select "Advanced Settings" of your site in the Application Pool by right-clicking and selecting "Advanced Settings".

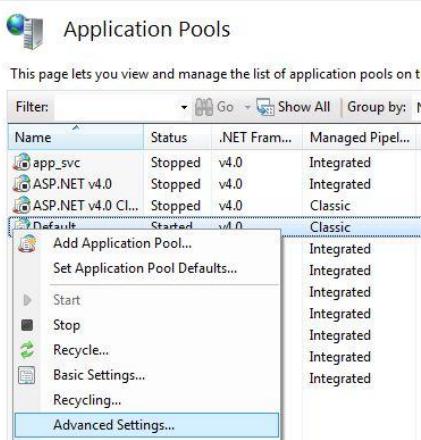

This page lets you view and manage the list of application pools on this server.


Filter:

Name	Status	.NET Framework Version	Managed Pipeline Mode
app_svc	Stopped	v4.0	Integrated
ASP.NET v4.0	Stopped	v4.0	Integrated
ASP.NET v4.0 Classic	Stopped	v4.0	Classic
Default	Started	v4.0	Classic

Action

-
-
-
-
-
-
-
-

Step 7: Select Integrated in the Managed Pipeline Mode.

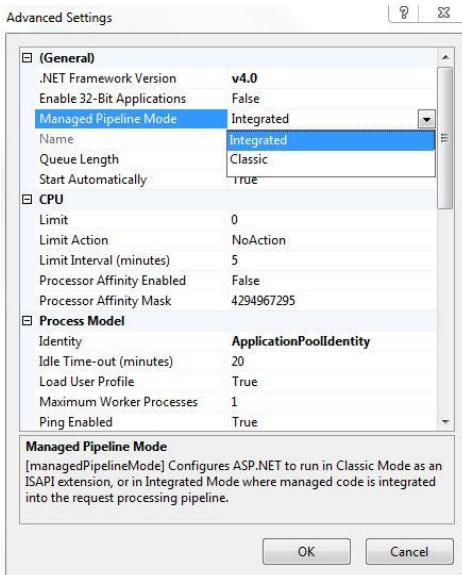

Advanced Settings

General

.NET Framework Version: v4.0
Enable 32-Bit Applications: False
Managed Pipeline Mode: Integrated

Name: Integrated
Queue Length: Classic
Start Automatically: TRUE

CPU

Limit: 0
Limit Action: NoAction
Limit Interval (minutes): 5
Processor Affinity Enabled: False
Processor Affinity Mask: 4294967295


Process Model

Identity: ApplicationPoolIdentity
Idle Time-out (minutes): 20
Load User Profile: True
Maximum Worker Processes: 1
Ping Enabled: True

Managed Pipeline Mode

[managedPipelineMode] Configures ASP.NET to run in Classic Mode as an ISAPI extension, or in Integrated Mode where managed code is integrated into the request processing pipeline.

Step 8: Reload your browser and you will see the Home Page.

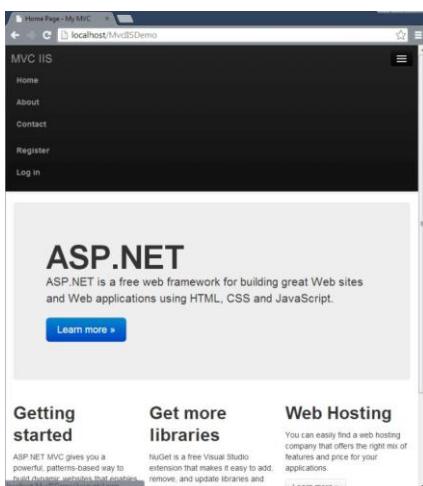

MVC IIS

Home
About
Contact
Register
Log in


ASP.NET
ASP.NET is a free web framework for building great Web sites and Web applications using HTML, CSS and JavaScript.
[Learn more »](#)

Getting started
ASP.NET MVC gives you a powerful, patterns-based way to build dynamic websites that enables a clean separation of concerns and gives you full control over your application's user interface.

Get more libraries
NuGet is a free Visual Studio extension that makes it easy to add, remove, and update libraries and tools in your Visual Studio projects.
[Learn more »](#)


Web Hosting
You can easily find a web hosting company that offers the right mix of features and price for your applications.

Step 9: Now click on "Register" and enter the details.

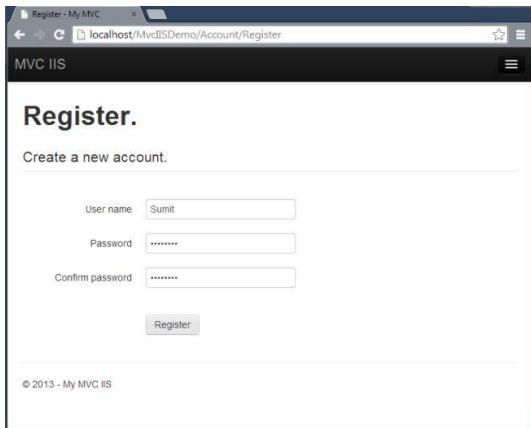


The screenshot shows a web browser window titled "Register - My MVC". The URL in the address bar is "localhost/MvcIISDemo/Account/Register". The page has a header "MVC IIS". The main content area has a title "Register." and a sub-instruction "Create a new account.". It contains three text input fields: "User name" (filled with "Sumit"), "Password" (filled with "*****"), and "Confirm password" (filled with "*****"). Below these is a "Register" button. At the bottom left, there is a copyright notice: "© 2013 - My MVC IIS".

Step 10: After registration you can login.

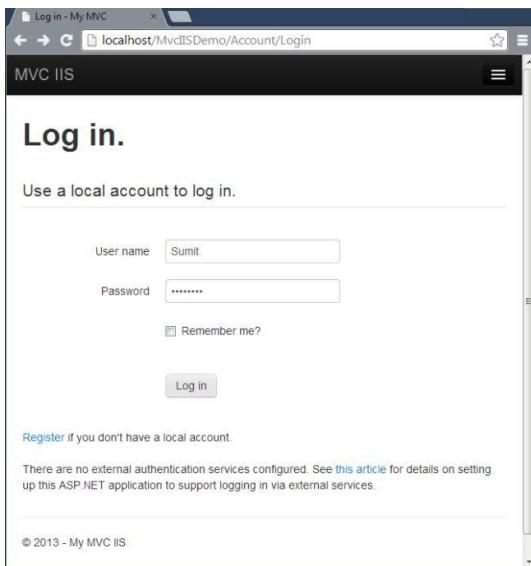

The screenshot shows a web browser window titled "Log in - My MVC". The URL in the address bar is "localhost/MvcIISDemo/Account/Login". The page has a header "MVC IIS". The main content area has a title "Log in." and a sub-instruction "Use a local account to log in.". It contains two text input fields: "User name" (filled with "Sumit") and "Password" (filled with "*****"). Below these is a "Remember me?" checkbox. At the bottom is a "Log in" button. At the bottom left, there is a link "Register" and a note: "There are no external authentication services configured. See this article for details on setting up this ASP.NET application to support logging in via external services.". At the very bottom left, there is a copyright notice: "© 2013 - My MVC IIS".

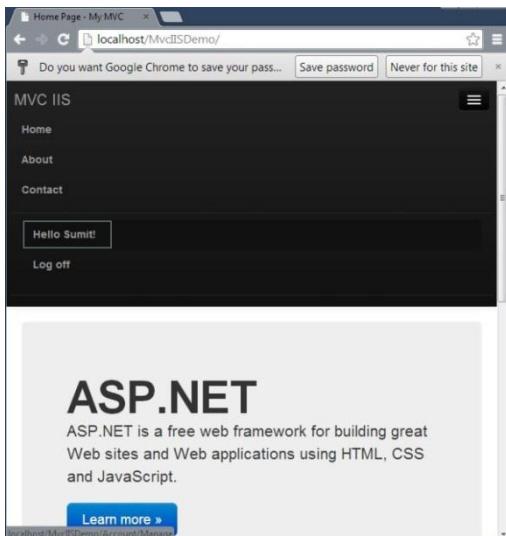

The screenshot shows a web browser window titled "Home Page - My MVC". The URL in the address bar is "localhost/MvcIISDemo/". The page has a header "MVC IIS". The main content area includes a "Hello Sumit!" message, a "Log off" link, and a large "ASP.NET" heading. Below it, a paragraph states: "ASP.NET is a free web framework for building great Web sites and Web applications using HTML, CSS and JavaScript." There is also a "Learn more" button and a link to "localhost/MvcIISDemo/Account/Manage". A Google Chrome save password dialog is visible at the top of the page.

7. Introduction of ASP.NET SignalR

In here, I am using the ASP.NET SignalR library in the latest MVC 5 project template. Let me give you a glimpse of SignalR, it is a library that adds real-time web functionality to the ASP.NET applications. Now, what is this real-time functionality? It is used to access the server code and push the content to the connected clients instantly instead of the server waiting for the client's request.

In that context, I am developing an ASP.NET Web application using the MVC Project template and in it using a real-time web application with ASP.NET SignalR.

Prerequisites

I am using Visual Studio 2013. There are some prerequisites to develop the application:


- Visual Studio 2010 SP1 or Visual Studio 2012.
- ASP.NET and Web Tools 2012.2

Let's create an application for SignalR development using the following sections:


- MVC 5 Application
- Code Execution

MVC 5 Application


Step 1: Open Visual Studio 2013 and create a New Project.

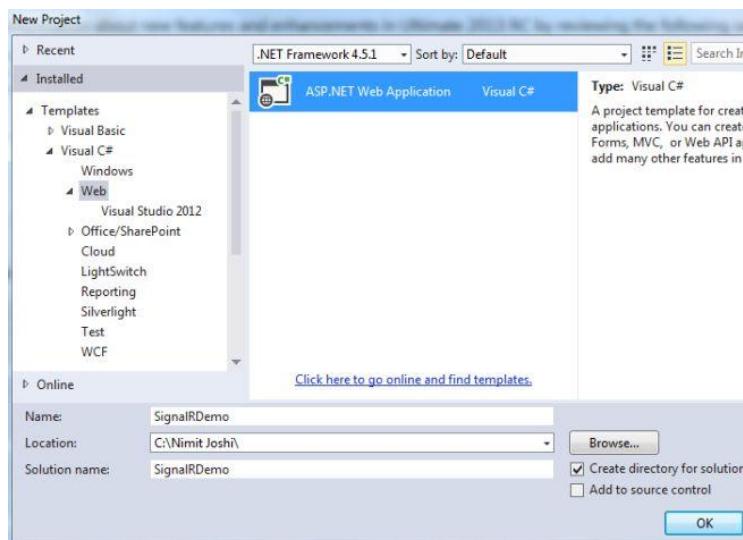

Step 2: Select MVC project template.

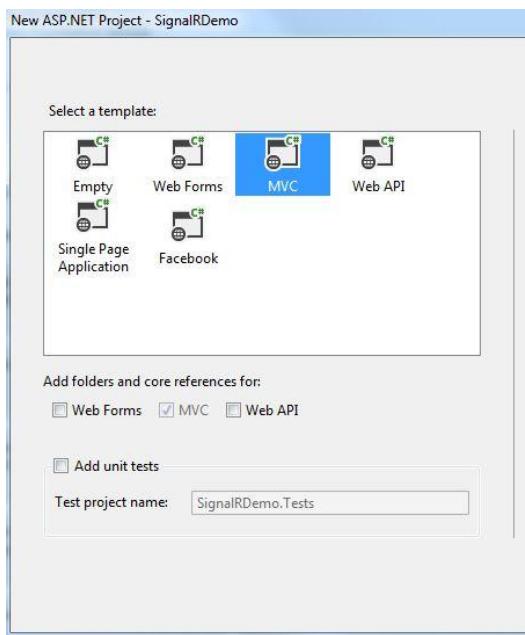

Step 3: Open the Package Manager Console.

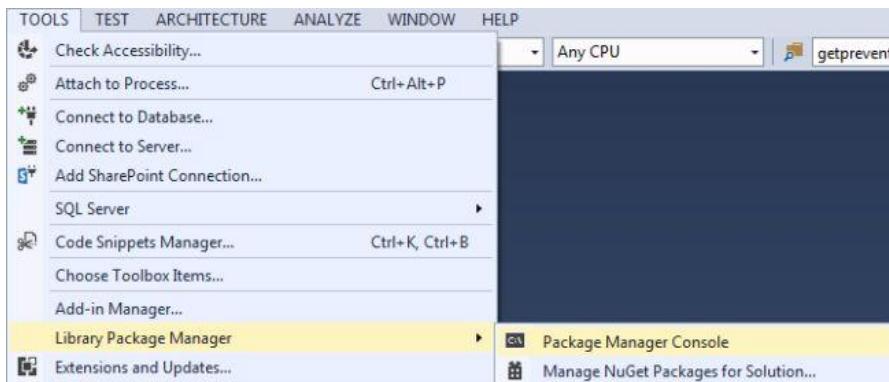


And write the following command:


```
install-package Microsoft.AspNet.SignalR
```

```
Package Manager Console
Package source: nuget.org | Default project: SignalRDemo
Successfully added 'Microsoft.AspNet.SignalR.JS 1.1.3' to SignalRDemo.
Adding 'Microsoft.AspNet.SignalR.Core 1.1.3' to SignalRDemo.
Successfully added 'Microsoft.AspNet.SignalR.Core 1.1.3' to SignalRDemo.
Adding 'Microsoft.AspNet.SignalR.Owin 1.1.3' to SignalRDemo.
Successfully added 'Microsoft.AspNet.SignalR.Owin 1.1.3' to SignalRDemo.
Adding 'Microsoft.AspNet.SignalR.SystemWeb 1.1.3' to SignalRDemo.
Successfully added 'Microsoft.AspNet.SignalR.SystemWeb 1.1.3' to SignalRDemo.
Adding 'Microsoft.AspNet.SignalR 1.1.3' to SignalRDemo.
Successfully added 'Microsoft.AspNet.SignalR 1.1.3' to SignalRDemo.
```


Step 4: You can see in your Solution Explorer that the SignalR was successfully added to your application.

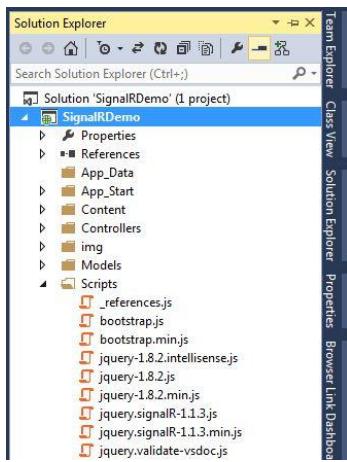

Step 5: Add a new folder named Hubs in your application and add a class in it.

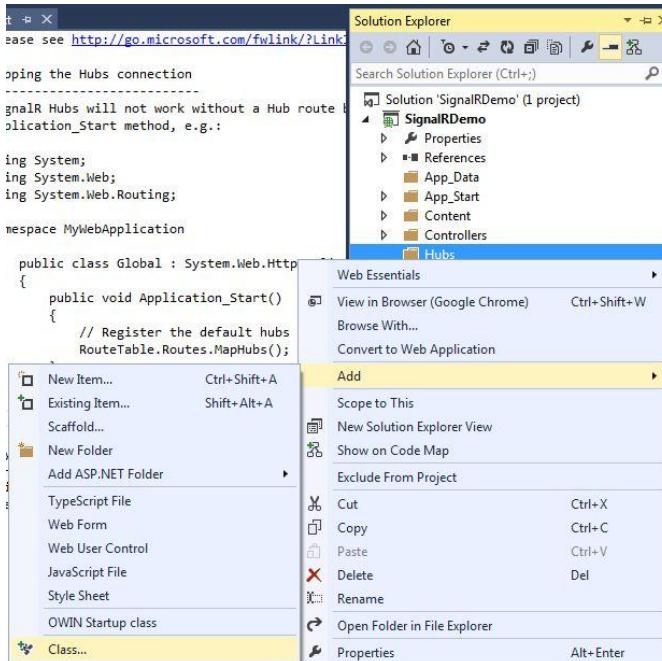

Give the name of your class ChatHub as shown below:

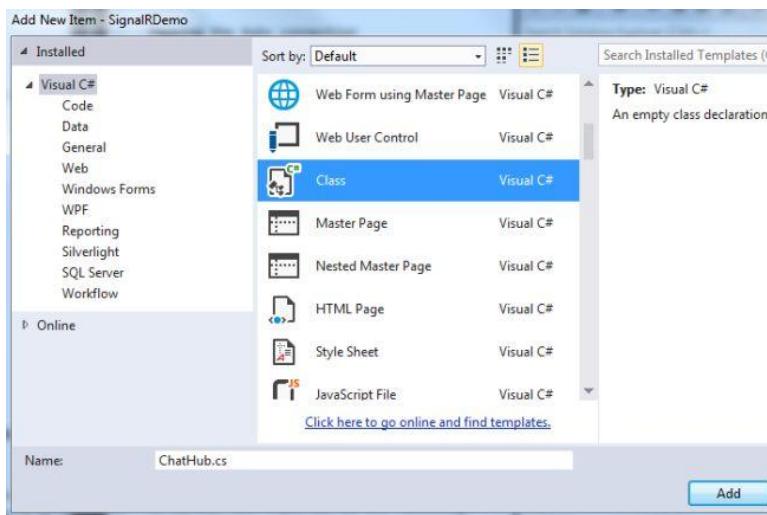

Step 5: Add the following code in the class:

```
using Microsoft.AspNet.SignalR;

namespace SignalRDemo.Hubs
{
    public class ChatHub : Hub
    {
        public void LetsChat(string Cl_Name, string Cl_Message)
        {
            Clients.All.NewMessage(Cl_Name, Cl_Message);
        }
    }
}
```

Step 6: Open the Global.asax file and modify the Application_Start() method as shown below:

```
public class MvcApplication : System.Web.HttpApplication
{
    protected void Application_Start()
    {
        RouteTable.Routes.MapHubs();
        AreaRegistration.RegisterAllAreas();
        FilterConfig.RegisterGlobalFilters(GlobalFilters.Filters);
        RouteConfig.RegisterRoutes(RouteTable.Routes);
        BundleConfig.RegisterBundles(BundleTable.Bundles);
    }
}
```

Step 7: Open your HomeController.cs file and modify it as shown below:

```
public ActionResult Contact()
{
```

```
ViewBag.Message = "Your contact page.";
```

```
return View();
```

```
}
```

```
public ActionResult Chat()
```

```
{
```


```
ViewBag.Message = "Your chat page";
```

```
return View();
```


```
}
```

Step 8: Generate the view for the Chat method as shown in the following parts:


- Select Home folder and right-click to add Scaffold

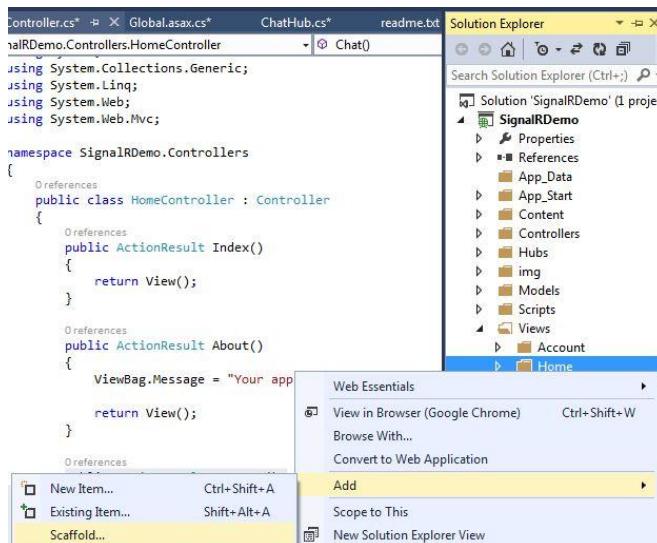

- Select MVC 5 View in the Add Scaffold wizard

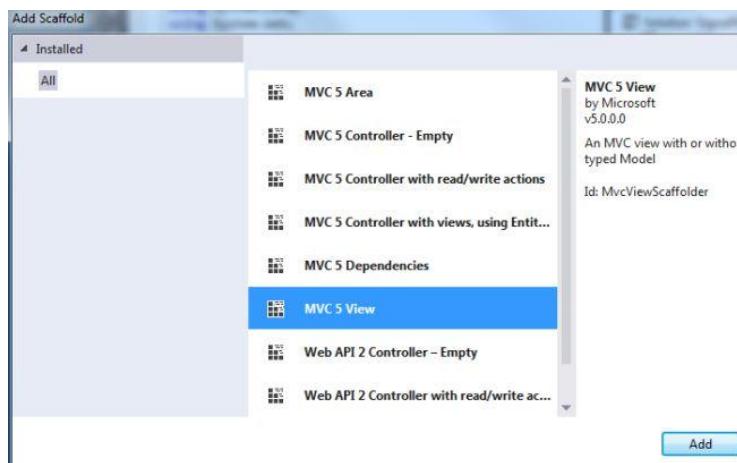

- Do as directed in the following image:

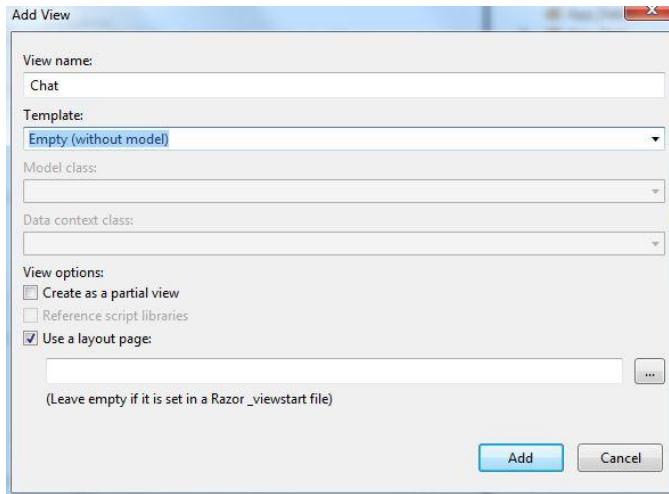

Step 9: Add the following code in the Chat.cshtml file:

```

@{
    ViewBag.Title = "Chat";
}

<hgroup>
    <h2>@ViewBag.Title.</h2>
    <h3>@ViewBag.Message</h3>
</hgroup>

<div class="container">
    <input type="text" id="TxtMessage" />
    <input type="button" id="BtnSend" value="Send" />
    <input type="hidden" id="UserName" />
    <ul id="Chats"></ul>
</div>

@section scripts {
    <script src="~/Scripts/jquery.signalR-1.1.3.js"></script>
    <script src="~/signalr/Hubs"></script>

    <script>
        $(function () {
            var chat = $.connection.chatHub;
            chat.client.NewMessage=function(Cl_Name, Cl_Message) {
                $('#Chats').append('<li><strong>' + htmlEncode(Cl_Name)
                    + '</strong>: ' + htmlEncode(Cl_Message) + '</li>');
            };
            $('#UserName').val(prompt('Please Enter Your Name:', ''));
        });
    </script>
}

```

```

$( "#TxtMessage" ).focus();
$.connection.hub.start().done(function () {
    $("#BtnSend").click(function () {
        chat.server.LetsChat($("#UserName").val(), $("#TxtMessage").val());
        $("#TxtMessage").val("").focus();
    });
});
});

function htmlEncode(value) {
    var encodedValue = $('<div />').text(value).html();
    return encodedValue;
}
</script>
}


```

Code Execution


Save all your application and debug the application. Use the following procedure.

Step 1: Debug your application. Open /Home/Chat in your browser like: <http://localhost:12345/Home/Chat>


Step 2: Enter your name in the prompt:

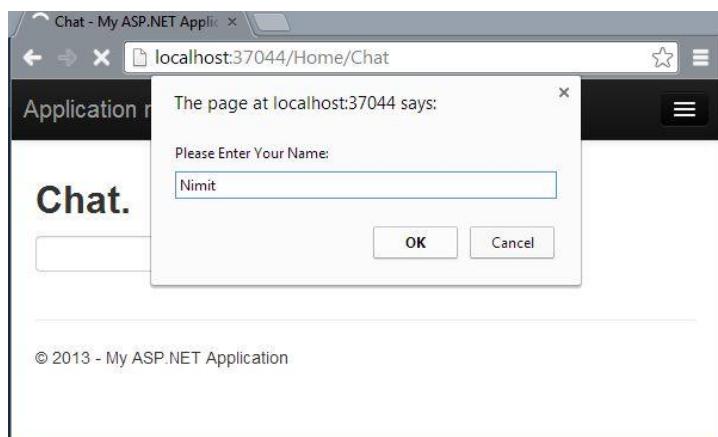

Step 3: Enter message and send:

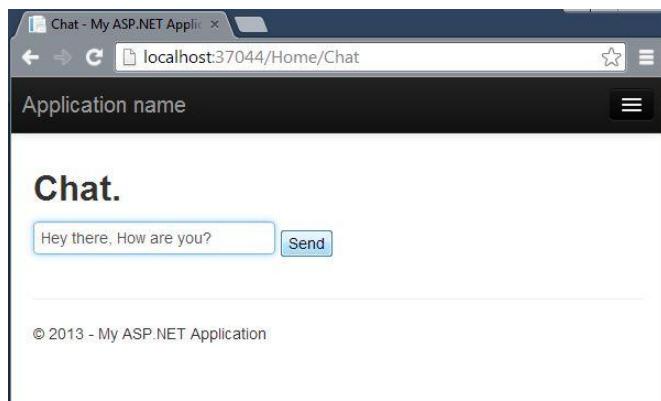

After clicking on Send:

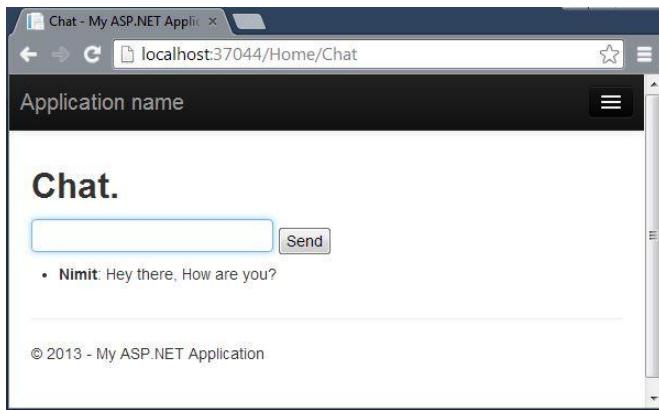

Step 4: Copy the browser URL and open more browsers, paste the URL in the address bar and do the same thing as above.

