


Gowshick S

Read – using sl_no

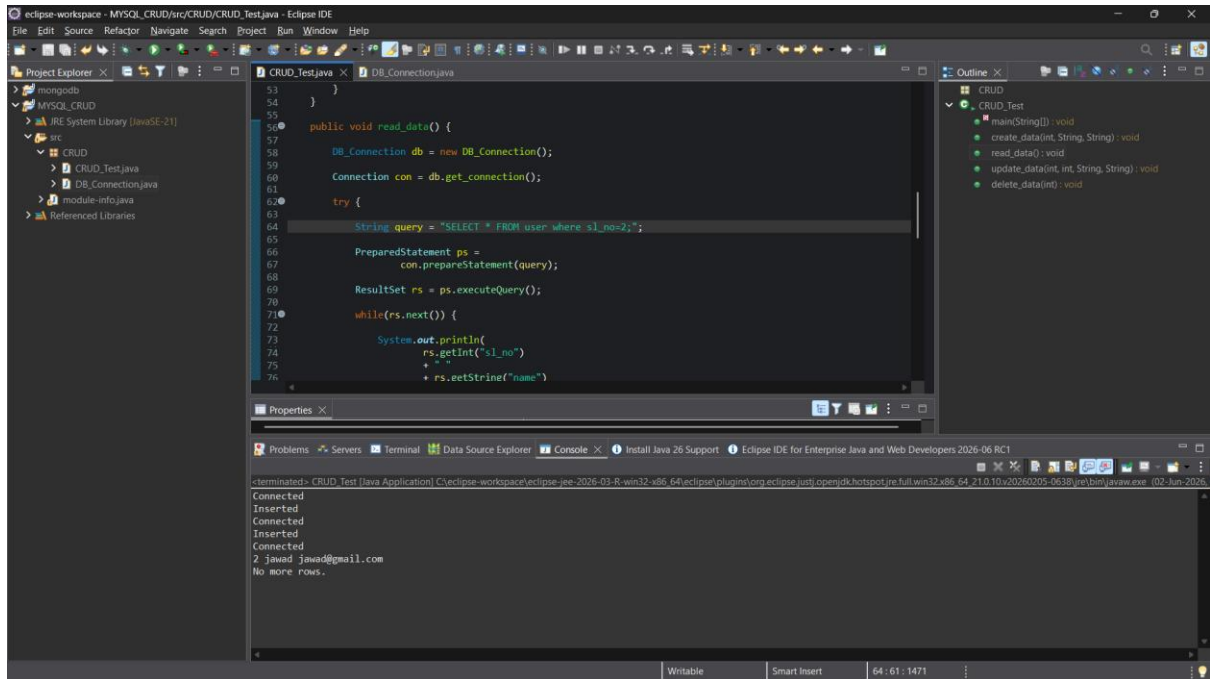


```
53 }
54 }
55
56 public void read_data() {
57
58     DB_Connection db = new DB_Connection();
59     Connection con = db.get_connection();
60
61     try {
62
63         String query = "SELECT * FROM user where sl_no=2;";
64
65         PreparedStatement ps =
66             con.prepareStatement(query);
67
68         ResultSet rs = ps.executeQuery();
69
70         while(rs.next()) {
71
72             System.out.println(
73                 rs.getInt("sl_no")
74                 + "-"
75                 + rs.getString("name")
76             );
77         }
78     } catch (Exception e) {
79         e.printStackTrace();
80     }
81 }
```

Connected
Inserted
Connected
Inserted
Connected
2 jawad_jawad@gmail.com
No more rows.


Alter

Add column “phone”

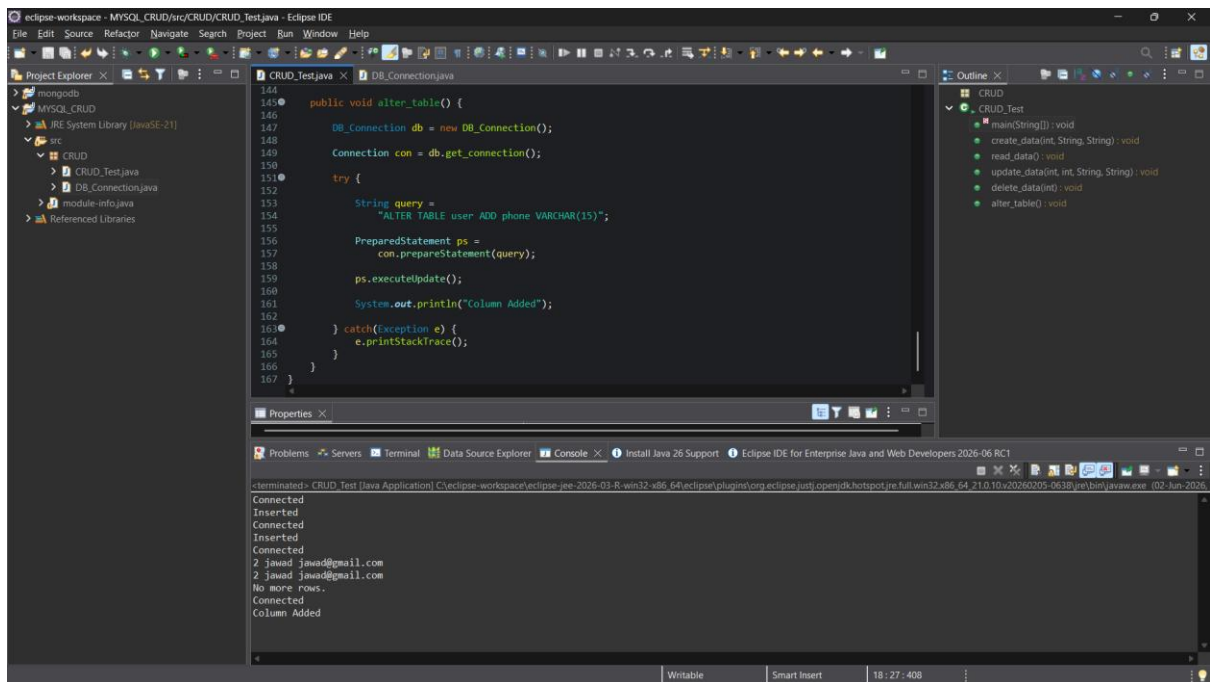



```
144
145 public void alter_table() {
146
147     DB_Connection db = new DB_Connection();
148
149     Connection con = db.get_connection();
150
151     try {
152
153         String query =
154             "ALTER TABLE user ADD phone VARCHAR(15)";
155
156         PreparedStatement ps =
157             con.prepareStatement(query);
158
159         ps.executeUpdate();
160
161         System.out.println("Column Added");
162
163     } catch (Exception e) {
164         e.printStackTrace();
165     }
166 }
167 }
```

Connected
Inserted
Connected
Inserted
Connected
2 jawad_jawad@gmail.com
2 jawad_jawad@gmail.com
No more rows.
Connected
Column Added

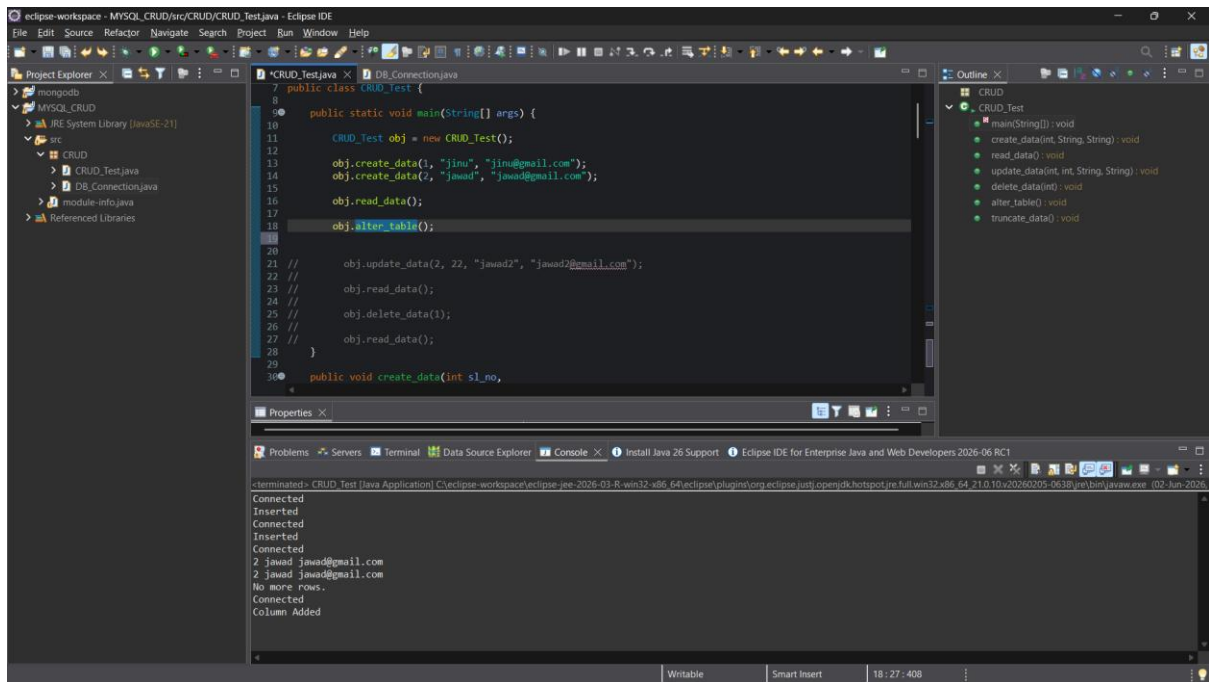


Truncate

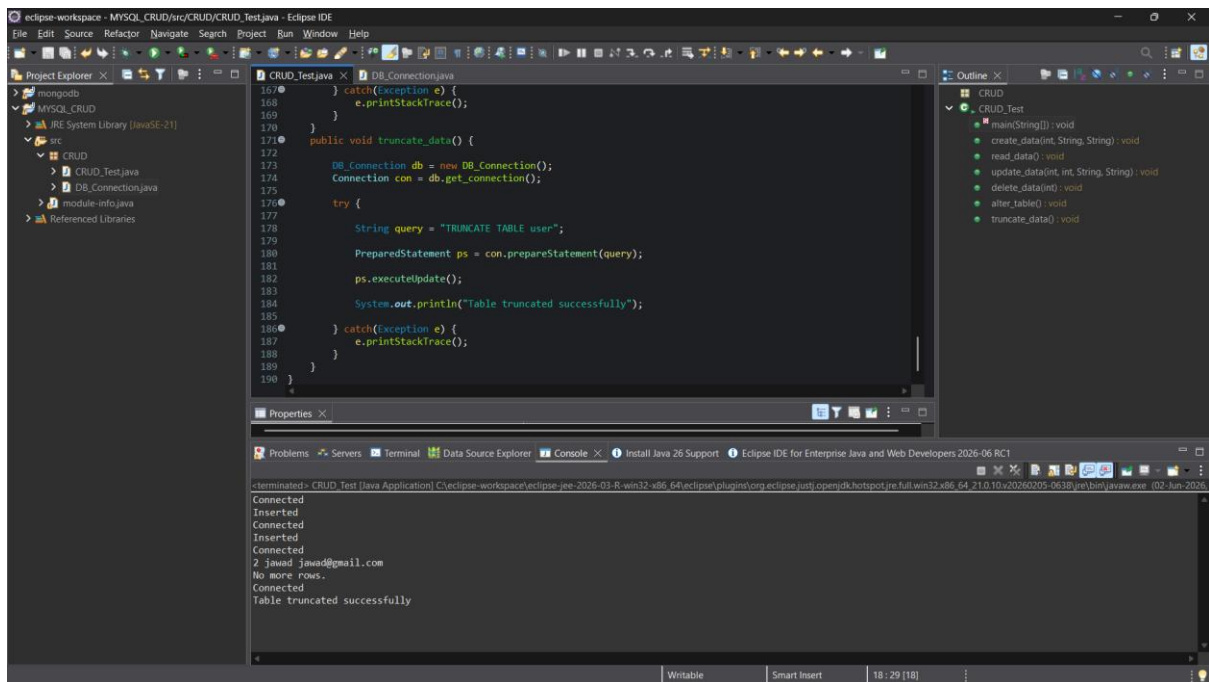

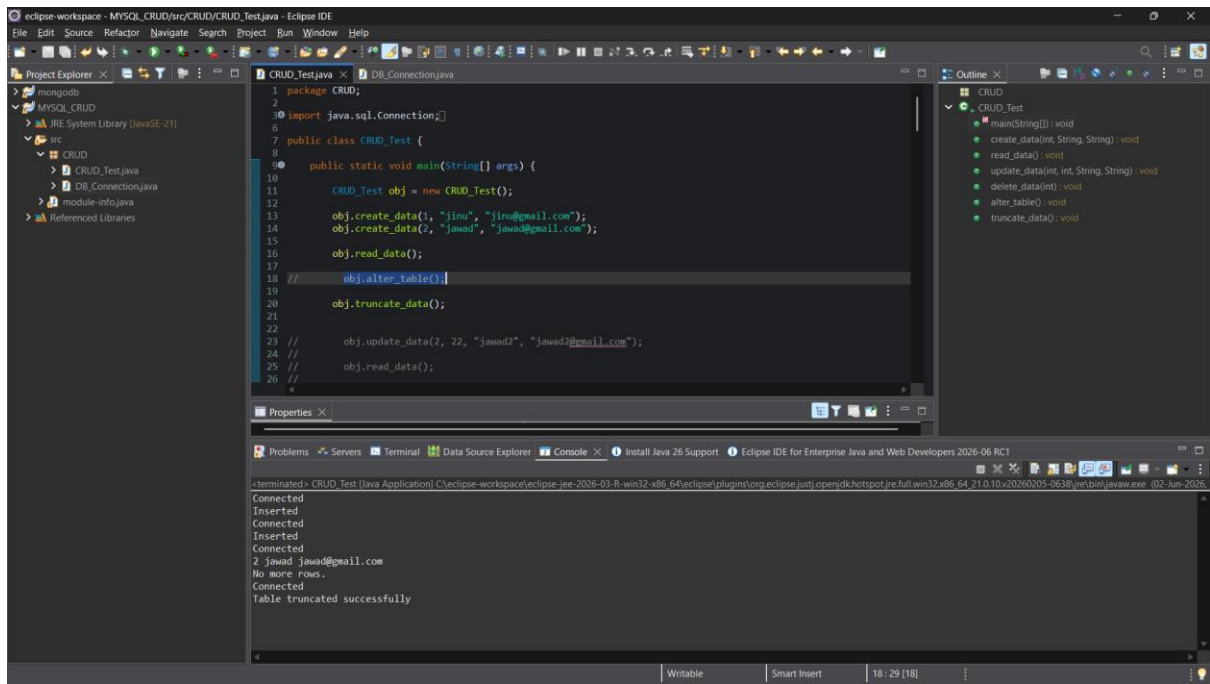

MongoDB connection – for crud

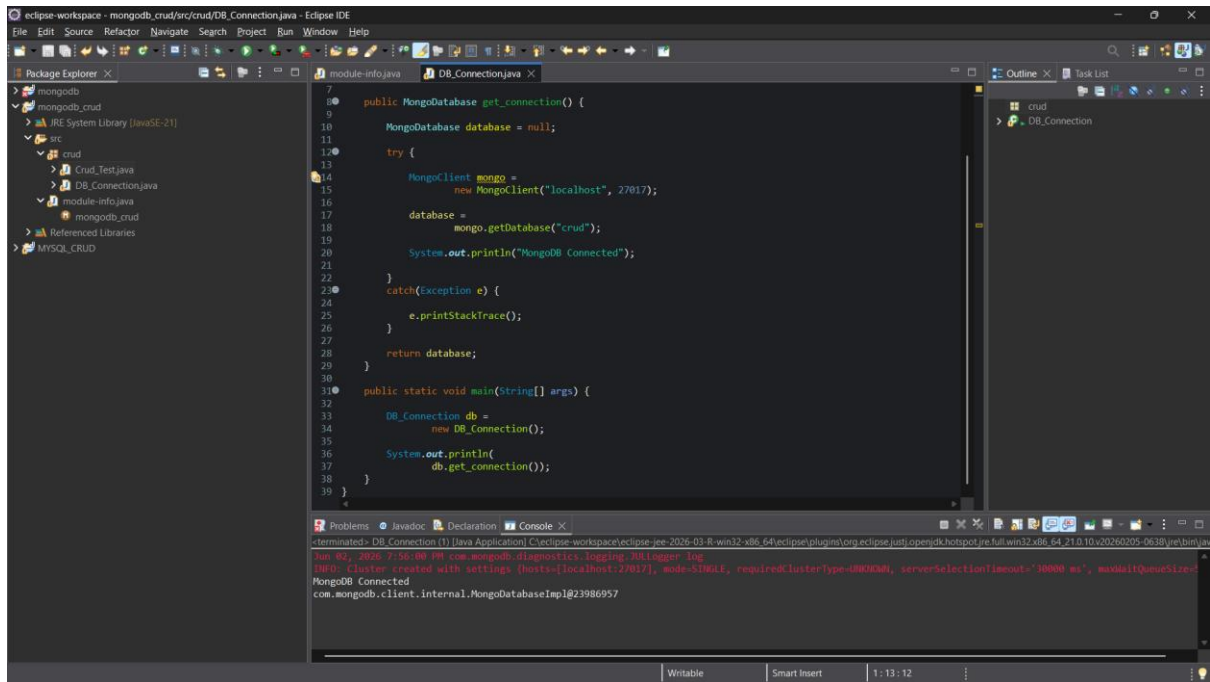

The screenshot shows the Eclipse IDE interface with a Java project named 'mongodb_crud'. The package explorer on the left shows the project structure, including a 'crud' package with 'DB_Connection.java'. The main editor displays the code for 'DB_Connection.java', which defines a 'MongoDatabase' interface and a 'MongoClient' implementation. The code includes a 'get_connection()' method that returns a 'MongoDatabase' object and a 'main()' method that demonstrates the connection. The console at the bottom shows the output of the program, including the message 'MongoDB Connected' and the stack trace of the connection process.

```
7 public MongoDatabase get_connection() {
8
9     MongoDB database = null;
10
11     try {
12
13         MongoClient mongo =
14             new MongoClient("localhost", 27017);
15
16         database =
17             mongo.getDatabase("crud");
18
19         System.out.println("MongoDB Connected");
20
21     }
22     catch(exception e) {
23
24         e.printStackTrace();
25     }
26
27     return database;
28 }
29
30 public static void main(String[] args) {
31
32     DB_Connection db =
33         new DB_Connection();
34
35     System.out.println(
36         db.get_connection());
37 }
38 }
39 }
```

Console Output:

```
terminated- DB_Connection (1) [Java Application] C:\eclipse-workspace\mongodb_crud\bin\Debug\mongodb_crud.exe
Jan 02, 2020 7:10:00 PM com.mongodb.MongoClientLogging$MongoLogger log
INFO: Cluster created with settings {hosts=[localhost:27017], mode=STANDALONE, requiredClusterType=STANDALONE, serverSelectionTimeout='30000 ms', maxWaitQueueSize=1000}
MongoDB Connected
com.mongodb.client.internal.MongoDatabaseImpl@23986957
```