


Telegram



Discord

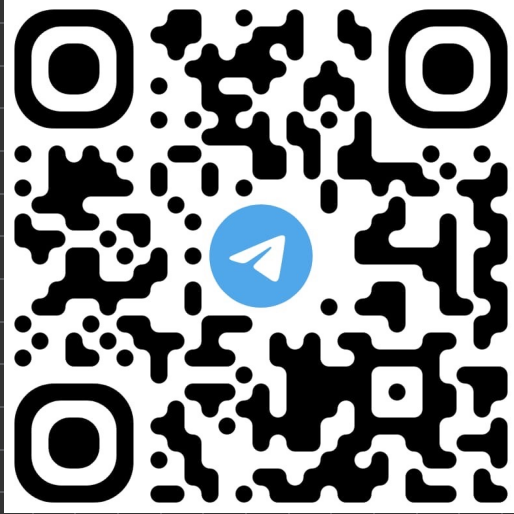

~~JS~~

HTML

CSS


→ methods


DOM



§3


Document object Model





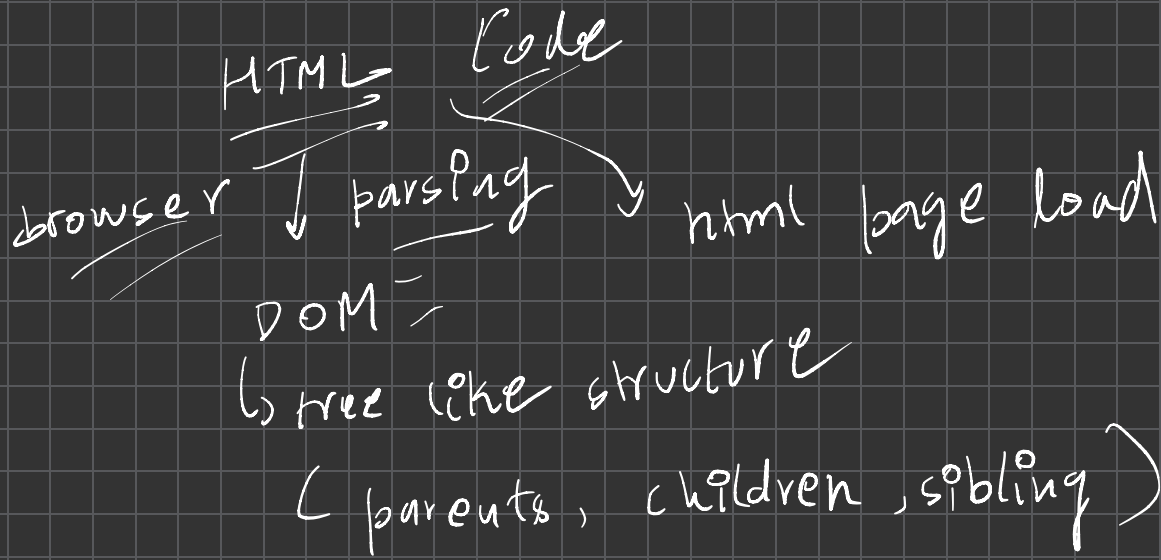


```
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
</head>
<body>

  <h1>Hello</h1>
  <script src="index.js"></script>
</body>
</html>
```

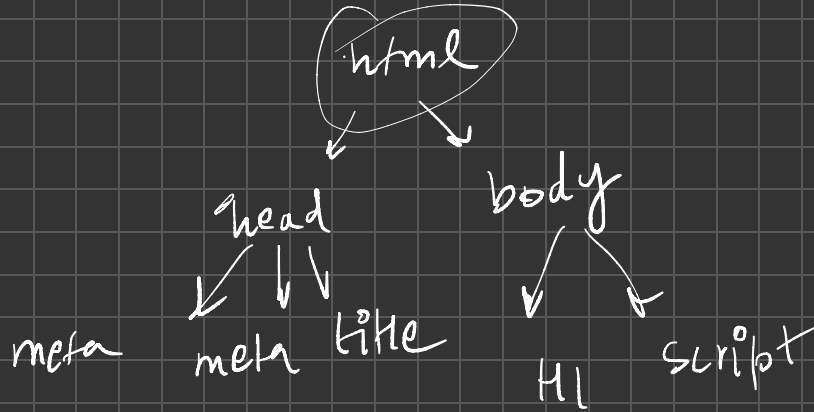

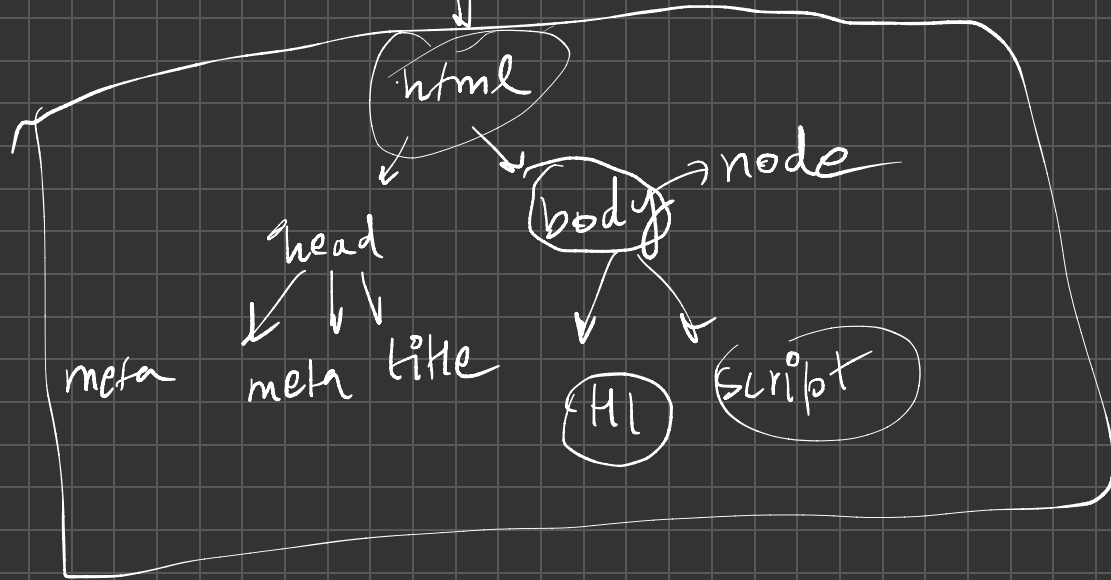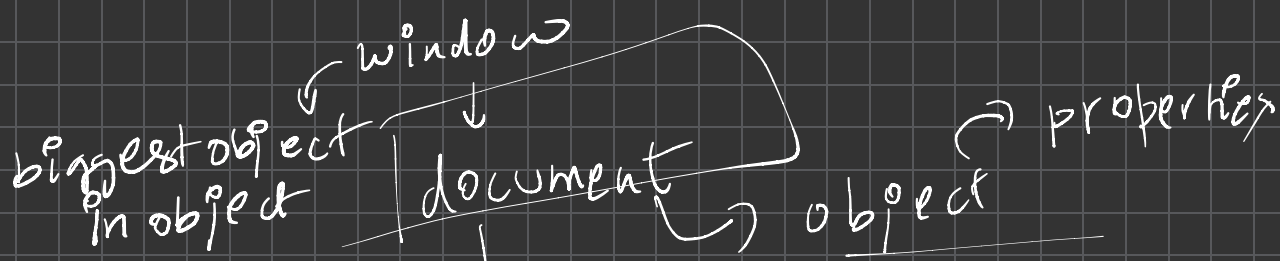

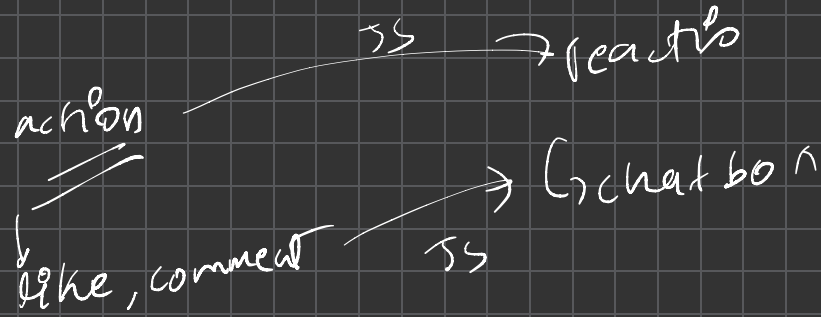

element select

element get krna hai
↓
getElementById

querySelector()

tag Name

h1 {
3

P

.h1 {
3

#h1 {
3

```
document.querySelector("h1") → class Name  
document.querySelector(".h1") → id  
document.querySelector("#h1")
```

querySelectorAll

nodeList is not array

```
▼ NodeList(2) [h1#h1, h1#h1] i
  ▶ 0: h1#h1
  ▶ 1: h1#h1
  length: 2
  ▶ [[Prototype]]: NodeList
```

get element by id and all me fark kya hai


↓
first element

Read & write Elements

→ textContent

→ innerHTML

→ innerText

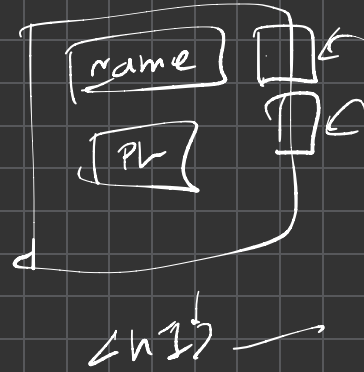

<h1>

```
<p id="desc">
  hii
  <b style="display: none;">Hello dosto kaise ho</b>
</p>
```

```
hii
Hello dosto kaise ho
```

→ textContent

```
hii
<b style="display: none;">Hello dosto kaise ho</b>
```

→ innerHTML



```
hii
```

↳ innerText

↳ content niddien

usko print nhi krta }

how to manage ISS from JS



setAttribute
getAttribute
removeAttribute

<h1 - - -

classList

- ↳ add
- ↳ remove
- ↳ toggle
- ↳ contains

there is no CSS & JS connection/link

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
  <link rel="stylesheet" href="index.css"> ✓
</head>
<body>

  <h1 id="h1">Hello</h1>
  <p id="desc">
    hii
    <b style="display: none;">Hello dosto kaise ho</b>
  </p>

  <button id="btn">Add to cart</button>
  <script src="index.js"></script>

</body>
</body>
</html>
```

class = 'random'

style object

dataset attribute

(, element extra info

swissy

my dynamic website

↳ data → pre existing ?

video

{

title: _____

description: _____


thumbnail: _____

}

↖ Array of objects

[{ }, { }, { }, { }]

creating, Appending & Removing Elements

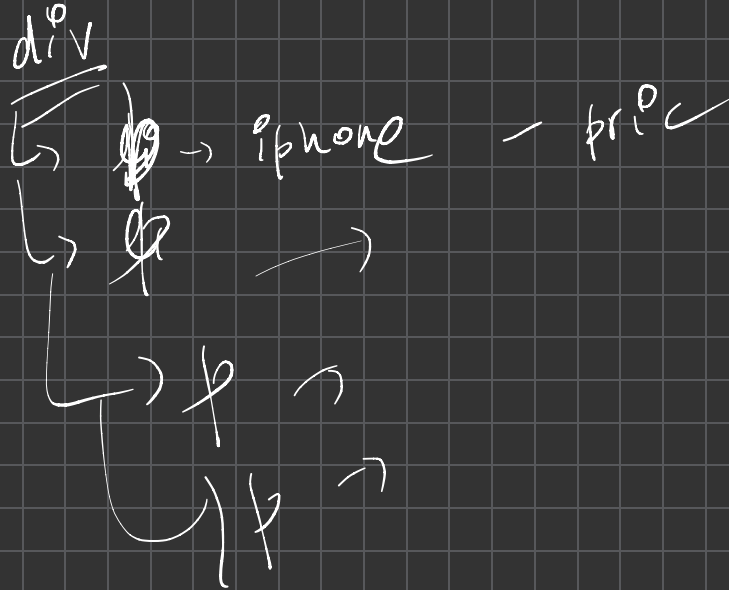

createElement

↳ used to create the element (p, div, a, ul)

→ appendChild()

`<div id="product-list"></div>`

it's append in the last


→ append()

depend / apply note hai jaha per

humko append

```
<div id="product-list"></div>
```

↓ empty div




```
let products = [  
  { ...  
},  
  { ...  
},  
  { ...  
},  
  { ...  
},  
  {  
    name: "Lava 12",  
    price: 53422  
  },  
]
```

div

```
let productList = document.querySelector("#product-list")
```

```
products.forEach((product) => {  
  const card = document.createElement("p")  
  card.textContent = `${product.name} - ${product.price}`  
  productList.append(card)  
})
```

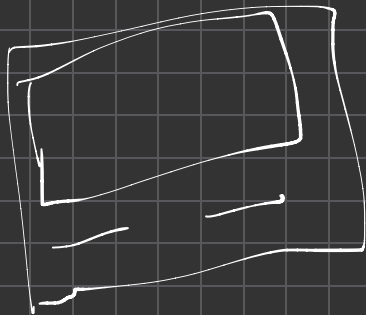

remove Element

• children

↳ return HTMLCollection

~~X~~
not array

```
productList.insertBefore(h2 , items[2])
```

element
insert
krna ho

usse phele
krna ho