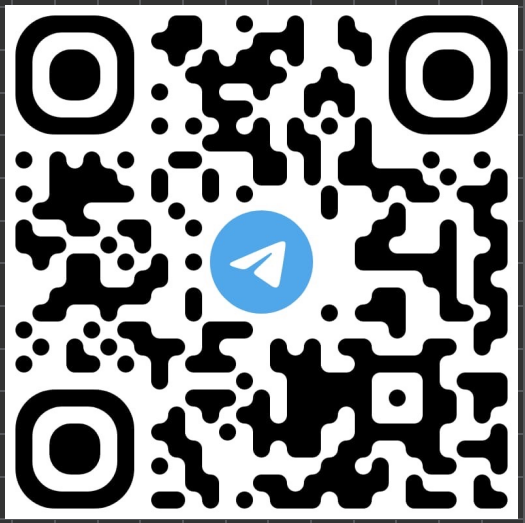
Telegram



Discord



Browser storage

→ Local storage

→ session storage

Local storage & Session storage (5MB)

1. .setItem(key , value)

to set the item in local storage

key → string

value → string

2. .getItem(key)

key → string

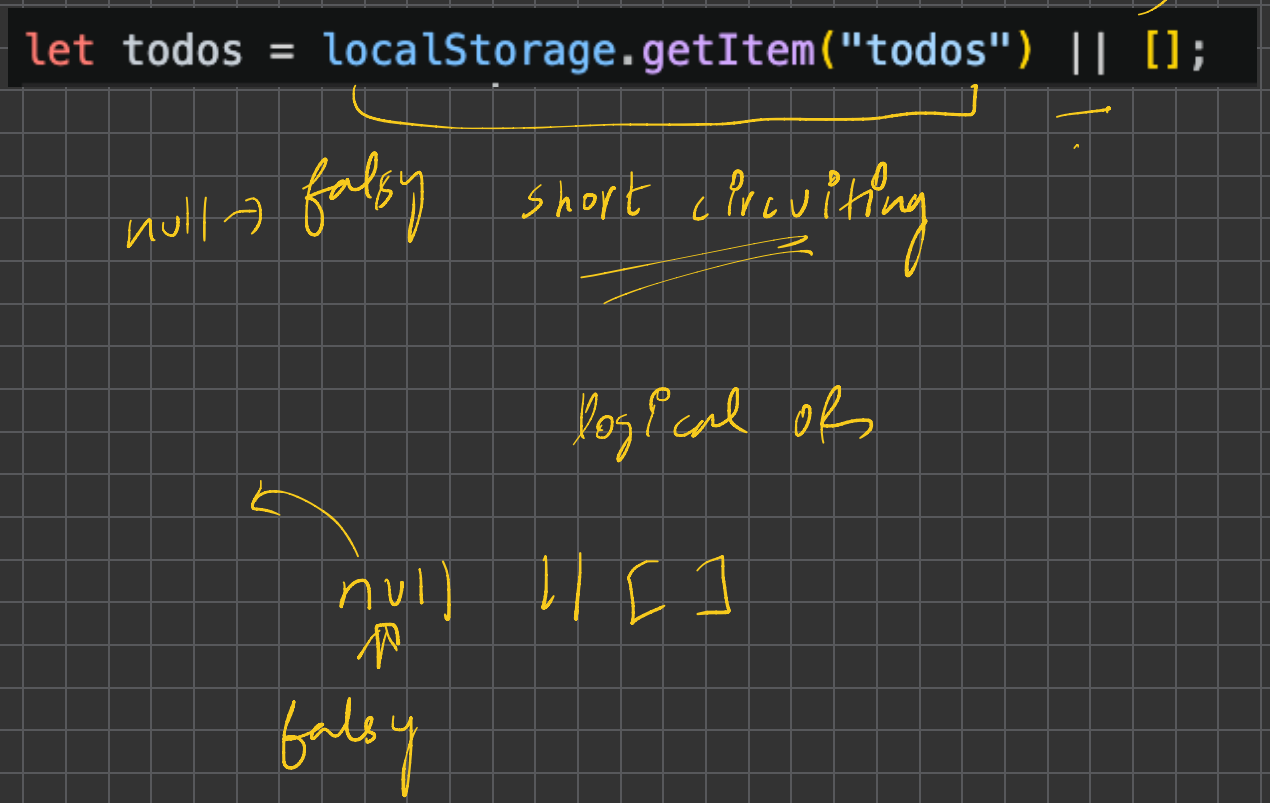
3 . key( ) → index like array

If exist then return
key name on particular index
otherwise returns null

4 . removeItem(key)

5 . clear( ) → It will
clear the localstorage
completely

Feature	`localStorage`	`sessionStorage`
Storage Limit	**~5 MB** per origin	**~5 MB** per origin
Data Lifetime	**Indefinite** (remains until explicitly deleted)	**Tab Lifespan** (deleted when tab/window is closed)
Tab Sharing	Shared across all tabs/windows with the same origin	Isolated to the **specific tab** that opened it
Survives Reloads?	Yes	Yes
Scope	Tied to browser origin (protocol + domain + port)	Tied to origin and unique tab instance


let todos = localStorage.getItem("todos") || [];
null → falsy
short circuiting
logical or
null || [ ]
falsy

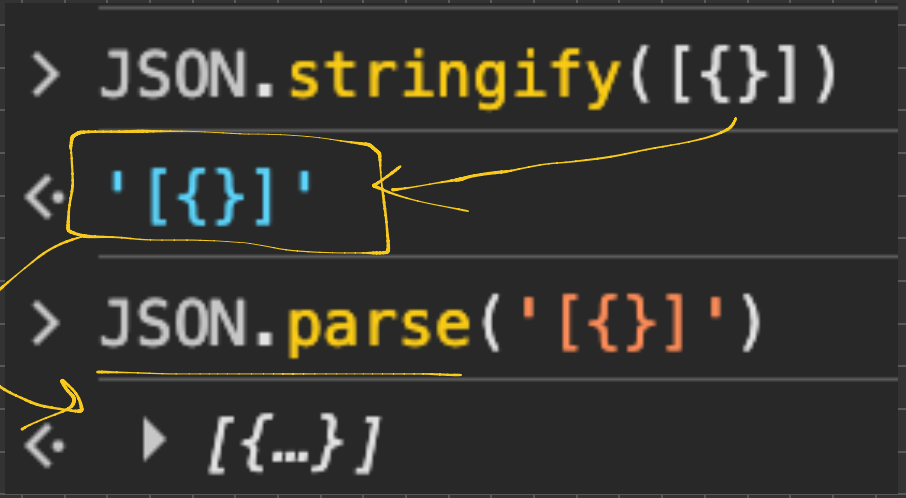
[ ] , { }

→ JSON string main convert kiya

ho toh

JSON.stringify( ) → converts to JSON string

JSON.parse( ) → converts from JSON string to valid object


> JSON.stringify([{}])
'[{}]'
> JSON.parse('[{}]')
▶ [{…}]

object → local storage

JSON

object → string → local storage

localstorage → string.forEach()

localstorage → JSON.parse() → object/Array

forEach

todos = [

{},

{},

]

JSON.stringify( )

refresh

kal

| 26 | NOV | 2026 |

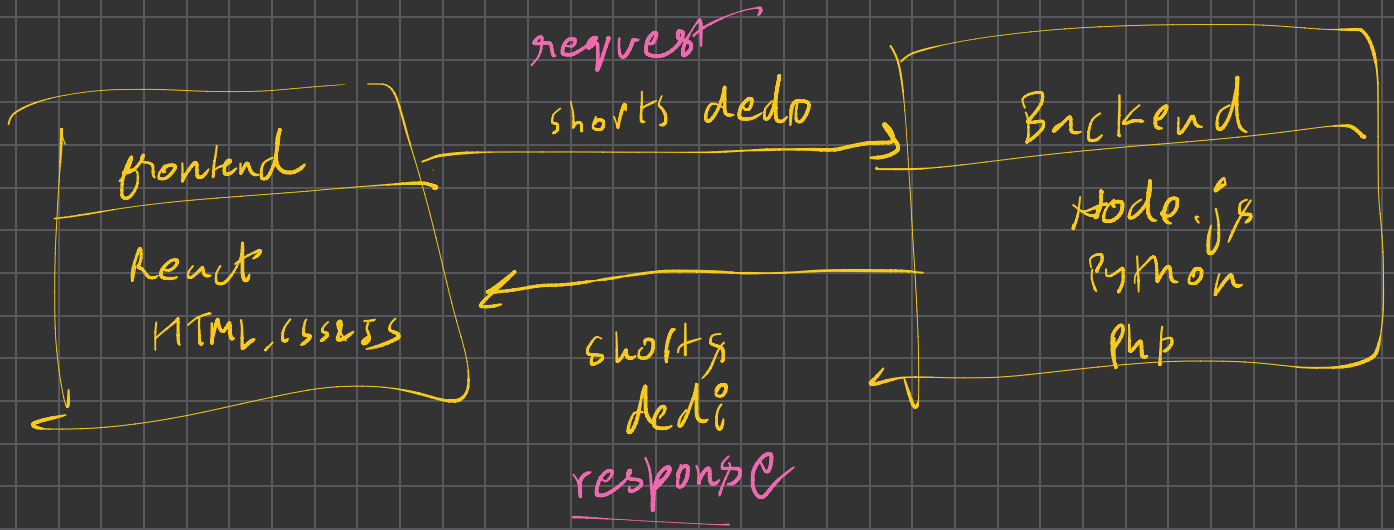
localstorage

string

.getItem

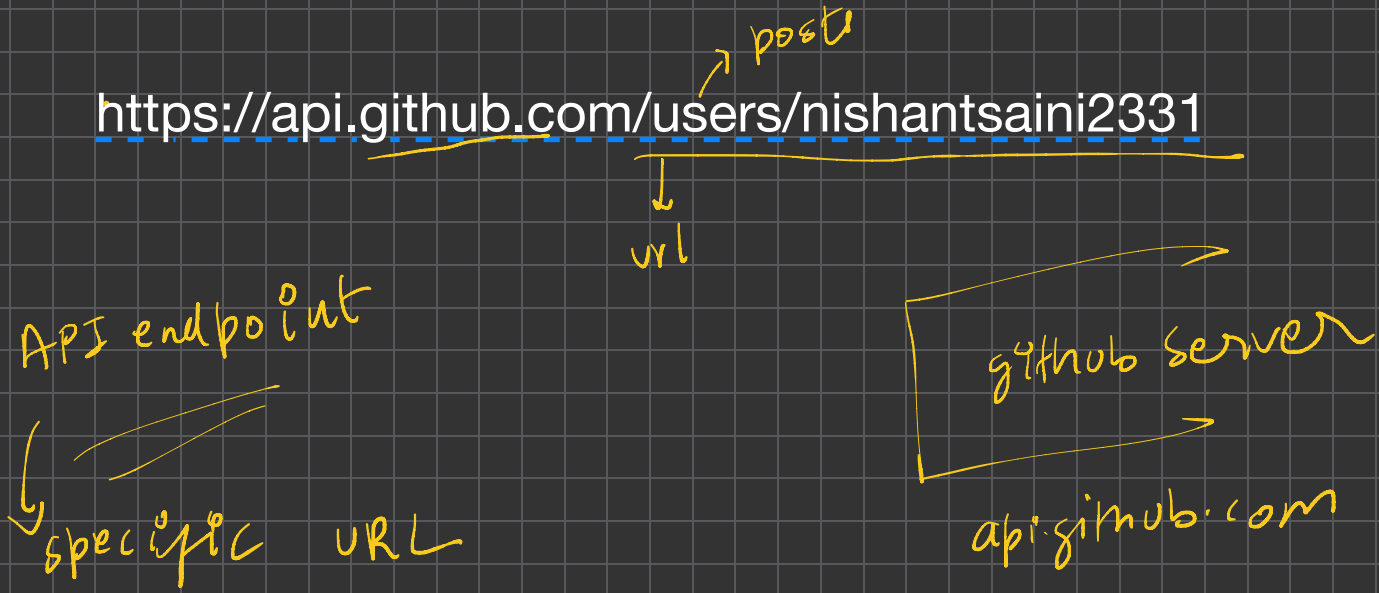
JSON.parse( )

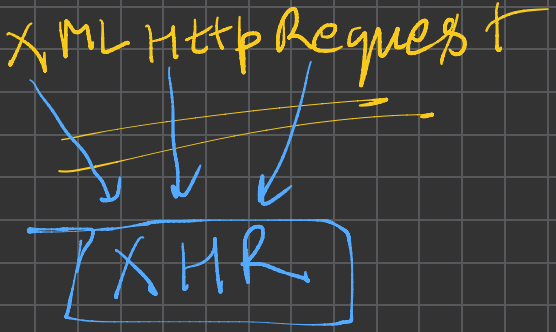
[ ].forEach( ) { } → valid



API

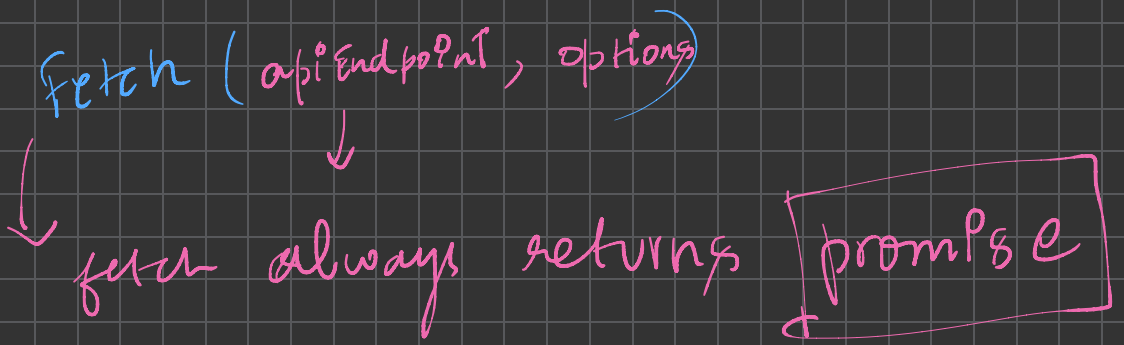
API is a way for our application to communicate with another application/server


https://api.github.com/users/nishantsaini2331
post
url
API endpoint
specific URL
github server
api.github.com



The XMLHttpRequest Object

The XMLHttpRequest object can be used to request data from a web server.


fetch (apiEndpoint , options)
fetch always returns promise

DOM

BOM

Browser object Model

navigator