



Telegram



Discord

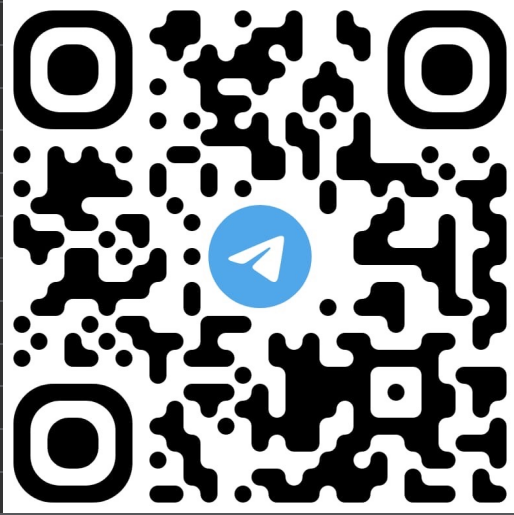

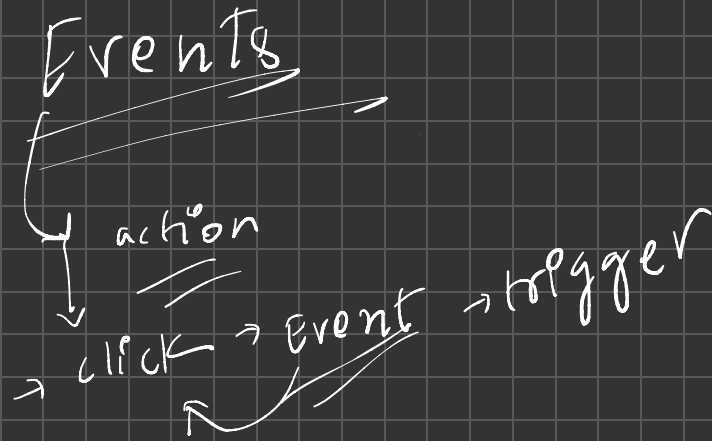

btn. addEventListener )

addEventListener ( event type , callback )

- ↳ click
- ↳ mouseover
- ↳ mouseup
- ↳ mousedown

```
let btn = document.querySelector("#reveal-gift")
let h1 = document.querySelector("#gift")

function revealGift() {
  h1.classList.toggle("hidden")
  // h1.classList.add("visible")
}

// btn.addEventListener('click' , () => {
//   console.log("hellooo hello miccccc checkkk");
// })

btn.addEventListener('click', revealGift)
```

↑  
event type


↓  
function  
call

# Event object


↗ JS element per click  
kiya

```
console.log(event.target);  
console.log(event.currentTarget);
```


↓  
JS element per event listener  
apply hai

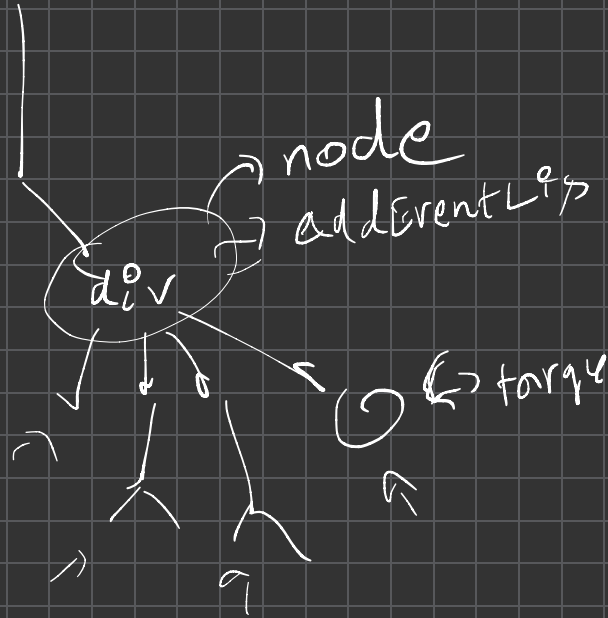

Remove FreutListner



Bubbling vs Capturing




# How events internally works

① capturing (click)

② Target

③ Bubbling

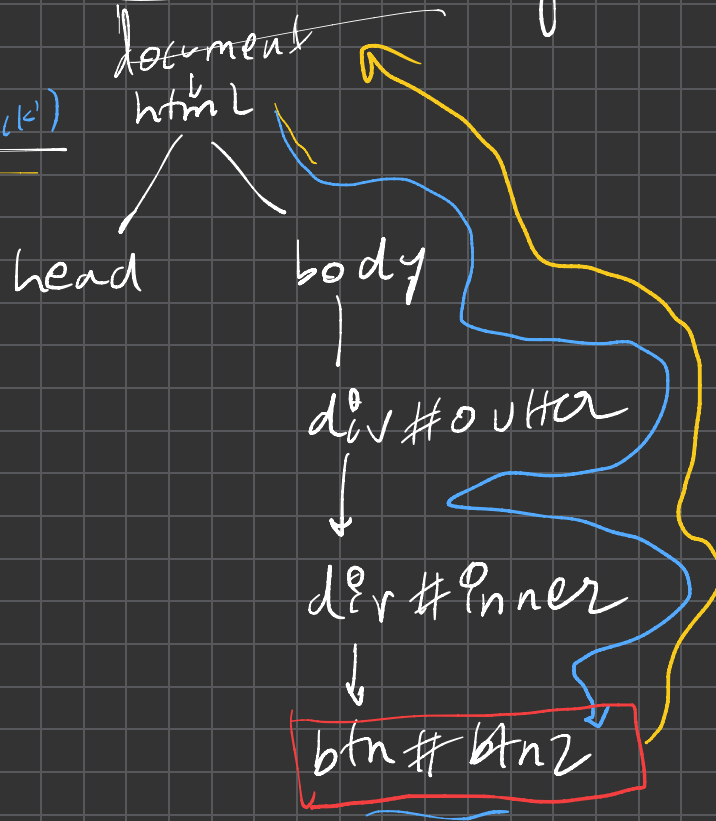

```
outter.addEventListener('click', (e) => {  
  console.log("Outter");  
}, { capture: true })
```

↓  
capturing phase mai he  
event listen kara do

✓ Stop Propagation

↳ stop Event bubbling

```
btn2.addEventListener('click', (e) => {  
  e.stopPropagation()  
  console.log("Btn2");  
})
```

↳ event object

↳ preventDefault

Event Delegation

# Event delegation

```
productList.addEventListener("click", (e) => {  
  e.stopPropagation();  
  console.log(e.target.parentElement);  
  console.log(e.target.tagName);  
  console.log(e.target.textContent);  
  
  // if (e.target.tagName === "BUTTON") {  
  //   // e.target.parentElement.remove()  
  // }  
  
  if (e.target.textContent === "Remove product") {  
    e.target.parentElement.remove() ✓  
  }  
})
```

→ `<div id="product-list">`

→ `<div class="singleProduct">` flex == \$0

▶ `<div>...</div>`

▶ `<div class="productDetail">...</div>` flex

`<button>Remove product</button>`

`<button>Add to cart</button>`

`</div>`

→ `<div class="singleProduct">...</div>` flex → card

→ `<div class="singleProduct">...</div>` flex → card

▶ `<div class="singleProduct">...</div>` flex → card

▶ `<div class="singleProduct">...</div>` flex → card

`</div>`

$e.target \rightarrow$  pure product list  
mai kis element  
per click hua hai

$e.target.parentElement \rightarrow$  jis element per click kiya hai usko parent element kon hai

1000  
X 1000 addEventListener

closest ( )

↑  
selector

tagName, id, (class)


→ div

img  
p

button

↳ parentElement

parentElement, parentElement

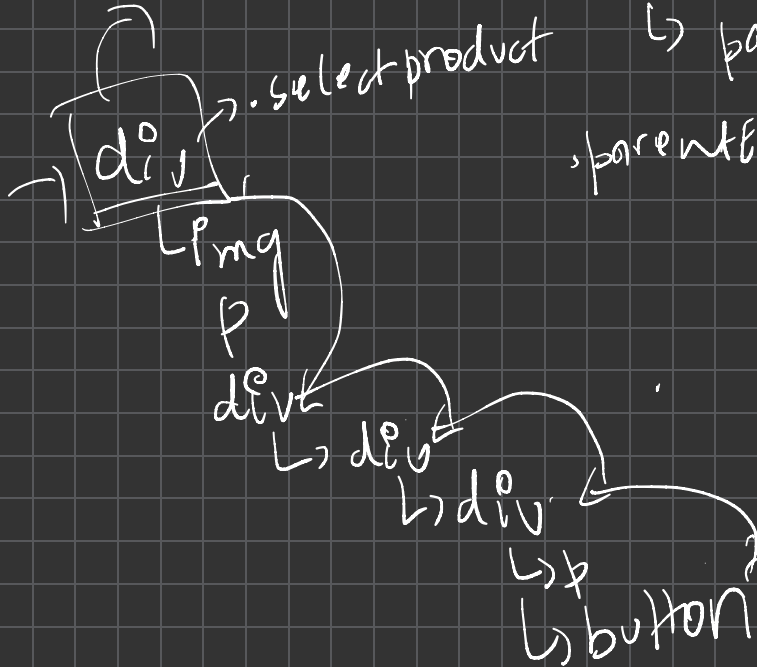

• closest(selector)