


Telegram



Discord

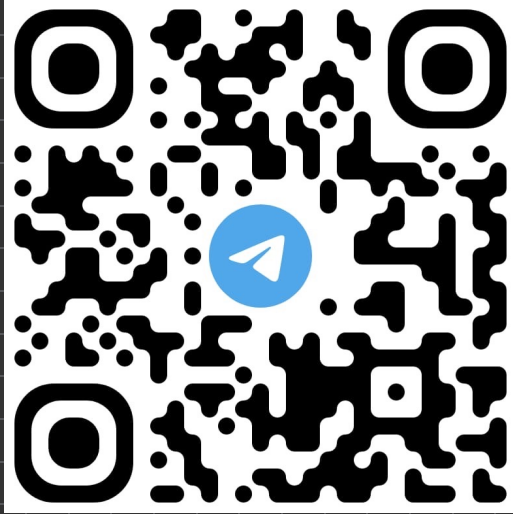

form Handling

form Events

event type  $\rightarrow$  submit

preventDefault()



stops default browser  
behaviour

```
console.log({ name , password , email});|
```


variable  
↓  
name

↓

email: →

name: →

password: →

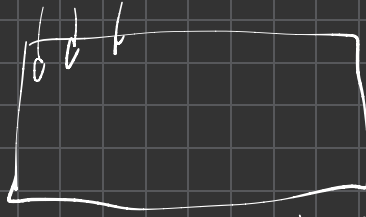

150 characters remaining

49

input →  
event type


keystroke

↳ pressing key

every keystroke it will fire

change eventType

↳ fired once

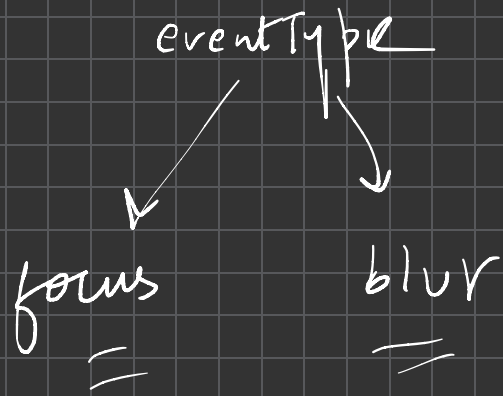




↳ frontend

form Data

collect form Data  
and check  
data  
(validation)

object

Backend



x frontend

input tags

↳ required

```

function validateUsername(username) {
  if (username.value.trim().length === 0) {
    errorMessage.textContent = "Enter your name"
    return false
  }
  return true
}

form.addEventListener("submit", (e) => {
  e.preventDefault();
  // const password = document.querySelector("#password").value

  const isValidUsername = validateUsername(username);


  // const email = document.querySelector("#email").value
  // console.log({ username: username.value, password: password.value, email });

  if (isValidUsername) {
    console.log("Form is valid"); // send data to backend
  } else {
    console.log("Form invalid"); // error
  }
})

```

false  
empty  
true

if email valid or if password

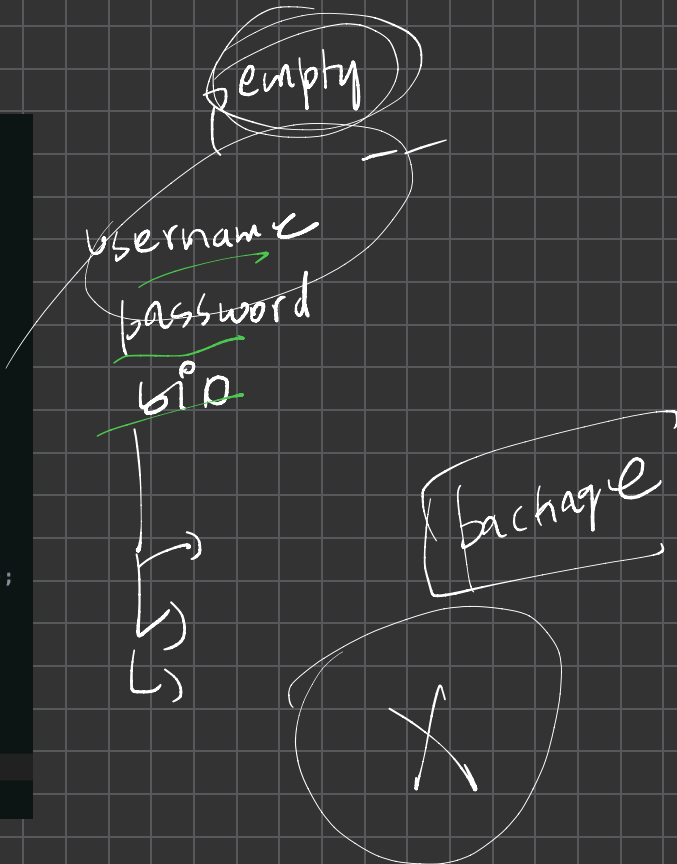

document

document.querySelector ( ⌈ )  
↓ search  
html  
code

→ <div>

}

</div>

• querySelector ( ⌈ )

```
function showError(input, errorMessage){  
  input.parentElement.querySelector(".error-message").textContent = errorMessage  
}
```

```
function clearError(input){  
  input.parentElement.querySelector(".error-message").textContent = ""  
}
```

```
function validUsername(username) {  
  if (username.value.trim().length === 0) {  
    showError(username, "Please Enter you name")  
    return false  
  }  
  if (username.value.trim().length < 3) {  
    showError(username, "username must be at least 3 character")  
    return false  
  }  
  clearError(username)  
  return true  
}
```

valid html  
element

query

```
form.addEventListener("submit", (e) => {  
  e.preventDefault();  
  // const password = document.querySelector("#password").value  
  
  const isUsernameValid = validUsername(username);  
  
  // const email = document.querySelector("#email").value  
  // console.log({ username: username.value, password: password.value, email });  
  
  if (isUsernameValid) {  
    console.log("Form is valid");  
  } else {  
    console.log("Form invalid");  
  }  
})
```

search  
document.querySelector  
complete html code