

Part 2: Polymorphism

1. Classes diagram

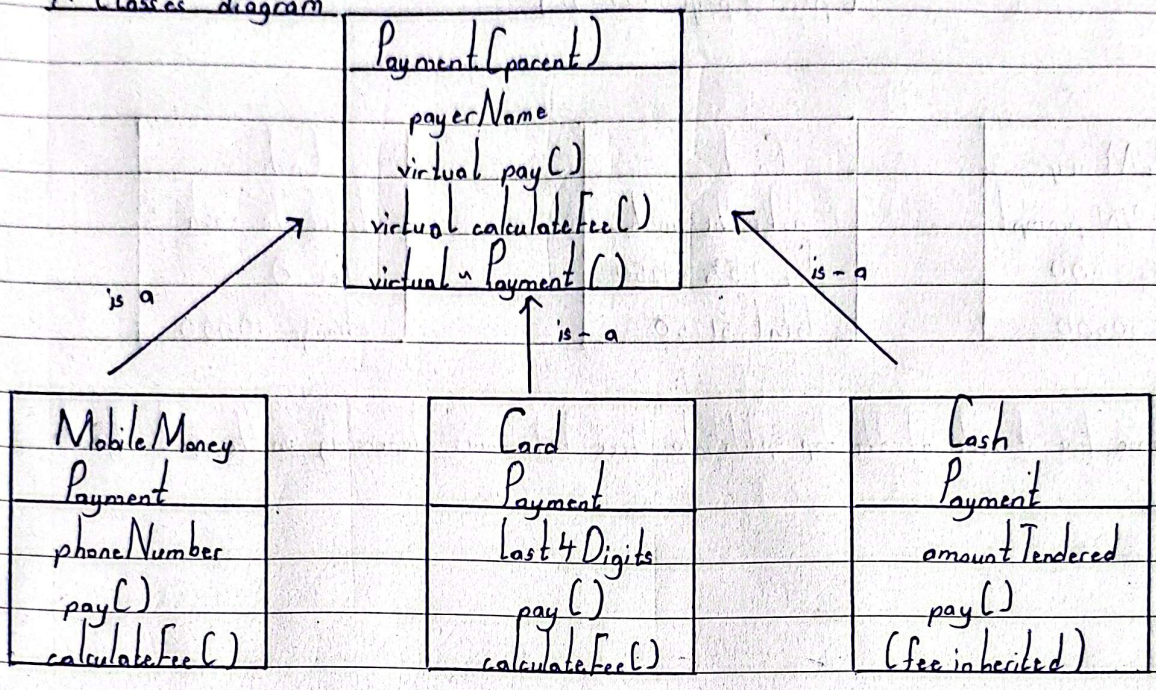

NB The parent is on top, three children below. Cash does not override the fee function, so it uses the parents

2. One pointer, three objects

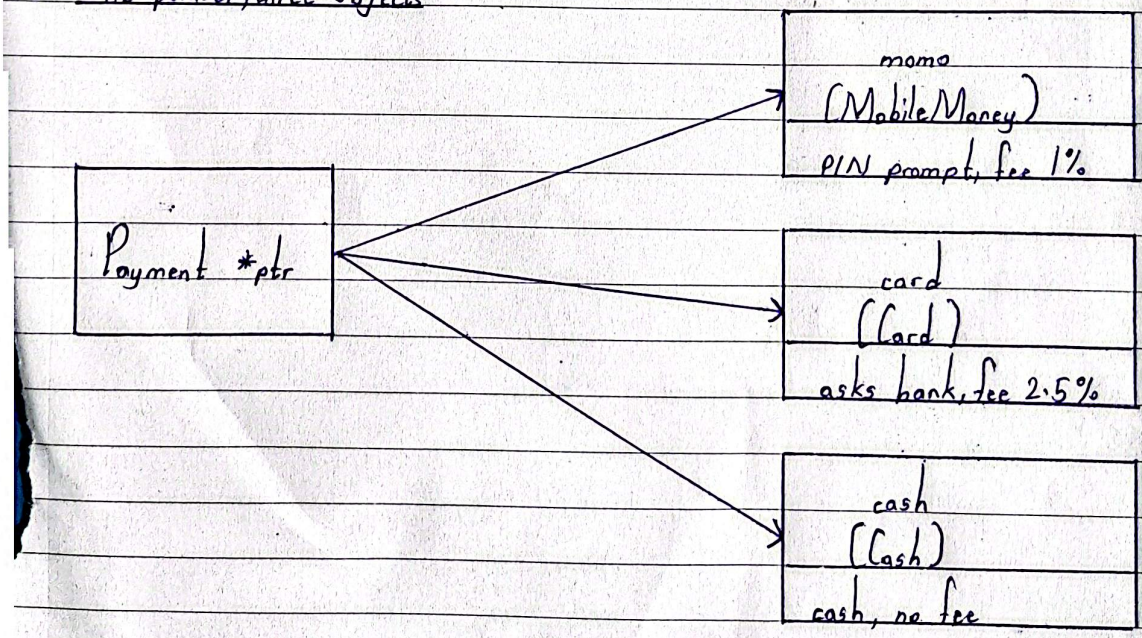

3. One call, many results

```
ptr → pay(50000)
```

MobileMoney	Card	Cash
sends PIN prompt	asks the bank	takes the cash
fee 1% = 500	fee 2.5% = 1250	fee 0
total 50500	total 51250	change 10000

The same line of code at the top splits into three behaviours depending on the real object.