Vashسفر

Complete Screen-by-Screen UI Blueprint

Passenger + Driver Android app only

Version 2.0 · 30 October 2026 · Navy-blue identity · English + Urdu (RTL)

Status disclaimer. This is a design specification. It is not evidence that code, backend, payments, maps, voice, notifications or SOS integrations exist. Items are tagged CONFIRMED PROPOSED NEEDS CONFIRMATION . Out of scope: Vashsafar Admin app and Silent Owner website.

Table of contents

Section	Page
Cover	1
How to use this blueprint	3
Executive scope & non-negotiable rules	4
Screen count methodology & master Screen Register	5
Part 5 — Global design system & component library	11
Part 6 — Passenger navigation map	13
Part 7 — Driver navigation map	14
Part 8 — Shared app-entry / auth / network states (SH, AU, ERR)	15
Part 9 — Passenger screen specifications (P)	167
Part 10 — Driver screen specifications (D)	541
Part 11 — Shared overlays & global error catalogue	705
Part 12 — English/Urdu string catalogue	708
Part 13 — Screen/action → backend matrix	721
Part 14 — Safety, privacy, GPS, QR, booking, payment, offline	727
Part 15 — QA checklist & scenarios	728
Part 16 — Open decisions register	729
Part 17 — Completeness audit, action→destination index, screen-ID index	730
Family — F0 App entry, global & shared (35 screens)	15
Family — F1 Authentication & account access (19 screens)	86
Family — F2 Passenger home & discovery (29 screens)	167
Family — F3 Search results & journey detail (16 screens)	235
Family — F4 Seat map, details, booking & payment (32 screens)	270
Family — F5 Confirmation, tickets & My Trips (28 screens)	345
Family — F6 Cancellation, refunds & disruptions (19 screens)	413
Family — F7 Passenger safety, SOS, location & support (25 screens)	454
Family — F8 Passenger settings, profile & help (16 screens)	507
Family — F9 Driver onboarding, approval & profile (12 screens)	541
Family — F10 Driver home, trips & trip operations (37 screens)	566
Family — F11 Driver safety, breakdown & help (17 screens)	645
Family — F12 Driver settings, profile & account (12 screens)	680
Family — F13 Cross-cutting full-screen states & recovery (21 screens)	125

PDF bookmarks mirror this table and every screen ID.

How to use this blueprint

Legend

CONFIRMED a rule stated in the source requirements. PROPOSED design detail this blueprint suggests where the source defines no value. NEEDS CONFIRMATION a business/legal/provider decision that must not be guessed (see Part 16).

Reading a screen specification

Each screen has a stable ID (SH shared, AU authentication, ERR cross-cutting recovery, P passenger, D driver) and follows the 18-section template: §1 header, §2 purpose/entry, §3 exits and Back, §4 canvas, §5 mockup with orange callout numbers, §6 vertical hierarchy, §7 component inventory, §8 exact EN/UR text, §9 interaction contract, §10 data, §11 validation, §12 state matrix, §13 backend (PROPOSED logical operations), §14 security, §15 accessibility, §16 analytics, §17 QA checks, §18 related screens.

Conventions

- All mockup content is **SAMPLE DATA**. Fares are “[server fare]”; destinations shown are samples only and never imply active service.
- Navigation destinations are screen IDs; the Part 17 index maps every control to its destination ID and PDF page. PDF bookmarks mirror the table of contents.
- Urdu: every screen shows a mirrored-layout preview. Strings with no confirmed Urdu are flagged (OD-18) rather than guessed; all Urdu needs native review.
- Shared error copy lives once in the Global Error Catalogue (Part 11) and is referenced by E-numbers.

Executive scope & non-negotiable rules

In scope: Vashسفر passenger + driver Android app. **Out of scope:** Vashsafar Admin app, Silent Owner website, any admin/owner/manager/worker UI (the app only shows safe outcomes such as “This trip is unavailable”).

Visual direction: navy blue; friendly original 3D-style illustrated cards for discovery; clean, high-contrast, professional booking/payment/ticket/safety screens; no copying of any other brand’s artwork. Confirmed choices: region = large illustrated cards (A); city = suggested cards + searchable list (C); vehicle = large Cars/Buses cards (C); results = premium detailed cards (C); seats = visual map + list alternative (C).

1. Quetta is the origin hub; only real, configured Quetta services appear; return journeys only when separately configured.
2. Search order: region → city → Cars/Buses → date → journeys → seats → passenger details → review/payment → confirmed ticket.
3. Islamabad is a territory, not a province; Karachi is in Sindh.
4. Standard car: 5 seats including driver; driver seat never sold; 1 front passenger + 3 rear passenger seats; other layouts are data-driven.
5. Segment-based seat reuse only when server inventory confirms non-overlap.
6. Seat holds last 10 minutes; server time and validation are authoritative.
7. Pending is never confirmed; QR only for server-confirmed bookings; offline counter tickets stay pending.
8. Checkout shows the ticket rate only: no highway/toll fee, no extra-luggage charge or luggage counter. The 10 kg-per-booked-seat limit appears only in Help and the Privacy Policy.
9. Cancellation: ≤ 8 h after booking confirmation → 100% refund; > 8 h → 75% refund, 25% retained; exactly 8 h → 75%; timer starts at confirmation; server calculates and shows estimate before confirm.
10. Driver cancels → replacement at company cost; none found → full refund. Passenger no-show (passenger-controlled) → no automatic refund. Company-caused issues are never passenger fault.
11. SOS and breakdown never claim delivery without server acknowledgement; location permission and offline handled honestly.
12. GPS retention: normal trips 90 days; SOS/breakdown location one year then review.
13. Payment providers are named only when verified; methods come from backend configuration.
14. Driver must be approved and assigned before trip actions; start/end only when the server allows; never pretend offline start/end succeeded.
15. Passenger bottom nav exactly: Home, My Trips, My Tickets, Help, Settings. Driver bottom nav exactly: Home, My Trips, Trip Records, Help, Settings.
16. PKR 0 / free-first budget direction; no paid service assumed. Kotlin/Jetpack Compose and Supabase/PostgreSQL are provisional.
17. All sensitive and authoritative state is validated server-side; the client handles duplicate taps, stale data, timeouts, retries and process death.

Screen count methodology

Every unique full screen and every meaningful full-screen state/variant has its own ID. Toasts and small transient messages are **not** counted; they live in the snackbar/banner catalogue (SH-034). Variants are counted separately only where layout, navigation or actions differ materially. Total: **318** (Shared 35, Authentication 19, Cross-cutting recovery 21, Passenger 165, Driver 78). The register below lists every ID with its PDF page.

Master Screen Register

ID	Title	Role	Family	Pri.	Page
SH-001	Splash / app initialisation	Shared	App entry, global & shared	P1	15
SH-002	First-launch welcome	Shared	App entry, global & shared	P1	17
SH-003	Choose language	Shared	App entry, global & shared	P0	19
SH-004	Language change preview (Urdu RTL)	Shared	App entry, global & shared	P1	21
SH-005	Terms & privacy acknowledgement	Shared	App entry, global & shared	P1	24
SH-006	Notification permission education	Shared	App entry, global & shared	P2	26
SH-007	Notification permission denied result	Shared	App entry, global & shared	P2	28
SH-008	Location permission education	Shared	App entry, global & shared	P0	30
SH-009	Location permission denied	Shared	App entry, global & shared	P0	32
SH-010	Location blocked — open Settings	Shared	App entry, global & shared	P0	34
SH-011	Microphone / voice search education	Shared	App entry, global & shared	P2	36
SH-012	Microphone denied	Shared	App entry, global & shared	P2	38
SH-013	Camera / QR scan education	Shared	App entry, global & shared	P1	40
SH-014	Camera denied / blocked	Shared	App entry, global & shared	P1	42
SH-015	Optional app update	Shared	App entry, global & shared	P2	44
SH-016	Required app update	Shared	App entry, global & shared	P0	46
SH-017	Maintenance notice	Shared	App entry, global & shared	P0	48
SH-018	Service unavailable	Shared	App entry, global & shared	P1	50
SH-019	Session expired	Shared	App entry, global & shared	P0	52
SH-020	Session recovery after process death	Shared	App entry, global & shared	P0	54
SH-021	Offline (global)	Shared	App entry, global & shared	P0	56
SH-022	Weak / slow connection	Shared	App entry, global & shared	P1	58
SH-023	Server unavailable (5xx)	Shared	App entry, global & shared	P1	60
SH-024	Stale data warning	Shared	App entry, global & shared	P1	62
SH-025	Generic recoverable failure	Shared	App entry, global & shared	P1	64
SH-026	Non-recoverable failure	Shared	App entry, global & shared	P1	66
SH-027	Confirmation dialog pattern	Shared	App entry, global & shared	P1	68
SH-028	Destructive-action confirmation	Shared	App entry, global & shared	P1	70
SH-029	Bottom-sheet pattern	Shared	App entry, global & shared	P1	72
SH-030	Loading / skeleton pattern	Shared	App entry, global & shared	P1	74
SH-031	Empty-state pattern	Shared	App entry, global & shared	P1	76
SH-032	No-results pattern	Shared	App entry, global & shared	P1	78
SH-033	Inline-error pattern	Shared	App entry, global & shared	P1	80
SH-034	Snackbar / toast / banner catalogue	Shared	App entry, global & shared	P1	82
SH-035	Sign-out confirmation	Shared	App entry, global & shared	P1	84
AU-001	Choose how to continue	Shared (auth)	Authentication & account access	P0	86
AU-002	Sign in	Shared (auth)	Authentication & account access	P0	88
AU-003	Phone number entry	Shared (auth)	Authentication & account access	P0	90
AU-004	Phone validation error	Shared (auth)	Authentication & account access	P0	92
AU-005	Code entry	Shared (auth)	Authentication & account access	P0	94
AU-006	Resend timer (waiting)	Shared (auth)	Authentication & account access	P1	97
AU-007	Invalid code	Shared (auth)	Authentication & account access	P0	99
AU-008	Expired code	Shared (auth)	Authentication & account access	P0	101
AU-009	Too many attempts	Shared (auth)	Authentication & account access	P0	103
AU-010	Network failure during OTP	Shared (auth)	Authentication & account access	P0	105
AU-011	Verification success	Shared (auth)	Authentication & account access	P1	107
AU-012	New-user details	Shared (auth)	Authentication & account access	P0	109
AU-013	New-user validation errors	Shared (auth)	Authentication & account access	P1	111
AU-014	Existing-user recovery	Shared (auth)	Authentication & account access	P2	113
AU-015	Account blocked	Shared (auth)	Authentication & account access	P0	115
AU-016	Account under review	Shared (auth)	Authentication & account access	P1	117
AU-017	Account deletion request	Shared (auth)	Authentication & account access	P2	119
AU-018	Account deletion confirmation	Shared (auth)	Authentication & account access	P2	121
AU-019	Re-authentication for sensitive action	Shared (auth)	Authentication & account access	P1	123
P-001	Passenger Home — default	Passenger	Passenger home & discovery	P0	167
P-002	Home — first-time empty	Passenger	Passenger home & discovery	P1	170
P-003	Home — upcoming trip	Passenger	Passenger home & discovery	P1	173
P-004	Home — no upcoming trip	Passenger	Passenger home & discovery	P1	176
P-005	Home — loading	Passenger	Passenger home & discovery	P1	179
P-006	Home — offline / stale	Passenger	Passenger home & discovery	P0	181
P-007	Announcements	Passenger	Passenger home & discovery	P2	183
P-008	Notification centre	Passenger	Passenger home & discovery	P1	186
P-009	Voice assistance — start	Passenger	Passenger home & discovery	P2	189

P-010	Voice assistance — help	Passenger	Passenger home & discovery	P2	192
P-011	Voice assistance — listening	Passenger	Passenger home & discovery	P2	194
P-012	Voice — permission denied	Passenger	Passenger home & discovery	P2	196
P-013	Voice — no speech	Passenger	Passenger home & discovery	P2	198
P-014	Voice — understood	Passenger	Passenger home & discovery	P2	200
P-015	Voice — ambiguous result	Passenger	Passenger home & discovery	P2	202
P-016	Voice — manual fallback	Passenger	Passenger home & discovery	P2	204
P-017	Province / region selection	Passenger	Passenger home & discovery	P0	206
P-018	Region — loading	Passenger	Passenger home & discovery	P1	209
P-019	Region — no configured destinations	Passenger	Passenger home & discovery	P1	211
P-020	City selection (suggested + search)	Passenger	Passenger home & discovery	P0	213
P-021	City — search active	Passenger	Passenger home & discovery	P1	216
P-022	City — no results	Passenger	Passenger home & discovery	P1	218
P-023	City — not served	Passenger	Passenger home & discovery	P1	220
P-024	Cars or Buses	Passenger	Passenger home & discovery	P0	222
P-025	Vehicle — category unavailable	Passenger	Passenger home & discovery	P1	225
P-026	Select travel date	Passenger	Passenger home & discovery	P0	227
P-027	Date — past date blocked	Passenger	Passenger home & discovery	P1	229
P-028	Date — no service	Passenger	Passenger home & discovery	P1	231
P-029	Date changed — results refresh	Passenger	Passenger home & discovery	P1	233
P-030	Results — loading	Passenger	Search results & journey detail	P0	235
P-031	Available journeys — premium cards	Passenger	Search results & journey detail	P0	237
P-032	No services for route	Passenger	Search results & journey detail	P0	240
P-033	No results for date	Passenger	Search results & journey detail	P0	242
P-034	Filter & sort sheet	Passenger	Search results & journey detail	P1	244
P-035	Filter active	Passenger	Search results & journey detail	P1	246
P-036	Results stale	Passenger	Search results & journey detail	P1	249
P-037	Route no longer available	Passenger	Search results & journey detail	P1	251
P-038	Journey detail	Passenger	Search results & journey detail	P1	253
P-039	Boarding & arrival point	Passenger	Search results & journey detail	P1	256
P-040	Fare & timing explanation	Passenger	Search results & journey detail	P2	258
P-041	Estimated arrival unavailable	Passenger	Search results & journey detail	P2	260
P-042	Seats sold out	Passenger	Search results & journey detail	P1	262
P-043	Trip unavailable at selection	Passenger	Search results & journey detail	P0	264
P-044	Results — error	Passenger	Search results & journey detail	P1	266
P-045	Return journeys (if configured)	Passenger	Search results & journey detail	P2	268
P-046	Seat map — loading	Passenger	Seat map, details, booking & payment	P0	270
P-047	Seat map — available	Passenger	Seat map, details, booking & payment	P0	272
P-048	Seats selected	Passenger	Seat map, details, booking & payment	P0	275
P-049	Booked & held seats shown	Passenger	Seat map, details, booking & payment	P0	278
P-050	Seat hold active — 10-minute timer	Passenger	Seat map, details, booking & payment	P0	281
P-051	Seat no longer available	Passenger	Seat map, details, booking & payment	P0	284
P-052	Hold expiring soon	Passenger	Seat map, details, booking & payment	P0	286
P-053	Hold expired	Passenger	Seat map, details, booking & payment	P0	288
P-054	Extend / reselect hold (if supported)	Passenger	Seat map, details, booking & payment	P2	290
P-055	Seat list alternative	Passenger	Seat map, details, booking & payment	P1	292
P-056	Vehicle layout — data-driven (bus)	Passenger	Seat map, details, booking & payment	P1	295
P-057	Passenger details	Passenger	Seat map, details, booking & payment	P0	297
P-058	Passenger details — errors	Passenger	Seat map, details, booking & payment	P1	300
P-059	Edit passenger details	Passenger	Seat map, details, booking & payment	P1	303
P-060	Booking review	Passenger	Seat map, details, booking & payment	P0	306
P-061	Fare calculation	Passenger	Seat map, details, booking & payment	P1	309
P-062	Fare changed — acknowledge	Passenger	Seat map, details, booking & payment	P0	312
P-063	Submitting booking	Passenger	Seat map, details, booking & payment	P0	314
P-064	Reservation conflict	Passenger	Seat map, details, booking & payment	P0	316
P-065	Server rejected booking	Passenger	Seat map, details, booking & payment	P0	318
P-066	App closed mid-booking — recovery	Passenger	Seat map, details, booking & payment	P0	320
P-067	Booking created — payment pending	Passenger	Seat map, details, booking & payment	P0	322
P-068	Payment method	Passenger	Seat map, details, booking & payment	P0	324
P-069	No payment methods configured	Passenger	Seat map, details, booking & payment	P0	327
P-070	Payment handoff	Passenger	Seat map, details, booking & payment	P0	329
P-071	Payment confirmed by server	Passenger	Seat map, details, booking & payment	P0	331
P-072	Payment pending	Passenger	Seat map, details, booking & payment	P0	333
P-073	Payment failed	Passenger	Seat map, details, booking & payment	P0	335
P-074	Payment cancelled by user	Passenger	Seat map, details, booking & payment	P1	337

P-075	Payment timeout — unknown status	Passenger	Seat map, details, booking & payment	P0	339
P-076	Payment status re-check	Passenger	Seat map, details, booking & payment	P0	341
P-077	Counter / cash flow (if configured)	Passenger	Seat map, details, booking & payment	P2	343
P-078	Booking confirmed	Passenger	Confirmation, tickets & My Trips	P0	345
P-079	Pending confirmation	Passenger	Confirmation, tickets & My Trips	P0	347
P-080	Confirmation failed	Passenger	Confirmation, tickets & My Trips	P0	349
P-081	My Tickets	Passenger	Confirmation, tickets & My Trips	P0	351
P-082	My Tickets — empty	Passenger	Confirmation, tickets & My Trips	P1	354
P-083	My Tickets — offline	Passenger	Confirmation, tickets & My Trips	P0	357
P-084	QR ticket — confirmed	Passenger	Confirmation, tickets & My Trips	P0	359
P-085	QR enlarged — high contrast	Passenger	Confirmation, tickets & My Trips	P0	362
P-086	Full ticket details	Passenger	Confirmation, tickets & My Trips	P1	364
P-087	Ticket — pending (no QR)	Passenger	Confirmation, tickets & My Trips	P0	367
P-088	Cached ticket — offline	Passenger	Confirmation, tickets & My Trips	P0	369
P-089	Ticket unavailable	Passenger	Confirmation, tickets & My Trips	P1	371
P-090	Share ticket	Passenger	Confirmation, tickets & My Trips	P1	373
P-091	Share fallback (system sheet)	Passenger	Confirmation, tickets & My Trips	P2	375
P-092	Save / show ticket offline	Passenger	Confirmation, tickets & My Trips	P2	377
P-093	Ticket history	Passenger	Confirmation, tickets & My Trips	P2	379
P-094	My Trips — Upcoming	Passenger	Confirmation, tickets & My Trips	P0	382
P-095	My Trips — Completed	Passenger	Confirmation, tickets & My Trips	P1	385
P-096	My Trips — Cancelled	Passenger	Confirmation, tickets & My Trips	P1	388
P-097	My Trips — no upcoming	Passenger	Confirmation, tickets & My Trips	P1	391
P-098	My Trips — no completed	Passenger	Confirmation, tickets & My Trips	P2	394
P-099	My Trips — no cancelled	Passenger	Confirmation, tickets & My Trips	P2	397
P-100	Trip details	Passenger	Confirmation, tickets & My Trips	P0	400
P-101	Trip detail — refreshing	Passenger	Confirmation, tickets & My Trips	P2	403
P-102	Cancelled trip details	Passenger	Confirmation, tickets & My Trips	P1	405
P-103	Booking status changed	Passenger	Confirmation, tickets & My Trips	P1	407
P-104	Boarding point & departure reminder	Passenger	Confirmation, tickets & My Trips	P2	409
P-105	Ticket support	Passenger	Confirmation, tickets & My Trips	P1	411
P-106	Cancellation — checking eligibility	Passenger	Cancellation, refunds & disruptions	P0	413
P-107	Refund estimate — 100% (within 8 h)	Passenger	Cancellation, refunds & disruptions	P0	415
P-108	Refund estimate — 75% (after 8 h)	Passenger	Cancellation, refunds & disruptions	P0	418
P-109	Cancellation confirmation	Passenger	Cancellation, refunds & disruptions	P0	421
P-110	Cancel request pending	Passenger	Cancellation, refunds & disruptions	P0	423
P-111	Cancellation successful	Passenger	Cancellation, refunds & disruptions	P0	425
P-112	Cancellation rejected (state changed)	Passenger	Cancellation, refunds & disruptions	P0	427
P-113	Cancellation not available	Passenger	Cancellation, refunds & disruptions	P1	429
P-114	Refund pending	Passenger	Cancellation, refunds & disruptions	P0	431
P-115	Refund completed	Passenger	Cancellation, refunds & disruptions	P1	434
P-116	Refund failed — needs support	Passenger	Cancellation, refunds & disruptions	P0	436
P-117	Driver cancellation notice	Passenger	Cancellation, refunds & disruptions	P0	438
P-118	Replacement being sought	Passenger	Cancellation, refunds & disruptions	P0	440
P-119	Replacement found	Passenger	Cancellation, refunds & disruptions	P0	442
P-120	No replacement — full refund	Passenger	Cancellation, refunds & disruptions	P0	444
P-121	Delay notice	Passenger	Cancellation, refunds & disruptions	P1	446
P-122	Trip details changed	Passenger	Cancellation, refunds & disruptions	P1	448
P-123	No-show explanation	Passenger	Cancellation, refunds & disruptions	P1	450
P-124	Company-caused disruption support	Passenger	Cancellation, refunds & disruptions	P0	452
P-125	SOS — how it works	Passenger	Passenger safety, SOS, location & support	P0	454
P-126	SOS — press and hold	Passenger	Passenger safety, SOS, location & support	P0	457
P-127	SOS — cancelled before sending	Passenger	Passenger safety, SOS, location & support	P0	459
P-128	SOS — sending	Passenger	Passenger safety, SOS, location & support	P0	461
P-129	SOS — delivered (server confirmed)	Passenger	Passenger safety, SOS, location & support	P0	463
P-130	SOS — delivery unconfirmed	Passenger	Passenger safety, SOS, location & support	P0	465
P-131	SOS — offline	Passenger	Passenger safety, SOS, location & support	P0	467
P-132	SOS — location unavailable/denied	Passenger	Passenger safety, SOS, location & support	P0	469
P-133	Retry & escalation guidance	Passenger	Passenger safety, SOS, location & support	P0	471
P-134	Emergency call action	Passenger	Passenger safety, SOS, location & support	P0	473
P-135	Live trip tracking	Passenger	Passenger safety, SOS, location & support	P1	475
P-136	Location sharing controls	Passenger	Passenger safety, SOS, location & support	P1	477
P-137	GPS unavailable / stale	Passenger	Passenger safety, SOS, location & support	P1	479
P-138	Location & privacy explanation	Passenger	Passenger safety, SOS, location & support	P1	481
P-139	Help hub	Passenger	Passenger safety, SOS, location & support	P0	483
P-140	FAQ list	Passenger	Passenger safety, SOS, location & support	P1	486

P-141	FAQ detail	Passenger	Passenger safety, SOS, location & support	P2	488
P-142	Luggage guidance (Help)	Passenger	Passenger safety, SOS, location & support	P1	490
P-143	Contact support	Passenger	Passenger safety, SOS, location & support	P0	492
P-144	Report a problem — category	Passenger	Passenger safety, SOS, location & support	P1	494
P-145	Report form	Passenger	Passenger safety, SOS, location & support	P1	496
P-146	Submitting report	Passenger	Passenger safety, SOS, location & support	P1	498
P-147	Report submitted	Passenger	Passenger safety, SOS, location & support	P1	500
P-148	Report failed	Passenger	Passenger safety, SOS, location & support	P1	502
P-149	Safety incident report	Passenger	Passenger safety, SOS, location & support	P0	504
P-150	Settings	Passenger	Passenger settings, profile & help	P0	507
P-151	Profile	Passenger	Passenger settings, profile & help	P1	510
P-152	Edit profile	Passenger	Passenger settings, profile & help	P1	512
P-153	Edit profile — field errors	Passenger	Passenger settings, profile & help	P1	514
P-154	Profile — saving	Passenger	Passenger settings, profile & help	P2	516
P-155	Profile — saved	Passenger	Passenger settings, profile & help	P2	518
P-156	Profile — save failed	Passenger	Passenger settings, profile & help	P2	520
P-157	Language settings	Passenger	Passenger settings, profile & help	P0	522
P-158	Urdu RTL preview	Passenger	Passenger settings, profile & help	P1	524
P-159	Notification settings	Passenger	Passenger settings, profile & help	P1	526
P-160	Permissions status	Passenger	Passenger settings, profile & help	P1	529
P-161	Privacy policy	Passenger	Passenger settings, profile & help	P1	531
P-162	Terms of use	Passenger	Passenger settings, profile & help	P1	533
P-163	Cancellation & refund policy	Passenger	Passenger settings, profile & help	P1	535
P-164	About / app version	Passenger	Passenger settings, profile & help	P2	537
P-165	Accessibility & voice settings	Passenger	Passenger settings, profile & help	P2	539
D-001	Driver home — before approval	Driver	Driver onboarding, approval & profile	P0	541
D-002	Approval pending	Driver	Driver onboarding, approval & profile	P0	543
D-003	Needs correction / rejected	Driver	Driver onboarding, approval & profile	P1	545
D-004	Driver profile setup	Driver	Driver onboarding, approval & profile	P0	548
D-005	Vehicle details	Driver	Driver onboarding, approval & profile	P0	550
D-006	Document upload (if required)	Driver	Driver onboarding, approval & profile	P1	552
D-007	Upload progress	Driver	Driver onboarding, approval & profile	P1	554
D-008	Document failed / invalid	Driver	Driver onboarding, approval & profile	P1	556
D-009	Submission confirmation	Driver	Driver onboarding, approval & profile	P1	558
D-010	Driver profile details	Driver	Driver onboarding, approval & profile	P1	560
D-011	Edit request	Driver	Driver onboarding, approval & profile	P1	562
D-012	Account disabled / suspended	Driver	Driver onboarding, approval & profile	P0	564
D-013	Driver Home — default	Driver	Driver home, trips & trip operations	P0	566
D-014	Driver Home — no assigned trip	Driver	Driver home, trips & trip operations	P0	569
D-015	Driver Home — assigned upcoming trip	Driver	Driver home, trips & trip operations	P0	571
D-016	Driver My Trips	Driver	Driver home, trips & trip operations	P0	574
D-017	My Trips — empty	Driver	Driver home, trips & trip operations	P1	577
D-018	Trip details	Driver	Driver home, trips & trip operations	P0	579
D-019	Route / stop list	Driver	Driver home, trips & trip operations	P1	582
D-020	Passenger manifest	Driver	Driver home, trips & trip operations	P0	584
D-021	Passenger / ticket lookup	Driver	Driver home, trips & trip operations	P1	586
D-022	Scanner ready	Driver	Driver home, trips & trip operations	P0	588
D-023	Scan — valid ticket	Driver	Driver home, trips & trip operations	P0	590
D-024	Scan — invalid ticket	Driver	Driver home, trips & trip operations	P0	592
D-025	Scan — wrong trip	Driver	Driver home, trips & trip operations	P0	594
D-026	Scan — already boarded	Driver	Driver home, trips & trip operations	P0	596
D-027	Scan — pending / unverified	Driver	Driver home, trips & trip operations	P0	598
D-028	Scan — offline warning	Driver	Driver home, trips & trip operations	P0	600
D-029	Boarding recorded	Driver	Driver home, trips & trip operations	P1	602
D-030	Boarding status	Driver	Driver home, trips & trip operations	P1	604
D-031	Start-trip eligibility	Driver	Driver home, trips & trip operations	P0	606
D-032	Start-trip confirmation	Driver	Driver home, trips & trip operations	P0	608
D-033	Starting trip…	Driver	Driver home, trips & trip operations	P0	610
D-034	Trip started (server confirmed)	Driver	Driver home, trips & trip operations	P0	612
D-035	Start rejected	Driver	Driver home, trips & trip operations	P0	614
D-036	Start — offline not accepted	Driver	Driver home, trips & trip operations	P0	616
D-037	Active trip	Driver	Driver home, trips & trip operations	P0	618
D-038	Navigation handoff	Driver	Driver home, trips & trip operations	P2	620
D-039	Report delay	Driver	Driver home, trips & trip operations	P1	622
D-040	End-trip eligibility	Driver	Driver home, trips & trip operations	P0	624

D-041	End-trip confirmation	Driver	Driver home, trips & trip operations	P0	626
D-042	Ending trip…	Driver	Driver home, trips & trip operations	P0	628
D-043	Trip ended (server confirmed)	Driver	Driver home, trips & trip operations	P0	630
D-044	End rejected	Driver	Driver home, trips & trip operations	P0	632
D-045	Post-trip summary	Driver	Driver home, trips & trip operations	P1	634
D-046	Trip Records	Driver	Driver home, trips & trip operations	P0	636
D-047	Trip record detail	Driver	Driver home, trips & trip operations	P1	639
D-048	Trip Records — empty	Driver	Driver home, trips & trip operations	P2	641
D-049	Trip Records — error/refresh	Driver	Driver home, trips & trip operations	P2	643
D-050	Driver SOS	Driver	Driver safety, breakdown & help	P0	645
D-051	Driver SOS — confirm	Driver	Driver safety, breakdown & help	P0	647
D-052	Driver SOS — sending	Driver	Driver safety, breakdown & help	P0	649
D-053	Driver SOS — delivered	Driver	Driver safety, breakdown & help	P0	651
D-054	Driver SOS — unconfirmed	Driver	Driver safety, breakdown & help	P0	653
D-055	Driver SOS — offline	Driver	Driver safety, breakdown & help	P0	655
D-056	Breakdown report	Driver	Driver safety, breakdown & help	P0	657
D-057	Breakdown — reason	Driver	Driver safety, breakdown & help	P0	659
D-058	Breakdown — location status	Driver	Driver safety, breakdown & help	P0	661
D-059	Call support	Driver	Driver safety, breakdown & help	P1	663
D-060	Support form	Driver	Driver safety, breakdown & help	P1	665
D-061	Report incident	Driver	Driver safety, breakdown & help	P1	667
D-062	Emergency guidance	Driver	Driver safety, breakdown & help	P0	669
D-063	Driver Help hub	Driver	Driver safety, breakdown & help	P1	671
D-064	Driver FAQ	Driver	Driver safety, breakdown & help	P2	674
D-065	Ticket / passenger issue	Driver	Driver safety, breakdown & help	P1	676
D-066	Trip disruption status	Driver	Driver safety, breakdown & help	P1	678
D-067	Driver Settings	Driver	Driver settings, profile & account	P0	680
D-068	Edit details	Driver	Driver settings, profile & account	P1	683
D-069	Driver language	Driver	Driver settings, profile & account	P1	685
D-070	Driver notifications	Driver	Driver settings, profile & account	P1	687
D-071	Location permission	Driver	Driver settings, profile & account	P0	689
D-072	Privacy & GPS explanation	Driver	Driver settings, profile & account	P0	691
D-073	Policies	Driver	Driver settings, profile & account	P2	693
D-074	App version	Driver	Driver settings, profile & account	P2	695
D-075	Account status	Driver	Driver settings, profile & account	P1	697
D-076	Approval status detail	Driver	Driver settings, profile & account	P2	699
D-077	Document status	Driver	Driver settings, profile & account	P2	701
D-078	Driver session expired	Driver	Driver settings, profile & account	P1	703
ERR-001	Slow network — with cancel	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	125
ERR-002	No internet before action	Shared (recovery)	Cross-cutting full-screen states & recovery	P0	127
ERR-003	Connection lost during read	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	129
ERR-004	Connection lost during booking write	Shared (recovery)	Cross-cutting full-screen states & recovery	P0	131
ERR-005	Rate limited	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	133
ERR-006	Session expired during action	Shared (recovery)	Cross-cutting full-screen states & recovery	P0	135
ERR-007	Return from OS Settings	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	137
ERR-008	Duplicate taps blocked	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	139
ERR-009	Background / foreground during hold	Shared (recovery)	Cross-cutting full-screen states & recovery	P0	141
ERR-010	Conflicting seat reservation	Shared (recovery)	Cross-cutting full-screen states & recovery	P0	143
ERR-011	Payment pending reconciliation	Shared (recovery)	Cross-cutting full-screen states & recovery	P0	145
ERR-012	Ticket QR needs refresh	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	147
ERR-013	Backend validation summary	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	149
ERR-014	Unhandled exception — safe recovery	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	151
ERR-015	Malformed response	Shared (recovery)	Cross-cutting full-screen states & recovery	P2	153
ERR-016	Booking saved, ticket not loaded	Shared (recovery)	Cross-cutting full-screen states & recovery	P0	155
ERR-017	Device time looks wrong	Shared (recovery)	Cross-cutting full-screen states & recovery	P2	157
ERR-018	Low storage / memory	Shared (recovery)	Cross-cutting full-screen states & recovery	P2	159
ERR-019	Background restriction for GPS	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	161
ERR-020	No assigned trip (action blocked)	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	163
ERR-021	Driver not approved (action blocked)	Shared (recovery)	Cross-cutting full-screen states & recovery	P1	165

Global design system & component library

Colour tokens


Primary Navy	Deep Navy	Secondary Blue	Light Blue	Page BG	Card White	Text Primary	Text Secondary	Success	Warning
#102A43	#071A2D	#1F4E79	#D9EAF7	#F4F7FA	#FFFFFF	#172B4D	#526579	#16865C	#F2B84B


Error	Border	Disabled (PROPOSED)
#C93636	#D9E2EC	#CBD2D9


Navy tokens #102A43 / #071A2D are proposed tokens carried from the source (“not yet final brand decisions”). Semantic: success #16865C, warning #F2B84B, error #C93636; disabled grey is PROPOSED. Never use colour alone — pair with icon + text. Red only for errors/destructive/urgent.


Token group	Values
Typography (PROPOSED)	Latin: Roboto/Noto Sans; Urdu: Noto Nastaliq Urdu or Noto Naskh Arabic (font choice NEEDS CONFIRMATION). Scale: Display 24/32 bold · Title 20/28 · Heading 16/24 bold · Body 14/20 · Secondary 12/16 · Caption 10/14; buttons 15 bold; never all-caps long labels; Urdu line-height +20%.
Spacing	4 · 8 · 12 · 16 · 24 · 32 dp; page margin 16 dp; card gap 12 dp
Corner radii	Cards 18–24 dp (source: proposed 18–24) · inputs 12 · buttons 16 · chips 15 · sheets 24 top
Elevation	0 dp flat default; 1–3 dp only where it improves hierarchy; scrim 45–50%
Icon sizes	20 (inline) · 24 (standard) · 32 (cards) · 48+ (illustration glyph); icon + label always
Button heights	Primary 52 dp · secondary 48 dp · minimum touch target 48 dp (large cards ≥ 96 dp)
Focus	2 dp navy ring + 2 dp offset; keyboard/TalkBack focus order = visual order
Dark mode	NEEDS CONFIRMATION (OD-19): first release designed and tested in light theme with navy accents
RTL mirroring rules	Mirror: layout order, back arrows, chevrons, nav order, progress direction, list alignment. Do NOT mirror: QR codes, seat map (physical), maps, numerals, ticket IDs, phone numbers, logos. Route names/IDs/dates are isolated with bidi isolates so “Quetta → Karachi” and “VS-0000” stay legible inside Urdu text.
Illustrations	Original, consistent 3D-style art (lighting, perspective, scale) for regions, cities, cars, buses, tickets, help, settings; local optimised assets; every image has a text label + spoken label; no luggage-selection art; no other brand’s artwork


Component gallery

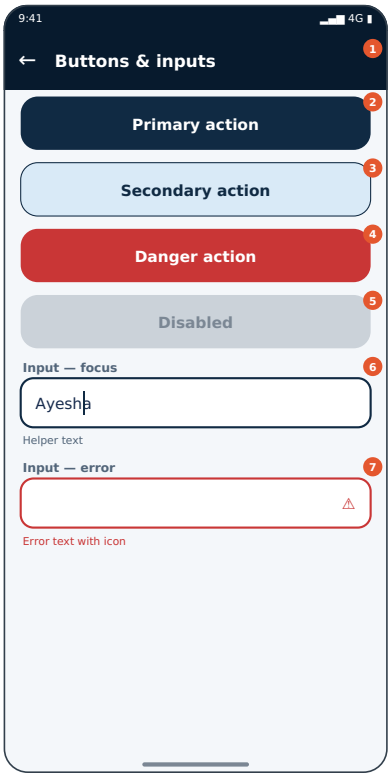


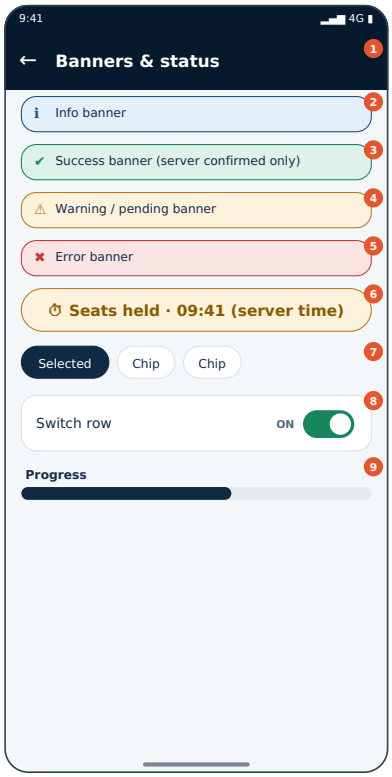


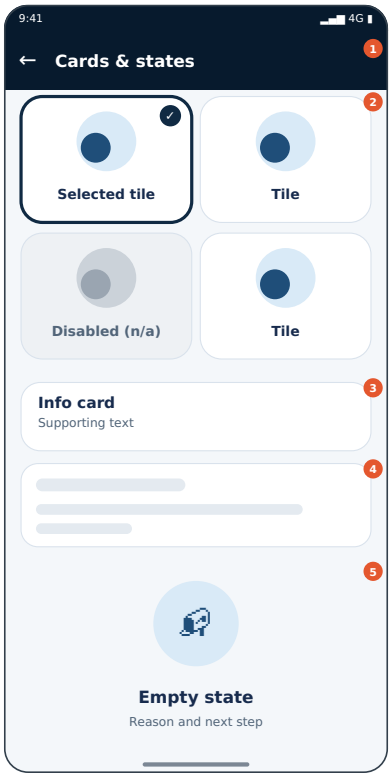

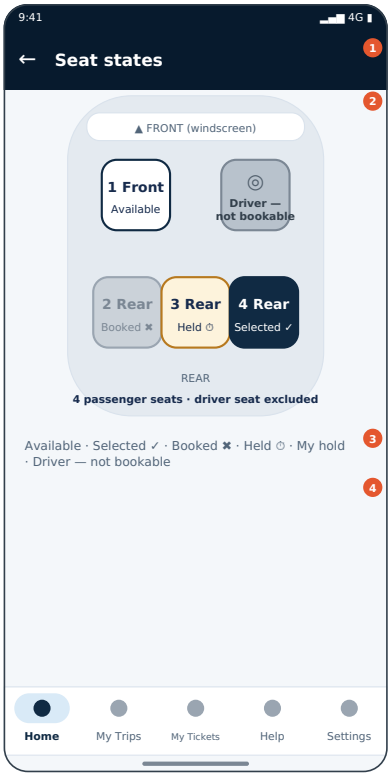

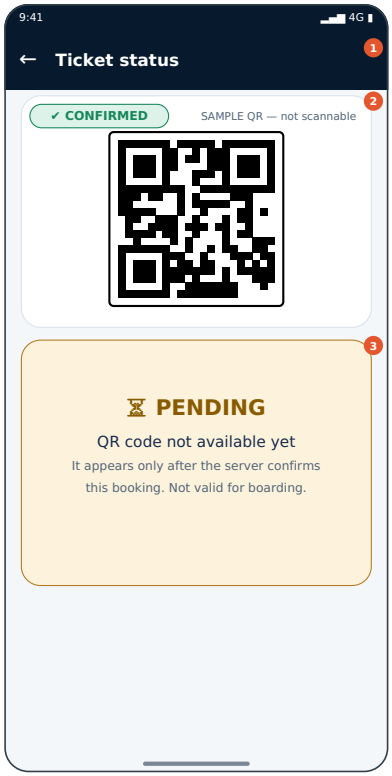

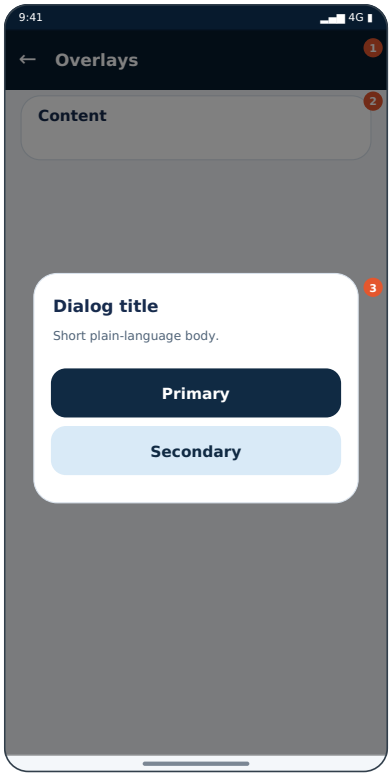


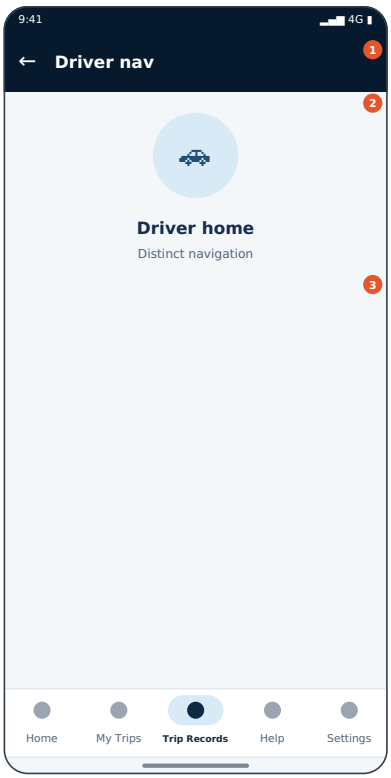


Passenger nav: Home · My Trips · My Tickets · Help · Settings. **Driver nav:** Home · My Trips · Trip Records · Help · Settings. Active = light-blue pill + bold label + navy icon; inactive = grey icon + regular label. In-progress forms in a tab are kept in memory when switching tabs; an active seat hold continues on the server and a hold banner/countdown is visible on other tabs (PROPOSED) — it is never silently lost; when time ends the user is told honestly (E14).

Part 6 — Complete passenger navigation map


A. Main booking journey

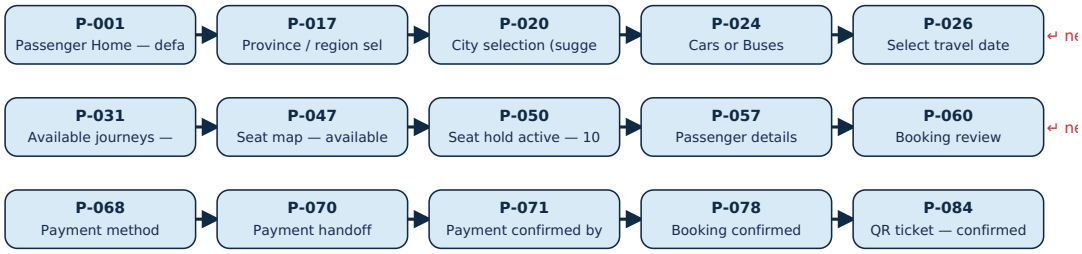


B. Failure/recovery branches of booking

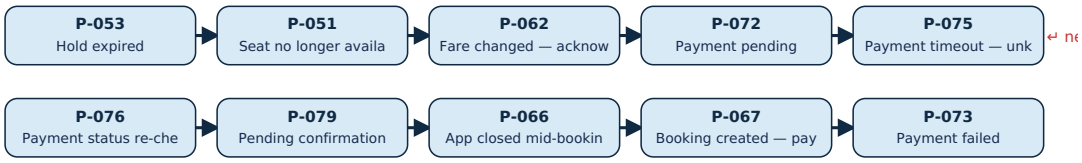


C. Tabs (bottom navigation)




D. Cancellation & refunds

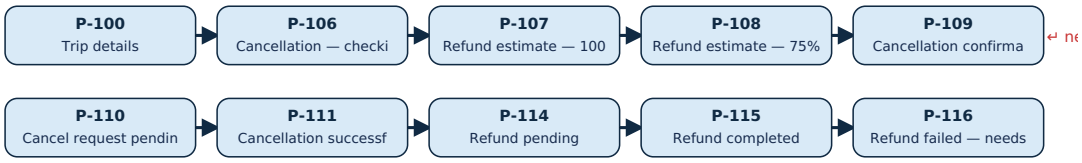


E. Disruptions

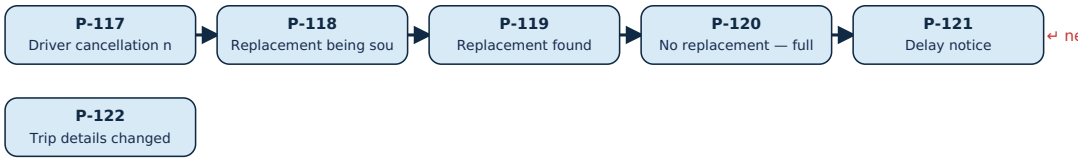

F. Safety & support

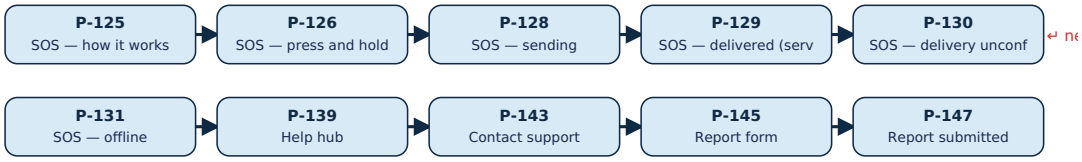

G. Onboarding & auth (shared)

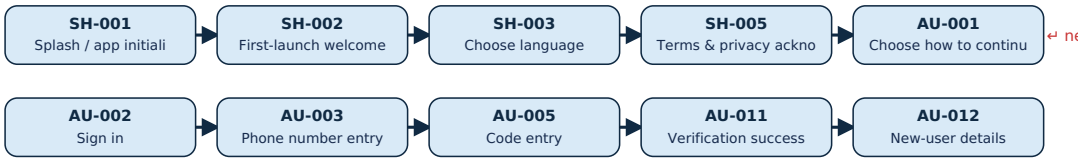


Every control→destination is listed in the Part 17 index. System Back always pops one level; tabs are roots (Back from a tab root exits or returns to Home per screen spec).

Part 7 — Complete driver navigation map


A. Driver onboarding




B. Trip operations

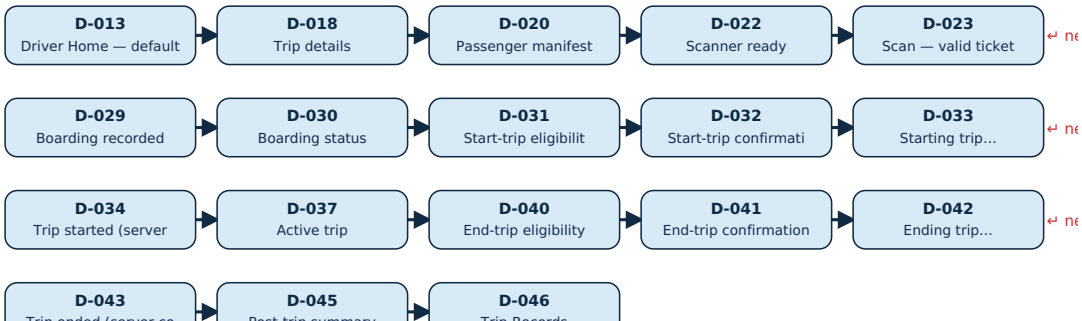


C. Scan outcomes

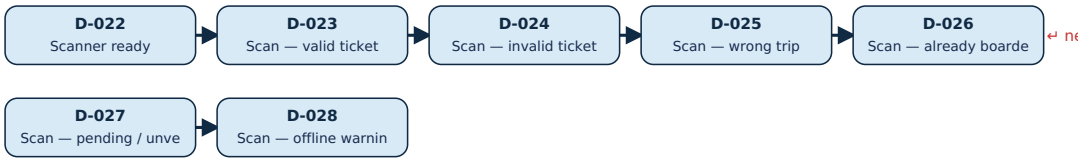

D. Safety

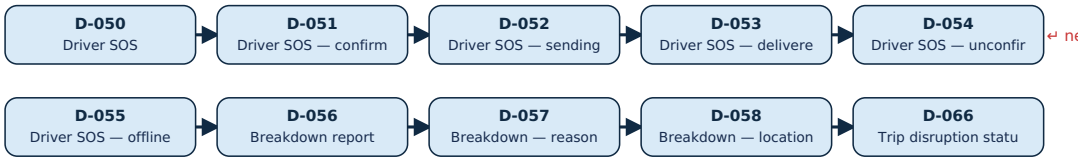

E. Tabs (bottom navigation)




Driver and passenger navigation are never mixed; mode is decided by the server-side role.

SH-001 CONFIRMED PROPOSED P1 v2.0

Splash / app initialisation

آغاز / ایپ شروع ہو رہی ہے

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.splash`

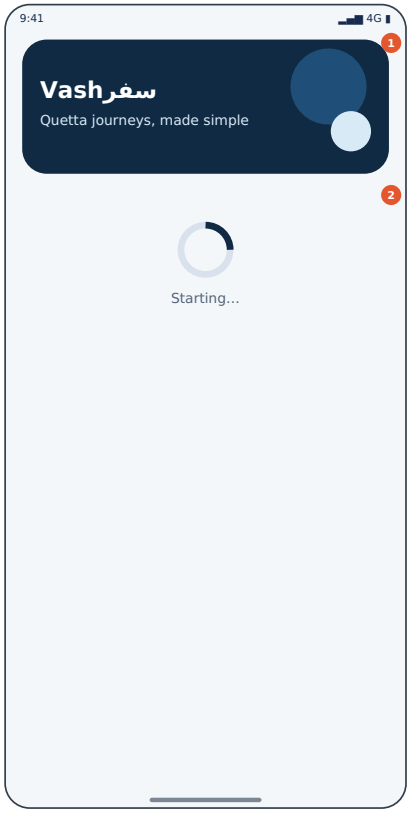

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Cold launch: show brand, init config, restore session, then route to the correct first screen.

Login: **No** · Incoming screens: ERR-014, SH-017, SH-018, SH-026


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back exits app (no previous screen) except where noted. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Hero card	24–160 dp	Full width, 16 dp margins	above fold
2	Loading indicator	160–280 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Hero card	24–160 dp	328×136 dp	Vashسفر; Quetta journeys, made simple	Navy #102A43 card, radius 22dp, white text	—	Vashسفر	No	Always in this state
2	C02 Loading indicator	160–280 dp	328×120 dp	Starting...	Navy arc on grey ring	—	Starting...	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
1	Quetta journeys, made simple	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Starting...	Translation review required	—

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Cold launch: show brand, init config, restore session, then route to the correct first screen.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E07 Maintenance flag from server config	Banner or full screen **SH-017** Maintenance notice	Service is being updated — Vashسفر is under maintenance. Please try again later.
E26 App version below minimum	Banner or full screen **SH-016** Required app update	Please update the app — This version is no longer supported.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_app_config (read)
Inputs	app version, locale
Server checks / RLS	min version, maintenance flag, configured payment methods, feature flags; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E07, E26
Retry / idempotency	Safe read
Offline	Use last config; never assume payment methods
Cache	Short TTL (PROPOSED)

14. Security, privacy & safety

No personal data shown. No tokens, OTPs or secrets logged. Server messages mapped to safe copy. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large primary action; short plain-language text; optional voice hint where available. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Splash ≤ 2 s on mid-range device unless config is slow (PROPOSED)
2. Routes: first launch→welcome; signed-in passenger→Home; signed-in driver→Driver Home; maintenance→maintenance; old version→required update
3. Cold start on low-end device completes without ANR
4. Language and RTL applied before first frame of next screen
5. Back behaviour matches Navigation section
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: ERR-014, SH-017, SH-018, SH-026


Open decisions: None specific (see Part 16).

SH-002 CONFIRMED P1 v2.0

First-launch welcome

خوش آمدید

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.welcome`

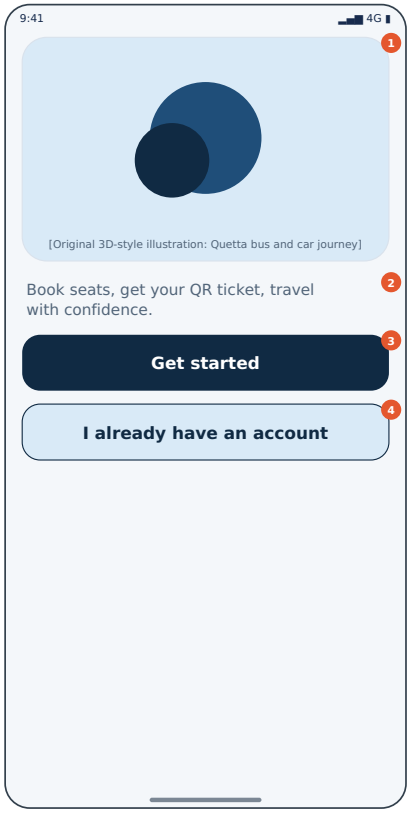

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Introduce the app in 3 simple illustrated steps before language/terms.

Login: **No** · Incoming screens: SH-019


3. Exit & navigation map

- Get started (Button) → **SH-003** Choose language
- I already have an account (Button) → **AU-001** Choose how to continue

Android system Back: Back exits app (no previous screen) except where noted. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–238 dp	Full width, 16 dp margins	above fold
2	Body text	238–290 dp	Full width, 16 dp margins	above fold
3	Button	290–352 dp	Full width, 16 dp margins	above fold
4	Button	352–414 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–238 dp	328×214 dp	[Quetta bus and car journey]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Quetta bus and car journey]	No	Always in this state
2	C02 Body text	238–290 dp	328×52 dp	Book seats, get your QR ticket, travel with confidence.	12–14sp secondary text	—	Book seats, get your QR ticket, travel w	No	Always in this state
3	C03 Button	290–352 dp	328×62 dp	Get started شروع کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Get started, button	Yes	Always in this state
4	C04 Button	352–414 dp	328×62 dp	I already have an account میرا اکاؤنٹ ہے	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	I already have an account, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	Book seats, get your QR ticket, travel with confidence.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Get started	شروع کریں	Needs native review
4	I already have an account	میرا اکاؤنٹ ہے	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Get started	≥48 dp	Enabled	Navigate to **SH-003** Choose language	Instant	—	E01, E06 copy; no false success	Primary button disables after first tap until response.
4	Button: I already have an	≥48 dp	Enabled	Navigate to **AU-001** Choose how to	Instant	—	E01, E06 copy; no false	Primary button disables after first tap

	account			continue			success	until response.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Introduce the app in 3 simple illustrated steps before language/terms.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E07 Maintenance flag from server config	Banner or full screen **SH-017** Maintenance notice	Service is being updated — Vashسفر is under maintenance. Please try again later.
E26 App version below minimum	Banner or full screen **SH-016** Required app update	Please update the app — This version is no longer supported.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E06, E07, E26
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data shown. No tokens, OTPs or secrets logged. Server messages mapped to safe copy. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large primary action; short plain-language text; optional voice hint where available. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Skip/Get started reach language choice
2. Existing user path reaches sign-in
3. Cold start on low-end device completes without ANR
4. Language and RTL applied before first frame of next screen
5. Back behaviour matches Navigation section
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-001, SH-003 · Incoming: SH-019


Open decisions: None specific (see Part 16).

SH-003 CONFIRMED P0 v2.0

Choose language

زبان منتخب کریں

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.lang`

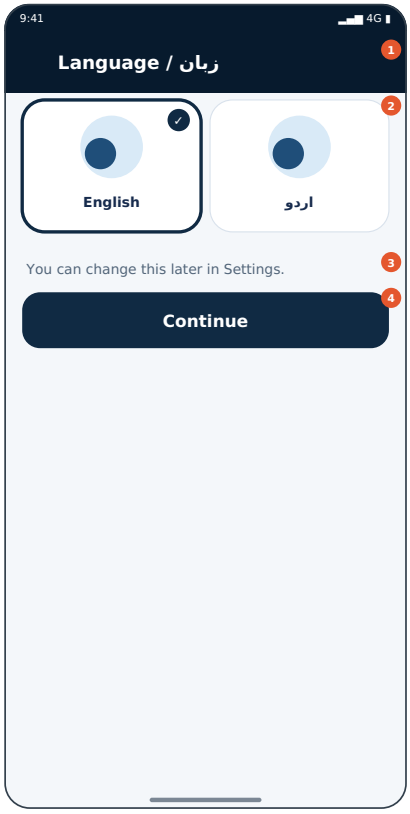

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Let the user pick English or Urdu; applies immediately and can be changed later in Settings.

Login: **Per flow** · Incoming screens: SH-002, SH-004


3. Exit & navigation map

- English (Tile) → **SH-004** Language change preview (Urdu RTL)
- اردو (Tile) → **SH-004** Language change preview (Urdu RTL)
- Continue (Button) → **SH-005** Terms & privacy acknowledgement

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Illustrated tile grid	80–220 dp	Full width, 16 dp margins	above fold
3	Body text	220–252 dp	Full width, 16 dp margins	above fold
4	Button	252–314 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Language / زبان	Deep navy #071A2D, white 16sp bold	Per state	Language / زبان	Yes	Always in this state
2	C02 Illustrated tile grid	80–220 dp	328×140 dp	English; اردو اردو / English	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	English	Yes	Always in this state
3	C03 Body text	220–252 dp	328×32 dp	You can change this later in Settings.	12–14sp secondary text	—	You can change this later in Settings.	No	Always in this state
4	C04 Button	252–314 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Language / زبان	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	English	English	Needs native review
2	اردو	اردو	Needs native review
3	You can change this later in Settings.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure

								Dup-tap / retry
2	Tile: English	≥48 dp	Enabled	Navigate to **SH-004** Language change preview (Urdu RTL)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
2	Tile: اردو	≥48 dp	Enabled	Navigate to **SH-004** Language change preview (Urdu RTL)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
4	Button: Continue	≥48 dp	Enabled	Navigate to **SH-005** Terms & privacy acknowledgement	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Let the user pick English or Urdu; applies immediately and can be changed later in Settings.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected language persists after relaunch
2. Urdu applies RTL to all screens
3. Selected state visible and announced by TalkBack
4. Back keeps previous selections
5. Only configured items appear; none invented
6. Urdu RTL grid order mirrors correctly
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: SH-004, SH-005 · Incoming: SH-002, SH-004


Open decisions: None specific (see Part 16).

SH-004 CONFIRMED P1 v2.0

Language change preview (Urdu RTL)

زبان کی تبدیلی کا پیش منظر

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.lang_prev`

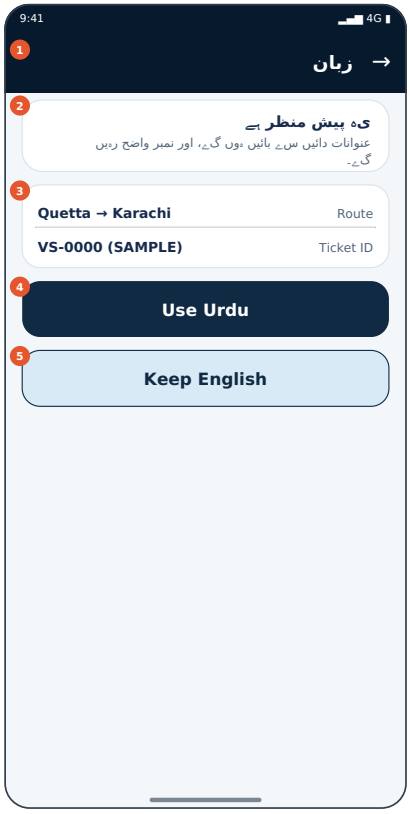

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Show a live preview so the user can see Urdu RTL layout before confirming.

Login: **Per flow** · Incoming screens: SH-003


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Use Urdu (Button) → **SH-005** Terms & privacy acknowledgement
- Keep English (Button) → **SH-003** Choose language

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–156 dp	Full width, 16 dp margins	above fold
3	Key-value card	156–242 dp	Full width, 16 dp margins	above fold
4	Button	242–304 dp	Full width, 16 dp margins	above fold
5	Button	304–366 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	زبان	Deep navy #071A2D, white 16sp bold	Per state	زبان	Yes	Always in this state
2	C02 Info card	80–156 dp	328×76 dp	یہ پیش منظر ہے عنوانات دائیں سے بائیں ہوں گے، اور نمبر واضح رہیں گے۔	White card, border #D9E2EC, radius 18dp	—	یہ پیش منظر ہے	No	Always in this state
3	C03 Key-value card	156–242 dp	328×86 dp	Route: Quetta → Karachi; Ticket ID: VS-0000 (SAMPLE)	White card, 30dp rows, label grey / value bold	—	Route: Quetta → Karachi	No	Always in this state
4	C04 Button	242–304 dp	328×62 dp	Use Urdu اردو استعمال کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Use Urdu, button	Yes	Always in this state
5	C05 Button	304–366 dp	328×62 dp	Keep English انگریزی رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Keep English, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	زبان	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	یہ پیش منظر ہے	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	عنوانات دائیں سے بائیں ہوں گے، اور نمبر واضح رہیں گے۔	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Route: Quetta → Karachi	روٹ	Needs native review
3	Ticket ID: VS-0000 (SAMPLE)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Use Urdu	اردو استعمال کریں	Needs native review

5	Keep English	انگریزی رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
4	Button: Use Urdu	≥48 dp	Enabled	Navigate to **SH-005** Terms & privacy acknowledgement	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
5	Button: Keep English	≥48 dp	Enabled	Navigate to **SH-003** Choose language	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Route	Quetta → Karachi	Server-derived	Required	Show “Not available” if missing; never blank/invented
Ticket ID	VS-0000 (SAMPLE)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Show a live preview so the user can see Urdu RTL layout before confirming.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Route names, IDs, dates remain legible inside RTL text
2. Navigation arrows mirror; QR/images do not
3. Selected state visible and announced by TalkBack
4. Back keeps previous selections
5. Only configured items appear; none invented
6. Urdu RTL grid order mirrors correctly
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: SH-003, SH-005 · Incoming: SH-003


Open decisions: None specific (see Part 16).

SH-005 CONFIRMED NEEDS CONFIRMATION P1 v2.0

Terms & privacy acknowledgement

شرائط اور رازداری کی منظوری

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.terms`

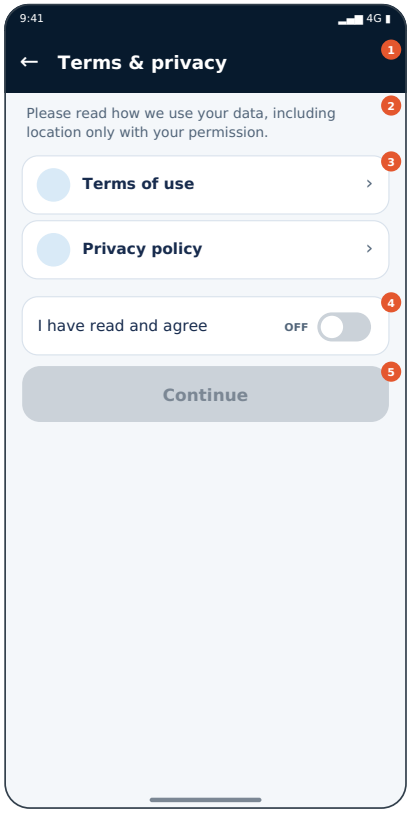

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Ask the user to acknowledge Terms and Privacy where legally required (NEEDS CONFIRMATION).

Login: **Per flow** · Incoming screens: SH-003, SH-004


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Terms of use (Row) → **P-162** Terms of use
- Privacy policy (Row) → **P-161** Privacy policy
- Continue (Button) → **AU-001** Choose how to continue

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–130 dp	Full width, 16 dp margins	above fold
3	List rows	130–256 dp	Full width, 16 dp margins	above fold
4	Switch row	256–318 dp	Full width, 16 dp margins	above fold
5	Button	318–380 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Terms & privacy	Deep navy #071A2D, white 16sp bold	Per state	Terms & privacy	Yes	Always in this state
2	C02 Body text	80–130 dp	328×50 dp	Please read how we use your data, including location only with your permission.	12–14sp secondary text	—	Please read how we use your data, includ	No	Always in this state
3	C03 List rows	130–256 dp	328×126 dp	Terms of use; Privacy policy	White rows radius 14dp, 52dp high, chevron/check	Per state	Terms of use	Yes	Always in this state
4	C04 Switch row	256–318 dp	328×62 dp	I have read and agree	52dp row, switch with ON/OFF text	Per state	I have read and agree	Yes	Always in this state
5	C05 Button	318–380 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Terms & privacy	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please read how we use your data, including location only with your permission.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Terms of use	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Privacy policy	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	I have read and agree	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
3	Row: Terms of use	≥48 dp	Enabled	Navigate to **P-162** Terms of use	Instant	—	E01, E03 copy; no false success	n/a
3	Row: Privacy policy	≥48 dp	Enabled	Navigate to **P-161** Privacy policy	Instant	—	E01, E03 copy; no false success	n/a
5	Button: Continue	≥48 dp	Enabled	Navigate to **AU-001** Choose how to continue	Instant	—	E01, E03 copy; no false success	n/a
4	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Ask the user to acknowledge Terms and Privacy where legally required (NEEDS CONFIRMATION).
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Continue disabled until accepted
2. Acceptance version stored server-side after sign-in (PROPOSED)
3. Text readable at 200%
4. Offline copy available
5. Urdu text RTL and complete
6. Policy content respects confirmed rules
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-001, P-161, P-162 · Incoming: SH-003, SH-004


Open decisions: OD-17 (see Part 16).

SH-006 CONFIRMED PROPOSED P2 v2.0

Notification permission education

اطلاعات کی اجازت کی وضاحت

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.notif_edu`

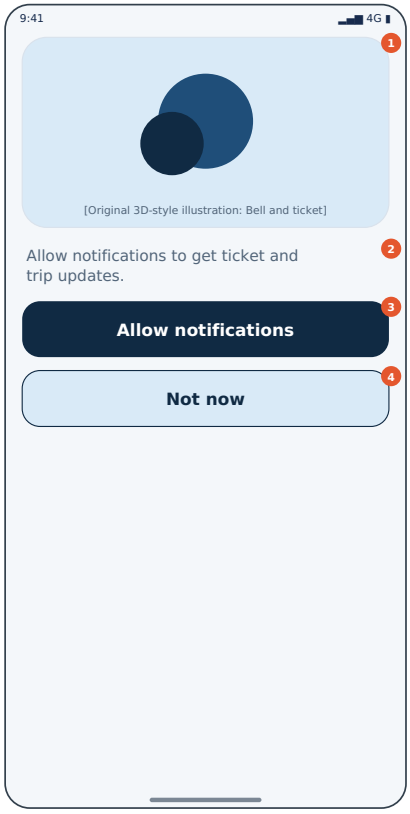

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Explain why notifications help (ticket, delay, cancellation updates) before the OS prompt.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Allow notifications (Button) → **SH-007** Notification permission denied result
- Not now (Button) → previous screen (system Back)

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–208 dp	Full width, 16 dp margins	above fold
2	Body text	208–260 dp	Full width, 16 dp margins	above fold
3	Button	260–322 dp	Full width, 16 dp margins	above fold
4	Button	322–384 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–208 dp	328×184 dp	[Bell and ticket]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Bell and ticket]	No	Always in this state
2	C02 Body text	208–260 dp	328×52 dp	Allow notifications to get ticket and trip updates.	12–14sp secondary text	—	Allow notifications to get ticket and tr	No	Always in this state
3	C03 Button	260–322 dp	328×62 dp	Allow notifications اجازت دیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Allow notifications, button	Yes	Always in this state
4	C04 Button	322–384 dp	328×62 dp	Not now ابھی نہیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Not now, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	Allow notifications to get ticket and trip updates.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Allow notifications	اجازت دیں	Needs native review
4	Not now	ابھی نہیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Allow notifications	≥48 dp	Enabled	Navigate to **SH-007** Notification permission denied result	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Not now	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant		E09, E10 copy; no false	Allow button opens OS prompt

4	Button: Not now	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Explain why notifications help (ticket, delay, cancellation updates) before the OS prompt.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt appears only after Allow tapped (Android 13+)
2. OS prompt shown only after user taps Allow
3. Deny → manual alternative shown
4. Permanent deny → Settings path
5. Return from Settings re-checks state
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: SH-007 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-007 CONFIRMED PROPOSED P2 v2.0

Notification permission denied result

اطلاعات کی اجازت نہیں ملی

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.notif_denied`

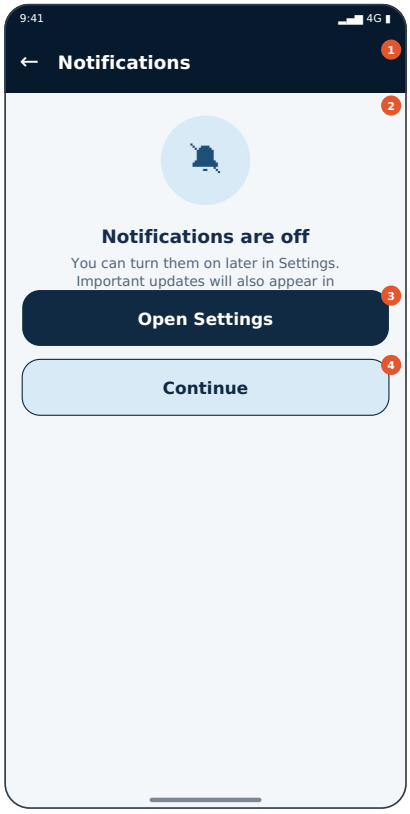

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Confirm notifications are off and explain where to change it later.

Login: **Per flow** · Incoming screens: SH-006


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open Settings (Button) → Android system settings
- Continue (Button) → previous screen (system Back)

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Notifications	Deep navy #071A2D, white 16sp bold	Per state	Notifications	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Notifications are off; You can turn them on later in Settings. Important updates will also appear in the app.	Light-blue circle icon + 16sp title + 12sp body	—	Notifications are off	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Open Settings سیٹنگز کھولیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open Settings, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Notifications	اطلاعات	Needs native review
2	Notifications are off	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You can turn them on later in Settings. Important updates will also appear in the app.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open Settings	سیٹنگز کھولیں	Needs native review
4	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
3	Button: Open Settings	≥48 dp	Enabled	Open Android Settings for this app; on return re-check state	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Continue	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Confirm notifications are off and explain where to change it later.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: SH-006


Open decisions: None specific (see Part 16).

SH-008 CONFIRMED P0 v2.0

Location permission education

لوکیشن کی اجازت کی وضاحت

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.loc_edu`

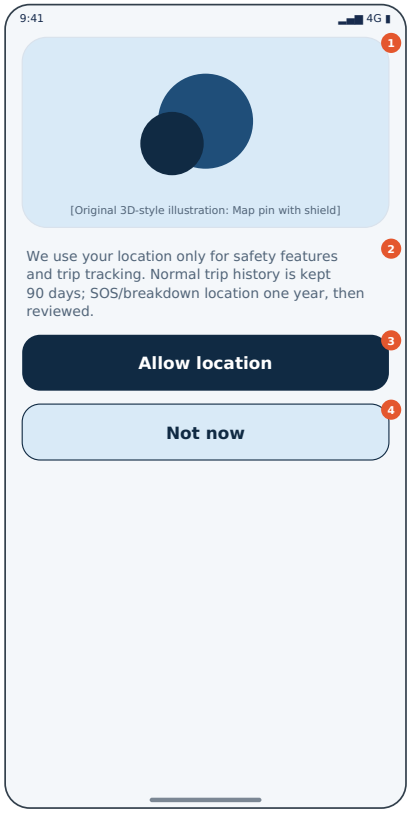

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Explain location use (live trip tracking, SOS, boarding help) and privacy before requesting.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Allow location (Button) → **SH-009** Location permission denied
- Not now (Button) → previous screen (system Back)

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–208 dp	Full width, 16 dp margins	above fold
2	Body text	208–290 dp	Full width, 16 dp margins	above fold
3	Button	290–352 dp	Full width, 16 dp margins	above fold
4	Button	352–414 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–208 dp	328×184 dp	[Map pin with shield]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Map pin with shield]	No	Always in this state
2	C02 Body text	208–290 dp	328×82 dp	We use your location only for safety features and trip tracking. Normal trip history is kept 90 days; SOS/breakdown location one year, then reviewed.	12–14sp secondary text	—	We use your location only for safety fea	No	Always in this state
3	C03 Button	290–352 dp	328×62 dp	Allow location لوکیشن کی اجازت دیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Allow location, button	Yes	Always in this state
4	C04 Button	352–414 dp	328×62 dp	Not now ابھی نہیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Not now, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	We use your location only for safety features and trip tracking. Normal trip history is kept 90 days; SOS/breakdown location one year, then reviewed.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Allow location	لوکیشن کی اجازت دیں	Needs native review
4	Not now	ابھی نہیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Allow	≥48 dp	Enabled	Navigate to **SH-009** Location permission	Instant	—	E09, E10 copy; no false	Allow button opens OS prompt

	location			denied			success	once.
4	Button: Not now	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Explain location use (live trip tracking, SOS, boarding help) and privacy before requesting.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Retention statement matches policy exactly
2. Not now keeps non-location features working
3. OS prompt shown only after user taps Allow
4. Deny → manual alternative shown
5. Permanent deny → Settings path
6. Return from Settings re-checks state
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: SH-009 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-009 CONFIRMED P0 v2.0

Location permission denied

لوکیشن کی اجازت مسترد

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.loc_denied`

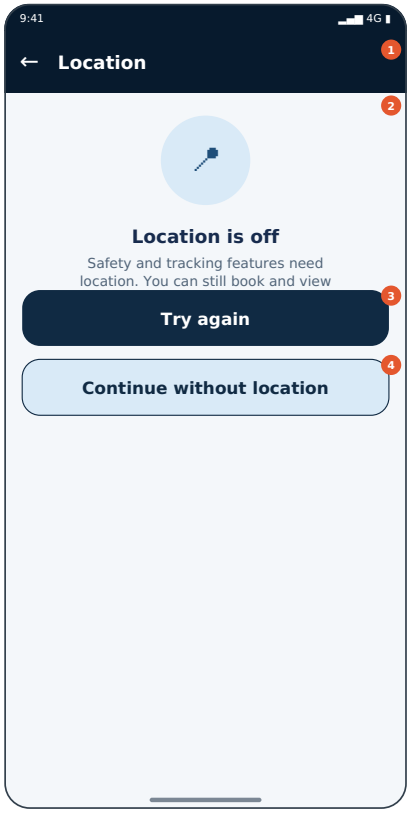

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

User denied once; explain the effect and offer manual alternatives and retry.

Login: **Per flow** · Incoming screens: SH-008


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **SH-010** Location blocked — open Settings
- Continue without location (Button) → previous screen (system Back)

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Location	Deep navy #071A2D, white 16sp bold	Per state	Location	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Location is off; Safety and tracking features need location. You can still book and view tickets.	Light-blue circle icon + 16sp title + 12sp body	—	Location is off	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ کوشش کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Continue without location بغیر لوکیشن جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue without location, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Location	لوکیشن	Needs native review
2	Location is off	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Safety and tracking features need location. You can still book and view tickets.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش کریں	Needs native review
4	Continue without location	بغیر لوکیشن جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
3	Button: Try again	≥48 dp	Enabled	Navigate to **SH-010** Location blocked — open Settings	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Continue without location	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	User denied once; explain the effect and offer manual alternatives and retry.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: SH-010 · Incoming: SH-008


Open decisions: None specific (see Part 16).

SH-010 CONFIRMED P0 v2.0

Location blocked — open Settings

لوکیشن بند — سیٹنگز کھولیں

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.loc_perm`

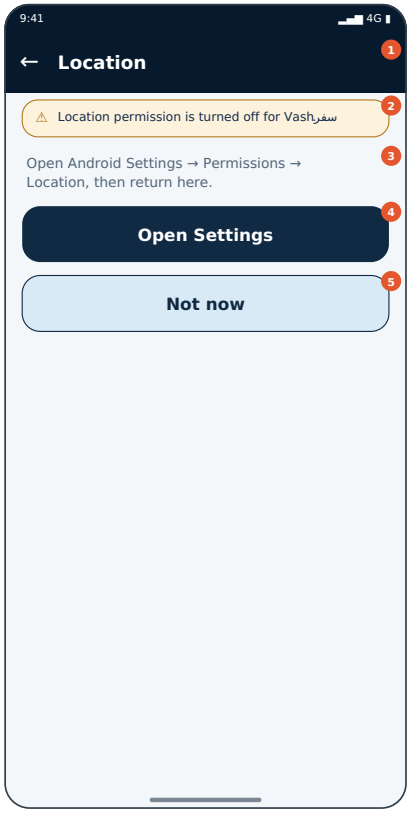

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Permission permanently denied; guide the user to Android Settings and re-check on return.

Login: **Per flow** · Incoming screens: P-132, SH-009


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open Settings (Button) → Android system settings
- Not now (Button) → previous screen (system Back)

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Body text	125–175 dp	Full width, 16 dp margins	above fold
4	Button	175–237 dp	Full width, 16 dp margins	above fold
5	Button	237–299 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Location	Deep navy #071A2D, white 16sp bold	Per state	Location	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Location permission is turned off for Vashسفر.	Tinted background + border + icon + text (never colour alone)	—	Location permission is turned off for Va	No	Always in this state
3	C03 Body text	125–175 dp	328×50 dp	Open Android Settings → Permissions → Location, then return here.	12–14sp secondary text	—	Open Android Settings → Permissions → Lo	No	Always in this state
4	C04 Button	175–237 dp	328×62 dp	Open Settings سیٹنگز کھولیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open Settings, button	Yes	Always in this state
5	C05 Button	237–299 dp	328×62 dp	Not now ابھی نہیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Not now, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Location	لوکیشن	Needs native review
2	Location permission is turned off for Vashسفر.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open Android Settings → Permissions → Location, then return here.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Open Settings	سیٹنگز کھولیں	Needs native review
5	Not now	ابھی نہیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E10, E09 copy; no false success	Allow button opens OS prompt once.
4	Button: Open Settings	≥48 dp	Enabled	Open Android Settings for this app; on return re-check state	Instant	—	E10, E09 copy; no false success	Allow button opens OS prompt once.
5	Button: Not now	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E10, E09 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Permission permanently denied; guide the user to Android Settings and re-check on return.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E10, E09
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Returning from Settings re-checks permission and updates UI
2. OS prompt shown only after user taps Allow
3. Deny → manual alternative shown
4. Permanent deny → Settings path
5. Return from Settings re-checks state
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-132, SH-009


Open decisions: None specific (see Part 16).

SH-011 CONFIRMED PROPOSED P2 v2.0

Microphone / voice search education

مائیکروفون کی اجازت کی وضاحت

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.mic_edu`

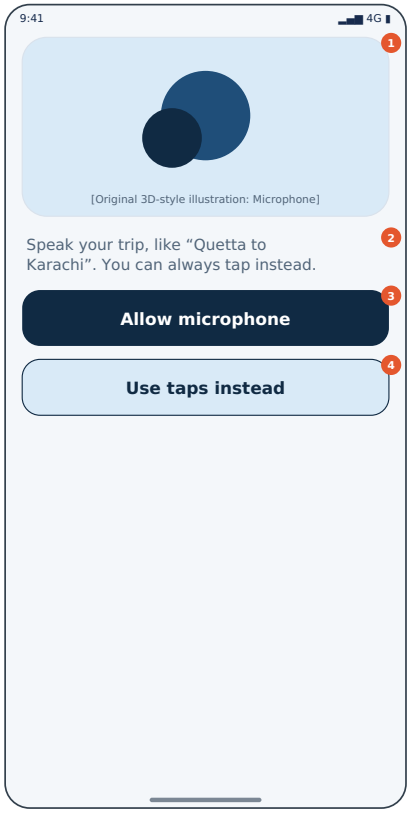

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Explain optional voice assistance; typing and tapping always remain available.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Allow microphone (Button) → **P-011** Voice assistance — listening
- Use taps instead (Button) → **P-017** Province / region selection

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–198 dp	Full width, 16 dp margins	above fold
2	Body text	198–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–198 dp	328×174 dp	[Microphone]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Microphone]	No	Always in this state
2	C02 Body text	198–250 dp	328×52 dp	Speak your trip, like “Quetta to Karachi”. You can always tap instead.	12–14sp secondary text	—	Speak your trip, like “Quetta to Karachi	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Allow microphone اجازت دیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Allow microphone, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Use taps instead ٹیپ استعمال کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Use taps instead, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	Speak your trip, like “Quetta to Karachi”. You can always tap instead.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Allow microphone	اجازت دیں	Needs native review
4	Use taps instead	ٹیپ استعمال کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Allow microphone	≥48 dp	Enabled	Navigate to **P-011** Voice assistance — listening	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Use taps	≥48 dp	Enabled	Navigate to **P-017** Province / region	Instant		E09, E10 copy; no false	Allow button opens OS prompt

4	Button: use taps instead	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Explain optional voice assistance; typing and tapping always remain available.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-011, P-017 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-012 CONFIRMED P2 v2.0

Microphone denied

مائیکروفون کی اجازت مسترد

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.mic_denied`

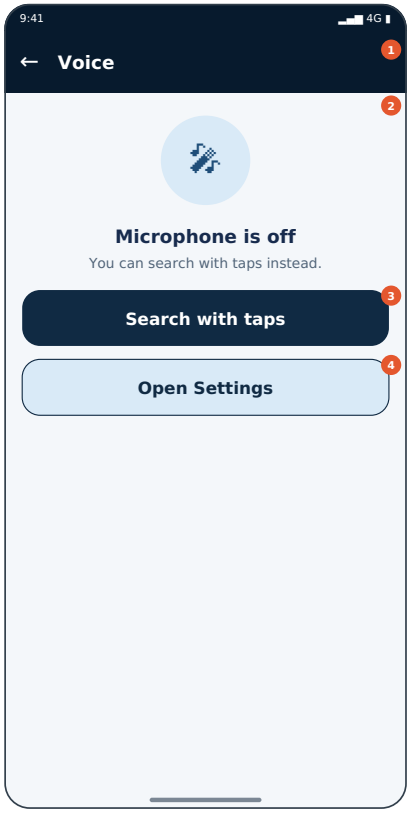

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Voice not available; direct the user to manual search.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Search with taps (Button) → **P-017** Province / region selection
- Open Settings (Button) → Android system settings

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Voice	Deep navy #071A2D, white 16sp bold	Per state	Voice	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Microphone is off; You can search with taps instead.	Light-blue circle icon + 16sp title + 12sp body	—	Microphone is off	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Search with taps ٹیپ سے تلاش کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Search with taps, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Open Settings سیٹنگز کھولیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open Settings, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Voice	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Microphone is off	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You can search with taps instead.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Search with taps	ٹیپ سے تلاش کریں	Needs native review
4	Open Settings	سیٹنگز کھولیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow; Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false	Allow button opens OS prompt

	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
3	Button: Search with taps	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Open Settings	≥48 dp	Enabled	Open Android Settings for this app; on return re-check state	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Voice not available; direct the user to manual search.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-017 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-013 CONFIRMED PROPOSED P1 v2.0

Camera / QR scan education

کیمرہ / کیو آر سکین کی وضاحت

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.cam_edu`

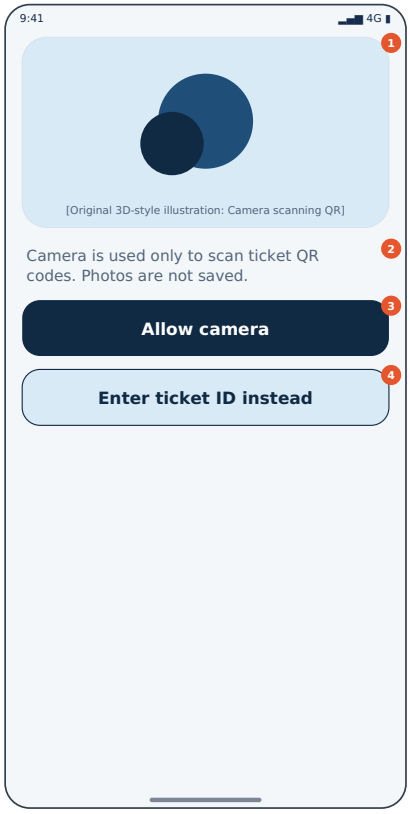

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Explain camera use for scanning tickets (driver) before the OS prompt.

Login: **Per flow** · Incoming screens: D-006


3. Exit & navigation map

- Allow camera (Button) → **D-022** Scanner ready
- Enter ticket ID instead (Button) → **D-021** Passenger / ticket lookup

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–208 dp	Full width, 16 dp margins	above fold
2	Body text	208–259 dp	Full width, 16 dp margins	above fold
3	Button	259–321 dp	Full width, 16 dp margins	above fold
4	Button	321–383 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–208 dp	328×184 dp	[Camera scanning QR]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Camera scanning QR]	No	Always in this state
2	C02 Body text	208–259 dp	328×51 dp	Camera is used only to scan ticket QR codes. Photos are not saved.	12–14sp secondary text	—	Camera is used only to scan ticket QR co	No	Always in this state
3	C03 Button	259–321 dp	328×62 dp	Allow camera اجازت دیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Allow camera, button	Yes	Always in this state
4	C04 Button	321–383 dp	328×62 dp	Enter ticket ID instead ٹکٹ آئی ڈی درج کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Enter ticket ID instead, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	Camera is used only to scan ticket QR codes. Photos are not saved.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Allow camera	اجازت دیں	Needs native review
4	Enter ticket ID instead	ٹکٹ آئی ڈی درج کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Allow camera	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Enter ticket ID	≥48 dp	Enabled	Navigate to **D-021** Passenger / ticket	Instant		E09, E10 copy; no false	Allow button opens OS prompt

4	Button: Enter ticket ID instead	≥48 dp	Enabled	Navigate to **D-021** Passenger / ticket lookup	Instant	—	E09, E10 copy, no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Explain camera use for scanning tickets (driver) before the OS prompt.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-021, D-022 · Incoming: D-006


Open decisions: None specific (see Part 16).

SH-014 CONFIRMED P1 v2.0

Camera denied / blocked

کیمرہ کی اجازت مسترد

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.cam_denied`

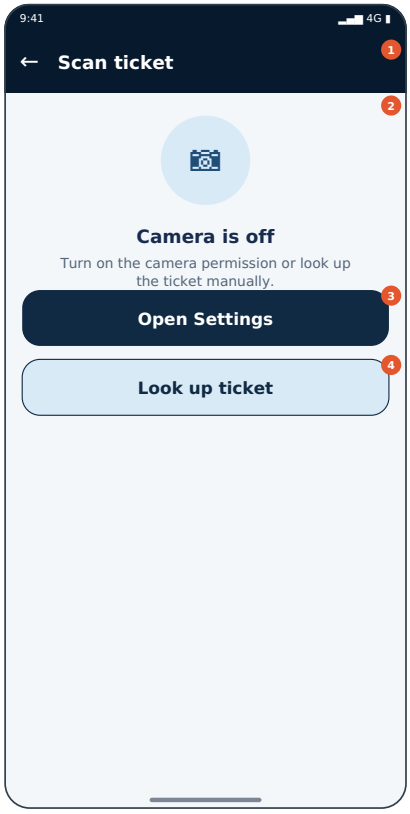

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Camera unavailable; offer ticket lookup and Settings path.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open Settings (Button) → Android system settings
- Look up ticket (Button) → **D-021** Passenger / ticket lookup

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Scan ticket	Deep navy #071A2D, white 16sp bold	Per state	Scan ticket	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Camera is off; Turn on the camera permission or look up the ticket manually.	Light-blue circle icon + 16sp title + 12sp body	—	Camera is off	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Open Settings سیٹنگز کھولیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open Settings, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Look up ticket ٹکٹ تلاش کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Look up ticket, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Scan ticket	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Camera is off	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Turn on the camera permission or look up the ticket manually.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open Settings	سیٹنگز کھولیں	Needs native review
4	Look up ticket	ٹکٹ تلاش کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

Tap result

#	Control	Target	Enabled		Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
3	Button: Open Settings	≥48 dp	Enabled	Open Android Settings for this app; on return re-check state	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Look up ticket	≥48 dp	Enabled	Navigate to **D-021** Passenger / ticket lookup	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Camera unavailable; offer ticket lookup and Settings path.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-021 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-015 CONFIRMED NEEDS CONFIRMATION P2 v2.0

Optional app update

اختیاری اپڈیٹ

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.update_opt`

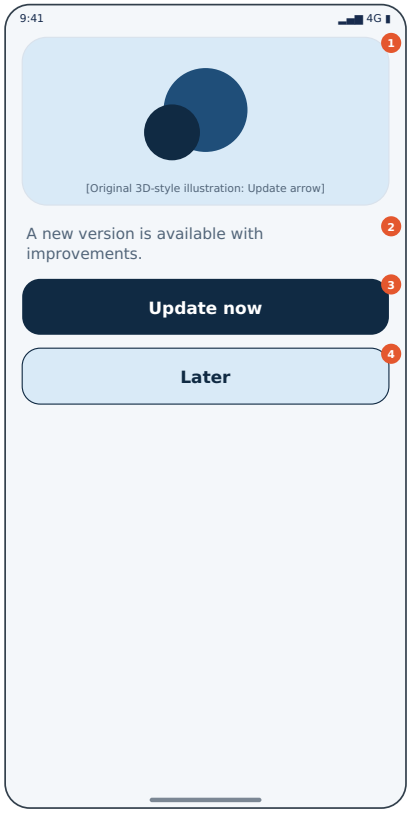

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

A newer version is available; user may continue.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Update now (Button) → external app: EXT:store
- Later (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–188 dp	Full width, 16 dp margins	above fold
2	Body text	188–240 dp	Full width, 16 dp margins	above fold
3	Button	240–302 dp	Full width, 16 dp margins	above fold
4	Button	302–364 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–188 dp	328×164 dp	[Update arrow]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Update arrow]	No	Always in this state
2	C02 Body text	188–240 dp	328×52 dp	A new version is available with improvements.	12–14sp secondary text	—	A new version is available with improvem	No	Always in this state
3	C03 Button	240–302 dp	328×62 dp	Update now ابھی اپڈیٹ کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Update now, button	Yes	Always in this state
4	C04 Button	302–364 dp	328×62 dp	Later بعد میں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Later, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	A new version is available with improvements.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Update now	ابھی اپڈیٹ کریں	Needs native review
4	Later	بعد میں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Update now	≥48 dp	Enabled	Hands off to external app (EXT:store); returning restores this screen	Instant	—	E28 copy; no false success	Retry debounced.
4	Button: Later	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E28 copy; no false	Retry

							success	debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	A newer version is available; user may continue.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_app_config (read)
Inputs	app version, locale
Server checks / RLS	min version, maintenance flag, configured payment methods, feature flags; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E28
Retry / idempotency	Safe read
Offline	Use last config; never assume payment methods
Cache	Short TTL (PROPOSED)

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Later dismisses for this session
2. Update link points to verified destination only
3. Copy matches catalogue EN/UR
4. Retry safety matches rule
5. No stuck spinner
6. Back lands on defined screen
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: OD-14 (see Part 16).

SH-016 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Required app update

لازمی اپڈیٹ

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.update_req`

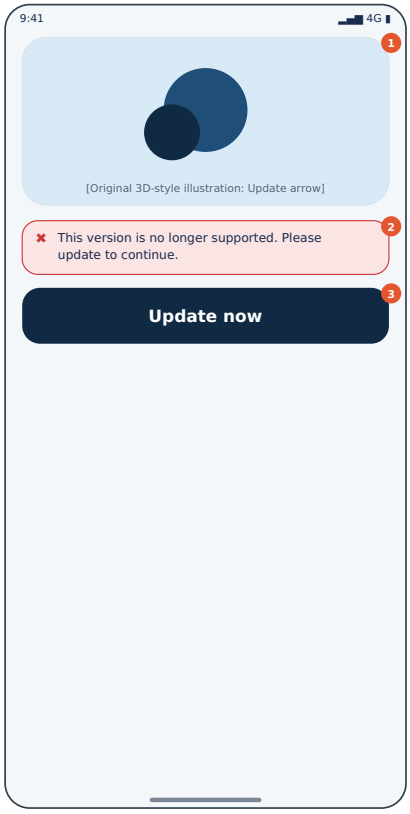

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Installed version is below minimum; block use until updated.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Update now (Button) → external app: EXT:store

Android system Back: Back exits app; no way past this screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–188 dp	Full width, 16 dp margins	above fold
2	Banner	188–248 dp	Full width, 16 dp margins	above fold
3	Button	248–310 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–188 dp	328×164 dp	[Update arrow]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Update arrow]	No	Always in this state
2	C02 Banner	188–248 dp	328×60 dp	This version is no longer supported. Please update to continue.	Tinted background + border + icon + text (never colour alone)	—	This version is no longer supported. Ple	No	Always in this state
3	C03 Button	248–310 dp	328×62 dp	Update now ابھی اپڈیٹ کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Update now, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	This version is no longer supported. Please update to continue.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Update now	ابھی اپڈیٹ کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Update now	≥48 dp	Enabled	Hands off to external app (EXT:store); returning restores this screen	Instant	—	E26 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Installed version is below minimum; block use until updated.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E26 App version below minimum	Banner or full screen **SH-016** Required app update	Please update the app — This version is no longer supported.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_app_config (read)
Inputs	app version, locale
Server checks / RLS	min version, maintenance flag, configured payment methods, feature flags; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E26
Retry / idempotency	Safe read
Offline	Use last config; never assume payment methods
Cache	Short TTL (PROPOSED)

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: OD-14 (see Part 16).

SH-017 CONFIRMED P0 v2.0

Maintenance notice

دیکھ بھال کا اعلان

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.maint`

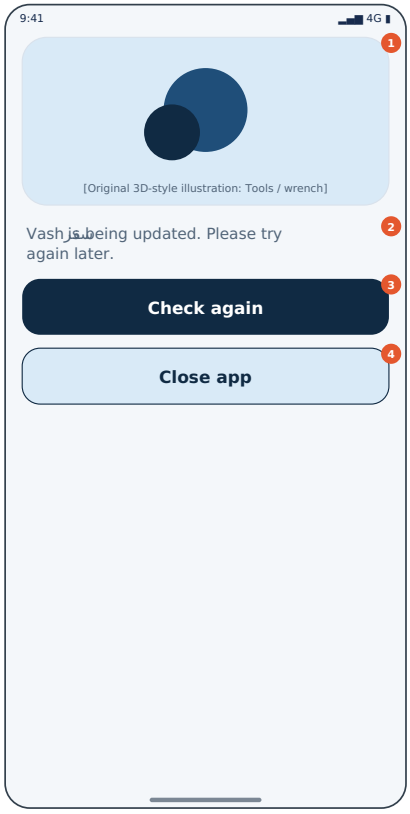

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server maintenance flag active; block actions.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Check again (Button) → **SH-001** Splash / app initialisation
- Close app (Button) → external app: EXT:exit

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–188 dp	Full width, 16 dp margins	above fold
2	Body text	188–240 dp	Full width, 16 dp margins	above fold
3	Button	240–302 dp	Full width, 16 dp margins	above fold
4	Button	302–364 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–188 dp	328×164 dp	[Tools / wrench]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Tools / wrench]	No	Always in this state
2	C02 Body text	188–240 dp	328×52 dp	Vashسفر is being updated. Please try again later.	12–14sp secondary text	—	Vashسفر is being updated. Please try aga	No	Always in this state
3	C03 Button	240–302 dp	328×62 dp	Check again دوبارہ چیک کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Check again, button	Yes	Always in this state
4	C04 Button	302–364 dp	328×62 dp	Close app ایپ بند کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Close app, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	Vashسفر is being updated. Please try again later.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Check again	دوبارہ چیک کریں	Needs native review
4	Close app	ایپ بند کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Check again	≥48 dp	Enabled	Navigate to **SH-001** Splash / app initialisation	Instant	—	E07 copy; no false success	Retry debounced.
4	Button: Close app	≥48 dp	Enabled	Hands off to external app (EXT:exit); returning restores this screen	Instant	—	E07 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server maintenance flag active; block actions.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E07 Maintenance flag from server config	Banner or full screen **SH-017** Maintenance notice	Service is being updated — Vashسفر is under maintenance. Please try again later.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_app_config (read)
Inputs	app version, locale
Server checks / RLS	min version, maintenance flag, configured payment methods, feature flags; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E07
Retry / idempotency	Safe read
Offline	Use last config; never assume payment methods
Cache	Short TTL (PROPOSED)

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: SH-001 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-018 CONFIRMED P1 v2.0

Service unavailable

سروس دستیاب نہیں

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.unavail`

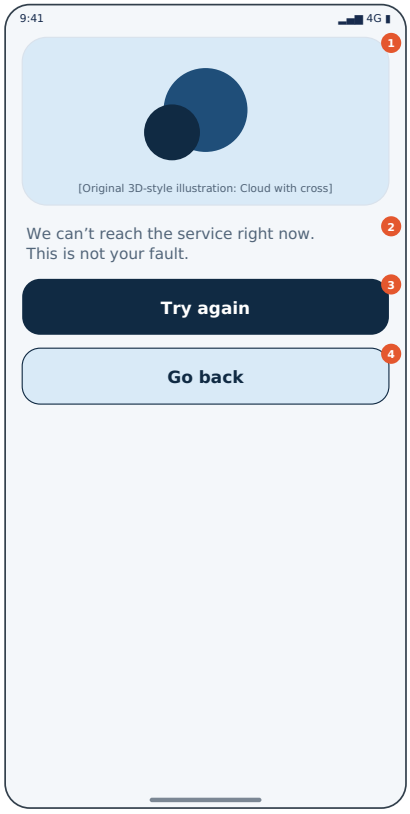

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Backend unreachable for non-maintenance reason; guide retry.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Try again (Button) → **SH-001** Splash / app initialisation
- Go back (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–188 dp	Full width, 16 dp margins	above fold
2	Body text	188–240 dp	Full width, 16 dp margins	above fold
3	Button	240–302 dp	Full width, 16 dp margins	above fold
4	Button	302–364 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–188 dp	328×164 dp	[Cloud with cross]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Cloud with cross]	No	Always in this state
2	C02 Body text	188–240 dp	328×52 dp	We can’t reach the service right now. This is not your fault.	12–14sp secondary text	—	We can’t reach the service right now. Th	No	Always in this state
3	C03 Button	240–302 dp	328×62 dp	Try again دوبارہ کوشش کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	302–364 dp	328×62 dp	Go back واپس جائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Go back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	We can’t reach the service right now. This is not your fault.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش کریں	Needs native review
4	Go back	واپس جائیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Try again	≥48 dp	Enabled	Navigate to **SH-001** Splash / app initialisation	Instant	—	E06, E03 copy; no false success	Retry debounced.
4	Button: Go back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E06, E03 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Backend unreachable for non-maintenance reason; guide retry.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E06, E03
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: SH-001 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-019 CONFIRMED P0 v2.0

Session expired

سیشن ختم ہو گیا

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.expired`

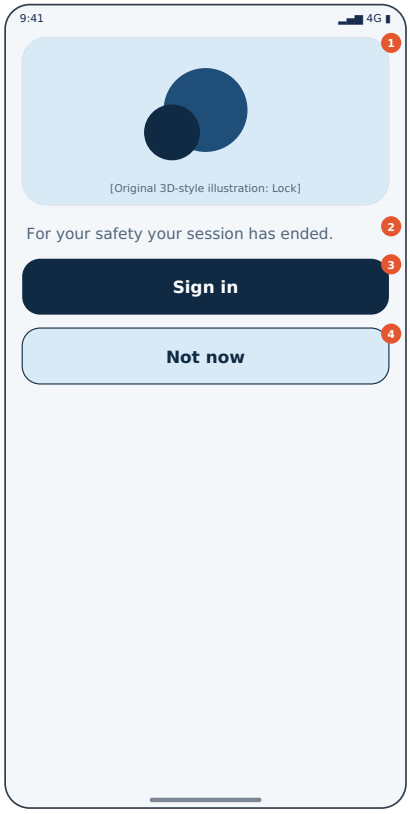

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Token expired outside an action; ask to sign in again.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Sign in (Button) → **AU-002** Sign in
- Not now (Button) → **SH-002** First-launch welcome

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–188 dp	Full width, 16 dp margins	above fold
2	Body text	188–222 dp	Full width, 16 dp margins	above fold
3	Button	222–284 dp	Full width, 16 dp margins	above fold
4	Button	284–346 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–188 dp	328×164 dp	[Lock]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Lock]	No	Always in this state
2	C02 Body text	188–222 dp	328×34 dp	For your safety your session has ended.	12–14sp secondary text	—	For your safety your session has ended.	No	Always in this state
3	C03 Button	222–284 dp	328×62 dp	Sign in سائن اِن	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Sign in, button	Yes	Always in this state
4	C04 Button	284–346 dp	328×62 dp	Not now ابھی نہیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Not now, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	For your safety your session has ended.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Sign in	سائن اِن	Needs native review
4	Not now	ابھی نہیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Sign in	≥48 dp	Enabled	Navigate to **AU-002** Sign in	Instant	—	E08 copy; no false success	Retry debounced.
4	Button: Not now	≥48 dp	Enabled	Navigate to **SH-002** First-launch welcome	Instant	—	E08 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Token expired outside an action; ask to sign in again.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_session / refresh_session (read)
Inputs	refresh token (secure storage)
Server checks / RLS	token validity, account status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E08
Retry / idempotency	Safe read
Offline	Shows signed-in shell with stale warning only if allowed
Cache	Token in secure storage only

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-002, SH-002 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-020 CONFIRMED PROPOSED P0 v2.0

Session recovery after process death

سیشن کی بحالی

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.recover`

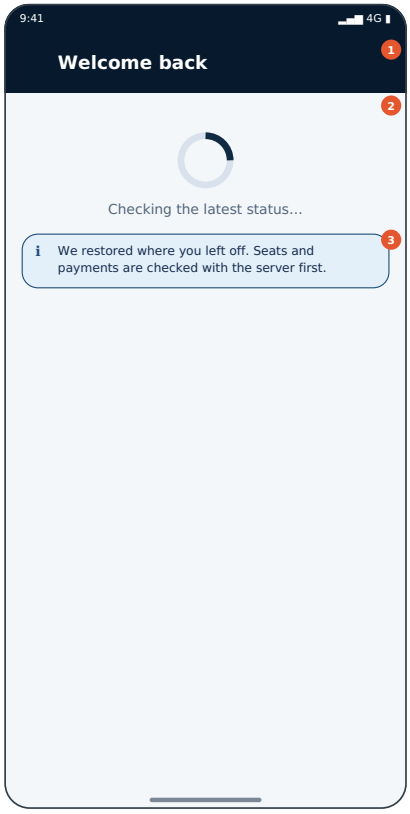

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

App was killed mid-flow; restore draft, revalidate with server, then resume at the safest screen.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Banner	200–260 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Welcome back	Deep navy #071A2D, white 16sp bold	Per state	Welcome back	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Checking the latest status...	Navy arc on grey ring	—	Checking the latest status...	No	Always in this state
3	C03 Banner	200–260 dp	328×60 dp	We restored where you left off. Seats and payments are checked with the server first.	Tinted background + border + icon + text (never colour alone)	—	We restored where you left off. Seats an	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Welcome back	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Checking the latest status...	Translation review required	—
3	We restored where you left off. Seats and payments are checked with the server first.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	App was killed mid-flow; restore draft, revalidate with server, then resume at the safest screen.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E23 Relaunch after interruption	Banner or full screen **SH-020** Session recovery after process death	Welcome back — We restored where you left off. Checking the latest status...

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_session / refresh_session (read)
Inputs	refresh token (secure storage)
Server checks / RLS	token validity, account status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E23
Retry / idempotency	Safe read
Offline	Shows signed-in shell with stale warning only if allowed
Cache	Token in secure storage only

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Seat hold and booking status re-read from server before any action
2. Never resubmits a write automatically
3. Never shows success without server confirmation
4. Back never resubmits a write
5. App kill/relaunch restores correct status
6. Urdu RTL copy matches catalogue
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-021 CONFIRMED P0 v2.0

Offline (global)

آف لائن

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.offline`

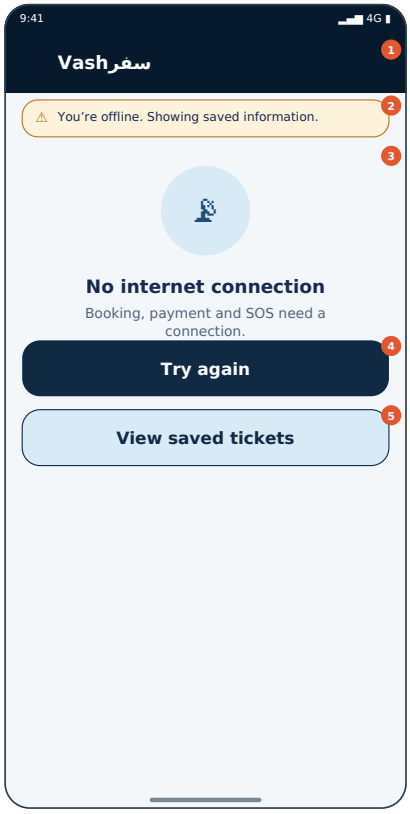

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No connectivity; show saved items and block server-authoritative actions.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Try again (Button) → stays on screen (action)
- View saved tickets (Button) → **P-081** My Tickets

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Empty/status block	125–295 dp	Full width, 16 dp margins	above fold
4	Button	295–357 dp	Full width, 16 dp margins	above fold
5	Button	357–419 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	You're offline. Showing saved information.	Tinted background + border + icon + text (never colour alone)	—	You're offline. Showing saved informatio	No	Always in this state
3	C03 Empty/status block	125–295 dp	328×170 dp	No internet connection; Booking, payment and SOS need a connection.	Light-blue circle icon + 16sp title + 12sp body	—	No internet connection	No	Always in this state
4	C04 Button	295–357 dp	328×62 dp	Try again دوبارہ کوشش کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
5	C05 Button	357–419 dp	328×62 dp	View saved tickets محفوظ ٹکٹ دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View saved tickets, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You're offline. Showing saved information.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	No internet connection	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Booking, payment and SOS need a connection.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Try again	دوبارہ کوشش کریں	Needs native review
5	View saved tickets	محفوظ ٹکٹ دیکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
4	Button: Try again	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E01 copy; no false success	Retry debounced.
5	Button: View saved tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No connectivity; show saved items and block server-authoritative actions.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-081 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-022 CONFIRMED P1 v2.0

Weak / slow connection

کمزور کنکشن

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.weak`

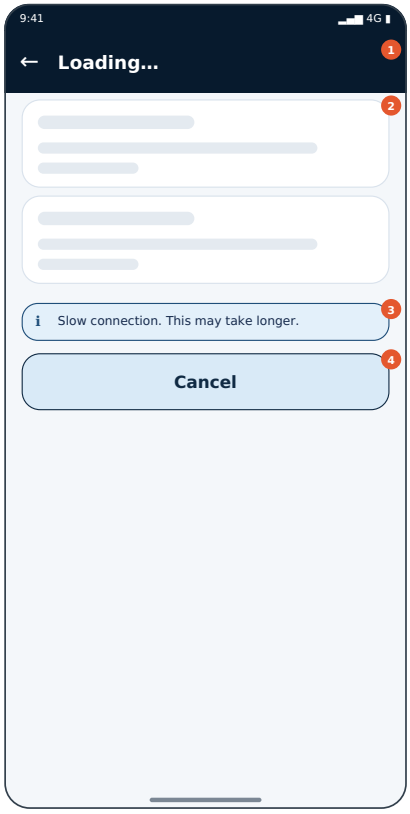

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Connection poor; keep user informed and allow cancel of reads.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Cancel (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Skeleton cards	80–262 dp	Full width, 16 dp margins	above fold
3	Banner	262–307 dp	Full width, 16 dp margins	above fold
4	Button	307–369 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Loading…	Deep navy #071A2D, white 16sp bold	Per state	Loading…	Yes	Always in this state
2	C02 Skeleton cards	80–262 dp	328×182 dp	2 skeleton cards	Grey blocks on white cards	—	2 skeleton cards	No	Always in this state
3	C03 Banner	262–307 dp	328×45 dp	Slow connection. This may take longer.	Tinted background + border + icon + text (never colour alone)	—	Slow connection. This may take longer.	No	Always in this state
4	C04 Button	307–369 dp	328×62 dp	Cancel منسوخ کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Loading…	لوڈ ہو رہا ہے…	Needs native review
3	Slow connection. This may take longer.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Cancel	منسوخ کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E02 copy; no false success	Retry debounced.
4	Button: Cancel	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E02 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Connection poor; keep user informed and allow cancel of reads.
E02 Request slower than 8 s (threshold PROPOSED)	Banner or full screen **ERR-001** Slow network — with cancel	Slow connection — This is taking longer than usual. You can keep waiting or cancel.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E02
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-023 CONFIRMED P1 v2.0

Server unavailable (5xx)

سرور دستیاب نہیں

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.server`

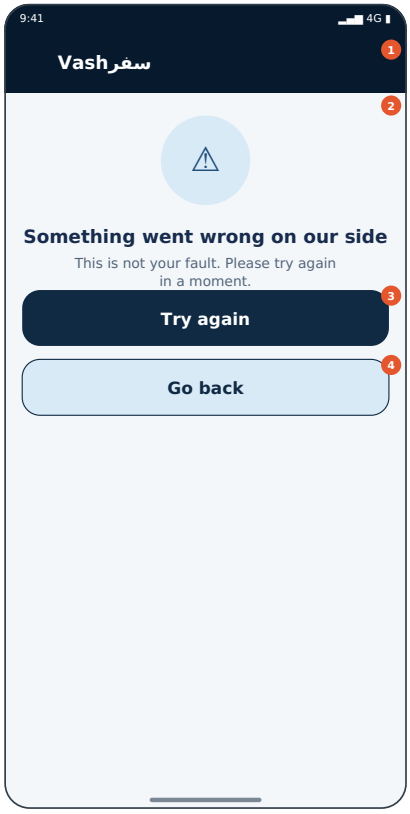

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Backend returned a server error for a read.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Try again (Button) → stays on screen (action)
- Go back (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Something went wrong on our side; This is not your fault. Please try again in a moment.	Light-blue circle icon + 16sp title + 12sp body	—	Something went wrong on our side	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ کوشش کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Go back واپس جائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Go back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Something went wrong on our side	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This is not your fault. Please try again in a moment.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش کریں	Needs native review
4	Go back	واپس جائیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Try again	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E06 copy; no false success	Retry debounced.

4	Button: Go back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E06 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Backend returned a server error for a read.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-024 CONFIRMED P1 v2.0

Stale data warning

پرانا ڈیٹا

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.stale`

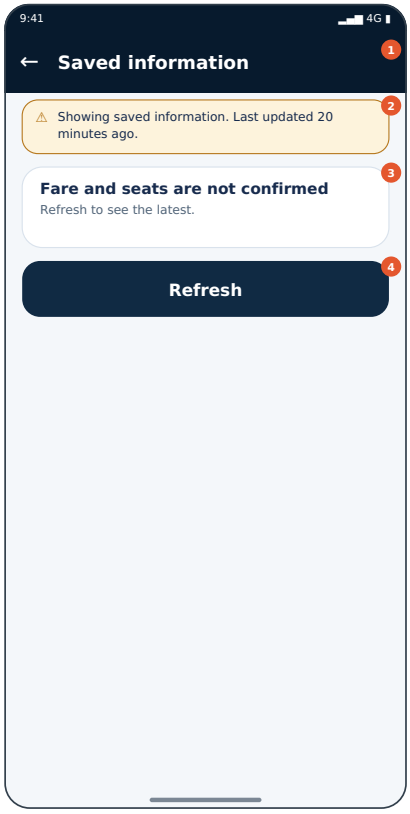

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Show saved data with age; fares/availability marked unconfirmed.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refresh (Button) → stays on screen (action)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Info card	140–224 dp	Full width, 16 dp margins	above fold
4	Button	224–286 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Saved information	Deep navy #071A2D, white 16sp bold	Per state	Saved information	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Showing saved information. Last updated 20 minutes ago.	Tinted background + border + icon + text (never colour alone)	—	Showing saved information. Last updated	No	Always in this state
3	C03 Info card	140–224 dp	328×84 dp	Fare and seats are not confirmed; Refresh to see the latest.	White card, border #D9E2EC, radius 18dp	—	Fare and seats are not confirmed	No	Always in this state
4	C04 Button	224–286 dp	328×62 dp	Refresh ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Saved information	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Showing saved information. Last updated 20 minutes ago.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Fare and seats are not confirmed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refresh to see the latest.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Refresh	ریفریش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same as system	Instant	—	E11 copy; no false	Status check button debounced; no write

	Back			Back)			success	retries.
4	Button: Refresh	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E11 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Show saved data with age; fares/availability marked unconfirmed.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-025 CONFIRMED P1 v2.0

Generic recoverable failure

قابلِ بحالی خرابی

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.generic`

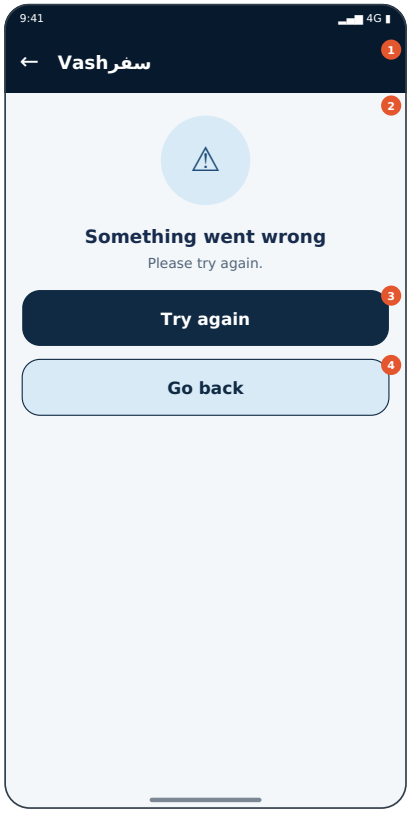

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Unclassified error where retry/back is safe.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → stays on screen (action)
- Go back (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Something went wrong; Please try again.	Light-blue circle icon + 16sp title + 12sp body	—	Something went wrong	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ کوشش کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Go back واپس جائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Go back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Something went wrong	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please try again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش کریں	Needs native review
4	Go back	واپس جائیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow; Back	>48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E28 copy; no false success	Retry debounced.

3	Button: Try again	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E28 copy; no false success	Retry debounced.
4	Button: Go back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E28 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Unclassified error where retry/back is safe.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-026 CONFIRMED PROPOSED P1 v2.0

Non-recoverable failure

ناقابلِ بحالی خرابی

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.fatal`

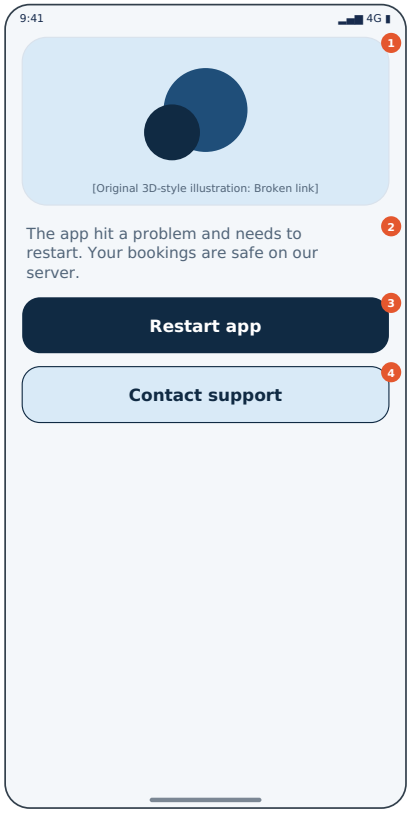

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Unhandled exception caught; offer safe restart without data loss claims.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Restart app (Button) → **SH-001** Splash / app initialisation
- Contact support (Button) → **P-143** Contact support

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–188 dp	Full width, 16 dp margins	above fold
2	Body text	188–256 dp	Full width, 16 dp margins	above fold
3	Button	256–318 dp	Full width, 16 dp margins	above fold
4	Button	318–380 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–188 dp	328×164 dp	[Broken link]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Broken link]	No	Always in this state
2	C02 Body text	188–256 dp	328×68 dp	The app hit a problem and needs to restart. Your bookings are safe on our server.	12–14sp secondary text	—	The app hit a problem and needs to resta	No	Always in this state
3	C03 Button	256–318 dp	328×62 dp	Restart app ایپ دوبارہ شروع کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Restart app, button	Yes	Always in this state
4	C04 Button	318–380 dp	328×62 dp	Contact support سپورٹ سے رابطہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	The app hit a problem and needs to restart. Your bookings are safe on our server.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Restart app	ایپ دوبارہ شروع کریں	Needs native review
4	Contact support	سپورٹ سے رابطہ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Restart app	≥48 dp	Enabled	Navigate to **SH-001** Splash / app initialisation	Instant	—	E28 copy; no false success	Retry debounced.
4	Button: Contact support	≥48 dp	Enabled	Navigate to **P-143** Contact support	Instant	—	E28 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Unhandled exception caught; offer safe restart without data loss claims.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-143, SH-001 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-027 CONFIRMED PROPOSED P1 v2.0

Confirmation dialog pattern

تصدیقی ڈائیلاگ

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.confirm`

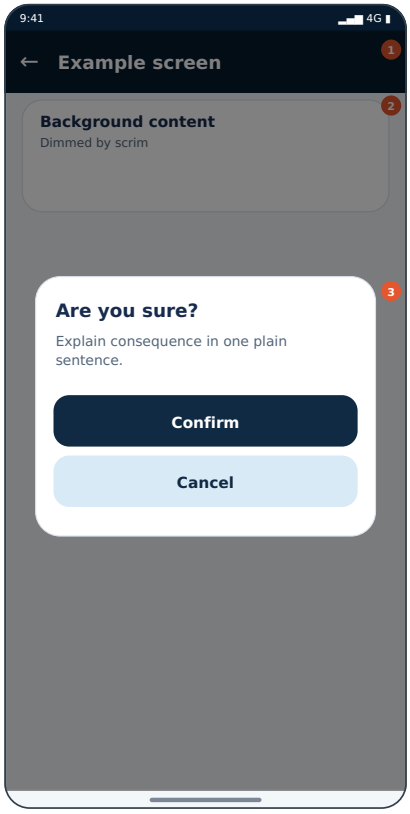

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Standard two-button confirmation for high-impact actions.

Login: **n/a (shared pattern)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–192 dp	Full width, 16 dp margins	above fold
3	Dialog	244–476 dp	Full width, 16 dp margins	above fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Example screen	Deep navy #071A2D, white 16sp bold	Per state	Example screen	Yes	Always in this state
2	C02 Info card	80–192 dp	328×112 dp	Background content; Dimmed by scrim	White card, border #D9E2EC, radius 18dp	—	Background content	No	Always in this state
3	C03 Dialog	244–476 dp	328×232 dp	Are you sure?; Explain consequence in one plain sentence.; Confirm; Cancel تصدیق / منسوخ	Radius 22dp, scrim 50%	Per state	Are you sure?	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Example screen	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Background content	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Dimmed by scrim	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Are you sure?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Explain consequence in one plain sentence.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Confirm	تصدیق	Needs native review
3	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Standard two-button confirmation for high-impact actions.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-028 CONFIRMED PROPOSED P1 v2.0

Destructive-action confirmation

حذف/منسوخی کی تصدیق

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.destruct`

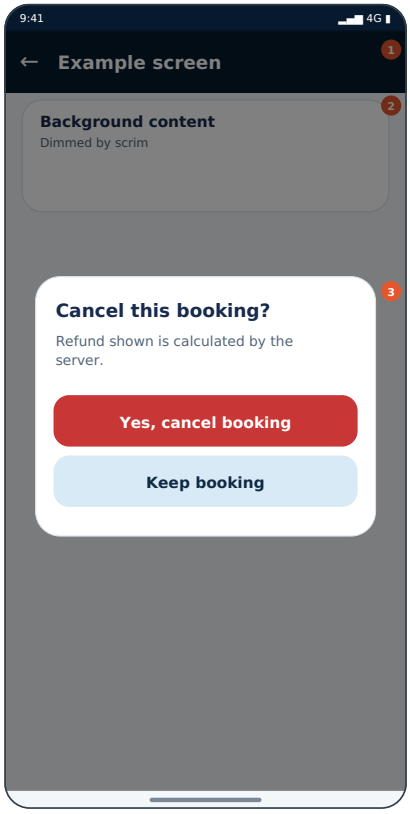

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Red confirm for cancellation, deletion, sign-out-all; default focus on safe option.

Login: **n/a (shared pattern)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–192 dp	Full width, 16 dp margins	above fold
3	Dialog	244–476 dp	Full width, 16 dp margins	above fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Example screen	Deep navy #071A2D, white 16sp bold	Per state	Example screen	Yes	Always in this state
2	C02 Info card	80–192 dp	328×112 dp	Background content; Dimmed by scrim	White card, border #D9E2EC, radius 18dp	—	Background content	No	Always in this state
3	C03 Dialog	244–476 dp	328×232 dp	Cancel this booking?; Refund shown is calculated by the server.; Yes, cancel booking; Keep booking ہاں، بکنگ منسوخ کریں / بکنگ رکھیں	Radius 22dp, scrim 50%	Per state	Cancel this booking?	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Example screen	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Background content	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Dimmed by scrim	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Cancel this booking?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refund shown is calculated by the server.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Yes, cancel booking	ہاں، بکنگ منسوخ کریں	Needs native review
3	Keep booking	بکنگ رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Red confirm for cancellation, deletion, sign-out-all; default focus on safe option.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-029 CONFIRMED PROPOSED P1 v2.0

Bottom-sheet pattern

باٹم شیٹ

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.sheet`

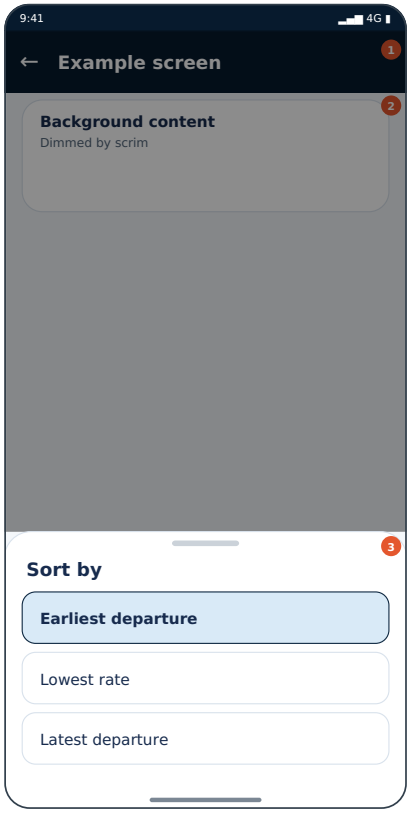

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Reusable sheet: handle, title, options, close; used for filters/sort and choices.

Login: **n/a (shared pattern)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–192 dp	Full width, 16 dp margins	above fold
3	Bottom sheet	472–704 dp	Full width, 16 dp margins	partly below fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Example screen	Deep navy #071A2D, white 16sp bold	Per state	Example screen	Yes	Always in this state
2	C02 Info card	80–192 dp	328×112 dp	Background content; Dimmed by scrim	White card, border #D9E2EC, radius 18dp	—	Background content	No	Always in this state
3	C03 Bottom sheet	472–704 dp	328×232 dp	Sort by; Earliest departure; Lowest rate; Latest departure	Radius-24dp top corners, scrim 45%	Per state	Sort by	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Example screen	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Background content	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Dimmed by scrim	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Sort by	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Earliest departure	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Lowest rate	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Latest departure	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Reusable sheet: handle, title, options, close; used for filters/sort and choices.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-030 CONFIRMED PROPOSED P1 v2.0

Loading / skeleton pattern

لوڈنگ پیٹرن

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.skeleton`

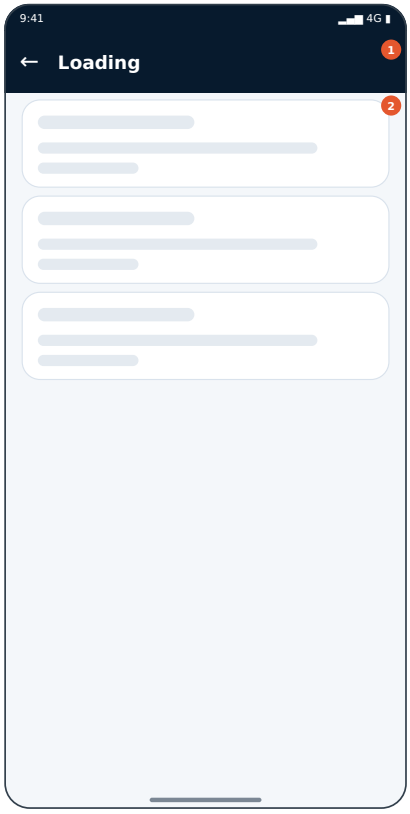

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Skeleton cards for lists; spinner only for short blocking actions.

Login: **n/a (shared pattern)** · Incoming screens: Entry point / system-launched

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Skeleton cards	80–348 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Loading	Deep navy #071A2D, white 16sp bold	Per state	Loading	Yes	Always in this state
2	C02 Skeleton cards	80–348 dp	328×268 dp	3 skeleton cards	Grey blocks on white cards	—	3 skeleton cards	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Loading	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Skeleton cards for lists; spinner only for short blocking actions.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request

E17 Second tap while request in flight	Banner or full screen **ERR-003** Duplicate taps blocked	Already in progress — Please wait — We're still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-031 CONFIRMED PROPOSED P1 v2.0

Empty-state pattern

خالی حالت

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.empty`

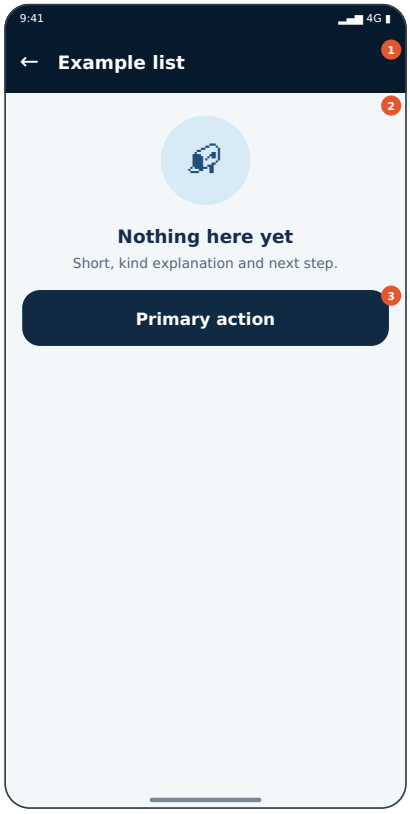

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Illustration + title + one-line reason + one clear action.

Login: **n/a (shared pattern)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Primary action (Button) → stays on screen (action)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Example list	Deep navy #071A2D, white 16sp bold	Per state	Example list	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Nothing here yet; Short, kind explanation and next step.	Light-blue circle icon + 16sp title + 12sp body	—	Nothing here yet	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Primary action بنیادی عمل	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Primary action, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Example list	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Nothing here yet	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Short, kind explanation and next step.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Primary action	بنیادی عمل	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.
3	Button: Primary action	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Illustration + title + one-line reason + one clear action.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-032 CONFIRMED PROPOSED P1 v2.0

No-results pattern

کوئی نتیجہ نہیں

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.noresult`

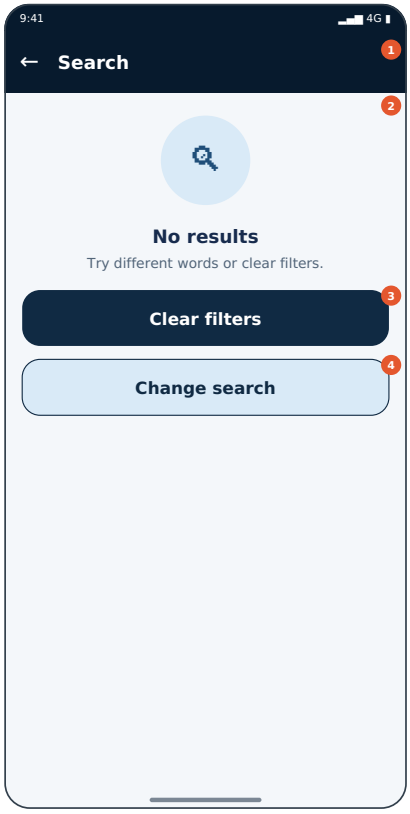

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Search/filter returned nothing; offer to reset or change input.

Login: **n/a (shared pattern)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Clear filters (Button) → stays on screen (action)
- Change search (Button) → previous screen (system Back)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Search	Deep navy #071A2D, white 16sp bold	Per state	Search	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	No results; Try different words or clear filters.	Light-blue circle icon + 16sp title + 12sp body	—	No results	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Clear filters فلٹر صاف کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Clear filters, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Change search تلاش بدلیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Change search, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Search	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	No results	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Try different words or clear filters.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Clear filters	فلٹر صاف کریں	Needs native review
4	Change search	تلاش بدلیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow; Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

3	Button: Clear filters	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E17, E28 copy; no false success	Buttons debounced.
4	Button: Change search	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Search/filter returned nothing; offer to reset or change input.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-033 CONFIRMED PROPOSED P1 v2.0

Inline-error pattern

ان لائن خرابی

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.inline`

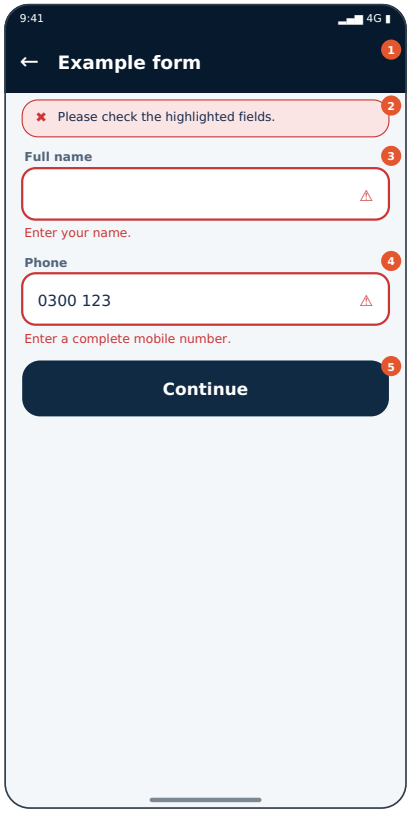

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Field-level error under input with icon and text plus error summary banner.

Login: **n/a (shared pattern)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → stays on screen (action)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Text field	125–219 dp	Full width, 16 dp margins	above fold
4	Text field	219–313 dp	Full width, 16 dp margins	above fold
5	Button	313–375 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Example form	Deep navy #071A2D, white 16sp bold	Per state	Example form	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Please check the highlighted fields.	Tinted background + border + icon + text (never colour alone)	—	Please check the highlighted fields.	No	Always in this state
3	C03 Text field	125–219 dp	328×94 dp	Full name: “” Enter your name.	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “” Enter your name.	Yes	Always in this state
4	C04 Text field	219–313 dp	328×94 dp	Phone: “0300 123” Enter a complete mobile number.	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Phone: “0300 123” Enter a complete mobil	Yes	Always in this state
5	C05 Button	313–375 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Example form	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please check the highlighted fields.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Full name	پورا نام	Needs native review
3	Enter your name.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Phone	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Enter a complete mobile number.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

5	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E27 copy; no false success	Buttons debounced.
5	Button: Continue	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E27 copy; no false success	Buttons debounced.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Buttons debounced.
4	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default
Phone	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Field-level error under input with icon and text plus error summary banner.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E27
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-034 CONFIRMED PROPOSED P1 v2.0

Snackbar / toast / banner catalogue

سنیک بار اور بینر

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.toasts`

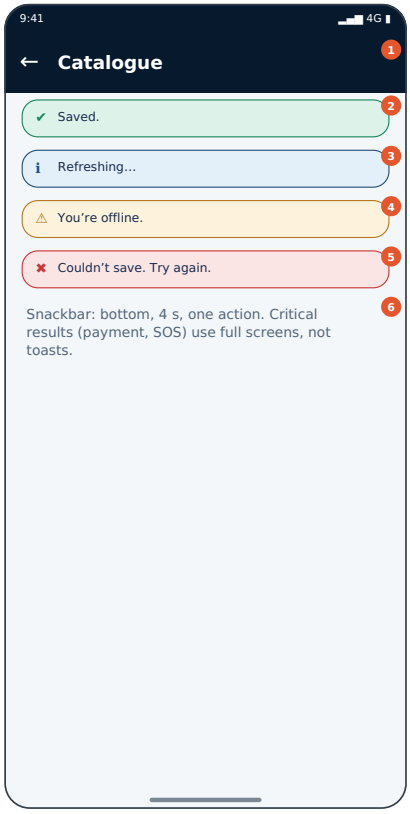

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Catalogue of transient messages: copy, placement (bottom above nav, banners under app bar), duration, never for critical outcomes.

Login: **n/a (shared pattern)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Banner	125–170 dp	Full width, 16 dp margins	above fold
4	Banner	170–215 dp	Full width, 16 dp margins	above fold
5	Banner	215–260 dp	Full width, 16 dp margins	above fold
6	Body text	260–324 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Catalogue	Deep navy #071A2D, white 16sp bold	Per state	Catalogue	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Saved.	Tinted background + border + icon + text (never colour alone)	—	Saved.	No	Always in this state
3	C03 Banner	125–170 dp	328×45 dp	Refreshing...	Tinted background + border + icon + text (never colour alone)	—	Refreshing...	No	Always in this state
4	C04 Banner	170–215 dp	328×45 dp	You're offline.	Tinted background + border + icon + text (never colour alone)	—	You're offline.	No	Always in this state
5	C05 Banner	215–260 dp	328×45 dp	Couldn't save. Try again.	Tinted background + border + icon + text (never colour alone)	—	Couldn't save. Try again.	No	Always in this state
6	C06 Body text	260–324 dp	328×64 dp	Snackbar: bottom, 4 s, one action. Critical results (payment, SOS) use full screens, not toasts.	12–14sp secondary text	—	Snackbar: bottom, 4 s, one action. Criti	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Catalogue	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Saved.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refreshing...	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

4	You’re offline.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Couldn’t save. Try again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
6	Snackbar: bottom, 4 s, one action. Critical results (payment, SOS) use full screens, not toasts.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Catalogue of transient messages: copy, placement (bottom above nav, banners under app bar), duration, never for critical outcomes.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

SH-035 CONFIRMED P1 v2.0

Sign-out confirmation

سائن آؤٹ کی تصدیق

Role: **Shared** · Family: F0 App entry, global & shared · Key: `sh.signout`

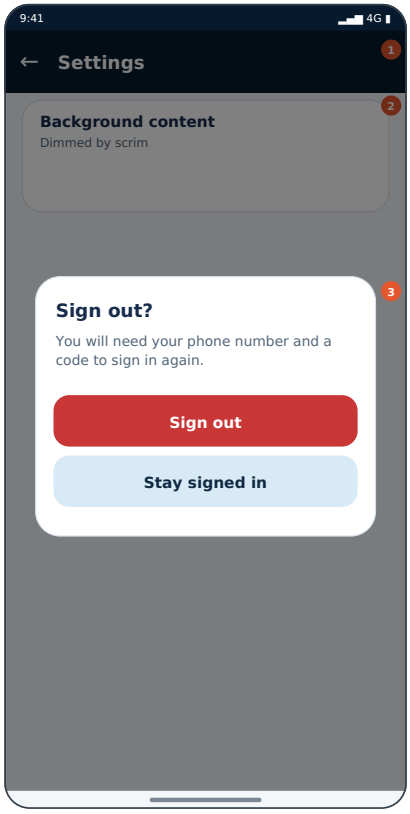

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Confirm sign-out; warn about unsent drafts; clear secure session.

Login: **n/a (shared pattern)** · Incoming screens: AU-015, AU-016, D-012, D-067, P-150


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–192 dp	Full width, 16 dp margins	above fold
3	Dialog	244–476 dp	Full width, 16 dp margins	above fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Settings	Deep navy #071A2D, white 16sp bold	Per state	Settings	Yes	Always in this state
2	C02 Info card	80–192 dp	328×112 dp	Background content; Dimmed by scrim	White card, border #D9E2EC, radius 18dp	—	Background content	No	Always in this state
3	C03 Dialog	244–476 dp	328×232 dp	Sign out?; You will need your phone number and a code to sign in again.; Sign out; Stay signed in سائن آؤٹ / سائن اِن رہیں	Radius 22dp, scrim 50%	Per state	Sign out?	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Settings	ترتیبات	Needs native review
2	Background content	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Dimmed by scrim	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Sign out?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	You will need your phone number and a code to sign in again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Sign out	سائن آؤٹ	Needs native review
3	Stay signed in	سائن اِن رہیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Confirm sign-out; warn about unsent drafts; clear secure session.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_session / refresh_session (read)
Inputs	refresh token (secure storage)
Server checks / RLS	token validity, account status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	Safe read
Offline	Shows signed-in shell with stale warning only if allowed
Cache	Token in secure storage only

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: AU-015, AU-016, D-012, D-067, P-150


Open decisions: None specific (see Part 16).

AU-001 CONFIRMED PROPOSED P0 v2.0

Choose how to continue

جاری رکھنے کا طریقہ

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.entry`

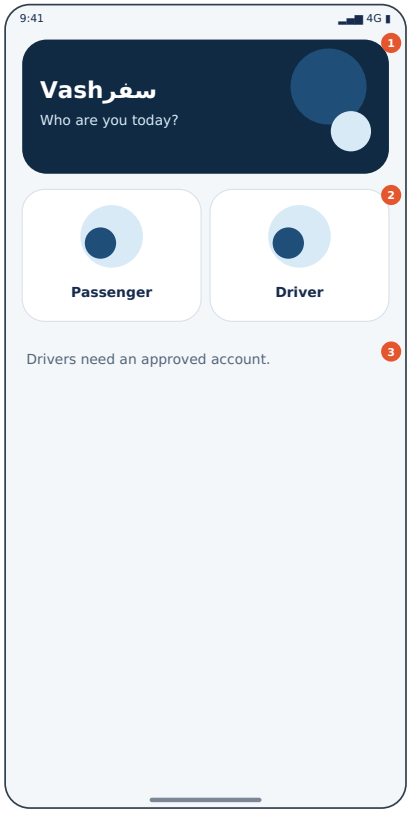

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Choose Passenger or Driver entry; each leads to its own onboarding/home.

Login: **No** · Incoming screens: SH-002, SH-005


3. Exit & navigation map

- Passenger (Tile) → **AU-002** Sign in
- Driver (Tile) → **AU-002** Sign in

Android system Back: Back exits app (no previous screen) except where noted. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Hero card	24–160 dp	Full width, 16 dp margins	above fold
2	Illustrated tile grid	160–300 dp	Full width, 16 dp margins	above fold
3	Body text	300–332 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Hero card	24–160 dp	328×136 dp	Vashسفر; Who are you today?	Navy #102A43 card, radius 22dp, white text	—	Vashسفر	No	Always in this state
2	C02 Illustrated tile grid	160–300 dp	328×140 dp	Passenger; Driver مسافر / ڈرائیور	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Passenger	Yes	Always in this state
3	C03 Body text	300–332 dp	328×32 dp	Drivers need an approved account.	12–14sp secondary text	—	Drivers need an approved account.	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
1	Who are you today?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Passenger	مسافر	Needs native review
2	Driver	ڈرائیور	Needs native review
3	Drivers need an approved account.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Tile: Passenger	≥48 dp	Enabled	Navigate to **AU-002** Sign in	Instant	—	E01, E06 copy; no false success	Primary button disables after first tap until response.
2	Tile: Driver	≥48 dp	Enabled	Navigate to **AU-002** Sign in	Instant	—	E01, E06 copy; no false success	Primary button disables after first tap until response.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Choose Passenger or Driver entry; each leads to its own onboarding/home.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E07 Maintenance flag from server config	Banner or full screen **SH-017** Maintenance notice	Service is being updated — Vashسفر is under maintenance. Please try again later.
E26 App version below minimum	Banner or full screen **SH-016** Required app update	Please update the app — This version is no longer supported.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E06, E07, E26
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data shown. No tokens, OTPs or secrets logged. Server messages mapped to safe copy. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large primary action; short plain-language text; optional voice hint where available. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Mode is not trusted from client; server role decides access
2. Cold start on low-end device completes without ANR
3. Language and RTL applied before first frame of next screen
4. Back behaviour matches Navigation section
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-002 · Incoming: SH-002, SH-005


Open decisions: OD-03 (see Part 16).

AU-002 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Sign in

سائن اِن

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.signin`

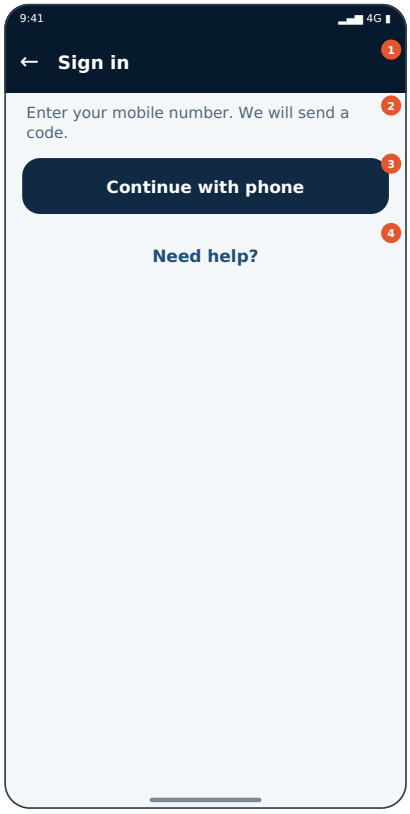

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Start sign-in with phone number (provider provisional).

Login: **As per flow** · Incoming screens: AU-001, AU-009, AU-014, D-078, ERR-006, SH-019


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue with phone (Button) → **AU-003** Phone number entry
- Need help? (Button) → **P-139** Help hub

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–132 dp	Full width, 16 dp margins	above fold
3	Button	132–194 dp	Full width, 16 dp margins	above fold
4	Button	194–256 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Sign in	Deep navy #071A2D, white 16sp bold	Per state	Sign in	Yes	Always in this state
2	C02 Body text	80–132 dp	328×52 dp	Enter your mobile number. We will send a code.	12–14sp secondary text	—	Enter your mobile number. We will send a	No	Always in this state
3	C03 Button	132–194 dp	328×62 dp	Continue with phone فون سے جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue with phone, button	Yes	Always in this state
4	C04 Button	194–256 dp	328×62 dp	Need help? مدد چاہیے؟	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Need help?, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Sign in	سائن اِن	Needs native review
2	Enter your mobile number. We will send a code.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Continue with phone	فون سے جاری رکھیں	Needs native review
4	Need help?	مدد چاہیے؟	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as	Instant	—	E01, E06 copy; no	Submit disabled while request in flight; one

				system Back)			false success	idempotency key per attempt.
3	Button: Continue with phone	≥48 dp	Enabled	Navigate to **AU-003** Phone number entry	Instant	—	E01, E06 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button: Need help?	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E06 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Start sign-in with phone number (provider provisional).
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-003, P-139 · Incoming: AU-001, AU-009, AU-014, D-078, ERR-006, SH-019


Open decisions: OD-01 (see Part 16).

AU-003 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Phone number entry

فون نمبر درج کریں

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.phone`

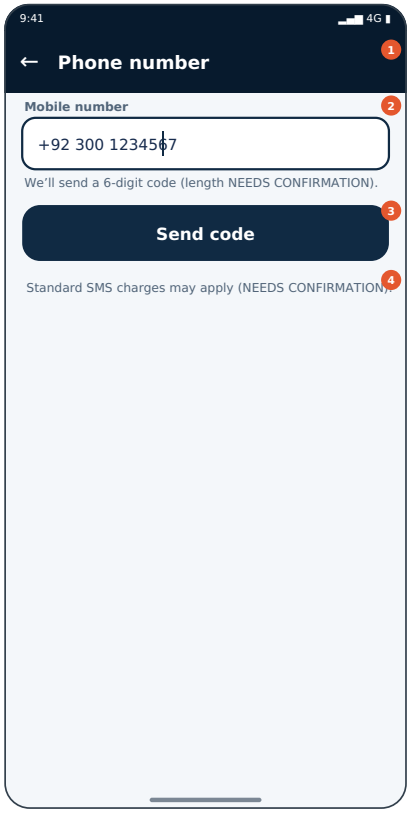

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Collect phone number; validate; request OTP.

Login: **As per flow** · Incoming screens: AU-002, AU-004, AU-010


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send code (Button) → **AU-005** Code entry

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–174 dp	Full width, 16 dp margins	above fold
3	Button	174–236 dp	Full width, 16 dp margins	above fold
4	Body text	236–267 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Phone number	Deep navy #071A2D, white 16sp bold	Per state	Phone number	Yes	Always in this state
2	C02 Text field	80–174 dp	328×94 dp	Mobile number: “+92 300 1234567” We’ll send a 6-digit code (length NEEDS CONFIRMATION).	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Mobile number: “+92 300 1234567” We’ll s	Yes	Always in this state
3	C03 Button	174–236 dp	328×62 dp	Send code کوڈ بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send code, button	Yes	Always in this state
4	C04 Body text	236–267 dp	328×31 dp	Standard SMS charges may apply (NEEDS CONFIRMATION).	12–14sp secondary text	—	Standard SMS charges may apply (NEEDS CO	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Phone number	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Mobile number	موبائل نمبر	Needs native review
2	We’ll send a 6-digit code (length NEEDS CONFIRMATION).	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Send code	کوڈ بھیجیں	Needs native review
4	Standard SMS charges may apply (NEEDS CONFIRMATION).	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow	≥ 48 dp	Enabled	Pop to previous screen (same	Instant		E01–E04 copy; no	Submit disabled while request in flight; one

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Button: Send code	≥48 dp	Enabled	Navigate to **AU-005** Code entry	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Phone	tel	Required	Valid Pakistani mobile format (exact rules NEEDS CONFIRMATION)	On blur + submit	Phone

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Collect phone number; validate; request OTP.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	request_otp (write)
Inputs	phone number (E.164)
Server checks / RLS	rate limit per phone/device; provider availability (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required: client request id; server dedupes resend window
Offline	Blocked — requires network
Cache	No cache; never log OTP

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Invalid number blocked with inline error
2. Request carries client request id
3. Empty submit shows field errors and focuses first error
4. Keyboard never hides focused field or primary button
5. Rotate/background keeps entered values
6. Urdu RTL: input alignment and caret correct, digits/phone legible
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-005 · Incoming: AU-002, AU-004, AU-010


Open decisions: OD-01 (see Part 16).

AU-004 CONFIRMED P0 v2.0

Phone validation error

فون نمبر کی غلطی

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.phone_err`

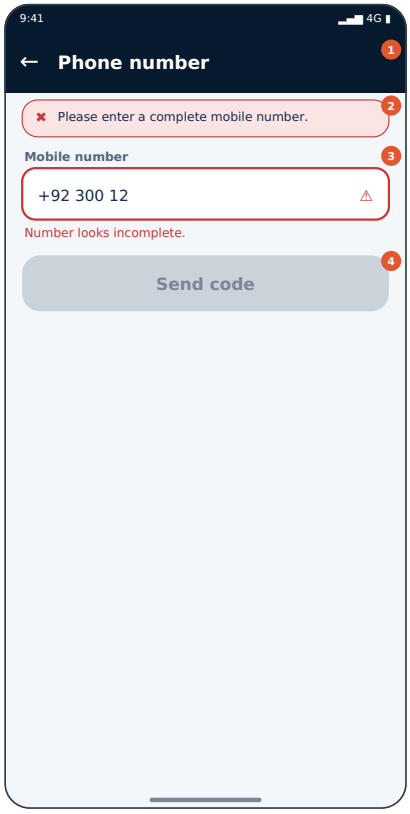

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Phone number failed validation.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send code (Button) → **AU-003** Phone number entry

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Text field	125–219 dp	Full width, 16 dp margins	above fold
4	Button	219–281 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Phone number	Deep navy #071A2D, white 16sp bold	Per state	Phone number	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Please enter a complete mobile number.	Tinted background + border + icon + text (never colour alone)	—	Please enter a complete mobile number.	No	Always in this state
3	C03 Text field	125–219 dp	328×94 dp	Mobile number: “+92 300 12” Number looks incomplete.	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Mobile number: “+92 300 12” Number looks	Yes	Always in this state
4	C04 Button	219–281 dp	328×62 dp	Send code کوڈ بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send code, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Phone number	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please enter a complete mobile number.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Mobile number	موبائل نمبر	Needs native review
3	Number looks incomplete.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Send code	کوڈ بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same	Instant	—	E27 copy; no	Submit disabled while request in flight; one

	Back			as system Back)			false success	idempotency key per attempt.
4	Button: Send code	≥48 dp	Enabled	Navigate to **AU-003** Phone number entry	Inline spinner; other controls locked	Server-confirmed result only	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Mobile number	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Phone number failed validation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	request_otp (write)
Inputs	phone number (E.164)
Server checks / RLS	rate limit per phone/device; provider availability (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E27
Retry / idempotency	Required: client request id; server dedupes resend window
Offline	Blocked — requires network
Cache	No cache; never log OTP

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-003 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

AU-005 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Code entry

کوڈ درج کریں

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.otp`

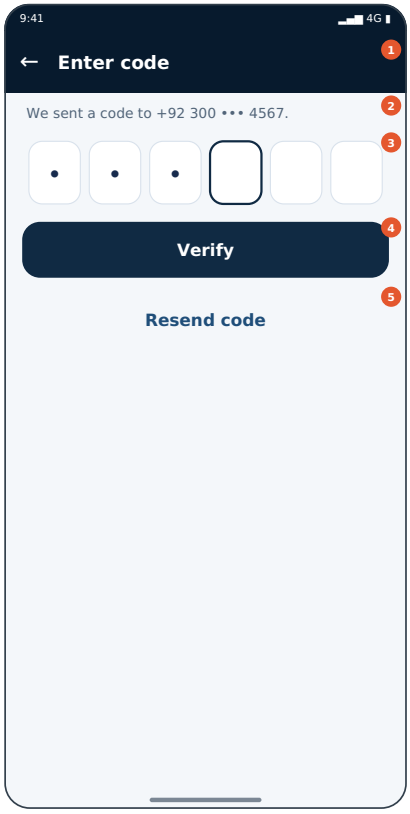

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Enter the one-time code received.

Login: **As per flow** · Incoming screens: AU-003, AU-007, AU-010


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Verify (Button) → **AU-011** Verification success
- Resend code (Button) → **AU-006** Resend timer (waiting)

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–113 dp	Full width, 16 dp margins	above fold
3	OTP boxes	113–189 dp	Full width, 16 dp margins	above fold
4	Button	189–251 dp	Full width, 16 dp margins	above fold
5	Button	251–313 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Enter code	Deep navy #071A2D, white 16sp bold	Per state	Enter code	Yes	Always in this state
2	C02 Body text	80–113 dp	328×33 dp	We sent a code to +92 300 ••• 4567.	12–14sp secondary text	—	We sent a code to +92 300 ••• 4567.	No	Always in this state
3	C03 OTP boxes	113–189 dp	328×76 dp	6-digit code, 3 entered	6 boxes 46×56dp	Per state	6-digit code, 3 entered	Yes	Always in this state
4	C04 Button	189–251 dp	328×62 dp	Verify تصدیق کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Verify, button	Yes	Always in this state
5	C05 Button	251–313 dp	328×62 dp	Resend code دوبارہ بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Resend code, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Enter code	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We sent a code to +92 300 ••• 4567.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Verify	تصدیق کریں	Needs native review
5	Resend code	دوبارہ بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button: Verify	≥48 dp	Enabled	Navigate to **AU-011** Verification success	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
5	Button: Resend code	≥48 dp	Enabled	Navigate to **AU-006** Resend timer (waiting)	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	OTP boxes	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
OTP code	numeric	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Enter the one-time code received.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_otp (write)
Inputs	phone, code, request id
Server checks / RLS	code validity, expiry, attempt count, lockout; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E24, E27
Retry / idempotency	Safe to resubmit same code only until used
Offline	Blocked
Cache	No cache; code never persisted

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Auto-focus first box; paste fills all
2. Code never logged
3. Empty submit shows field errors and focuses first error
4. Keyboard never hides focused field or primary button
5. Rotate/background keeps entered values
6. Urdu RTL: input alignment and caret correct, digits/phone legible
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-006, AU-011 · Incoming: AU-003, AU-007, AU-010


Open decisions: OD-01 (see Part 16).

AU-006 CONFIRMED PROPOSED P1 v2.0

Resend timer (waiting)

دوبارہ بھیجنے کا انتظار

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.otp_wait`

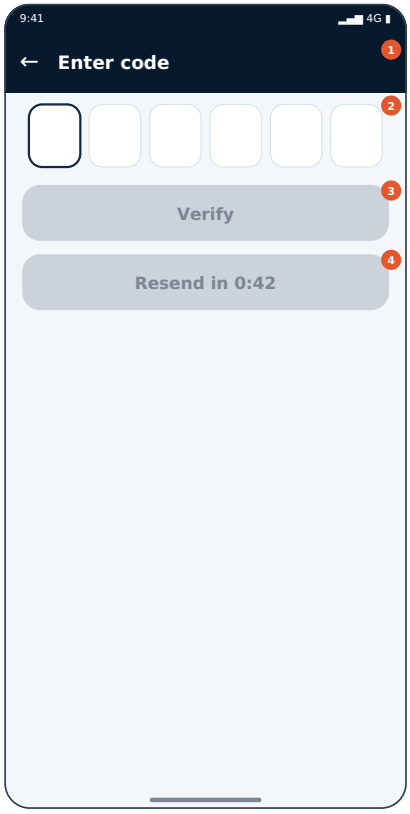

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Resend disabled during cooldown.

Login: **As per flow** · Incoming screens: AU-005, AU-007, AU-008


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Verify (Button) → **AU-011** Verification success

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	OTP boxes	80–156 dp	Full width, 16 dp margins	above fold
3	Button	156–218 dp	Full width, 16 dp margins	above fold
4	Button	218–280 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Enter code	Deep navy #071A2D, white 16sp bold	Per state	Enter code	Yes	Always in this state
2	C02 OTP boxes	80–156 dp	328×76 dp	6-digit code, 0 entered	6 boxes 46×56dp	Per state	6-digit code, 0 entered	Yes	Always in this state
3	C03 Button	156–218 dp	328×62 dp	Verify تصدیق کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Verify, button	Yes	Visible, disabled until conditions met
4	C04 Button	218–280 dp	328×62 dp	Resend in 0:42 0:42 میں دوبارہ بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Resend in 0:42, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Enter code	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Verify	تصدیق کریں	Needs native review
4	Resend in 0:42	0:42 میں دوبارہ بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E24 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Button: Verify	≥48 dp	Enabled	Navigate to **AU-011** Verification success	Inline spinner; other controls locked	Server-confirmed result only	E24 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.

2	OTP boxes	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
OTP code	numeric	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Resend disabled during cooldown.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	request_otp (write)
Inputs	phone number (E.164)
Server checks / RLS	rate limit per phone/device; provider availability (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E24
Retry / idempotency	Required: client request id; server dedupes resend window
Offline	Blocked — requires network
Cache	No cache; never log OTP

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-011 · Incoming: AU-005, AU-007, AU-008


Open decisions: None specific (see Part 16).

AU-007 CONFIRMED P0 v2.0

Invalid code

غلط کوڈ

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.otp_bad`

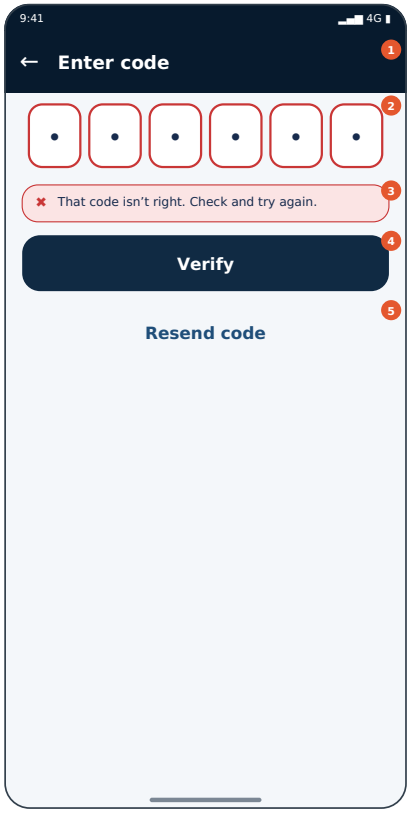

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Wrong code entered.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Verify (Button) → **AU-005** Code entry
- Resend code (Button) → **AU-006** Resend timer (waiting)

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	OTP boxes	80–156 dp	Full width, 16 dp margins	above fold
3	Banner	156–201 dp	Full width, 16 dp margins	above fold
4	Button	201–263 dp	Full width, 16 dp margins	above fold
5	Button	263–325 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Enter code	Deep navy #071A2D, white 16sp bold	Per state	Enter code	Yes	Always in this state
2	C02 OTP boxes	80–156 dp	328×76 dp	6-digit code, 6 entered	6 boxes 46×56dp	Per state	6-digit code, 6 entered	Yes	Always in this state
3	C03 Banner	156–201 dp	328×45 dp	That code isn't right. Check and try again.	Tinted background + border + icon + text (never colour alone)	—	That code isn't right. Check and try aga	No	Always in this state
4	C04 Button	201–263 dp	328×62 dp	Verify تصدیق کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Verify, button	Yes	Always in this state
5	C05 Button	263–325 dp	328×62 dp	Resend code دوبارہ بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Resend code, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Enter code	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	That code isn't right. Check and try again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Verify	تصدیق کریں	Needs native review
5	Resend code	دوبارہ بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button: Verify	≥48 dp	Enabled	Navigate to **AU-005** Code entry	Inline spinner; other controls locked	Server-confirmed result only	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
5	Button: Resend code	≥48 dp	Enabled	Navigate to **AU-006** Resend timer (waiting)	Inline spinner; other controls locked	Server-confirmed result only	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
2	OTP boxes	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
OTP code	numeric	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Wrong code entered.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_otp (write)
Inputs	phone, code, request id
Server checks / RLS	code validity, expiry, attempt count, lockout; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E27
Retry / idempotency	Safe to resubmit same code only until used
Offline	Blocked
Cache	No cache; code never persisted

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-005, AU-006 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

AU-008 CONFIRMED P0 v2.0

Expired code

کوڈ کی میعاد ختم

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.otp_exp`

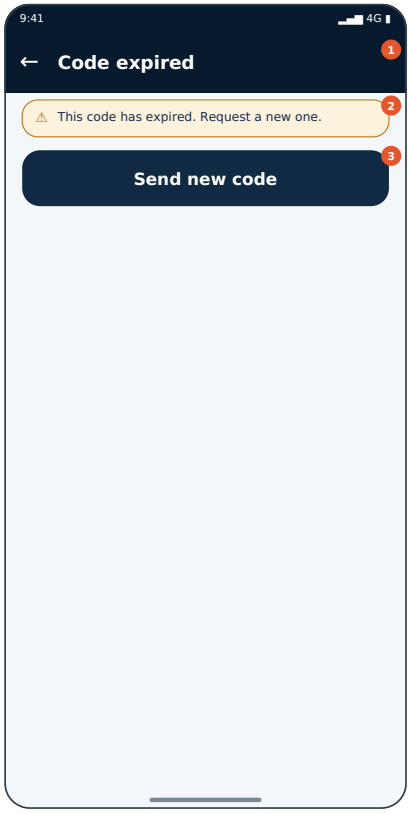

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Code expired; require a new code.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send new code (Button) → **AU-006** Resend timer (waiting)

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Code expired	Deep navy #071A2D, white 16sp bold	Per state	Code expired	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	This code has expired. Request a new one.	Tinted background + border + icon + text (never colour alone)	—	This code has expired. Request a new one	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Send new code نیا کوڈ بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send new code, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Code expired	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This code has expired. Request a new one.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Send new code	نیا کوڈ بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Button: Send new code	≥48 dp	Enabled	Navigate to **AU-006** Resend timer (waiting)	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Code expired; require a new code.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	request_otp (write)
Inputs	phone number (E.164)
Server checks / RLS	rate limit per phone/device; provider availability (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required: client request id; server dedupes resend window
Offline	Blocked — requires network
Cache	No cache; never log OTP

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-006 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

AU-009 CONFIRMED P0 v2.0

Too many attempts

بہت زیادہ کوششیں

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.otp_many`

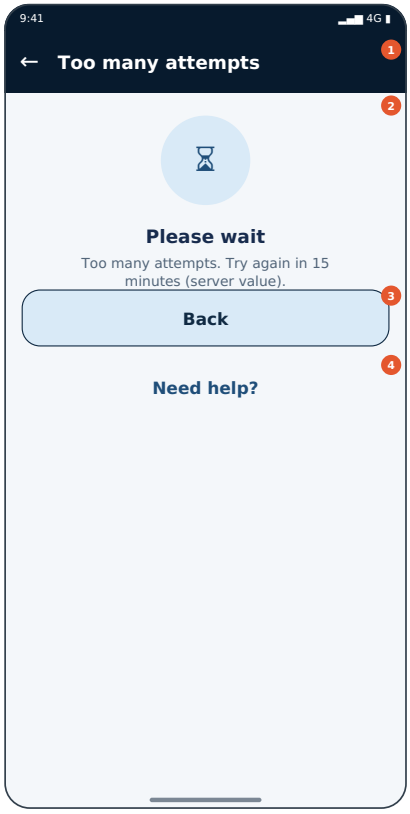

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Lockout after too many tries; show wait time from server.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Back (Button) → **AU-002** Sign in
- Need help? (Button) → **P-139** Help hub

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Too many attempts	Deep navy #071A2D, white 16sp bold	Per state	Too many attempts	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Please wait; Too many attempts. Try again in 15 minutes (server value).	Light-blue circle icon + 16sp title + 12sp body	—	Please wait	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Need help? مدد چاہیے؟	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Need help?, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Too many attempts	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please wait	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Too many attempts. Try again in 15 minutes (server value).	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Back	واپس	Needs native review
4	Need help?	مدد چاہیے؟	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

									Dup-tap /

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E24 copy; no false success	Retry debounced.
3	Button: Back	≥48 dp	Enabled	Navigate to **AU-002** Sign in	Inline spinner; other controls locked	Server-confirmed result only	E24 copy; no false success	Retry debounced.
4	Button: Need help?	≥48 dp	Enabled	Navigate to **P-139** Help hub	Inline spinner; other controls locked	Server-confirmed result only	E24 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Lockout after too many tries; show wait time from server.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_otp (write)
Inputs	phone, code, request id
Server checks / RLS	code validity, expiry, attempt count, lockout; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E24
Retry / idempotency	Safe to resubmit same code only until used
Offline	Blocked
Cache	No cache; code never persisted

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-002, P-139 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

AU-010 CONFIRMED P0 v2.0

Network failure during OTP

کوڈ کے دوران نیٹ ورک خرابی

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.otp_net`

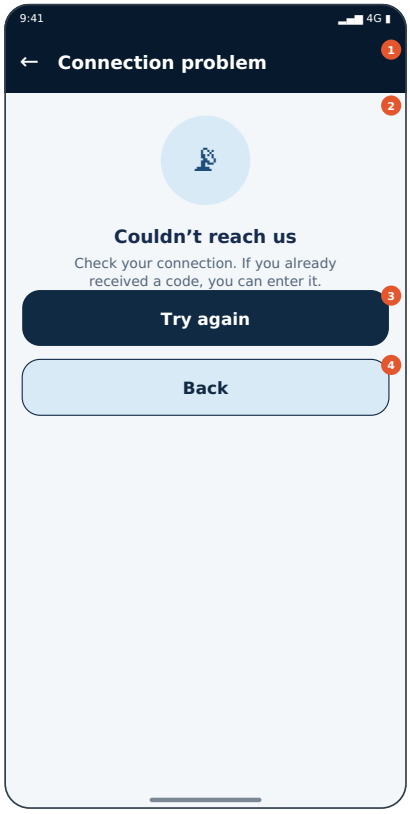

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Connection lost while requesting/verifying code.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **AU-005** Code entry
- Back (Button) → **AU-003** Phone number entry

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Connection problem	Deep navy #071A2D, white 16sp bold	Per state	Connection problem	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Couldn’t reach us; Check your connection. If you already received a code, you can enter it.	Light-blue circle icon + 16sp title + 12sp body	—	Couldn’t reach us	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ کوشش کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Connection problem	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Couldn’t reach us	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Check your connection. If you already received a code, you can enter it.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش کریں	Needs native review
4	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

									Dup-tap /

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Retry debounced.
3	Button: Try again	≥48 dp	Enabled	Navigate to **AU-005** Code entry	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Retry debounced.
4	Button: Back	≥48 dp	Enabled	Navigate to **AU-003** Phone number entry	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Connection lost while requesting/verifying code.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_otp (write)
Inputs	phone, code, request id
Server checks / RLS	code validity, expiry, attempt count, lockout; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04
Retry / idempotency	Safe to resubmit same code only until used
Offline	Blocked
Cache	No cache; code never persisted

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-003, AU-005 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

AU-011 CONFIRMED P1 v2.0

Verification success

تصدیق کامیاب

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.ok`

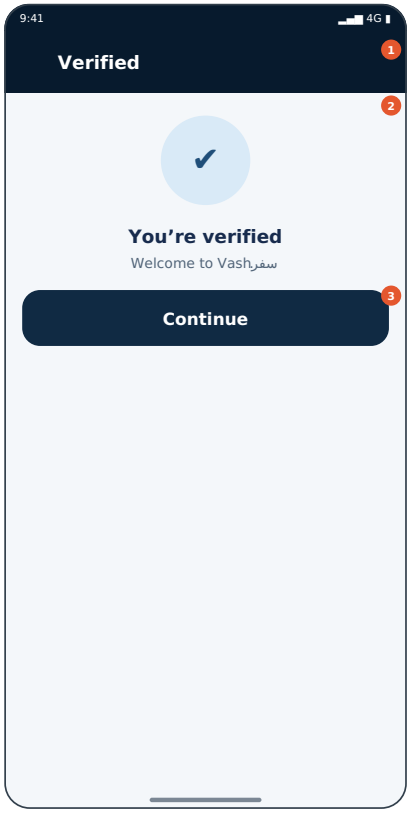

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Phone verified; route by account state.

Login: **Per flow** · Incoming screens: AU-005, AU-006


3. Exit & navigation map

- Continue (Button) → **AU-012** New-user details

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Verified	Deep navy #071A2D, white 16sp bold	Per state	Verified	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	You’re verified; Welcome to Vashسفر.	Light-blue circle icon + 16sp title + 12sp body	—	You’re verified	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Verified	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You’re verified	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Welcome to Vashسفر.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Continue	≥48 dp	Enabled	Navigate to **AU-012** New-user details	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Phone verified; route by account state.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_session / refresh_session (read)
Inputs	refresh token (secure storage)
Server checks / RLS	token validity, account status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Shows signed-in shell with stale warning only if allowed
Cache	Token in secure storage only

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Routes: new user→details; passenger→Home; driver→Driver Home/approval; blocked→blocked
2. Never shows success without server confirmation
3. Back never resubmits a write
4. App kill/relaunch restores correct status
5. Urdu RTL copy matches catalogue
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-012 · Incoming: AU-005, AU-006


Open decisions: None specific (see Part 16).

AU-012 CONFIRMED PROPOSED P0 v2.0

New-user details

نئے صارف کی تفصیلات

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.new`

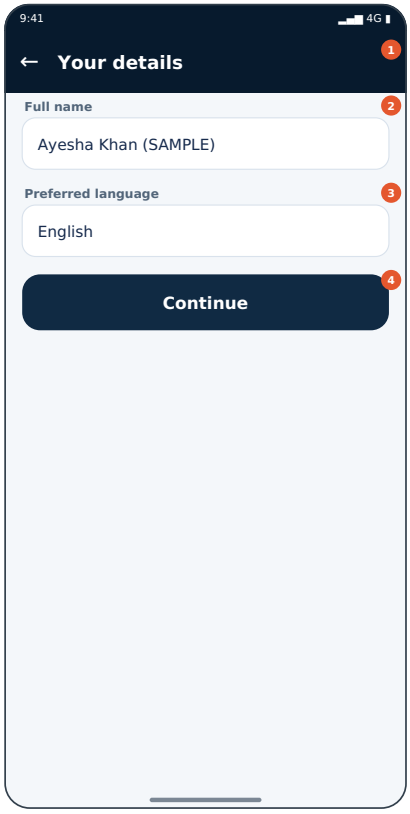

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Collect only required details to create the profile.

Login: **As per flow** · Incoming screens: AU-011, AU-013


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **P-001** Passenger Home — default

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Text field	158–236 dp	Full width, 16 dp margins	above fold
4	Button	236–298 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Your details	Deep navy #071A2D, white 16sp bold	Per state	Your details	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Full name: “Ayesha Khan (SAMPLE)”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “Ayesha Khan (SAMPLE)”	Yes	Always in this state
3	C03 Text field	158–236 dp	328×78 dp	Preferred language: “English”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Preferred language: “English”	Yes	Always in this state
4	C04 Button	236–298 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Your details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Full name	پورا نام	Needs native review
3	Preferred language	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button:	≥48 dp	Enabled	Navigate to **P-001** Passenger	Inline spinner; other	Server-confirmed	E01, E04 copy; no	Submit disabled while request in flight; one

	Continue			Home — default	controls locked	result only	false success	idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text	Required	Min/max length NEEDS CONFIRMATION	On blur + submit	Text

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Collect only required details to create the profile.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upsert_profile (write)
Inputs	name, language, contact fields confirmed by rules
Server checks / RLS	auth user match, field validation, role immutability (role never client-set); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Idempotent upsert
Offline	Draft kept locally; submit blocked
Cache	Profile cached after success

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001 · Incoming: AU-011, AU-013


Open decisions: OD-03 (see Part 16).

AU-013 CONFIRMED P1 v2.0

New-user validation errors

تفصیلات میں غلطیاں

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.new_err`

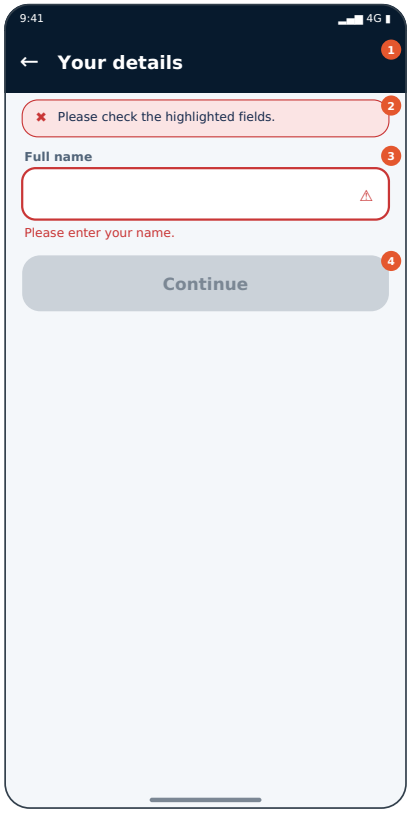

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Show field errors for profile creation.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **AU-012** New-user details

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Text field	125–219 dp	Full width, 16 dp margins	above fold
4	Button	219–281 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Your details	Deep navy #071A2D, white 16sp bold	Per state	Your details	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Please check the highlighted fields.	Tinted background + border + icon + text (never colour alone)	—	Please check the highlighted fields.	No	Always in this state
3	C03 Text field	125–219 dp	328×94 dp	Full name: “” Please enter your name.	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “” Please enter your name.	Yes	Always in this state
4	C04 Button	219–281 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Your details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please check the highlighted fields.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Full name	پورا نام	Needs native review
3	Please enter your name.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.

4	Button: Continue	≥48 dp	Enabled	Navigate to **AU-012** New-user details	Inline spinner; other controls locked	Server-confirmed result only	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Show field errors for profile creation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upsert_profile (write)
Inputs	name, language, contact fields confirmed by rules
Server checks / RLS	auth user match, field validation, role immutability (role never client-set); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E27
Retry / idempotency	Idempotent upsert
Offline	Draft kept locally; submit blocked
Cache	Profile cached after success

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-012 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

AU-014 PROPOSED NEEDS CONFIRMATION P2 v2.0

Existing-user recovery

اکاؤنٹ کی بحالی

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.recov`

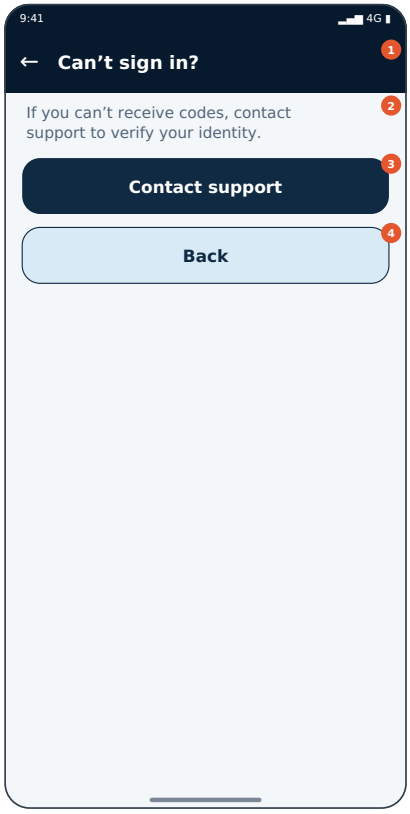

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

User lost access to number; guide to support path (process NEEDS CONFIRMATION).

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Contact support (Button) → **P-143** Contact support
- Back (Button) → **AU-002** Sign in

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–132 dp	Full width, 16 dp margins	above fold
3	Button	132–194 dp	Full width, 16 dp margins	above fold
4	Button	194–256 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Can’t sign in?	Deep navy #071A2D, white 16sp bold	Per state	Can’t sign in?	Yes	Always in this state
2	C02 Body text	80–132 dp	328×52 dp	If you can’t receive codes, contact support to verify your identity.	12–14sp secondary text	—	If you can’t receive codes, contact supp	No	Always in this state
3	C03 Button	132–194 dp	328×62 dp	Contact support سپورٹ سے رابطہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state
4	C04 Button	194–256 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Can’t sign in?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	If you can’t receive codes, contact support to verify your identity.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Contact support	سپورٹ سے رابطہ	Needs native review
4	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.

3	Button: Contact support	≥48 dp	Enabled	Navigate to **P-143** Contact support	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button: Back	≥48 dp	Enabled	Navigate to **AU-002** Sign in	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	User lost access to number; guide to support path (process NEEDS CONFIRMATION).
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-002, P-143 · Incoming: Entry point / system-launched


Open decisions: OD-09 (see Part 16).

AU-015 CONFIRMED P0 v2.0

Account blocked

اکاؤنٹ بلاک

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.blocked`

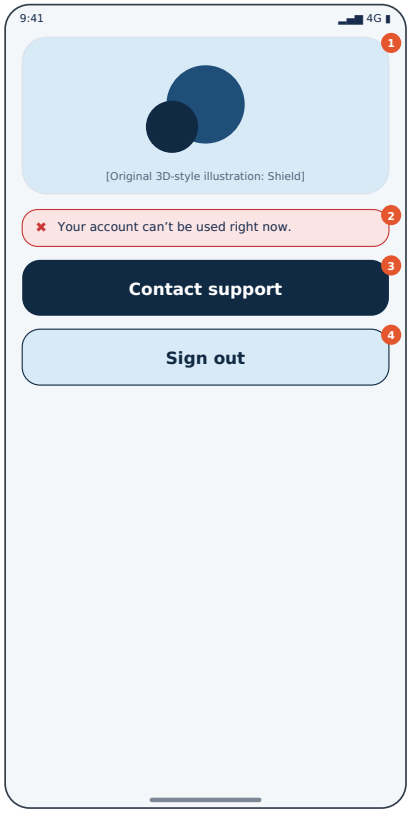

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server marks account blocked; no internal reason shown.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Contact support (Button) → **P-143** Contact support
- Sign out (Button) → **SH-035** Sign-out confirmation

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–178 dp	Full width, 16 dp margins	above fold
2	Banner	178–223 dp	Full width, 16 dp margins	above fold
3	Button	223–285 dp	Full width, 16 dp margins	above fold
4	Button	285–347 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–178 dp	328×154 dp	[Shield]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Shield]	No	Always in this state
2	C02 Banner	178–223 dp	328×45 dp	Your account can't be used right now.	Tinted background + border + icon + text (never colour alone)	—	Your account can't be used right now.	No	Always in this state
3	C03 Button	223–285 dp	328×62 dp	Contact support سپورٹ سے رابطہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state
4	C04 Button	285–347 dp	328×62 dp	Sign out سائن آؤٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Sign out, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	Your account can't be used right now.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Contact support	سپورٹ سے رابطہ	Needs native review
4	Sign out	سائن آؤٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Contact support	≥48 dp	Enabled	Navigate to **P-143** Contact support	Instant	—	E28 copy; no false success	Retry debounced.
4	Button: Sign out	≥48 dp	Enabled	Navigate to **SH-035** Sign-out confirmation	Instant	—	E28 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server marks account blocked; no internal reason shown.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_session / refresh_session (read)
Inputs	refresh token (secure storage)
Server checks / RLS	token validity, account status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E28
Retry / idempotency	Safe read
Offline	Shows signed-in shell with stale warning only if allowed
Cache	Token in secure storage only

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-143, SH-035 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

AU-016 CONFIRMED P1 v2.0

Account under review

اکاؤنٹ زیر جائزہ

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.review`

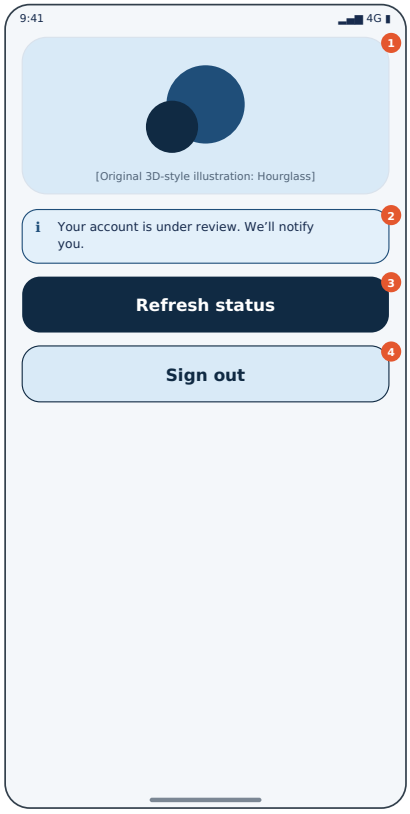

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Account pending review; explain wait.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Refresh status (Button) → stays on screen (action)
- Sign out (Button) → **SH-035** Sign-out confirmation

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–178 dp	Full width, 16 dp margins	above fold
2	Banner	178–238 dp	Full width, 16 dp margins	above fold
3	Button	238–300 dp	Full width, 16 dp margins	above fold
4	Button	300–362 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–178 dp	328×154 dp	[Hourglass]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Hourglass]	No	Always in this state
2	C02 Banner	178–238 dp	328×60 dp	Your account is under review. We'll notify you.	Tinted background + border + icon + text (never colour alone)	—	Your account is under review. We'll noti	No	Always in this state
3	C03 Button	238–300 dp	328×62 dp	Refresh status حالت ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh status, button	Yes	Always in this state
4	C04 Button	300–362 dp	328×62 dp	Sign out سائن آؤٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Sign out, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	Your account is under review. We'll notify you.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refresh status	حالت ریفریش	Needs native review
4	Sign out	سائن آؤٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Refresh status	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
4	Button: Sign out	≥48 dp	Enabled	Navigate to **SH-035** Sign-out	Instant	—	E01, E04 copy; no false	Status check button debounced; no write

				confirmation			success	retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Account pending review; explain wait.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_session / refresh_session (read)
Inputs	refresh token (secure storage)
Server checks / RLS	token validity, account status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Shows signed-in shell with stale warning only if allowed
Cache	Token in secure storage only

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: SH-035 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

AU-017 PROPOSED NEEDS CONFIRMATION P2 v2.0

Account deletion request

اکاؤنٹ حذف کرنے کی درخواست

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.del_info`

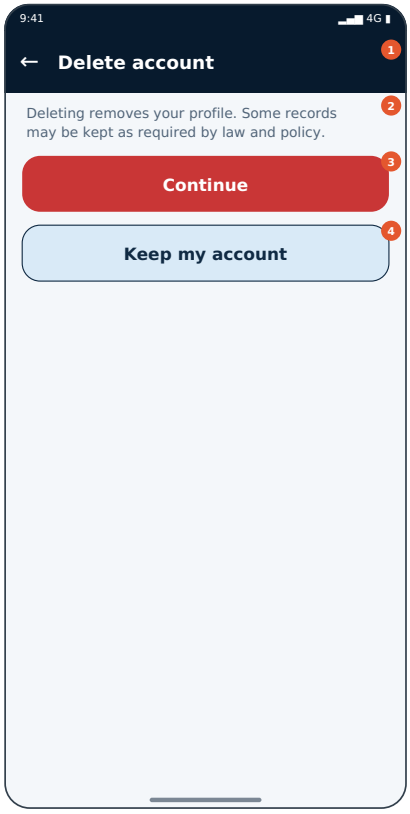

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Explain what deletion means and what must be kept legally (NEEDS CONFIRMATION).

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **AU-018** Account deletion confirmation
- Keep my account (Button) → previous screen (system Back)

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–130 dp	Full width, 16 dp margins	above fold
3	Button	130–192 dp	Full width, 16 dp margins	above fold
4	Button	192–254 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Delete account	Deep navy #071A2D, white 16sp bold	Per state	Delete account	Yes	Always in this state
2	C02 Body text	80–130 dp	328×50 dp	Deleting removes your profile. Some records may be kept as required by law and policy.	12–14sp secondary text	—	Deleting removes your profile. Some reco	No	Always in this state
3	C03 Button	130–192 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state
4	C04 Button	192–254 dp	328×62 dp	Keep my account اکاؤنٹ رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Keep my account, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Delete account	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Deleting removes your profile. Some records may be kept as required by law and policy.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Continue	جاری رکھیں	Needs native review
4	Keep my account	اکاؤنٹ رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system	Instant	—	E01, E03 copy; no false	n/a

				Back)			success	
3	Button: Continue	≥48 dp	Enabled	Navigate to **AU-018** Account deletion confirmation	Inline spinner; other controls locked	Server-confirmed result only	E01, E03 copy; no false success	n/a
4	Button: Keep my account	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Inline spinner; other controls locked	Server-confirmed result only	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Explain what deletion means and what must be kept legally (NEEDS CONFIRMATION).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	request_account_deletion (write)
Inputs	reason (optional), re-auth proof
Server checks / RLS	active bookings/refunds check, legal retention rules (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	Required key; duplicate returns existing request
Offline	Blocked
Cache	No cache

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-018 · Incoming: Entry point / system-launched


Open decisions: OD-11 (see Part 16).

AU-018 PROPOSED NEEDS CONFIRMATION P2 v2.0

Account deletion confirmation

حذف کی تصدیق

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.del_conf`

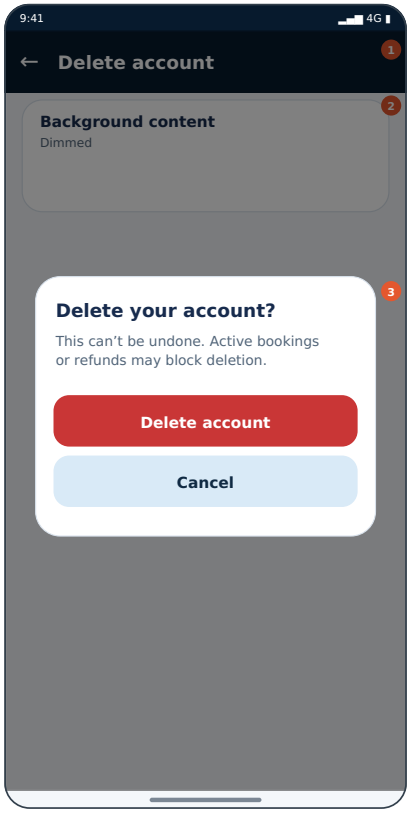

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Final destructive confirmation with re-authentication.

Login: **n/a (shared pattern)** · Incoming screens: AU-017


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–192 dp	Full width, 16 dp margins	above fold
3	Dialog	244–476 dp	Full width, 16 dp margins	above fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Delete account	Deep navy #071A2D, white 16sp bold	Per state	Delete account	Yes	Always in this state
2	C02 Info card	80–192 dp	328×112 dp	Background content; Dimmed	White card, border #D9E2EC, radius 18dp	—	Background content	No	Always in this state
3	C03 Dialog	244–476 dp	328×232 dp	Delete your account?; This can’t be undone. Active bookings or refunds may block deletion.; Delete account; Cancel اکاؤنٹ حذف کریں / منسوخ	Radius 22dp, scrim 50%	Per state	Delete your account?	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Delete account	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Background content	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Dimmed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Delete your account?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	This can’t be undone. Active bookings or refunds may block deletion.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Delete account	اکاؤنٹ حذف کریں	Needs native review
3	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Final destructive confirmation with re-authentication.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	request_account_deletion (write)
Inputs	reason (optional), re-auth proof
Server checks / RLS	active bookings/refunds check, legal retention rules (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	Required key; duplicate returns existing request
Offline	Blocked
Cache	No cache

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: AU-017


Open decisions: OD-11 (see Part 16).

AU-019 CONFIRMED PROPOSED P1 v2.0

Re-authentication for sensitive action

حساس عمل کے لیے دوبارہ تصدیق

Role: **Shared (auth)** · Family: F1 Authentication & account access · Key: `au.reauth`

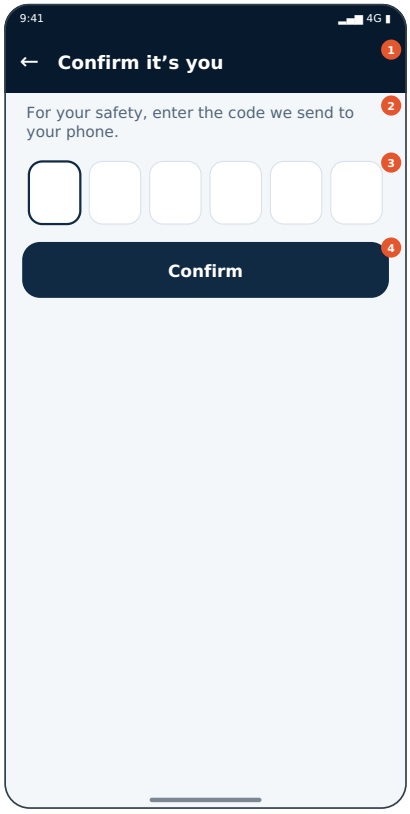

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Re-enter a code before sensitive changes.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Confirm (Button) → previous screen (system Back)

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–131 dp	Full width, 16 dp margins	above fold
3	OTP boxes	131–207 dp	Full width, 16 dp margins	above fold
4	Button	207–269 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Confirm it’s you	Deep navy #071A2D, white 16sp bold	Per state	Confirm it’s you	Yes	Always in this state
2	C02 Body text	80–131 dp	328×51 dp	For your safety, enter the code we send to your phone.	12–14sp secondary text	—	For your safety, enter the code we send	No	Always in this state
3	C03 OTP boxes	131–207 dp	328×76 dp	6-digit code, 0 entered	6 boxes 46×56dp	Per state	6-digit code, 0 entered	Yes	Always in this state
4	C04 Button	207–269 dp	328×62 dp	Confirm تصدیق	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Confirm, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Confirm it’s you	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	For your safety, enter the code we send to your phone.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Confirm	تصدیق	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E24 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button:	≥48 dp	Enabled	Pop to previous screen (same	Inline spinner; other	Server-confirmed	E01, E24 copy; no	Submit disabled while request in flight; one

	Confirm			as system Back)	controls locked	result only	false success	idempotency key per attempt.
3	OTP boxes	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
OTP code	numeric	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Re-enter a code before sensitive changes.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_otp (write)
Inputs	phone, code, request id
Server checks / RLS	code validity, expiry, attempt count, lockout; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E24, E27
Retry / idempotency	Safe to resubmit same code only until used
Offline	Blocked
Cache	No cache; code never persisted

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-001 CONFIRMED P1 v2.0

Slow network — with cancel

سست نیٹ ورک

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.slow`

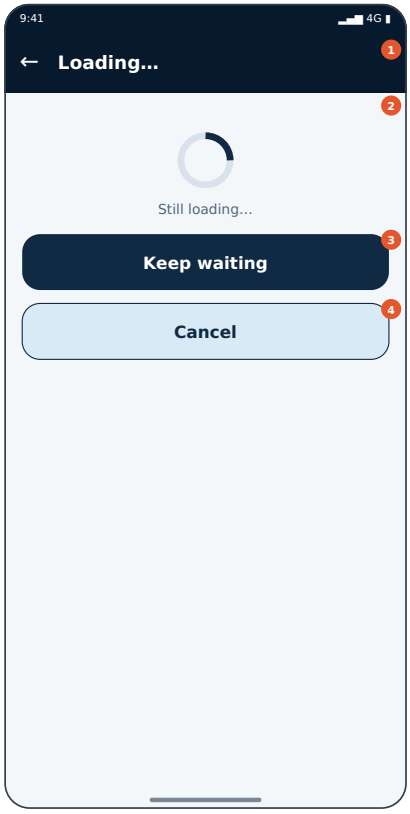

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Long-running read: visible loading, cancel and Back behaviour.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Keep waiting (Button) → stays on screen (action)
- Cancel (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Button	200–262 dp	Full width, 16 dp margins	above fold
4	Button	262–324 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Loading…	Deep navy #071A2D, white 16sp bold	Per state	Loading…	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Still loading…	Navy arc on grey ring	—	Still loading…	No	Always in this state
3	C03 Button	200–262 dp	328×62 dp	Keep waiting انتظار کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Keep waiting, button	Yes	Always in this state
4	C04 Button	262–324 dp	328×62 dp	Cancel منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Loading…	لوڈ ہو رہا ہے…	Needs native review
2	Still loading…	Translation review required	—
3	Keep waiting	انتظار کریں	Needs native review
4	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E02 copy; no false success	Retry debounced.
3	Button: Keep waiting	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E02 copy; no false success	Retry debounced.
4	Button: Cancel	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E02 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Long-running read: visible loading, cancel and Back behaviour.
E02 Request slower than 8 s (threshold PROPOSED)	Banner or full screen **ERR-001** Slow network — with cancel	Slow connection — This is taking longer than usual. You can keep waiting or cancel.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E02
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-002 CONFIRMED P0 v2.0

No internet before action

انٹرنیٹ نہیں — عمل سے پہلے

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.offline`

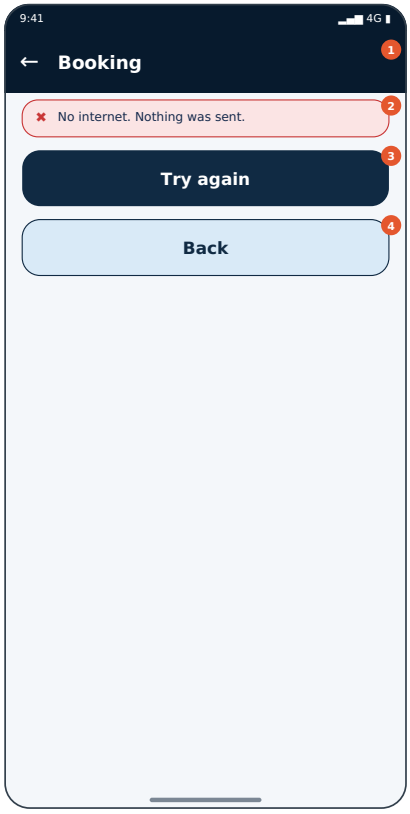

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Action blocked before send; nothing queued.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → stays on screen (action)
- Back (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Booking	Deep navy #071A2D, white 16sp bold	Per state	Booking	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	No internet. Nothing was sent.	Tinted background + border + icon + text (never colour alone)	—	No internet. Nothing was sent.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Try again دوبارہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Booking	بکنگ	Needs native review
2	No internet. Nothing was sent.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ	Needs native review
4	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01 copy; no false success	Retry debounced.
3	Button: Try again	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E01 copy; no false success	Retry debounced.
4	Button: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Action blocked before send; nothing queued.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-003 CONFIRMED P1 v2.0

Connection lost during read

پڑھتے وقت کنکشن ٹوٹا

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.read_lost`

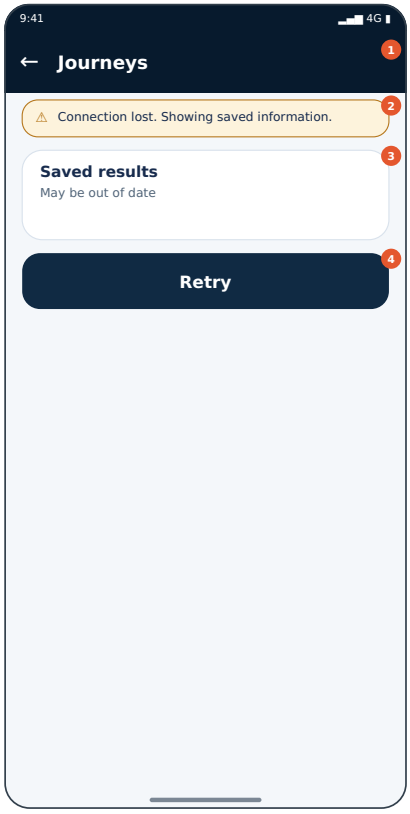

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Partial content with saved data and retry.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Retry (Button) → stays on screen (action)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Info card	125–217 dp	Full width, 16 dp margins	above fold
4	Button	217–279 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Connection lost. Showing saved information.	Tinted background + border + icon + text (never colour alone)	—	Connection lost. Showing saved informati	No	Always in this state
3	C03 Info card	125–217 dp	328×92 dp	Saved results; May be out of date	White card, border #D9E2EC, radius 18dp	—	Saved results	No	Always in this state
4	C04 Button	217–279 dp	328×62 dp	Retry دوبارہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Retry, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Connection lost. Showing saved information.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Saved results	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	May be out of date	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Retry	دوبارہ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E03, E11 copy; no false success	Retry debounced.

4	Button: Retry	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E03, E11 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Partial content with saved data and retry.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E03, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-004 CONFIRMED P0 v2.0

Connection lost during booking write

بکنگ کے دوران کنکشن ٹوٹا

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.write_lost`

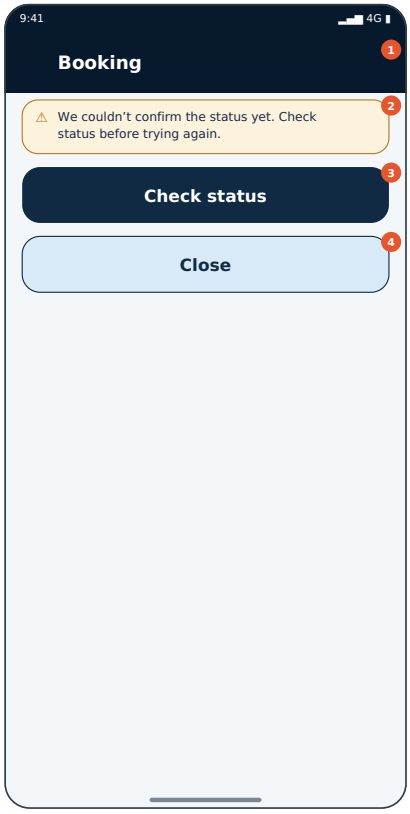

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Outcome unknown: neutral copy, status check, no blind retry.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Check status (Button) → **P-066** App closed mid-booking — recovery
- Close (Button) → **P-094** My Trips — Upcoming

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Booking	Deep navy #071A2D, white 16sp bold	Per state	Booking	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	We couldn’t confirm the status yet. Check status before trying again.	Tinted background + border + icon + text (never colour alone)	—	We couldn’t confirm the status yet. Chec	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Check status حالت چیک	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Check status, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	Close بند	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Close, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Booking	بکنگ	Needs native review
2	We couldn’t confirm the status yet. Check status before trying again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Check status	حالت چیک	Needs native review
4	Close	بند	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Check	≥48 dp	Enabled	Navigate to **P-066** App closed mid-booking —	Instant	—	E04, E05 copy; no false	Status check button debounced; no

	status			recovery			success	write retries.
4	Button: Close	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E04, E05 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Outcome unknown: neutral copy, status check, no blind retry.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_booking_status (read)
Inputs	booking id
Server checks / RLS	server-confirmed status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E05
Retry / idempotency	Safe read
Offline	Show cached with freshness label
Cache	Status cache labelled

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-066, P-094 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-005 CONFIRMED P1 v2.0

Rate limited

بہت زیادہ درخواستیں

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.rate`

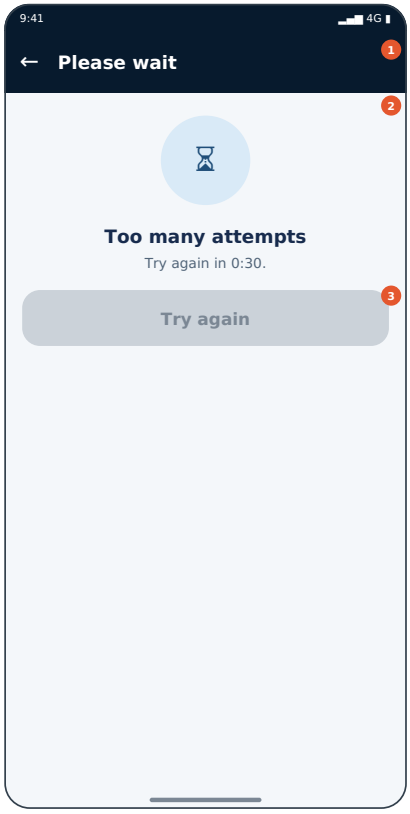

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server rate limit; wait countdown.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Please wait	Deep navy #071A2D, white 16sp bold	Per state	Please wait	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Too many attempts; Try again in 0:30.	Light-blue circle icon + 16sp title + 12sp body	—	Too many attempts	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Please wait	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Too many attempts	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Try again in 0:30.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E24 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Sample value	Missing / freshness

Data	Source of truth	Req.
Data is static UI copy or derived from the action in §13.		

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server rate limit; wait countdown.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E24
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-006 CONFIRMED P0 v2.0

Session expired during action

عمل کے دوران سیشن ختم

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.auth_action`

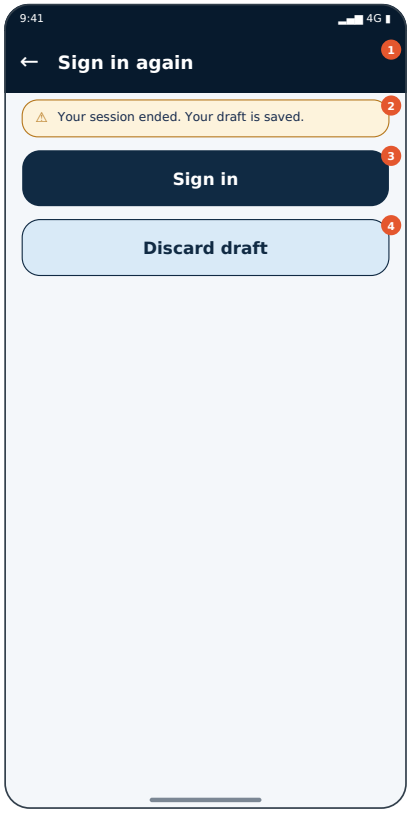

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Draft preserved; sign in, then re-check before continuing.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Sign in (Button) → **AU-002** Sign in
- Discard draft (Button) → **P-001** Passenger Home — default

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Sign in again	Deep navy #071A2D, white 16sp bold	Per state	Sign in again	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Your session ended. Your draft is saved.	Tinted background + border + icon + text (never colour alone)	—	Your session ended. Your draft is saved.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Sign in سائن اِن	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Sign in, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Discard draft ڈرافٹ ختم	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Discard draft, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Sign in again	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your session ended. Your draft is saved.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Sign in	سائن اِن	Needs native review
4	Discard draft	ڈرافٹ ختم	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E08 copy; no false success	Retry debounced.

3	Button: Sign in	≥48 dp	Enabled	Navigate to **AU-002** Sign in	Instant	—	E08 copy; no false success	Retry debounced.
4	Button: Discard draft	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E08 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Draft preserved; sign in, then re-check before continuing.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_session / refresh_session (read)
Inputs	refresh token (secure storage)
Server checks / RLS	token validity, account status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E08
Retry / idempotency	Safe read
Offline	Shows signed-in shell with stale warning only if allowed
Cache	Token in secure storage only

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-002, P-001 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-007 CONFIRMED P1 v2.0

Return from OS Settings

سیٹنگز سے واپسی

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.settings_ret`

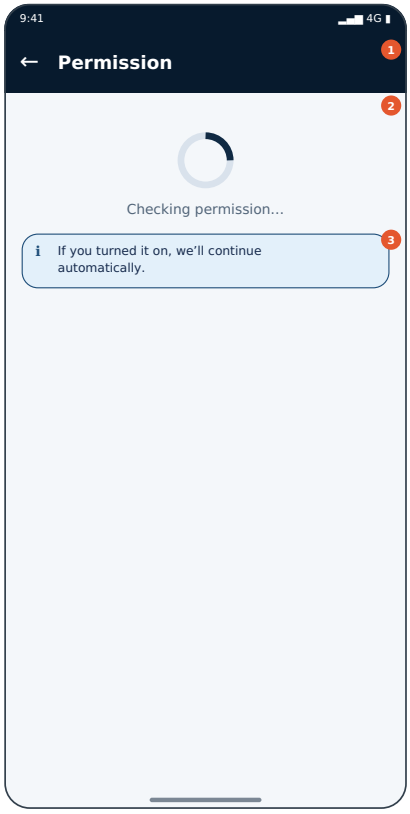

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

App re-checks permission after returning.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Banner	200–260 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Permission	Deep navy #071A2D, white 16sp bold	Per state	Permission	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Checking permission...	Navy arc on grey ring	—	Checking permission...	No	Always in this state
3	C03 Banner	200–260 dp	328×60 dp	If you turned it on, we'll continue automatically.	Tinted background + border + icon + text (never colour alone)	—	If you turned it on, we'll continue auto	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Permission	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Checking permission...	Translation review required	—
3	If you turned it on, we'll continue automatically.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	App re-checks permission after returning.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-008 CONFIRMED P1 v2.0

Duplicate taps blocked

ڈبل ٹیپ روکا گیا

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.dup`

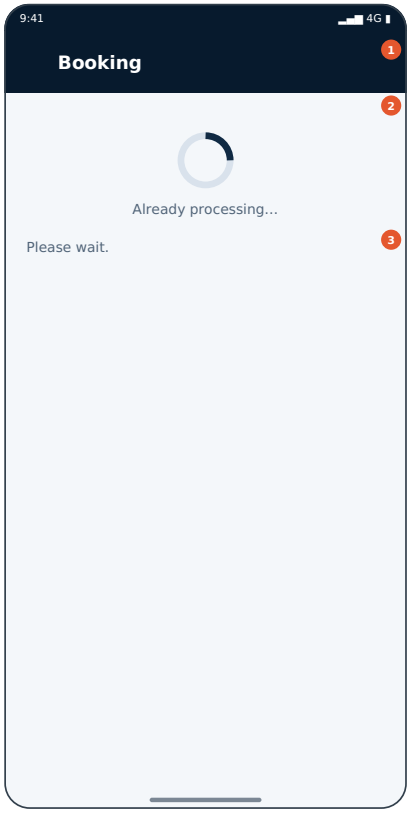

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Processing lock overlay; one request only.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Body text	200–232 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Booking	Deep navy #071A2D, white 16sp bold	Per state	Booking	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Already processing...	Navy arc on grey ring	—	Already processing...	No	Always in this state
3	C03 Body text	200–232 dp	328×32 dp	Please wait.	12–14sp secondary text	—	Please wait.	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Booking	بکنگ	Needs native review
2	Already processing...	Translation review required	—
3	Please wait.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Processing lock overlay; one request only.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-009 CONFIRMED P0 v2.0

Background / foreground during hold

بیک گراؤنڈ — ہولڈ

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.bg`

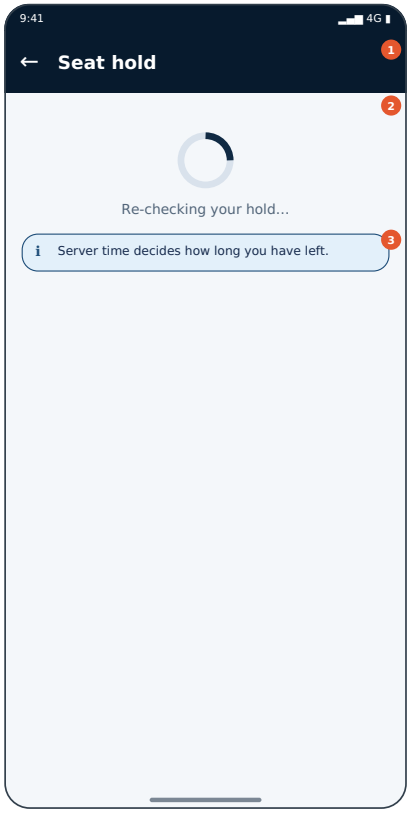

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

On return, hold re-read from server; local clock not trusted.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Banner	200–245 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Seat hold	Deep navy #071A2D, white 16sp bold	Per state	Seat hold	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Re-checking your hold…	Navy arc on grey ring	—	Re-checking your hold…	No	Always in this state
3	C03 Banner	200–245 dp	328×45 dp	Server time decides how long you have left.	Tinted background + border + icon + text (never colour alone)	—	Server time decides how long you have le	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Seat hold	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Re-checking your hold…	Translation review required	—
3	Server time decides how long you have left.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E14, E23 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	On return, hold re-read from server; local clock not trusted.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E23 Relaunch after interruption	Banner or full screen **SH-020** Session recovery after process death	Welcome back — We restored where you left off. Checking the latest status...

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_hold_status (read)
Inputs	hold id
Server checks / RLS	expiry (server time), ownership; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E14, E23
Retry / idempotency	Safe read
Offline	Shows last known; warns not authoritative
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-010 CONFIRMED P0 v2.0

Conflicting seat reservation

سیٹ پر تصادم

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.conflict`

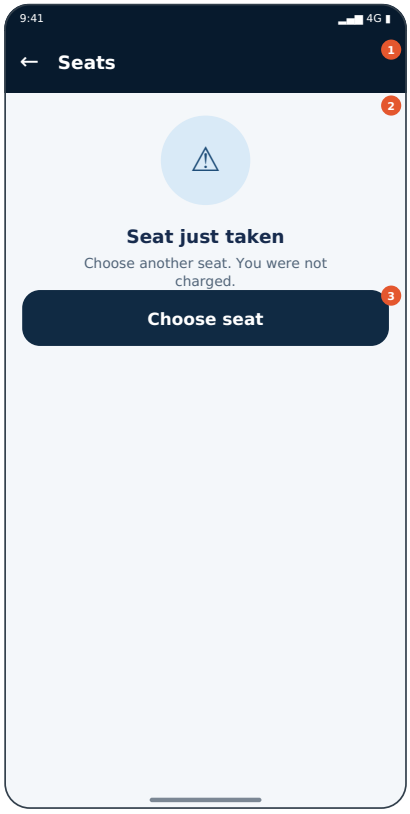

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Two users, one seat: loser sees this.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Choose seat (Button) → **P-047** Seat map — available

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Seats	Deep navy #071A2D, white 16sp bold	Per state	Seats	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Seat just taken; Choose another seat. You were not charged.	Light-blue circle icon + 16sp title + 12sp body	—	Seat just taken	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Choose seat سیٹ منتخب	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Choose seat, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Seats	سیٹیں	Needs native review
2	Seat just taken	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Choose another seat. You were not charged.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Choose seat	سیٹ منتخب	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E13 copy; no false success	Retry debounced.
3	Button: Choose seat	≥48 dp	Enabled	Navigate to **P-047** Seat map — available	Instant	—	E13 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Two users, one seat: loser sees this.
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E13
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-047 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-011 CONFIRMED P0 v2.0

Payment pending reconciliation

ادائیگی کی مطابقت

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.pay_recon`

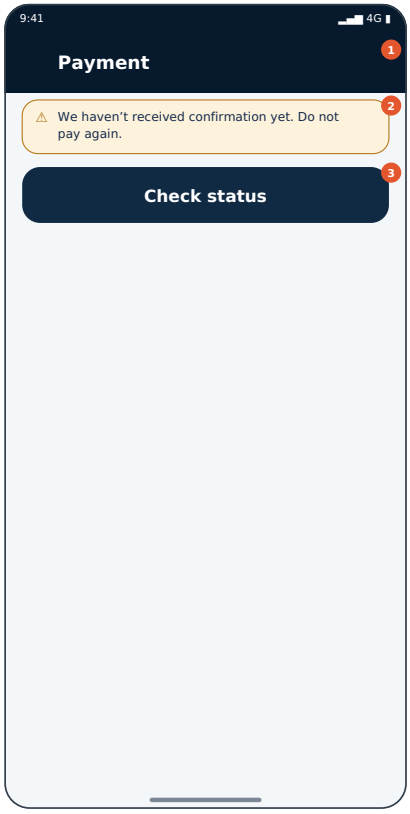

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server reconciling; no second payment.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Check status (Button) → **P-076** Payment status re-check

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment	Deep navy #071A2D, white 16sp bold	Per state	Payment	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	We haven't received confirmation yet. Do not pay again.	Tinted background + border + icon + text (never colour alone)	—	We haven't received confirmation yet. Do	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Check status حالت	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Check status, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment	ادائیگی	Needs native review
2	We haven't received confirmation yet. Do not pay again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Check status	حالت	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Check status	≥48 dp	Enabled	Navigate to **P-076** Payment status re-check	Instant	—	E16 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Sample value	Missing / freshness

Data	Source of truth	Req.
Data is static UI copy or derived from the action in §13.		

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server reconciling; no second payment.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_payment_status (read)
Inputs	booking id / payment attempt id
Server checks / RLS	authoritative payment + booking state (reconciliation); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E16
Retry / idempotency	Safe read
Offline	Blocked; show last known
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-076 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-012 PROPOSED NEEDS CONFIRMATION P1 v2.0

Ticket QR needs refresh

کیو آر ری فریش

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.qr_exp`

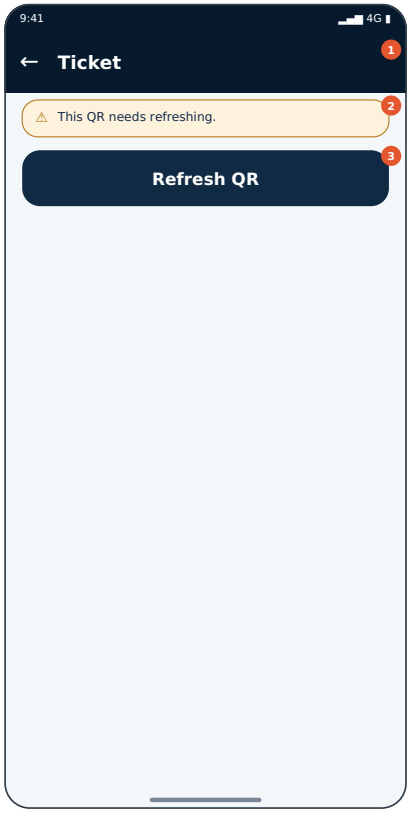

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

QR expired/rotated; refresh from server.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refresh QR (Button) → **P-084** QR ticket — confirmed

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket	Deep navy #071A2D, white 16sp bold	Per state	Ticket	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	This QR needs refreshing.	Tinted background + border + icon + text (never colour alone)	—	This QR needs refreshing.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Refresh QR کیو آر ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh QR, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket	ٹکٹ	Needs native review
2	This QR needs refreshing.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refresh QR	کیو آر ریفریش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E18 copy; no false success	Retry debounced.
3	Button: Refresh QR	≥48 dp	Enabled	Navigate to **P-084** QR ticket — confirmed	Instant	—	E18 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13				

Data is static UI copy or derived from the action in §13.

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	QR expired/rotated; refresh from server.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E18 QR invalid, expired, or wrong trip	Banner or full screen **D-024** Scan — invalid ticket	Ticket not valid — This ticket could not be verified for this trip.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_ticket (read)
Inputs	booking id
Server checks / RLS	booking confirmed; QR payload only if confirmed; owner check; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E18
Retry / idempotency	Safe read
Offline	Cached confirmed ticket shown with freshness; pending never shows QR
Cache	Secure local cache (PROPOSED)

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-084 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-013 CONFIRMED P1 v2.0

Backend validation summary

سرور کی توثیق

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.validation`

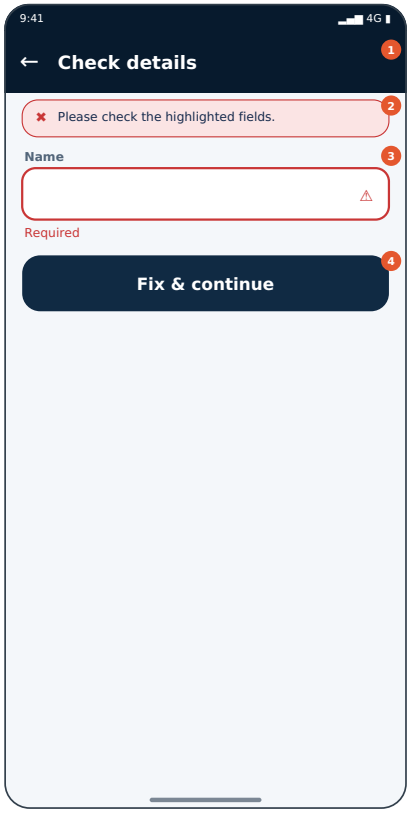

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server validation errors mapped to fields.

Login: **As per flow** · Incoming screens: Entry point / system-launched

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Fix & continue (Button) → stays on screen (action)

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Text field	125–219 dp	Full width, 16 dp margins	above fold
4	Button	219–281 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Check details	Deep navy #071A2D, white 16sp bold	Per state	Check details	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Please check the highlighted fields.	Tinted background + border + icon + text (never colour alone)	—	Please check the highlighted fields.	No	Always in this state
3	C03 Text field	125–219 dp	328×94 dp	Name: “” Required	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Name: “” Required	Yes	Always in this state
4	C04 Button	219–281 dp	328×62 dp	Fix & continue درست کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Fix & continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Check details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please check the highlighted fields.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Name	نام	Needs native review
3	Required	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Fix & continue	درست کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button: Fix &	≥48 dp	Enabled	Runs the on-screen action (see §13);	Instant	—	E27 copy; no false	Submit disabled while request in flight; one

	continue			stays here			success	idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Name	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server validation errors mapped to fields.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E27
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-014 CONFIRMED P1 v2.0

Unhandled exception — safe recovery

غیر متوقع خرابی

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.crash`

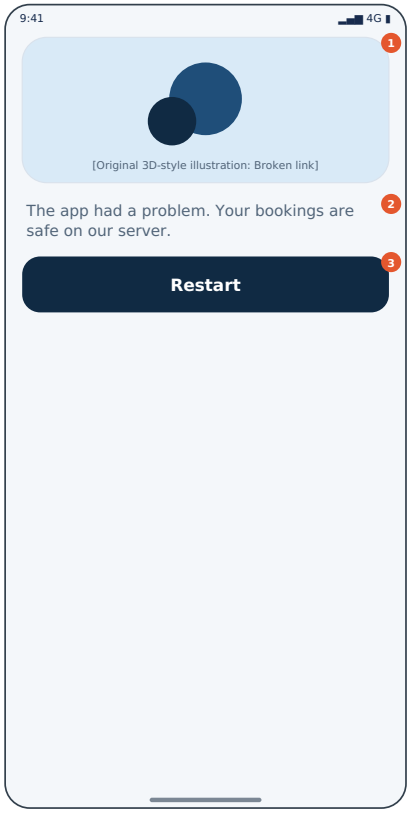

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Global handler; no data-loss claims.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Restart (Button) → **SH-001** Splash / app initialisation

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–168 dp	Full width, 16 dp margins	above fold
2	Body text	168–220 dp	Full width, 16 dp margins	above fold
3	Button	220–282 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–168 dp	328×144 dp	[Broken link]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Broken link]	No	Always in this state
2	C02 Body text	168–220 dp	328×52 dp	The app had a problem. Your bookings are safe on our server.	12–14sp secondary text	—	The app had a problem. Your bookings are	No	Always in this state
3	C03 Button	220–282 dp	328×62 dp	Restart دوبارہ شروع	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Restart, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	The app had a problem. Your bookings are safe on our server.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Restart	دوبارہ شروع	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Restart	≥48 dp	Enabled	Navigate to **SH-001** Splash / app initialisation	Instant	—	E28 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Global handler; no data-loss claims.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: SH-001 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-015 CONFIRMED P2 v2.0

Malformed response

غلط جواب

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.malformed`

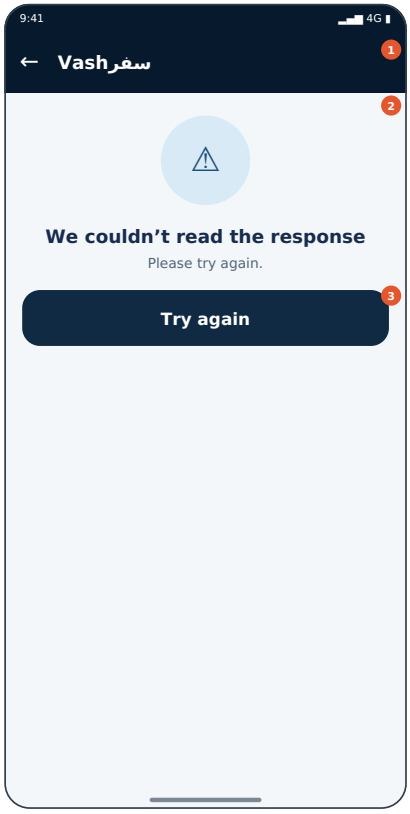

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Unexpected payload; safe state.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → stays on screen (action)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	We couldn’t read the response; Please try again.	Light-blue circle icon + 16sp title + 12sp body	—	We couldn’t read the response	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We couldn’t read the response	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please try again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E25 copy; no false success	Retry debounced.
3	Button: Try again	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E25 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Unexpected payload; safe state.
E25 Unexpected/malformed response	Banner or full screen **ERR-015** Malformed response	We couldn’t read the response — Something unexpected came back. Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E25
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-016 CONFIRMED P0 v2.0

Booking saved, ticket not loaded

بکنگ محفوظ، ٹکٹ لوڈ نہیں

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.partial`

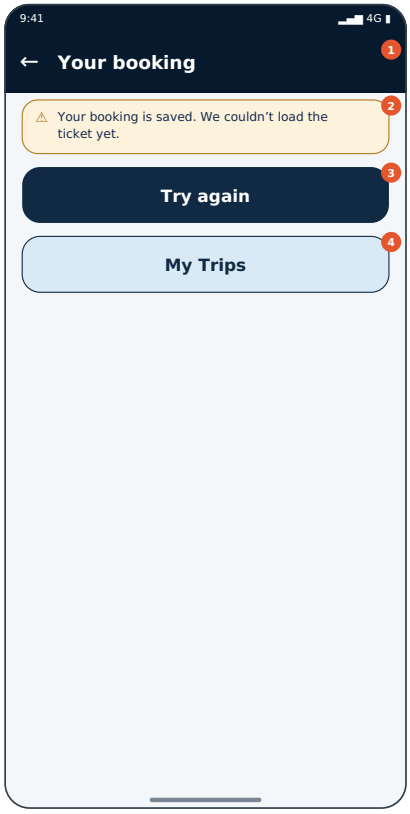

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Partial failure: booking exists; ticket fetch failed; no fake QR.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **P-084** QR ticket — confirmed
- My Trips (Button) → **P-094** My Trips — Upcoming

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Your booking	Deep navy #071A2D, white 16sp bold	Per state	Your booking	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Your booking is saved. We couldn't load the ticket yet.	Tinted background + border + icon + text (never colour alone)	—	Your booking is saved. We couldn't load	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Try again دوبارہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	My Trips میرے سفر	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	My Trips, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Your booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your booking is saved. We couldn't load the ticket yet.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ	Needs native review
4	My Trips	میرے سفر	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E03, E30 copy; no false success	Status check button debounced; no write retries.

3	Button: Try again	≥48 dp	Enabled	Navigate to **P-084** QR ticket — confirmed	Instant	—	E03, E30 copy; no false success	Status check button debounced; no write retries.
4	Button: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E03, E30 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Partial failure: booking exists; ticket fetch failed; no fake QR.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_ticket (read)
Inputs	booking id
Server checks / RLS	booking confirmed; QR payload only if confirmed; owner check; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E03, E30
Retry / idempotency	Safe read
Offline	Cached confirmed ticket shown with freshness; pending never shows QR
Cache	Secure local cache (PROPOSED)

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-084, P-094 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-017 PROPOSED NEEDS CONFIRMATION P2 v2.0

Device time looks wrong

ڈیوائس کا وقت غلط

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.clock`

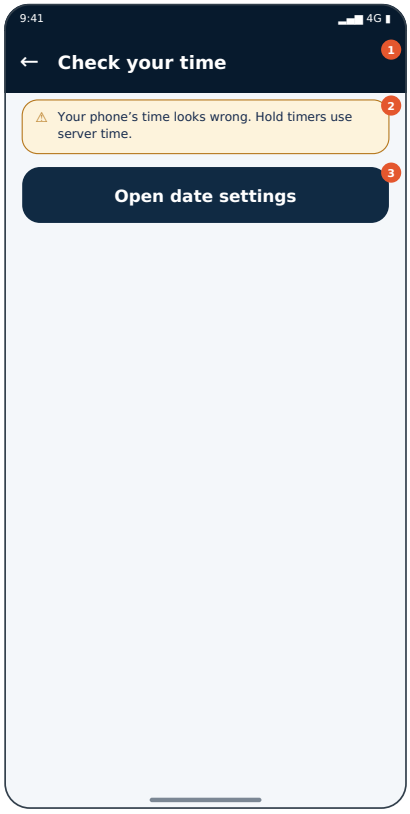

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Device clock skew; server time authoritative for holds.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open date settings (Button) → Android system settings

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Check your time	Deep navy #071A2D, white 16sp bold	Per state	Check your time	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Your phone’s time looks wrong. Hold timers use server time.	Tinted background + border + icon + text (never colour alone)	—	Your phone’s time looks wrong. Hold time	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Open date settings سیٹنگز	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open date settings, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Check your time	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your phone’s time looks wrong. Hold timers use server time.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open date settings	سیٹنگز	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E28 copy; no false success	Retry debounced.
3	Button: Open date settings	≥48 dp	Enabled	Open Android Settings for this app; on return re-check state	Instant	—	E28 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Device clock skew; server time authoritative for holds.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-018 PROPOSED NEEDS CONFIRMATION P2 v2.0

Low storage / memory

کم اسٹوریج / میموری

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.lowmem`

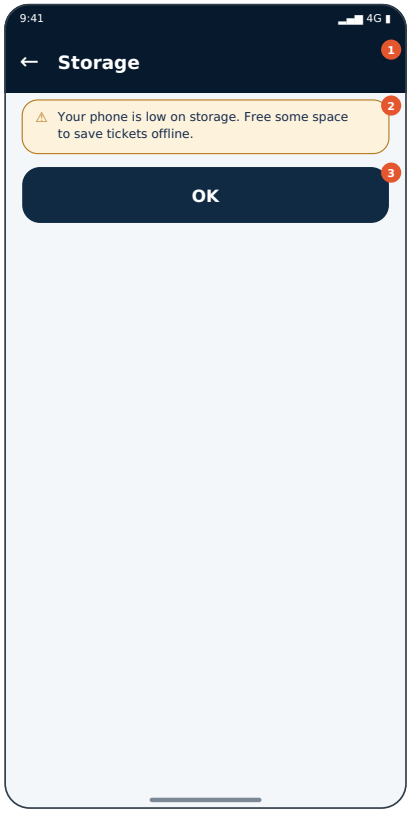

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Low-end device pressure.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- OK (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Storage	Deep navy #071A2D, white 16sp bold	Per state	Storage	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Your phone is low on storage. Free some space to save tickets offline.	Tinted background + border + icon + text (never colour alone)	—	Your phone is low on storage. Free some	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	OK ٹھیک ہے	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	OK, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Storage	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your phone is low on storage. Free some space to save tickets offline.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	OK	ٹھیک ہے	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E28 copy; no false success	Retry debounced.
3	Button: OK	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E28 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Low-end device pressure.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-019 PROPOSED NEEDS CONFIRMATION P1 v2.0

Background restriction for GPS

بیک گراؤنڈ پابندی

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.battery`

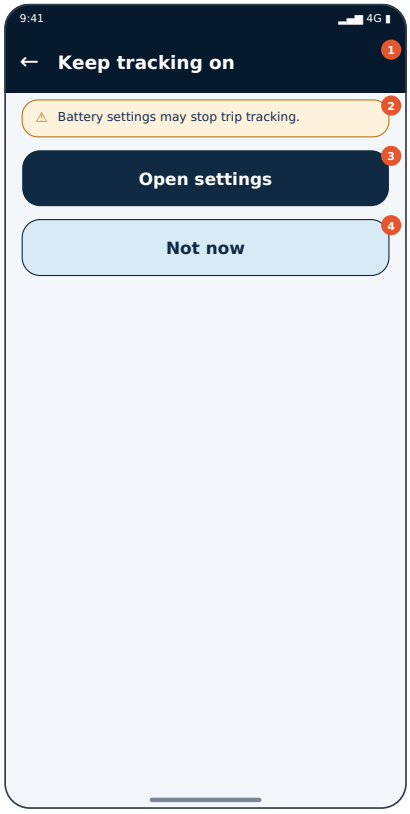

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Battery optimisation may stop GPS; explain.

Login: **Per flow** · Incoming screens: Entry point / system-launched

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open settings (Button) → Android system settings
- Not now (Button) → previous screen (system Back)

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Keep tracking on	Deep navy #071A2D, white 16sp bold	Per state	Keep tracking on	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Battery settings may stop trip tracking.	Tinted background + border + icon + text (never colour alone)	—	Battery settings may stop trip tracking.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Open settings سیٹنگز	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open settings, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Not now ابھی نہیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Not now, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Keep tracking on	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Battery settings may stop trip tracking.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open settings	سیٹنگز	Needs native review
4	Not now	ابھی نہیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false	Allow button opens OS prompt

							success	once.
3	Button: Open settings	≥48 dp	Enabled	Open Android Settings for this app; on return re-check state	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Not now	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Battery optimisation may stop GPS; explain.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-020 CONFIRMED P1 v2.0

No assigned trip (action blocked)

کوئی سفر تفویض نہیں

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.noassign`

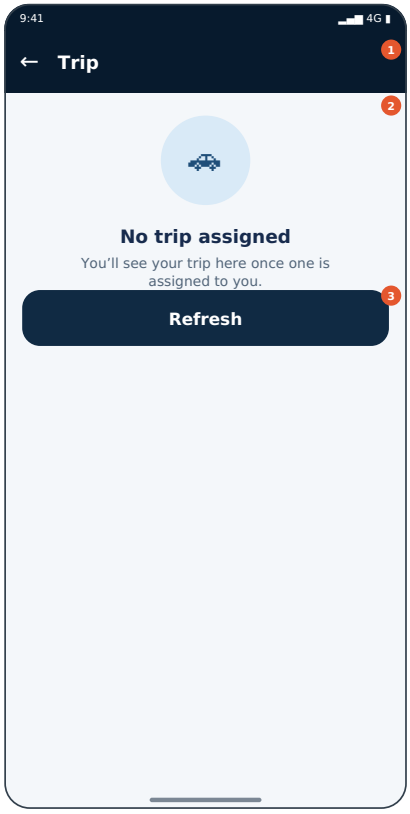

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Driver tried a trip action with no assignment.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refresh (Button) → **D-013** Driver Home — default

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip	Deep navy #071A2D, white 16sp bold	Per state	Trip	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	No trip assigned; You'll see your trip here once one is assigned to you.	Light-blue circle icon + 16sp title + 12sp body	—	No trip assigned	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Refresh ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	No trip assigned	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You'll see your trip here once one is assigned to you.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refresh	ریفریش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E20 copy; no false success	Retry debounced.
3	Button: Refresh	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E20 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Driver tried a trip action with no assignment.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E20 No trip assigned to driver	Banner or full screen **D-013** Driver Home — default	No trip assigned — You'll see your trip here once one is assigned to you.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E20
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

ERR-021 CONFIRMED P1 v2.0

Driver not approved (action blocked)

ڈرائیور منظور نہیں

Role: **Shared (recovery)** · Family: F13 Cross-cutting full-screen states & recovery · Key: `e.notappr`

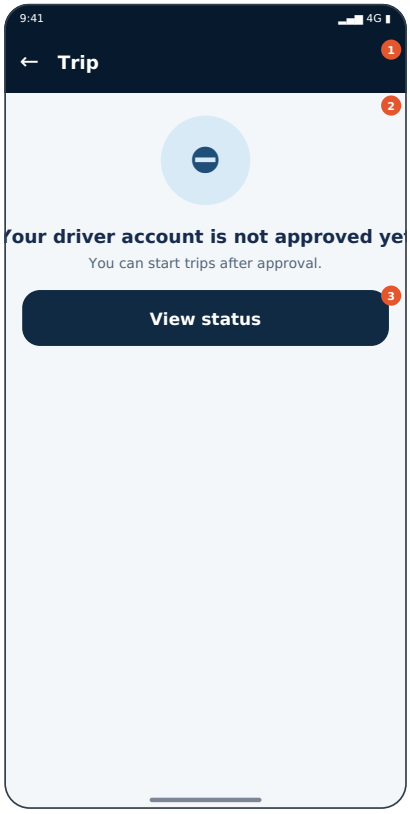

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Driver tried a trip action while not approved.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- View status (Button) → **D-002** Approval pending

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip	Deep navy #071A2D, white 16sp bold	Per state	Trip	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Your driver account is not approved yet; You can start trips after approval.	Light-blue circle icon + 16sp title + 12sp body	—	Your driver account is not approved yet	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	View status حالت	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View status, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your driver account is not approved yet	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You can start trips after approval.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View status	حالت	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E19 copy; no false success	Retry debounced.
3	Button: View status	≥48 dp	Enabled	Navigate to **D-002** Approval pending	Instant	—	E19 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Driver tried a trip action while not approved.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E19 Driver account not approved	Banner or full screen **D-002** Approval pending	Your driver account is not approved yet — You can start trips after approval.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E19
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-002 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-001 CONFIRMED P0 v2.0

Passenger Home — default

مسافر ہوم

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.home`

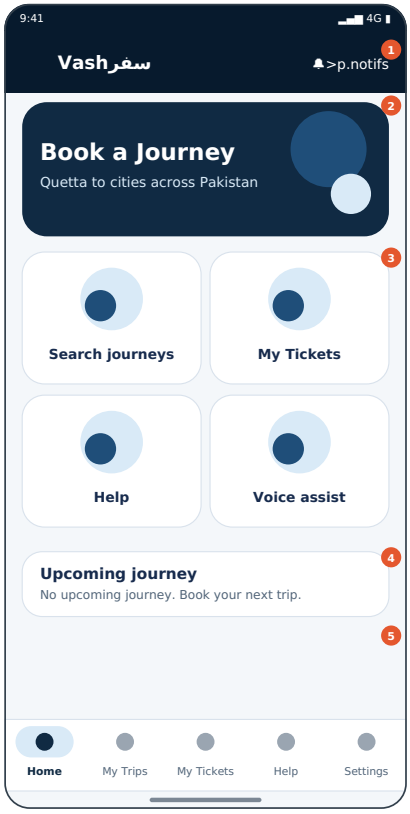

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Primary entry: start a journey search, see next trip, announcements, quick actions.

Login: **Yes (or guest if confirmed)** · Incoming screens: AU-012, ERR-006, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-019, P-080, P-081, P-082, P-083, P-093, P-094, P-095, P-096, P-097, P-098, P-099, P-139, P-150, P-159


3. Exit & navigation map

- (App-bar action) → **P-008** Notification centre
- Search journeys (Tile) → **P-017** Province / region selection
- My Tickets (Tile) → **P-081** My Tickets
- Help (Tile) → **P-139** Help hub
- Voice assist (Tile) → **P-009** Voice assistance — start
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Hero card	80–216 dp	Full width, 16 dp margins	above fold
3	Illustrated tile grid	216–484 dp	Full width, 16 dp margins	above fold
4	Info card	484–554 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	554–554 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر;	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Hero card	80–216 dp	328×136 dp	Book a Journey; Quetta to cities across Pakistan	Navy #102A43 card, radius 22dp, white text	—	Book a Journey	No	Always in this state
3	C03 Illustrated tile grid	216–484 dp	328×268 dp	Search journeys; My Tickets; Help; Voice assist سفر تلاش کریں / میرے ٹکٹ / مدد / آواز سے مدد	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Search journeys	Yes	Always in this state
4	C04 Info card	484–554 dp	328×70 dp	Upcoming journey; No upcoming journey. Book your next trip.	White card, border #D9E2EC, radius 18dp	—	Upcoming journey	No	Always in this state
5	C05 Bottom navigation	554–554 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
1		Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Book a Journey	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta to cities across Pakistan	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Search journeys	سفر تلاش کریں	Needs native review

		سفر تلاش کریں	
3	My Tickets	میرے ٹکٹ	Needs native review
3	Help	مدد	Needs native review
3	Voice assist	آواز سے مدد	Needs native review
4	Upcoming journey	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	No upcoming journey. Book your next trip.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Home	ہوم	Needs native review
5	My Trips	میرے سفر	Needs native review
5	My Tickets	میرے ٹکٹ	Needs native review
5	Help	مدد	Needs native review
5	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	App-bar action: 🔔	≥48 dp	Enabled	Navigate to **P-008** Notification centre	Instant	—	E01, E03 copy; no false success	Cards debounced.
3	Tile: Search journeys	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E01, E03 copy; no false success	Cards debounced.
3	Tile: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Cards debounced.
3	Tile: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Cards debounced.
3	Tile: Voice assist	≥48 dp	Enabled	Navigate to **P-009** Voice assistance — start	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Primary entry: start a journey search, see next trip, announcements, quick actions.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_home_summary (read)
Inputs	auth user
Server checks / RLS	next upcoming booking, announcements, configured origins; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Show cached summary labelled “saved”
Cache	Cache with timestamp

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Search flow starts only via region step
2. Bottom nav exact: Home, My Trips, My Tickets, Help, Settings
3. Bottom nav exact labels
4. Primary action visible above fold on 360×640
5. Offline shows saved data labelled
6. Urdu RTL mirrored
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-008, P-009, P-017, P-081, P-094, P-139, P-150 · Incoming: AU-012, ERR-006, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-019, P-080, P-081, P-082, P-083, P-093, P-094, P-095, P-096, P-097, P-098, P-099, P-139, P-150, P-159


Open decisions: None specific (see Part 16).

P-002 CONFIRMED P1 v2.0

Home — first-time empty

ہوم — پہلی بار

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.home_first`

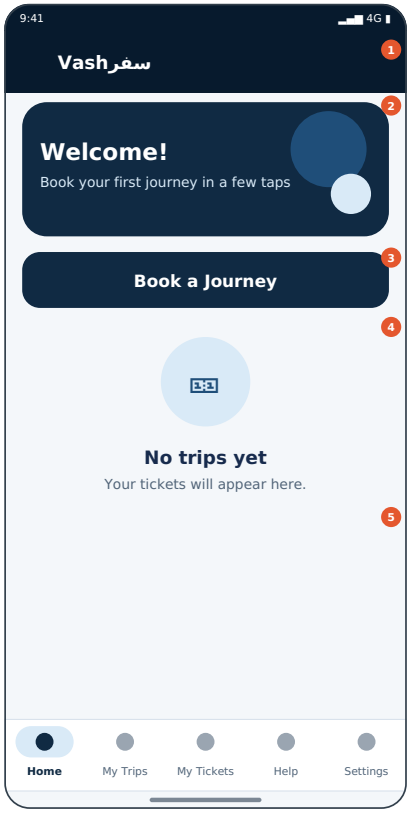

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

New user with no history; guide to first booking.

Login: **Yes (or guest if confirmed)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Book a Journey (Button) → **P-017** Province / region selection
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Hero card	80–216 dp	Full width, 16 dp margins	above fold
3	Button	216–278 dp	Full width, 16 dp margins	above fold
4	Empty/status block	278–448 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	448–448 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Hero card	80–216 dp	328×136 dp	Welcome!; Book your first journey in a few taps	Navy #102A43 card, radius 22dp, white text	—	Welcome!	No	Always in this state
3	C03 Button	216–278 dp	328×62 dp	Book a Journey سفر بُک کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Book a Journey, button	Yes	Always in this state
4	C04 Empty/status block	278–448 dp	328×170 dp	No trips yet; Your tickets will appear here.	Light-blue circle icon + 16sp title + 12sp body	—	No trips yet	No	Always in this state
5	C05 Bottom navigation	448–448 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Welcome!	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Book your first journey in a few taps	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Book a Journey	سفر بُک کریں	Needs native review
4	No trips yet	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Your tickets will appear here.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

5	Home	ہوم	Needs native review
5	My Trips	میرے سفر	Needs native review
5	My Tickets	میرے ٹکٹ	Needs native review
5	Help	مدد	Needs native review
5	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Book a Journey	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	New user with no history; guide to first booking.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_home_summary (read)
Inputs	auth user
Server checks / RLS	next upcoming booking, announcements, configured origins; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Show cached summary labelled "saved"
Cache	Cache with timestamp

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Bottom nav exact labels
2. Primary action visible above fold on 360×640
3. Offline shows saved data labelled
4. Urdu RTL mirrored

5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-017, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-003 CONFIRMED P1 v2.0

Home — upcoming trip

ہوم — آنے والا سفر

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.home_trip`

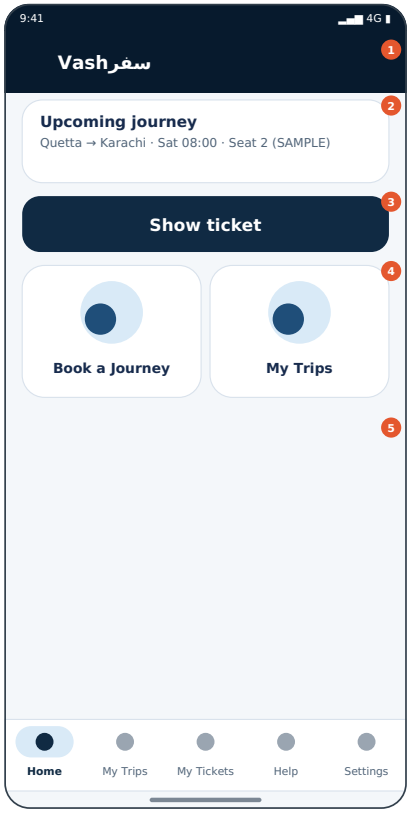

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Returning user with a confirmed upcoming trip shown prominently.

Login: **Yes (or guest if confirmed)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Show ticket (Button) → **P-084** QR ticket — confirmed
- Book a Journey (Tile) → **P-017** Province / region selection
- My Trips (Tile) → **P-094** My Trips — Upcoming
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–166 dp	Full width, 16 dp margins	above fold
3	Button	166–228 dp	Full width, 16 dp margins	above fold
4	Illustrated tile grid	228–368 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	368–368 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Info card	80–166 dp	328×86 dp	Upcoming journey; Quetta → Karachi · Sat 08:00 · Seat 2 (SAMPLE)	White card, border #D9E2EC, radius 18dp	—	Upcoming journey	No	Always in this state
3	C03 Button	166–228 dp	328×62 dp	Show ticket ٹکٹ دکھائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Show ticket, button	Yes	Always in this state
4	C04 Illustrated tile grid	228–368 dp	328×140 dp	Book a Journey; My Trips سفر بُک کریں / میرے سفر	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Book a Journey	Yes	Always in this state
5	C05 Bottom navigation	368–368 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Upcoming journey	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta → Karachi · Sat 08:00 · Seat 2 (SAMPLE)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Show ticket	ٹکٹ دکھائیں	Needs native review
4	Book a Journey	سفر بُک کریں	Needs native review
4	My Trips		Needs native review

4	My Trips	میرے سفر	Needs native review
5	Home	ہوم	Needs native review
5	My Trips	میرے سفر	Needs native review
5	My Tickets	میرے ٹکٹ	Needs native review
5	Help	مدد	Needs native review
5	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Show ticket	≥48 dp	Enabled	Navigate to **P-084** QR ticket — confirmed	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Tile: Book a Journey	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Tile: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Returning user with a confirmed upcoming trip shown prominently.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_home_summary (read)
Inputs	auth user
Server checks / RLS	next upcoming booking, announcements, configured origins; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Show cached summary labelled “saved”
Cache	Cache with timestamp

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Upcoming card only for server-confirmed bookings

2. Bottom nav exact labels
3. Primary action visible above fold on 360×640
4. Offline shows saved data labelled
5. Urdu RTL mirrored
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-017, P-081, P-084, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-004 CONFIRMED P1 v2.0

Home — no upcoming trip

ہوم — کوئی سفر نہیں

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.home_none`

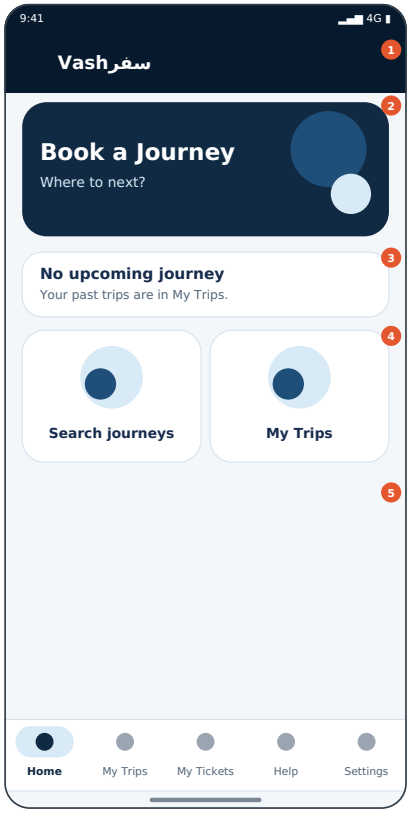

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Returning user without an upcoming trip.

Login: **Yes (or guest if confirmed)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Search journeys (Tile) → **P-017** Province / region selection
- My Trips (Tile) → **P-094** My Trips — Upcoming
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Hero card	80–216 dp	Full width, 16 dp margins	above fold
3	Info card	216–286 dp	Full width, 16 dp margins	above fold
4	Illustrated tile grid	286–426 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	426–426 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Hero card	80–216 dp	328×136 dp	Book a Journey; Where to next?	Navy #102A43 card, radius 22dp, white text	—	Book a Journey	No	Always in this state
3	C03 Info card	216–286 dp	328×70 dp	No upcoming journey; Your past trips are in My Trips.	White card, border #D9E2EC, radius 18dp	—	No upcoming journey	No	Always in this state
4	C04 Illustrated tile grid	286–426 dp	328×140 dp	Search journeys; My Trips سفر تلاش کریں / میرے سفر	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Search journeys	Yes	Always in this state
5	C05 Bottom navigation	426–426 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Book a Journey	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Where to next?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	No upcoming journey	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Your past trips are in My Trips.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Search journeys	سفر تلاش کریں	Needs native review

4	My Trips	میرے سفر	Needs native review
5	Home	ہوم	Needs native review
5	My Trips	میرے سفر	Needs native review
5	My Tickets	میرے ٹکٹ	Needs native review
5	Help	مدد	Needs native review
5	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
4	Tile: Search journeys	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Tile: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Returning user without an upcoming trip.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_home_summary (read)
Inputs	auth user
Server checks / RLS	next upcoming booking, announcements, configured origins; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Show cached summary labelled “saved”
Cache	Cache with timestamp

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Bottom nav exact labels

2. Primary action visible above fold on 360×640
3. Offline shows saved data labelled
4. Urdu RTL mirrored
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-017, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-005 CONFIRMED P1 v2.0

Home — loading

ہوم — لوڈ ہو رہا ہے

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.home_load`

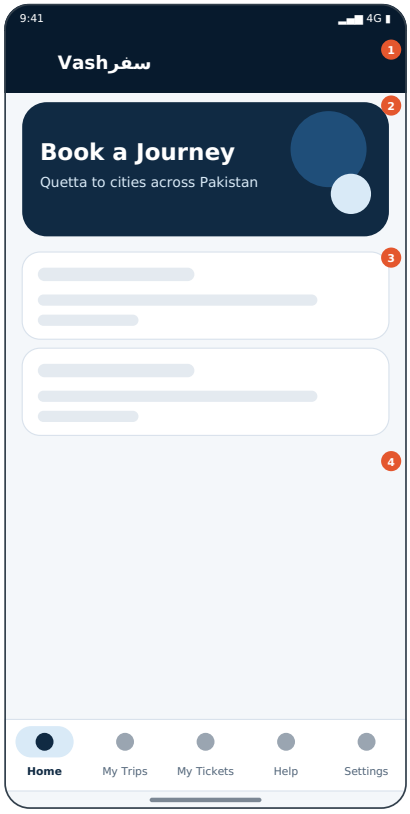

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Skeleton while summary loads; primary card usable immediately.

Login: **Yes (or guest if confirmed)** · Incoming screens: Entry point / system-launched

3. Exit & navigation map

- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Hero card	80–216 dp	Full width, 16 dp margins	above fold
3	Skeleton cards	216–398 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	398–398 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Hero card	80–216 dp	328×136 dp	Book a Journey; Quetta to cities across Pakistan	Navy #102A43 card, radius 22dp, white text	—	Book a Journey	No	Always in this state
3	C03 Skeleton cards	216–398 dp	328×182 dp	2 skeleton cards	Grey blocks on white cards	—	2 skeleton cards	No	Always in this state
4	C04 Bottom navigation	398–398 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Book a Journey	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta to cities across Pakistan	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review
4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Skeleton while summary loads; primary card usable immediately.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_home_summary (read)
Inputs	auth user
Server checks / RLS	next upcoming booking, announcements, configured origins; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03
Retry / idempotency	Safe read
Offline	Show cached summary labelled "saved"
Cache	Cache with timestamp

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Bottom nav exact labels
2. Primary action visible above fold on 360×640
3. Offline shows saved data labelled
4. Urdu RTL mirrored
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-006 CONFIRMED P0 v2.0

Home — offline / stale

ہوم — آف لائن

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.home_off`

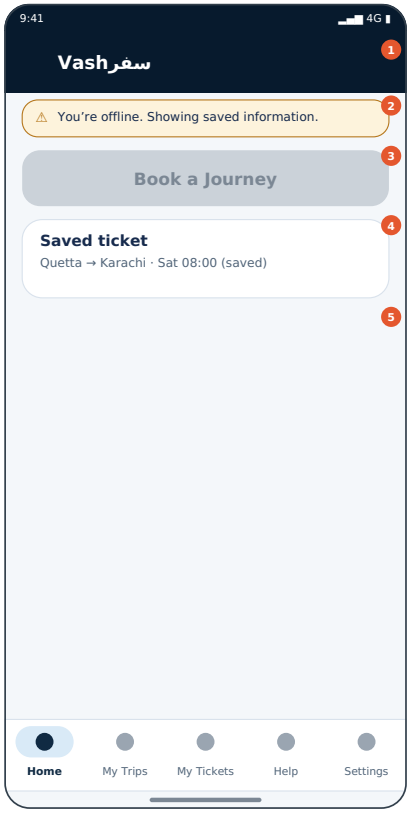

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Offline: saved summary labelled; search and booking disabled with explanation.

Login: **Yes (or guest if confirmed)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Info card	187–269 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	269–269 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	You're offline. Showing saved information.	Tinted background + border + icon + text (never colour alone)	—	You're offline. Showing saved informatio	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Book a Journey سفر بُک کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Book a Journey, button	Yes	Visible, disabled until conditions met
4	C04 Info card	187–269 dp	328×82 dp	Saved ticket; Quetta → Karachi · Sat 08:00 (saved)	White card, border #D9E2EC, radius 18dp	—	Saved ticket	No	Always in this state
5	C05 Bottom navigation	269–269 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You're offline. Showing saved information.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Book a Journey	سفر بُک کریں	Needs native review
4	Saved ticket	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Quetta → Karachi · Sat 08:00 (saved)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Home	ہوم	Needs native review
5	My Trips	میرے سفر	Needs native review
5	My Tickets	ٹکٹ	Needs native review

5	My Tickets	میرے ٹکٹ	Needs native review
5	Help	مدد	Needs native review
5	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E11 copy; no false success	Cards debounced.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E11 copy; no false success	Cards debounced.
5	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E11 copy; no false success	Cards debounced.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E11 copy; no false success	Cards debounced.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E11 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Offline: saved summary labelled; search and booking disabled with explanation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_home_summary (read)
Inputs	auth user
Server checks / RLS	next upcoming booking, announcements, configured origins; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E11
Retry / idempotency	Safe read
Offline	Show cached summary labelled “saved”
Cache	Cache with timestamp

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Bottom nav exact labels
2. Primary action visible above fold on 360×640
3. Offline shows saved data labelled
4. Urdu RTL mirrored
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-007 CONFIRMED PROPOSED P2 v2.0

Announcements

اعلانات

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.ann`

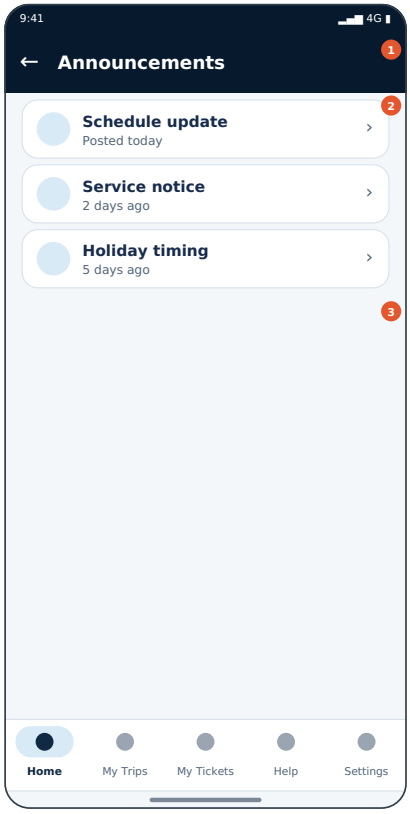

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

List of service announcements.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	264–264 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Announcements	Deep navy #071A2D, white 16sp bold	Per state	Announcements	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	Schedule update|Posted today; Service notice|2 days ago; Holiday timing|5 days ago	White rows radius 14dp, 52dp high, chevron/check	Per state	Schedule update|Posted today	Yes	Always in this state
3	C03 Bottom navigation	264–264 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Announcements	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Schedule update|Posted today	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Service notice|2 days ago	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Holiday timing|5 days ago	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Home	ہوم	Needs native review
3	My Trips	میرے سفر	Needs native review
3	My Tickets	میرے ٹکٹ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	List of service announcements.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_home_summary (read)
Inputs	auth user
Server checks / RLS	next upcoming booking, announcements, configured origins; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Show cached summary labelled “saved”
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-008 CONFIRMED P1 v2.0

Notification centre

اطلاعات

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.notifs`

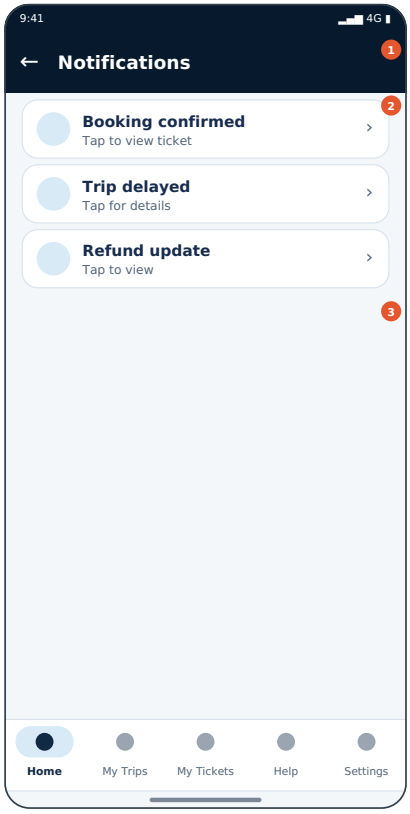

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

In-app history of trip/booking notifications; tapping opens relevant detail.

Login: **Per flow** · Incoming screens: P-001


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	264–264 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Notifications	Deep navy #071A2D, white 16sp bold	Per state	Notifications	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	Booking confirmed|Tap to view ticket; Trip delayed|Tap for details; Refund update|Tap to view	White rows radius 14dp, 52dp high, chevron/check	Per state	Booking confirmed|Tap to view ticket	Yes	Always in this state
3	C03 Bottom navigation	264–264 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Notifications	اطلاعات	Needs native review
2	Booking confirmed|Tap to view ticket	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Trip delayed|Tap for details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Refund update|Tap to view	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Home	ہوم	Needs native review
3	My Trips	میرے سفر	Needs native review
3	My Tickets	میرے ٹکٹ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	In-app history of trip/booking notifications; tapping opens relevant detail.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trips (read)
Inputs	status filter, page
Server checks / RLS	owner-only rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Each item opens correct screen or shows “no longer available”
2. Pull-to-refresh works and shows timestamp
3. Empty and error states are distinct
4. Scroll position retained on Back
5. Urdu RTL row mirroring correct, numbers legible
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-139, P-150 · Incoming: P-001


Open decisions: None specific (see Part 16).

P-009 CONFIRMED PROPOSED P2 v2.0

Voice assistance — start

آواز سے مدد

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.voice_intro`

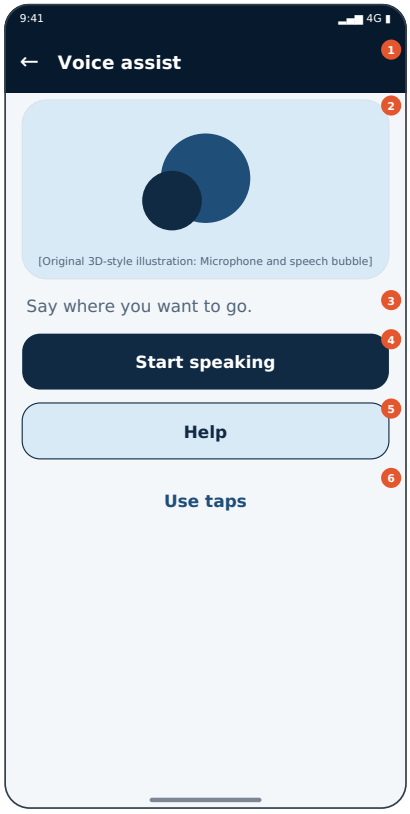

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Optional voice entry; explains example phrases; manual option always visible.

Login: **Per flow** · Incoming screens: P-001


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Start speaking (Button) → **P-011** Voice assistance — listening
- Help (Button) → **P-010** Voice assistance — help
- Use taps (Button) → **P-017** Province / region selection

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Illustration card	80–254 dp	Full width, 16 dp margins	above fold
3	Body text	254–289 dp	Full width, 16 dp margins	above fold
4	Button	289–351 dp	Full width, 16 dp margins	above fold
5	Button	351–413 dp	Full width, 16 dp margins	above fold
6	Button	413–475 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Voice assist	Deep navy #071A2D, white 16sp bold	Per state	Voice assist	Yes	Always in this state
2	C02 Illustration card	80–254 dp	328×174 dp	[Microphone and speech bubble]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Microphone and speech bubble]	No	Always in this state
3	C03 Body text	254–289 dp	328×35 dp	Say where you want to go.	12–14sp secondary text	—	Say where you want to go.	No	Always in this state
4	C04 Button	289–351 dp	328×62 dp	Start speaking بولنا شروع کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Start speaking, button	Yes	Always in this state
5	C05 Button	351–413 dp	328×62 dp	Help مدد	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Help, button	Yes	Always in this state
6	C06 Button	413–475 dp	328×62 dp	Use taps ٹیپ استعمال کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Use taps, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Voice assist	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Say where you want to go.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Start speaking	بولنا شروع کریں	Needs native review
5	Help	مدد	Needs native review
6	Use taps	ٹیپ استعمال کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
4	Button: Start speaking	≥48 dp	Enabled	Navigate to **P-011** Voice assistance — listening	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
5	Button: Help	≥48 dp	Enabled	Navigate to **P-010** Voice assistance — help	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
6	Button: Use taps	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Optional voice entry; explains example phrases; manual option always visible.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-010, P-011, P-017 · Incoming: P-001


Open decisions: None specific (see Part 16).

P-010 CONFIRMED PROPOSED P2 v2.0

Voice assistance — help

آواز کی مدد

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.voice_help`

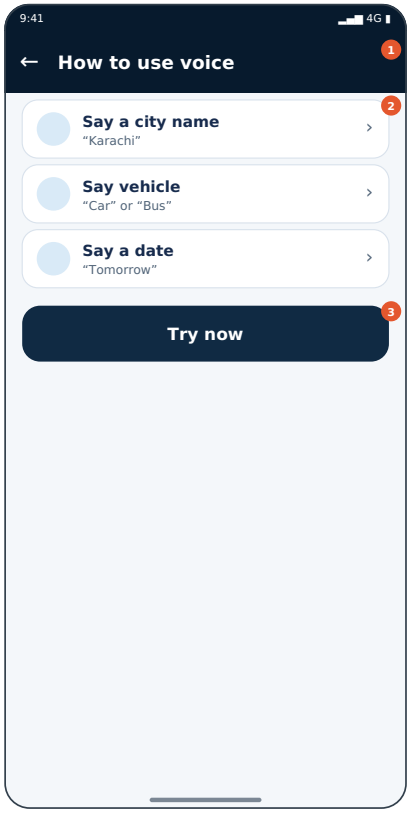

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Examples of supported phrases.

Login: **Per flow** · Incoming screens: P-009


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try now (Button) → **P-011** Voice assistance — listening

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold
3	Button	264–326 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	How to use voice	Deep navy #071A2D, white 16sp bold	Per state	How to use voice	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	Say a city name|"Karachi"; Say vehicle|"Car" or "Bus"; Say a date|"Tomorrow"	White rows radius 14dp, 52dp high, chevron/check	Per state	Say a city name|"Karachi"	Yes	Always in this state
3	C03 Button	264–326 dp	328×62 dp	Try now ابھی آزمائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try now, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	How to use voice	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Say a city name|"Karachi"	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Say vehicle|"Car" or "Bus"	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Say a date|"Tomorrow"	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try now	ابھی آزمائیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
3	Button: Try now	≥48 dp	Enabled	Navigate to **P-011** Voice assistance — listening	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Examples of supported phrases.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-011 · Incoming: P-009


Open decisions: None specific (see Part 16).

P-011 CONFIRMED PROPOSED P2 v2.0

Voice assistance — listening

سن رہا ہے

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.voice_listen`

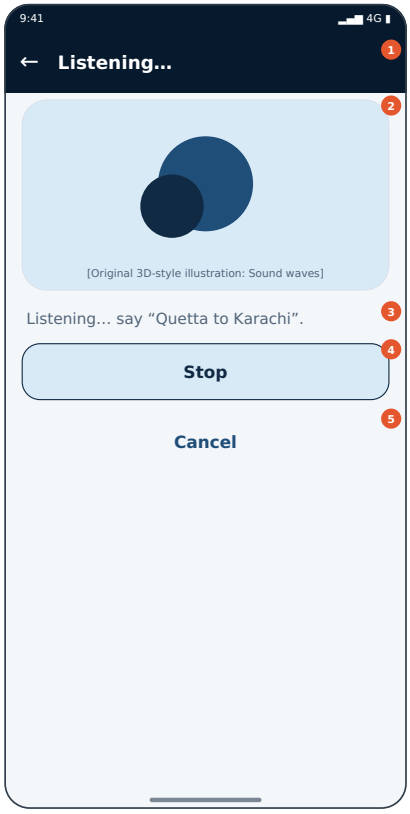

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Mic active with visual level indicator and Stop.

Login: **Per flow** · Incoming screens: P-009, P-010, P-013, P-015, SH-011


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Stop (Button) → **P-014** Voice — understood
- Cancel (Button) → previous screen (system Back)

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Illustration card	80–264 dp	Full width, 16 dp margins	above fold
3	Body text	264–298 dp	Full width, 16 dp margins	above fold
4	Button	298–360 dp	Full width, 16 dp margins	above fold
5	Button	360–422 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Listening...	Deep navy #071A2D, white 16sp bold	Per state	Listening...	Yes	Always in this state
2	C02 Illustration card	80–264 dp	328×184 dp	[Sound waves]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Sound waves]	No	Always in this state
3	C03 Body text	264–298 dp	328×34 dp	Listening... say “Quetta to Karachi”.	12–14sp secondary text	—	Listening... say “Quetta to Karachi”.	No	Always in this state
4	C04 Button	298–360 dp	328×62 dp	Stop روکیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Stop, button	Yes	Always in this state
5	C05 Button	360–422 dp	328×62 dp	Cancel منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Listening...	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Listening... say “Quetta to Karachi”.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Stop	روکیں	Needs native review
5	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Selection is local until Continue; double tap selects once.
4	Button: Stop	≥48 dp	Enabled	Navigate to **P-014** Voice — understood	Instant	—	E09, E10 copy; no false success	Selection is local until Continue; double tap selects once.
5	Button: Cancel	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Mic active with visual level indicator and Stop.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-014 · Incoming: P-009, P-010, P-013, P-015, SH-011


Open decisions: None specific (see Part 16).

P-012 CONFIRMED P2 v2.0

Voice — permission denied

آواز — اجازت مسترد

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.voice_denied`

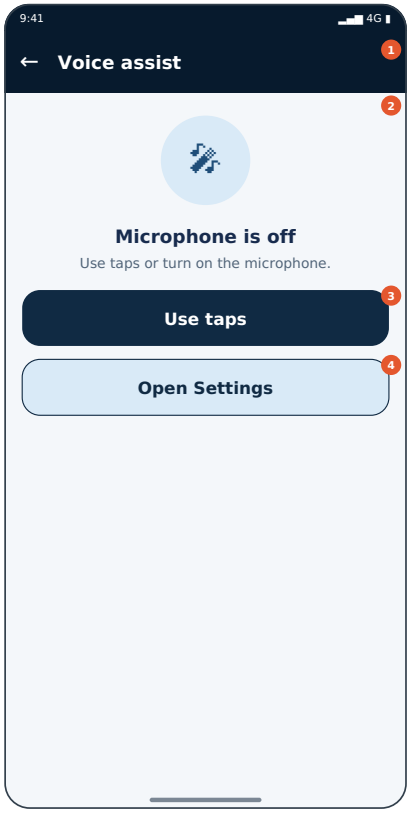

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Microphone denied; manual fallback.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Use taps (Button) → **P-017** Province / region selection
- Open Settings (Button) → Android system settings

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Voice assist	Deep navy #071A2D, white 16sp bold	Per state	Voice assist	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Microphone is off; Use taps or turn on the microphone.	Light-blue circle icon + 16sp title + 12sp body	—	Microphone is off	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Use taps ٹیپ استعمال کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Use taps, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Open Settings سیٹنگز کھولیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open Settings, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Voice assist	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Microphone is off	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Use taps or turn on the microphone.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Use taps	ٹیپ استعمال کریں	Needs native review
4	Open Settings	سیٹنگز کھولیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow; Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false	Allow button opens OS prompt

	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
3	Button: Use taps	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Open Settings	≥48 dp	Enabled	Open Android Settings for this app; on return re-check state	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Microphone denied; manual fallback.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-017 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-013 CONFIRMED P2 v2.0

Voice — no speech

آواز — کچھ سنائی نہیں دیا

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.voice_none`

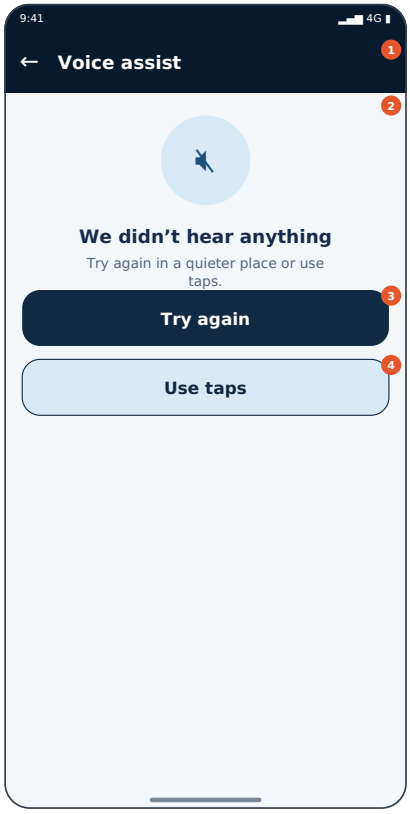

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No speech detected.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **P-011** Voice assistance — listening
- Use taps (Button) → **P-017** Province / region selection

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Voice assist	Deep navy #071A2D, white 16sp bold	Per state	Voice assist	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	We didn't hear anything; Try again in a quieter place or use taps.	Light-blue circle icon + 16sp title + 12sp body	—	We didn't hear anything	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Use taps ٹیپ استعمال کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Use taps, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Voice assist	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We didn't hear anything	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Try again in a quieter place or use taps.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش	Needs native review
4	Use taps	ٹیپ استعمال کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow; Back	>48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E28 copy; no false success	Retry debounced.

3	Button: Try again	≥48 dp	Enabled	Navigate to **P-011** Voice assistance — listening	Instant	—	E28 copy; no false success	Retry debounced.
4	Button: Use taps	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E28 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No speech detected.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-011, P-017 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-014 CONFIRMED PROPOSED P2 v2.0

Voice — understood

آواز — سمجھ گیا

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.voice_ok`

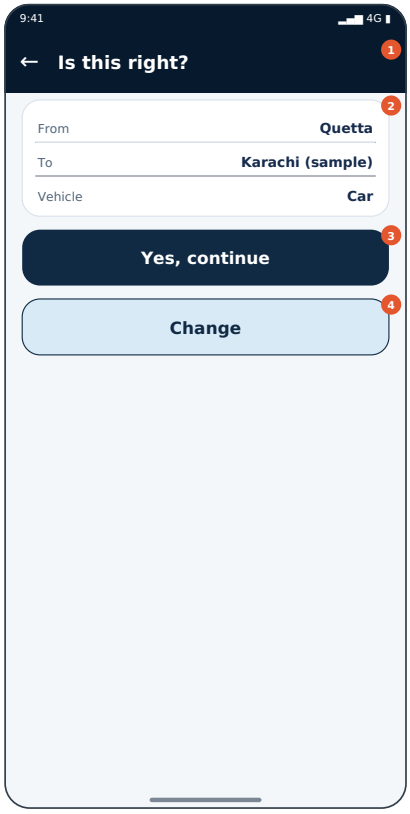

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Show understood choices for confirmation before continuing.

Login: **Per flow** · Incoming screens: P-011


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Yes, continue (Button) → **P-026** Select travel date
- Change (Button) → **P-016** Voice — manual fallback

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–196 dp	Full width, 16 dp margins	above fold
3	Button	196–258 dp	Full width, 16 dp margins	above fold
4	Button	258–320 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Is this right?	Deep navy #071A2D, white 16sp bold	Per state	Is this right?	Yes	Always in this state
2	C02 Key-value card	80–196 dp	328×116 dp	From: Quetta; To: Karachi (sample); Vehicle: Car	White card, 30dp rows, label grey / value bold	—	From: Quetta	No	Always in this state
3	C03 Button	196–258 dp	328×62 dp	Yes, continue ہاں، جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Yes, continue, button	Yes	Always in this state
4	C04 Button	258–320 dp	328×62 dp	Change تبدیل کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Change, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Is this right?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	From: Quetta	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	To: Karachi (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Vehicle: Car	گاڑی	Needs native review
3	Yes, continue	ہاں، جاری رکھیں	Needs native review
4	Change	تبدیل کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Button: Yes, continue	≥48 dp	Enabled	Navigate to **P-026** Select travel date	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
4	Button: Change	≥48 dp	Enabled	Navigate to **P-016** Voice — manual fallback	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
From	Quetta	Server-derived	Required	Show “Not available” if missing; never blank/invented
To	Karachi (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Vehicle	Car	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Show understood choices for confirmation before continuing.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never auto-books; always user confirm
2. Selected state visible and announced by TalkBack
3. Back keeps previous selections
4. Only configured items appear; none invented
5. Urdu RTL grid order mirrors correctly
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-016, P-026 · Incoming: P-011


Open decisions: None specific (see Part 16).

P-015 CONFIRMED PROPOSED P2 v2.0

Voice — ambiguous result

آواز — غیر واضح

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.voice_ambig`

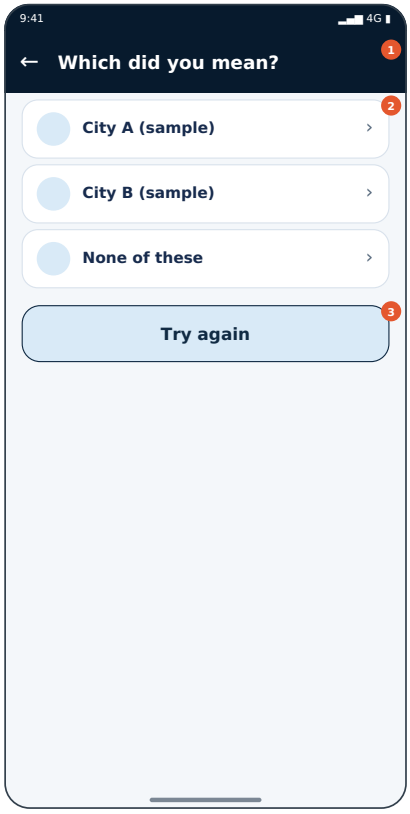

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Several matches; user picks one.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **P-011** Voice assistance — listening

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold
3	Button	264–326 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Which did you mean?	Deep navy #071A2D, white 16sp bold	Per state	Which did you mean?	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	City A (sample); City B (sample); None of these	White rows radius 14dp, 52dp high, chevron/check	Per state	City A (sample)	Yes	Always in this state
3	C03 Button	264–326 dp	328×62 dp	Try again دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Which did you mean?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	City A (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	City B (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	None of these	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Button: Try again	≥48 dp	Enabled	Navigate to **P-011** Voice assistance — listening	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Several matches; user picks one.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-011 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-016 CONFIRMED PROPOSED P2 v2.0

Voice — manual fallback

آواز — دستی طریقہ

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.voice_manual`

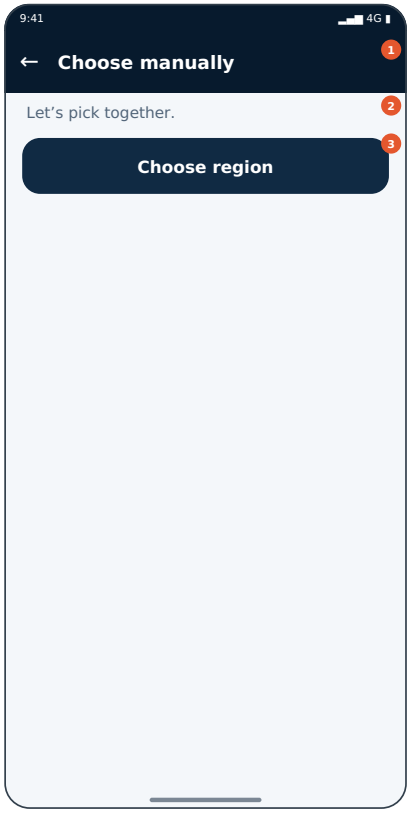

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Continue with taps from the understood context.

Login: **Per flow** · Incoming screens: P-014


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Choose region (Button) → **P-017** Province / region selection

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–114 dp	Full width, 16 dp margins	above fold
3	Button	114–176 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose manually	Deep navy #071A2D, white 16sp bold	Per state	Choose manually	Yes	Always in this state
2	C02 Body text	80–114 dp	328×34 dp	Let’s pick together.	12–14sp secondary text	—	Let’s pick together.	No	Always in this state
3	C03 Button	114–176 dp	328×62 dp	Choose region علاقہ منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Choose region, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose manually	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Let’s pick together.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Choose region	علاقہ منتخب کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Button: Choose region	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Continue with taps from the understood context.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-017 · Incoming: P-014

Open decisions: None specific (see Part 16).

P-017 CONFIRMED PROPOSED P0 v2.0

Province / region selection

صوبہ / علاقہ منتخب کریں

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.region`



5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Step 1: choose region using large illustrated cards. Islamabad is a territory, not a province.

Login: **Per flow** · Incoming screens: P-001, P-002, P-003, P-004, P-009, P-012, P-013, P-016, P-037, P-082, P-097, SH-011, SH-012

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Balochistan (Tile) → **P-020** City selection (suggested + search)
- Sindh (Tile) → **P-020** City selection (suggested + search)
- Punjab (Tile) → **P-020** City selection (suggested + search)
- Khyber Pakhtunkhwa (Tile) → **P-020** City selection (suggested + search)
- Islamabad Capital Territory (Tile) → **P-020** City selection (suggested + search)
- Gilgit-Baltistan / AJK (Tile) → **P-020** City selection (suggested + search)

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Illustrated tile grid	132–528 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose region	Deep navy #071A2D, white 16sp bold	Per state	Choose region	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Region; City; Vehicle; Date; Results	Numbered dots, current bold	—	Region	No	Always in this state
3	C03 Illustrated tile grid	132–528 dp	328×396 dp	Balochistan; Sindh; Punjab; Khyber Pakhtunkhwa; Islamabad Capital Territory; Gilgit-Baltistan / AJK بلوچستان / سندھ / پنجاب / خیبر پختونخوا / وفاقی دارالحکومت / گلگت بلتستان / آزاد کشمیر	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Balochistan	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose region	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Region	علاقہ	Needs native review
2	City	شہر	Needs native review
2	Vehicle	گاڑی	Needs native review
2	Date	تاریخ	Needs native review
2	Results	نتائج	Needs native review
3	Balochistan	بلوچستان	Needs native review
3	Sindh	سندھ	Needs native review
3	Punjab	پنجاب	Needs native review
3	Khyber Pakhtunkhwa		Needs native review

3	Khyber Pakhtunkhwa	خیبر پختونخوا	Needs native review
3	Islamabad Capital Territory	وفاقی دارالحکومت	Needs native review
3	Gilgit-Baltistan / AJK	گلگت بلتستان / آزاد کشمیر	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Tile: Balochistan	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Tile: Sindh	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Tile: Punjab	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Tile: Khyber Pakhtunkhwa	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Tile: Islamabad Capital Territory	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Tile: Gilgit-Baltistan / AJK	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Step 1: choose region using large illustrated cards. Islamabad is a territory, not a province.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_regions (read)
Inputs	origin=Quetta
Server checks / RLS	only regions that have ≥1 configured Quetta service; correct classification (Islamabad = territory; Karachi in Sindh); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	Safe read
Offline	Cached list labelled saved
Cache	Medium TTL (PROPOSED)

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Only regions with a configured Quetta service are shown (sample list)
2. Islamabad is not labelled a province; Karachi sits under Sindh
3. Selected state visible and announced by TalkBack
4. Back keeps previous selections
5. Only configured items appear; none invented
6. Urdu RTL grid order mirrors correctly
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-020 · Incoming: P-001, P-002, P-003, P-004, P-009, P-012, P-013, P-016, P-037, P-082, P-097, SH-011, SH-012


Open decisions: OD-12 (see Part 16).

P-018 CONFIRMED P1 v2.0

Region — loading

علاقہ — لوڈ ہو رہا ہے

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.region_load`

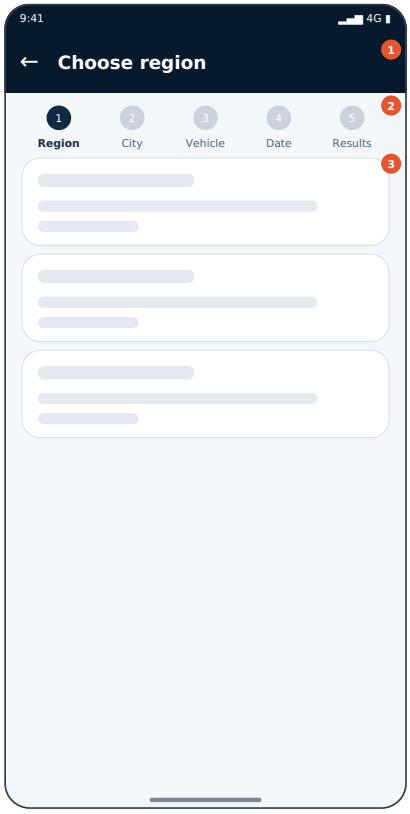

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Skeleton cards while regions load.

Login: **Per flow** · Incoming screens: Entry point / system-launched

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Skeleton cards	132–400 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose region	Deep navy #071A2D, white 16sp bold	Per state	Choose region	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Region; City; Vehicle; Date; Results	Numbered dots, current bold	—	Region	No	Always in this state
3	C03 Skeleton cards	132–400 dp	328×268 dp	3 skeleton cards	Grey blocks on white cards	—	3 skeleton cards	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose region	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Region	علاقہ	Needs native review
2	City	شہر	Needs native review
2	Vehicle	گاڑی	Needs native review
2	Date	تاریخ	Needs native review
2	Results	نتائج	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E02 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Skeleton cards while regions load.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E02 Request slower than 8 s (threshold PROPOSED)	Banner or full screen **ERR-001** Slow network — with cancel	Slow connection — This is taking longer than usual. You can keep waiting or cancel.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_regions (read)
Inputs	origin=Quetta
Server checks / RLS	only regions that have ≥1 configured Quetta service; correct classification (Islamabad = territory; Karachi in Sindh); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E02, E03
Retry / idempotency	Safe read
Offline	Cached list labelled saved
Cache	Medium TTL (PROPOSED)

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-019 CONFIRMED P1 v2.0

Region — no configured destinations

علاقہ — کوئی منزل نہیں

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.region_none`

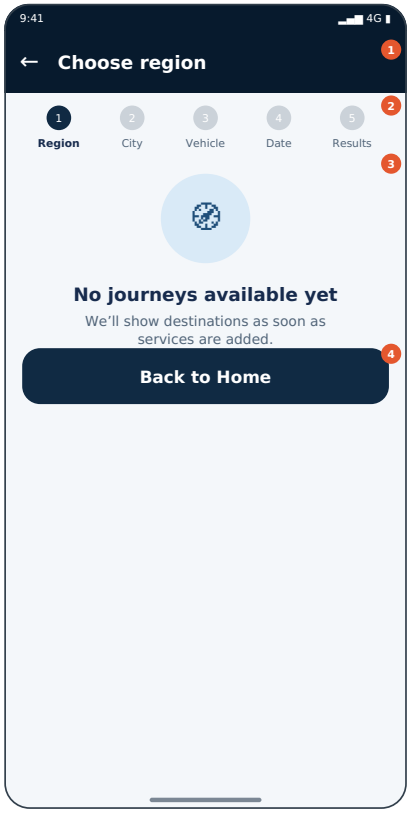

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No configured Quetta services yet; honest empty state.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Back to Home (Button) → **P-001** Passenger Home — default

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Empty/status block	132–302 dp	Full width, 16 dp margins	above fold
4	Button	302–364 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose region	Deep navy #071A2D, white 16sp bold	Per state	Choose region	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Region; City; Vehicle; Date; Results	Numbered dots, current bold	—	Region	No	Always in this state
3	C03 Empty/status block	132–302 dp	328×170 dp	No journeys available yet; We'll show destinations as soon as services are added.	Light-blue circle icon + 16sp title + 12sp body	—	No journeys available yet	No	Always in this state
4	C04 Button	302–364 dp	328×62 dp	Back to Home ہوم پر واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back to Home, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose region	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Region	علاقہ	Needs native review
2	City	شہر	Needs native review
2	Vehicle	گاڑی	Needs native review
2	Date	تاریخ	Needs native review
2	Results	نتائج	Needs native review
3	No journeys available yet	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

3	We'll show destinations as soon as services are added.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Back to Home	ہوم پر واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Retry debounced.
4	Button: Back to Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E12 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No configured Quetta services yet; honest empty state.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_regions (read)
Inputs	origin=Quetta
Server checks / RLS	only regions that have ≥1 configured Quetta service; correct classification (Islamabad = territory; Karachi in Sindh); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12
Retry / idempotency	Safe read
Offline	Cached list labelled saved
Cache	Medium TTL (PROPOSED)

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-020 CONFIRMED PROPOSED P0 v2.0

City selection (suggested + search)

شہر منتخب کریں

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.city`

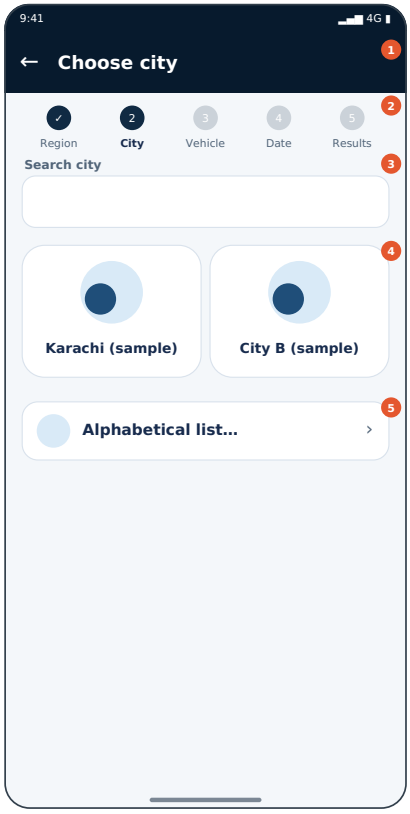

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Step 2: hybrid suggested-city cards plus searchable list; only served cities.

Login: **Per flow** · Incoming screens: P-017, P-022, P-023, P-032


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Karachi (sample) (Tile) → **P-024** Cars or Buses
- City B (sample) (Tile) → **P-024** Cars or Buses

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Text field	132–210 dp	Full width, 16 dp margins	above fold
4	Illustrated tile grid	210–350 dp	Full width, 16 dp margins	above fold
5	List rows	350–418 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose city	Deep navy #071A2D, white 16sp bold	Per state	Choose city	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Region; City; Vehicle; Date; Results	Numbered dots, current bold	—	Region	No	Always in this state
3	C03 Text field	132–210 dp	328×78 dp	Search city: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Search city: “”	Yes	Always in this state
4	C04 Illustrated tile grid	210–350 dp	328×140 dp	Karachi (sample); City B (sample) کراچی	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Karachi (sample)	Yes	Always in this state
5	C05 List rows	350–418 dp	328×68 dp	Alphabetical list...	White rows radius 14dp, 52dp high, chevron/check	Per state	Alphabetical list...	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose city	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Region	علاقہ	Needs native review
2	City	شہر	Needs native review
2	Vehicle	گاڑی	Needs native review
2	Date	تاریخ	Needs native review
2	Results	نتائج	Needs native review
3	Search city	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Karachi (sample)	کراچی	Needs native review

4	Karachi (sample)	کراچی	Needs native review
4	City B (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Alphabetical list…	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
4	Tile: Karachi (sample)	≥48 dp	Enabled	Navigate to **P-024** Cars or Buses	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
4	Tile: City B (sample)	≥48 dp	Enabled	Navigate to **P-024** Cars or Buses	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Search city	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Step 2: hybrid suggested-city cards plus searchable list; only served cities.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_cities (read)
Inputs	region id, origin
Server checks / RLS	configured destinations only; served flag; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	Safe read
Offline	Cached list labelled saved
Cache	Medium TTL

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Search filters list; suggested cards unaffected
2. Unserved cities not shown as bookable
3. Selected state visible and announced by TalkBack

4. Back keeps previous selections
5. Only configured items appear; none invented
6. Urdu RTL grid order mirrors correctly
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-024 · Incoming: P-017, P-022, P-023, P-032


Open decisions: None specific (see Part 16).

P-021 CONFIRMED P1 v2.0

City — search active

شہر — تلاش جاری

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.city_search`

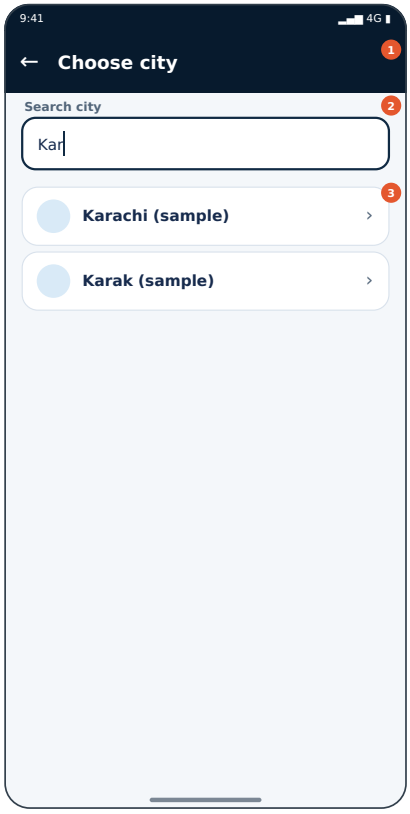

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Typing filters the list; clear button visible.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Karachi (sample) (Row) → **P-024** Cars or Buses
- Karak (sample) (Row) → **P-024** Cars or Buses

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	List rows	158–284 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose city	Deep navy #071A2D, white 16sp bold	Per state	Choose city	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Search city: “Kar”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Search city: “Kar”	Yes	Always in this state
3	C03 List rows	158–284 dp	328×126 dp	Karachi (sample); Karak (sample)	White rows radius 14dp, 52dp high, chevron/check	Per state	Karachi (sample)	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose city	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Search city	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Karachi (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Karak (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Row: Karachi (sample)	≥48 dp	Enabled	Navigate to **P-024** Cars or Buses	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Row: Karak (sample)	≥48 dp	Enabled	Navigate to **P-024** Cars or Buses	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Search city	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Typing filters the list; clear button visible.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_cities (read)
Inputs	region id, origin
Server checks / RLS	configured destinations only; served flag; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	Safe read
Offline	Cached list labelled saved
Cache	Medium TTL

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-024 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-022 CONFIRMED P1 v2.0

City — no results

شہر — کوئی نتیجہ نہیں

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.city_none`

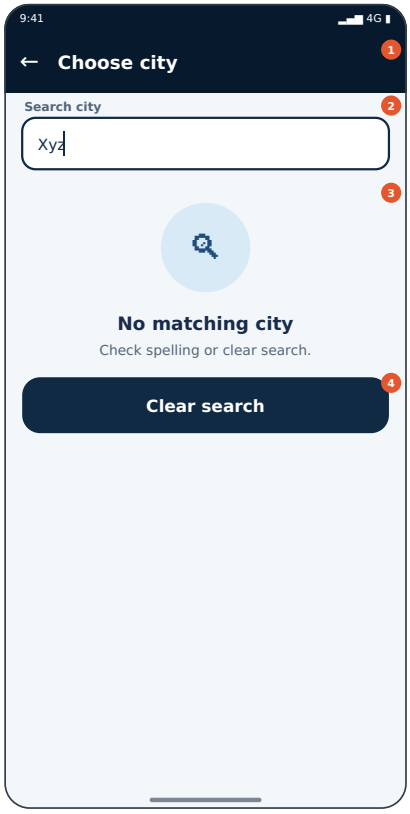

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Search has no match.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Clear search (Button) → **P-020** City selection (suggested + search)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Empty/status block	158–328 dp	Full width, 16 dp margins	above fold
4	Button	328–390 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose city	Deep navy #071A2D, white 16sp bold	Per state	Choose city	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Search city: “Xyz”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Search city: “Xyz”	Yes	Always in this state
3	C03 Empty/status block	158–328 dp	328×170 dp	No matching city; Check spelling or clear search.	Light-blue circle icon + 16sp title + 12sp body	—	No matching city	No	Always in this state
4	C04 Button	328–390 dp	328×62 dp	Clear search تلاش صاف کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Clear search, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose city	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Search city	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	No matching city	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Check spelling or clear search.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Clear search	تلاش صاف کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Retry debounced.
4	Button: Clear search	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E12 copy; no false success	Retry debounced.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Search city	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Search has no match.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-020 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-023 CONFIRMED P1 v2.0

City — not served

شہر — سروس نہیں

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.city_unserved`

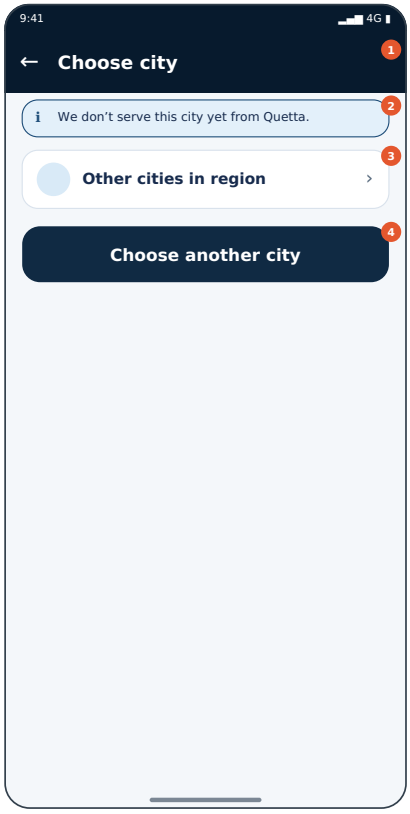

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

City exists in region but has no configured Quetta service.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Other cities in region (Row) → **P-020** City selection (suggested + search)
- Choose another city (Button) → **P-020** City selection (suggested + search)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	List rows	125–193 dp	Full width, 16 dp margins	above fold
4	Button	193–255 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose city	Deep navy #071A2D, white 16sp bold	Per state	Choose city	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	We don't serve this city yet from Quetta.	Tinted background + border + icon + text (never colour alone)	—	We don't serve this city yet from Quetta	No	Always in this state
3	C03 List rows	125–193 dp	328×68 dp	Other cities in region	White rows radius 14dp, 52dp high, chevron/check	Per state	Other cities in region	Yes	Always in this state
4	C04 Button	193–255 dp	328×62 dp	Choose another city دوسرا شہر	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Choose another city, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose city	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We don't serve this city yet from Quetta.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Other cities in region	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Choose another city	دوسرا شہر	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Retry debounced.
3	Row: Other cities in region	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E12 copy; no false success	Retry debounced.

4	Button: Choose another city	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E12 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	City exists in region but has no configured Quetta service.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never implies all cities are served
2. Copy matches catalogue EN/UR
3. Retry safety matches rule
4. No stuck spinner
5. Back lands on defined screen
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-020 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-024 CONFIRMED PROPOSED P0 v2.0

Cars or Buses

کار یا بس

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.cat`

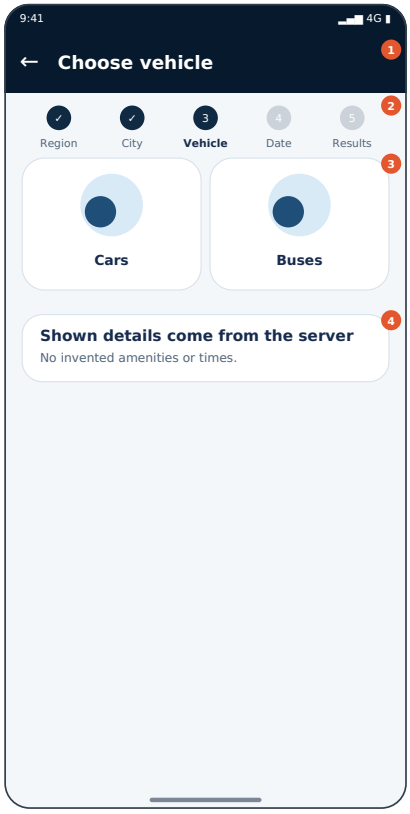

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Step 3: large Cars/Buses cards with verified details only.

Login: **Per flow** · Incoming screens: P-020, P-021, P-032


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Cars (Tile) → **P-026** Select travel date
- Buses (Tile) → **P-026** Select travel date

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Illustrated tile grid	132–272 dp	Full width, 16 dp margins	above fold
4	Info card	272–344 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose vehicle	Deep navy #071A2D, white 16sp bold	Per state	Choose vehicle	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Region; City; Vehicle; Date; Results	Numbered dots, current bold	—	Region	No	Always in this state
3	C03 Illustrated tile grid	132–272 dp	328×140 dp	Cars; Buses کاریں / بسیں	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Cars	Yes	Always in this state
4	C04 Info card	272–344 dp	328×72 dp	Shown details come from the server; No invented amenities or times.	White card, border #D9E2EC, radius 18dp	—	Shown details come from the server	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose vehicle	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Region	علاقہ	Needs native review
2	City	شہر	Needs native review
2	Vehicle	گاڑی	Needs native review
2	Date	تاریخ	Needs native review
2	Results	نتائج	Needs native review
3	Cars	کاریں	Needs native review
3	Buses	بسیں	Needs native review

4	Shown details come from the server	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	No invented amenities or times.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Tile: Cars	≥48 dp	Enabled	Navigate to **P-026** Select travel date	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Tile: Buses	≥48 dp	Enabled	Navigate to **P-026** Select travel date	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Step 3: large Cars/Buses cards with verified details only.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_vehicle_categories (read)
Inputs	region/city ids
Server checks / RLS	only categories with configured service; verified details only; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	Safe read
Offline	Cached
Cache	Short TTL

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-026 · Incoming: P-020, P-021, P-032


Open decisions: None specific (see Part 16).

P-025 CONFIRMED P1 v2.0

Vehicle — category unavailable

گاڑی — دستیاب نہیں

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.cat_dis`

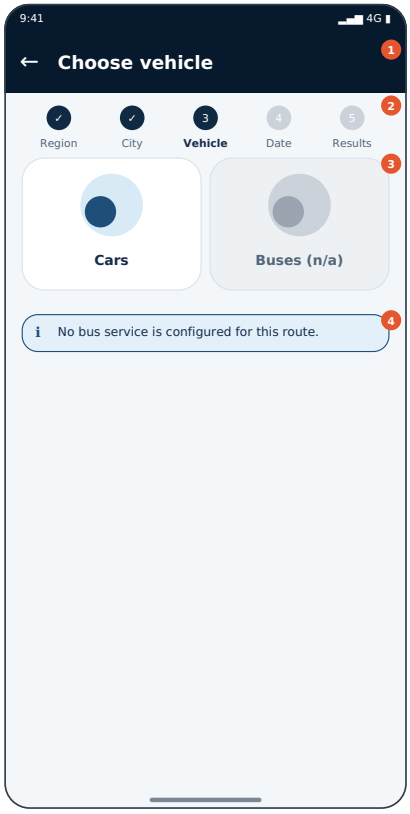

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

One category has no service for this route.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Cars (Tile) → **P-026** Select travel date

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Illustrated tile grid	132–272 dp	Full width, 16 dp margins	above fold
4	Banner	272–317 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Choose vehicle	Deep navy #071A2D, white 16sp bold	Per state	Choose vehicle	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Region; City; Vehicle; Date; Results	Numbered dots, current bold	—	Region	No	Always in this state
3	C03 Illustrated tile grid	132–272 dp	328×140 dp	Cars; Buses کاریں / بسیں	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Cars	Yes	Always in this state
4	C04 Banner	272–317 dp	328×45 dp	No bus service is configured for this route.	Tinted background + border + icon + text (never colour alone)	—	No bus service is configured for this ro	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Choose vehicle	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Region	علاقہ	Needs native review
2	City	شہر	Needs native review
2	Vehicle	گاڑی	Needs native review
2	Date	تاریخ	Needs native review
2	Results	نتائج	Needs native review
3	Cars	کاریں	Needs native review
3	Buses	بسیں	Needs native review

4	No bus service is configured for this route.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Selection is local until Continue; double tap selects once.
3	Tile: Cars	≥48 dp	Enabled	Navigate to **P-026** Select travel date	Instant	—	E12 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	One category has no service for this route.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_vehicle_categories (read)
Inputs	region/city ids
Server checks / RLS	only categories with configured service; verified details only; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12
Retry / idempotency	Safe read
Offline	Cached
Cache	Short TTL

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-026 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-026 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Select travel date

سفر کی تاریخ

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.date`

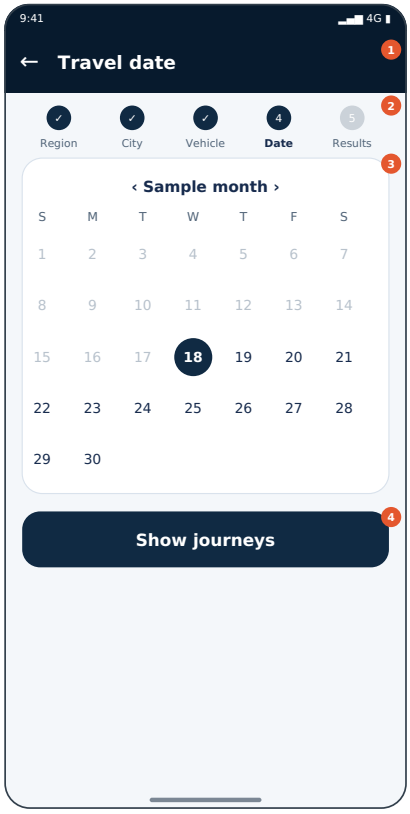

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Step 4: choose date; past dates blocked; service dates per server.

Login: **Per flow** · Incoming screens: P-014, P-024, P-025, P-033, P-042


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Show journeys (Button) → **P-030** Results — loading

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Calendar	132–448 dp	Full width, 16 dp margins	above fold
4	Button	448–510 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Travel date	Deep navy #071A2D, white 16sp bold	Per state	Travel date	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Region; City; Vehicle; Date; Results	Numbered dots, current bold	—	Region	No	Always in this state
3	C03 Calendar	132–448 dp	328×316 dp	Calendar, selected 18; blocked: 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17	Month grid, selected navy circle	Per state	Calendar, selected 18; blocked: 1,2,3,4,	Yes	Always in this state
4	C04 Button	448–510 dp	328×62 dp	Show journeys سفر دکھائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Show journeys, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Travel date	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Region	علاقہ	Needs native review
2	City	شہر	Needs native review
2	Vehicle	گاڑی	Needs native review
2	Date	تاریخ	Needs native review
2	Results	نتائج	Needs native review
4	Show journeys	سفر دکھائیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
4	Button: Show journeys	≥48 dp	Enabled	Navigate to **P-030** Results — loading	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Calendar	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Step 4: choose date; past dates blocked; service dates per server.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_service_dates (read)
Inputs	route, category
Server checks / RLS	booking horizon/cutoff (NEEDS CONFIRMATION), service days; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	Safe read
Offline	Cached; mark unconfirmed
Cache	Short TTL

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-030 · Incoming: P-014, P-024, P-025, P-033, P-042


Open decisions: OD-05 (see Part 16).

P-027 CONFIRMED P1 v2.0

Date — past date blocked

تاریخ — گزری ہوئی

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.date_past`

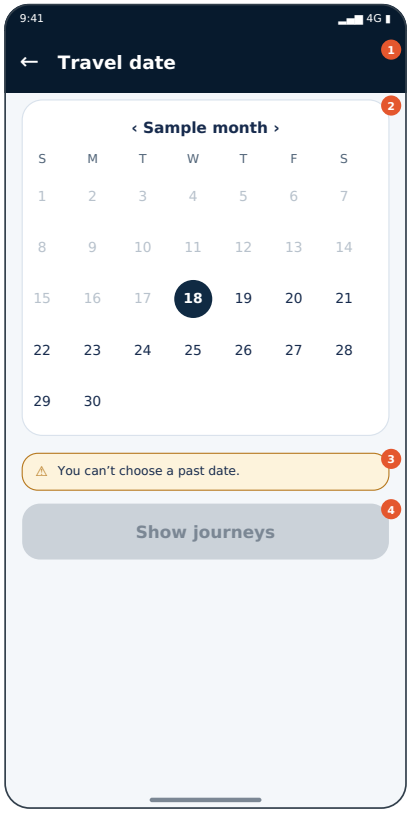

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Past date tapped; explain and keep selection.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Show journeys (Button) → **P-030** Results — loading

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Calendar	80–396 dp	Full width, 16 dp margins	above fold
3	Banner	396–441 dp	Full width, 16 dp margins	above fold
4	Button	441–503 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Travel date	Deep navy #071A2D, white 16sp bold	Per state	Travel date	Yes	Always in this state
2	C02 Calendar	80–396 dp	328×316 dp	Calendar, selected 18; blocked: 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17	Month grid, selected navy circle	Per state	Calendar, selected 18; blocked: 1,2,3,4,	Yes	Always in this state
3	C03 Banner	396–441 dp	328×45 dp	You can’t choose a past date.	Tinted background + border + icon + text (never colour alone)	—	You can’t choose a past date.	No	Always in this state
4	C04 Button	441–503 dp	328×62 dp	Show journeys سفر دکھائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Show journeys, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Travel date	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	You can’t choose a past date.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Show journeys	سفر دکھائیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
4	Button: Show	≥48 dp	Enabled	Navigate to **P-030** Results — loading	Instant	—	E01, E03 copy; no false	Selection is local until Continue; double tap

4	Button: Show journeys	≥48 dp	Enabled	Navigate to P-030 Results — loading	Instant		E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
2	Calendar	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Past date tapped; explain and keep selection.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-030 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-028 CONFIRMED P1 v2.0

Date — no service

تاریخ — سروس نہیں

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.date_nosvc`

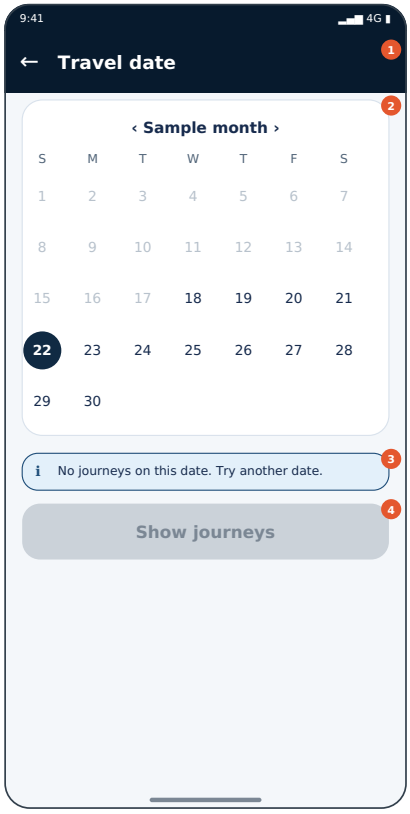

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Selected date has no configured service.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Calendar	80–396 dp	Full width, 16 dp margins	above fold
3	Banner	396–441 dp	Full width, 16 dp margins	above fold
4	Button	441–503 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Travel date	Deep navy #071A2D, white 16sp bold	Per state	Travel date	Yes	Always in this state
2	C02 Calendar	80–396 dp	328×316 dp	Calendar, selected 22; blocked: 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17	Month grid, selected navy circle	Per state	Calendar, selected 22; blocked: 1,2,3,4,	Yes	Always in this state
3	C03 Banner	396–441 dp	328×45 dp	No journeys on this date. Try another date.	Tinted background + border + icon + text (never colour alone)	—	No journeys on this date. Try another da	No	Always in this state
4	C04 Button	441–503 dp	328×62 dp	Show journeys سفر دکھائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Show journeys, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Travel date	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	No journeys on this date. Try another date.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Show journeys	سفر دکھائیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Retry debounced.
2	Calendar	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Selected date has no configured service.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_service_dates (read)
Inputs	route, category
Server checks / RLS	booking horizon/cutoff (NEEDS CONFIRMATION), service days; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12
Retry / idempotency	Safe read
Offline	Cached; mark unconfirmed
Cache	Short TTL

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-029 CONFIRMED P1 v2.0

Date changed — results refresh

تاریخ تبدیل — نتائج ریفریش

Role: **Passenger** · Family: F2 Passenger home & discovery · Key: `p.date_changed`

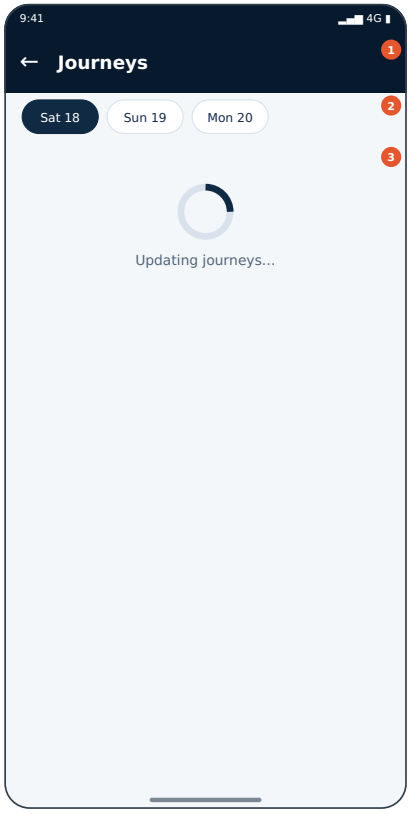

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Date changed from results; refresh with loading and preserved filters.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–126 dp	Full width, 16 dp margins	above fold
3	Loading indicator	126–246 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Chips	80–126 dp	328×46 dp	Sat 18; Sun 19; Mon 20	Pill 30dp high; selected navy fill	Per state	Sat 18	Yes	Always in this state
3	C03 Loading indicator	126–246 dp	328×120 dp	Updating journeys...	Navy arc on grey ring	—	Updating journeys...	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Sat 18	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Sun 19	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Mon 20	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Updating journeys...	Translation review required	—

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Date changed from results; refresh with loading and preserved filters.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-030 CONFIRMED P0 v2.0

Results — loading

نتائج — لوڈ ہو رہے ہیں

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.res_load`

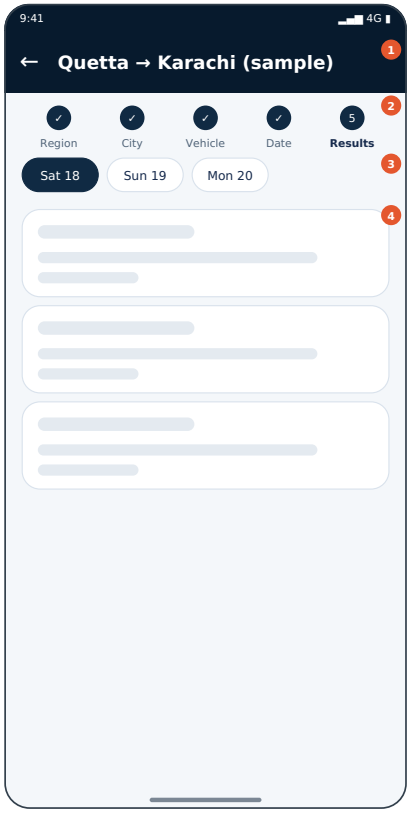

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Skeleton cards while journeys load.

Login: **Per flow** · Incoming screens: P-026, P-027, P-043, P-044


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Chips	132–178 dp	Full width, 16 dp margins	above fold
4	Skeleton cards	178–446 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Quetta → Karachi (sample)	Deep navy #071A2D, white 16sp bold	Per state	Quetta → Karachi (sample)	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Region; City; Vehicle; Date; Results	Numbered dots, current bold	—	Region	No	Always in this state
3	C03 Chips	132–178 dp	328×46 dp	Sat 18; Sun 19; Mon 20	Pill 30dp high; selected navy fill	Per state	Sat 18	Yes	Always in this state
4	C04 Skeleton cards	178–446 dp	328×268 dp	3 skeleton cards	Grey blocks on white cards	—	3 skeleton cards	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Quetta → Karachi (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Region	علاقہ	Needs native review
2	City	شہر	Needs native review
2	Vehicle	گاڑی	Needs native review
2	Date	تاریخ	Needs native review
2	Results	نتائج	Needs native review
3	Sat 18	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Sun 19	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Mon 20	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E02 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Skeleton cards while journeys load.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E02 Request slower than 8 s (threshold PROPOSED)	Banner or full screen **ERR-001** Slow network — with cancel	Slow connection — This is taking longer than usual. You can keep waiting or cancel.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E02, E03, E06
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-026, P-027, P-043, P-044


Open decisions: None specific (see Part 16).

P-031 CONFIRMED P0 v2.0

Available journeys — premium cards

دستیاب سفر

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.res`

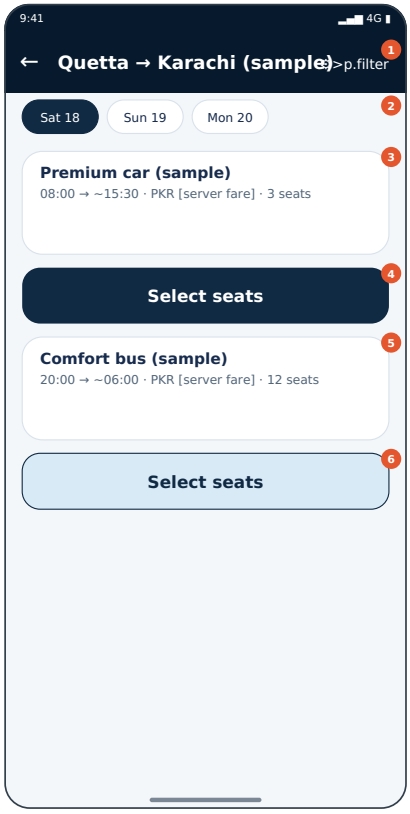

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Detailed journey cards: rate, departure, estimated arrival, truthful availability, Select Seats.

Login: **Per flow** · Incoming screens: P-035, P-036, P-053, P-062


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- ⚙ (App-bar action) → **P-034** Filter & sort sheet
- Select seats (Button) → **P-046** Seat map — loading
- Select seats (Button) → **P-046** Seat map — loading

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–126 dp	Full width, 16 dp margins	above fold
3	Info card	126–230 dp	Full width, 16 dp margins	above fold
4	Button	230–292 dp	Full width, 16 dp margins	above fold
5	Info card	292–396 dp	Full width, 16 dp margins	above fold
6	Button	396–458 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Quetta → Karachi (sample); ⚙	Deep navy #071A2D, white 16sp bold	Per state	Quetta → Karachi (sample)	Yes	Always in this state
2	C02 Chips	80–126 dp	328×46 dp	Sat 18; Sun 19; Mon 20	Pill 30dp high; selected navy fill	Per state	Sat 18	Yes	Always in this state
3	C03 Info card	126–230 dp	328×104 dp	Premium car (sample); 08:00 → ~15:30 · PKR [server fare] · 3 seats	White card, border #D9E2EC, radius 18dp	—	Premium car (sample)	No	Always in this state
4	C04 Button	230–292 dp	328×62 dp	Select seats سیٹیں منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Select seats, button	Yes	Always in this state
5	C05 Info card	292–396 dp	328×104 dp	Comfort bus (sample); 20:00 → ~06:00 · PKR [server fare] · 12 seats	White card, border #D9E2EC, radius 18dp	—	Comfort bus (sample)	No	Always in this state
6	C06 Button	396–458 dp	328×62 dp	Select seats سیٹیں منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Select seats, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Quetta → Karachi (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
1	⚙	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Sat 18	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

2	Sun 19	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Mon 20	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Premium car (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	08:00 → ~15:30 · PKR [server fare] · 3 seats	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Select seats	سیٹیں منتخب کریں	Needs native review
5	Comfort bus (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	20:00 → ~06:00 · PKR [server fare] · 12 seats	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
6	Select seats	سیٹیں منتخب کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
1	App-bar action: ⚙	≥48 dp	Enabled	Navigate to **P-034** Filter & sort sheet	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Button: Select seats	≥48 dp	Enabled	Navigate to **P-046** Seat map — loading	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
6	Button: Select seats	≥48 dp	Enabled	Navigate to **P-046** Seat map — loading	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Detailed journey cards: rate, departure, estimated arrival, truthful availability, Select Seats.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Shows ticket rate, departure, estimated arrival (if provided), seats only if server provides
2. No toll/highway/luggage amounts
3. Pull-to-refresh works and shows timestamp
4. Empty and error states are distinct
5. Scroll position retained on Back
6. Urdu RTL row mirroring correct, numbers legible
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-034, P-046 · Incoming: P-035, P-036, P-053, P-062


Open decisions: None specific (see Part 16).

P-032 CONFIRMED P0 v2.0

No services for route

اس روٹ پر سروس نہیں

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.res_empty`

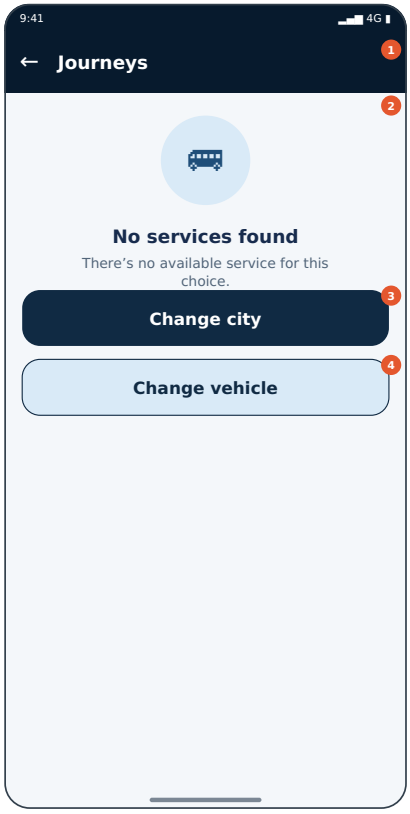

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No configured services for route/category.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Change city (Button) → **P-020** City selection (suggested + search)
- Change vehicle (Button) → **P-024** Cars or Buses

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	No services found; There's no available service for this choice.	Light-blue circle icon + 16sp title + 12sp body	—	No services found	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Change city شہر بدلیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Change city, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Change vehicle گاڑی بدلیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Change vehicle, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	No services found	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	There's no available service for this choice.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Change city	شہر بدلیں	Needs native review
4	Change vehicle	گاڑی بدلیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow; Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Retry debounced.

3	Button: Change city	≥48 dp	Enabled	Navigate to **P-020** City selection (suggested + search)	Instant	—	E12 copy; no false success	Retry debounced.
4	Button: Change vehicle	≥48 dp	Enabled	Navigate to **P-024** Cars or Buses	Instant	—	E12 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No configured services for route/category.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-020, P-024 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-033 CONFIRMED P0 v2.0

No results for date

اس تاریخ پر نتائج نہیں

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.res_nodate`

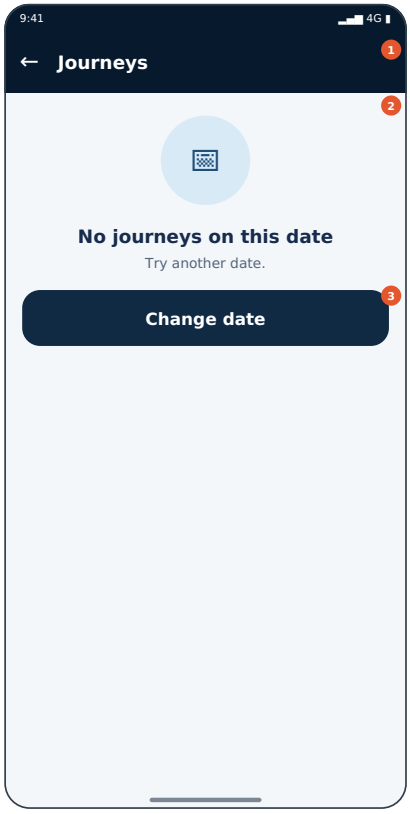

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Route exists but not on this date.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Change date (Button) → **P-026** Select travel date

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	No journeys on this date; Try another date.	Light-blue circle icon + 16sp title + 12sp body	—	No journeys on this date	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Change date تاریخ بدلیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Change date, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	No journeys on this date	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Try another date.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Change date	تاریخ بدلیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Retry debounced.
3	Button: Change date	≥48 dp	Enabled	Navigate to **P-026** Select travel date	Instant	—	E12 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Route exists but not on this date.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-026 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-034 CONFIRMED PROPOSED P1 v2.0

Filter & sort sheet

فلٹر اور ترتیب

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.filter`

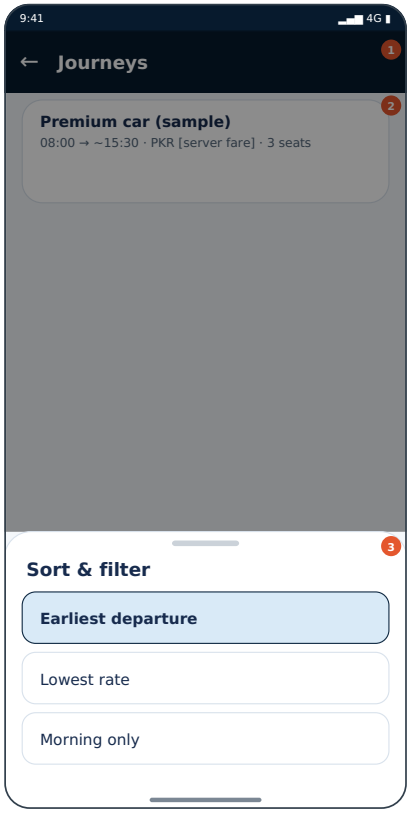

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Sort and filter journeys; apply or reset.

Login: **Per flow** · Incoming screens: P-031


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–184 dp	Full width, 16 dp margins	above fold
3	Bottom sheet	472–704 dp	Full width, 16 dp margins	partly below fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Info card	80–184 dp	328×104 dp	Premium car (sample); 08:00 → ~15:30 · PKR [server fare] · 3 seats	White card, border #D9E2EC, radius 18dp	—	Premium car (sample)	No	Always in this state
3	C03 Bottom sheet	472–704 dp	328×232 dp	Sort & filter; Earliest departure; Lowest rate; Morning only	Radius-24dp top corners, scrim 45%	Per state	Sort & filter	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Premium car (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	08:00 → ~15:30 · PKR [server fare] · 3 seats	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Sort & filter	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Earliest departure	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Lowest rate	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Morning only	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Sort and filter journeys; apply or reset.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-031


Open decisions: None specific (see Part 16).

P-035 CONFIRMED P1 v2.0

Filter active

فلٹر فعال

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.filter_on`

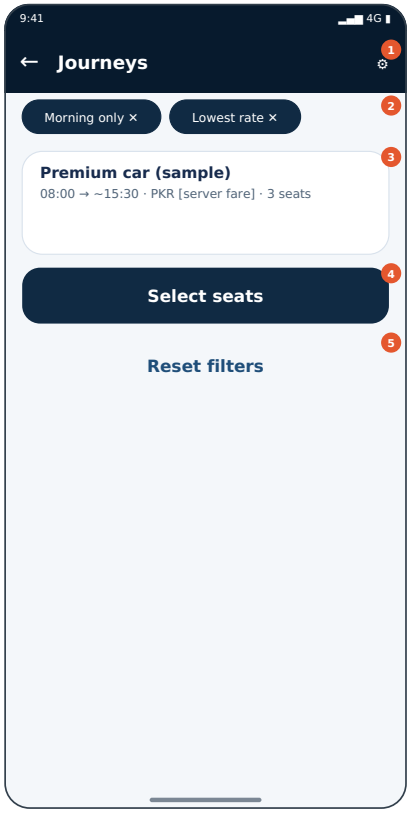

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Active filter chips with reset; results updated.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Select seats (Button) → **P-046** Seat map — loading
- Reset filters (Button) → **P-031** Available journeys — premium cards

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–126 dp	Full width, 16 dp margins	above fold
3	Info card	126–230 dp	Full width, 16 dp margins	above fold
4	Button	230–292 dp	Full width, 16 dp margins	above fold
5	Button	292–354 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys; ⚙	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Chips	80–126 dp	328×46 dp	Morning only ×; Lowest rate ×	Pill 30dp high; selected navy fill	Per state	Morning only ×	Yes	Always in this state
3	C03 Info card	126–230 dp	328×104 dp	Premium car (sample); 08:00 → ~15:30 · PKR [server fare] · 3 seats	White card, border #D9E2EC, radius 18dp	—	Premium car (sample)	No	Always in this state
4	C04 Button	230–292 dp	328×62 dp	Select seats سیٹیں منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Select seats, button	Yes	Always in this state
5	C05 Button	292–354 dp	328×62 dp	Reset filters فلٹر ری سیٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Reset filters, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
1	⚙	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Morning only ×	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Lowest rate ×	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Premium car (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	08:00 → ~15:30 · PKR [server fare] · 3 seats	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

4	Select seats	سیٹیں منتخب کریں	Needs native review
5	Reset filters	فلٹر ری سیٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Button: Select seats	≥48 dp	Enabled	Navigate to **P-046** Seat map — loading	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
5	Button: Reset filters	≥48 dp	Enabled	Navigate to **P-031** Available journeys — premium cards	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Active filter chips with reset; results updated.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-031, P-046 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-036 CONFIRMED P1 v2.0

Results stale

نتائج پرانے

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.res_stale`

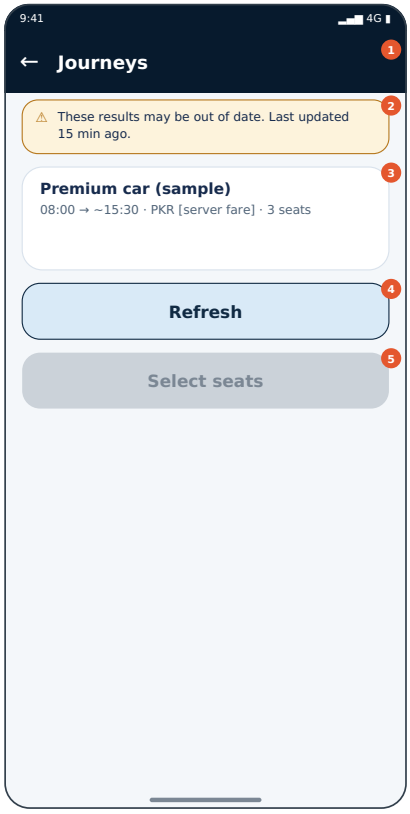

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Cached results older than limit; actions need refresh.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refresh (Button) → **P-031** Available journeys — premium cards

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Info card	140–244 dp	Full width, 16 dp margins	above fold
4	Button	244–306 dp	Full width, 16 dp margins	above fold
5	Button	306–368 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	These results may be out of date. Last updated 15 min ago.	Tinted background + border + icon + text (never colour alone)	—	These results may be out of date. Last u	No	Always in this state
3	C03 Info card	140–244 dp	328×104 dp	Premium car (sample); 08:00 → ~15:30 · PKR [server fare] · 3 seats	White card, border #D9E2EC, radius 18dp	—	Premium car (sample)	No	Always in this state
4	C04 Button	244–306 dp	328×62 dp	Refresh ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh, button	Yes	Always in this state
5	C05 Button	306–368 dp	328×62 dp	Select seats سیٹیں منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Select seats, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	These results may be out of date. Last updated 15 min ago.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Premium car (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	08:00 → ~15:30 · PKR [server fare] · 3 seats	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Refresh	ریفریش	Needs native review
5	Select seats	سیٹیں منتخب کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E11 copy; no false success	Status check button debounced; no write retries.
4	Button: Refresh	≥48 dp	Enabled	Navigate to **P-031** Available journeys — premium cards	Instant	—	E11 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Cached results older than limit; actions need refresh.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E11
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-031 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-037 CONFIRMED P1 v2.0

Route no longer available

روٹ دستیاب نہیں

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.route_gone`

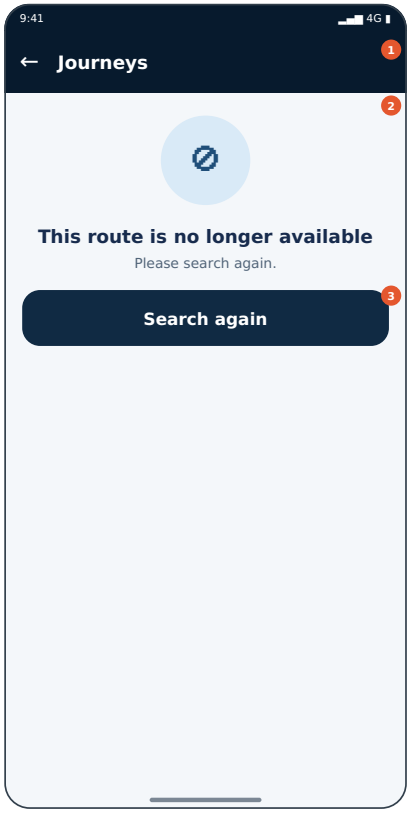

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Route/trip removed after search.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Search again (Button) → **P-017** Province / region selection

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	This route is no longer available; Please search again.	Light-blue circle icon + 16sp title + 12sp body	—	This route is no longer available	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Search again دوبارہ تلاش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Search again, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This route is no longer available	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please search again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Search again	دوبارہ تلاش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Retry debounced.
3	Button: Search again	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E12 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Route/trip removed after search.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-017 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-038 CONFIRMED P1 v2.0

Journey detail

سفر کی تفصیل

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.jdetail`

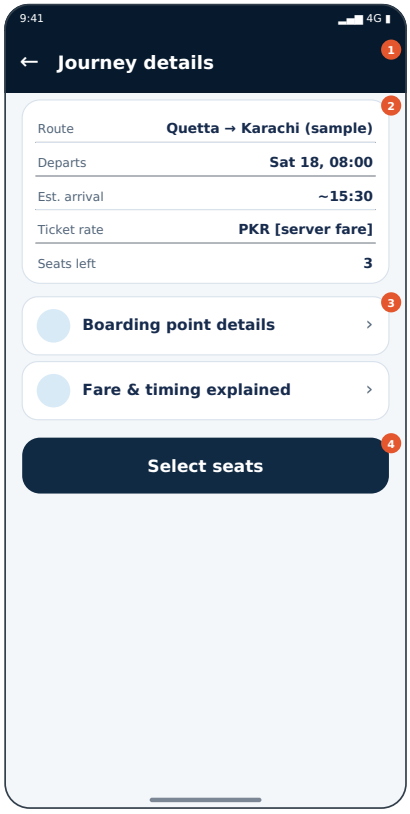

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Full journey details: times, rate, boarding point, vehicle, availability.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Boarding point details (Row) → **P-039** Boarding & arrival point
- Fare & timing explained (Row) → **P-040** Fare & timing explanation
- Select seats (Button) → **P-046** Seat map — loading

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–256 dp	Full width, 16 dp margins	above fold
3	List rows	256–382 dp	Full width, 16 dp margins	above fold
4	Button	382–444 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journey details	Deep navy #071A2D, white 16sp bold	Per state	Journey details	Yes	Always in this state
2	C02 Key-value card	80–256 dp	328×176 dp	Route: Quetta → Karachi (sample); Departs: Sat 18, 08:00; Est. arrival: ~15:30; Ticket rate: PKR [server fare]; Seats left: 3	White card, 30dp rows, label grey / value bold	—	Route: Quetta → Karachi (sample)	No	Always in this state
3	C03 List rows	256–382 dp	328×126 dp	Boarding point details; Fare & timing explained	White rows radius 14dp, 52dp high, chevron/check	Per state	Boarding point details	Yes	Always in this state
4	C04 Button	382–444 dp	328×62 dp	Select seats سیٹیں منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Select seats, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journey details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Route: Quetta → Karachi (sample)	روٹ	Needs native review
2	Departs: Sat 18, 08:00	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Est. arrival: ~15:30	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Ticket rate: PKR [server fare]	ٹکٹ کا کرایہ	Needs native review
2	Seats left: 3	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Boarding point details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Fare & timing explained	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Select seats	سیٹیں منتخب کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Row: Boarding point details	≥48 dp	Enabled	Navigate to **P-039** Boarding & arrival point	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Row: Fare & timing explained	≥48 dp	Enabled	Navigate to **P-040** Fare & timing explanation	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
4	Button: Select seats	≥48 dp	Enabled	Navigate to **P-046** Seat map — loading	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Route	Quetta → Karachi (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Departs	Sat 18, 08:00	Server-derived	Required	Show “Not available” if missing; never blank/invented
Est. arrival	~15:30	Server-derived	Required	Show “Not available” if missing; never blank/invented
Ticket rate	PKR [server fare]	Server-derived	Required	Show “Not available” if missing; never blank/invented
Seats left	3	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Full journey details: times, rate, boarding point, vehicle, availability.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_journey_detail (read)
Inputs	journey id, date
Server checks / RLS	fare, times, boarding/arrival points, status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached detail flagged stale
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Estimated arrival marked “estimated”
2. All fields show server values or explicit “not available”
3. Back returns to origin list
4. TalkBack order matches visual order
5. Urdu RTL: mixed route/ID/date direction legible
6. Android Back follows §3 on every state

7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-039, P-040, P-046 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-039 CONFIRMED NEEDS CONFIRMATION P1 v2.0

Boarding & arrival point

بورڈنگ اور آمد کا مقام

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.board_detail`

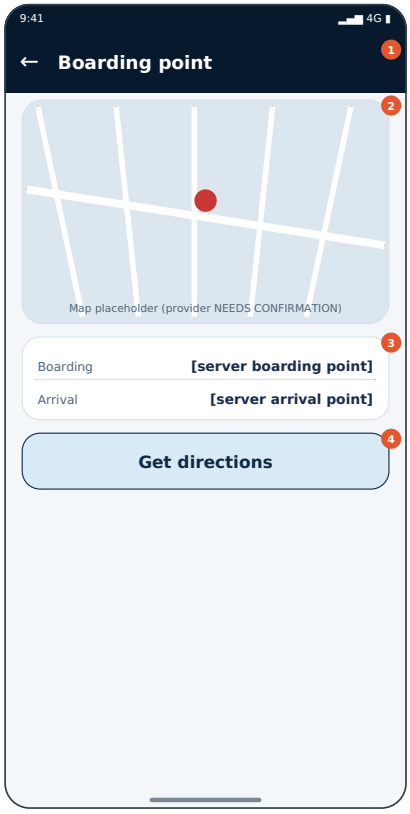

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Pickup/boarding and arrival point with map handoff when configured.

Login: **Per flow** · Incoming screens: P-038


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Get directions (Button) → external app: EXT:maps

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Map placeholder	80–292 dp	Full width, 16 dp margins	above fold
3	Key-value card	292–378 dp	Full width, 16 dp margins	above fold
4	Button	378–440 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Boarding point	Deep navy #071A2D, white 16sp bold	Per state	Boarding point	Yes	Always in this state
2	C02 Map placeholder	80–292 dp	328×212 dp	Map placeholder (provider NEEDS CONFIRMATION)	Provider NEEDS CONFIRMATION	—	Map placeholder (provider NEEDS CONFIRMA	No	Always in this state
3	C03 Key-value card	292–378 dp	328×86 dp	Boarding: [server boarding point]; Arrival: [server arrival point]	White card, 30dp rows, label grey / value bold	—	Boarding: [server boarding point]	No	Always in this state
4	C04 Button	378–440 dp	328×62 dp	Get directions راستہ دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Get directions, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Boarding point	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Map placeholder (provider NEEDS CONFIRMATION)	Translation review required	—
3	Boarding: [server boarding point]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Arrival: [server arrival point]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Get directions	راستہ دیکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false	Action buttons

							success	debounced.
4	Button: Get directions	≥48 dp	Enabled	Hands off to external app (EXT:maps); returning restores this screen	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Boarding	[server boarding point]	Server-derived	Required	Show “Not available” if missing; never blank/invented
Arrival	[server arrival point]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Pickup/boarding and arrival point with map handoff when configured.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_journey_detail (read)
Inputs	journey id, date
Server checks / RLS	fare, times, boarding/arrival points, status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached detail flagged stale
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-038


Open decisions: OD-08 (see Part 16).

P-040 CONFIRMED PROPOSED P2 v2.0

Fare & timing explanation

کرایہ اور وقت کی وضاحت

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.fare_expl`

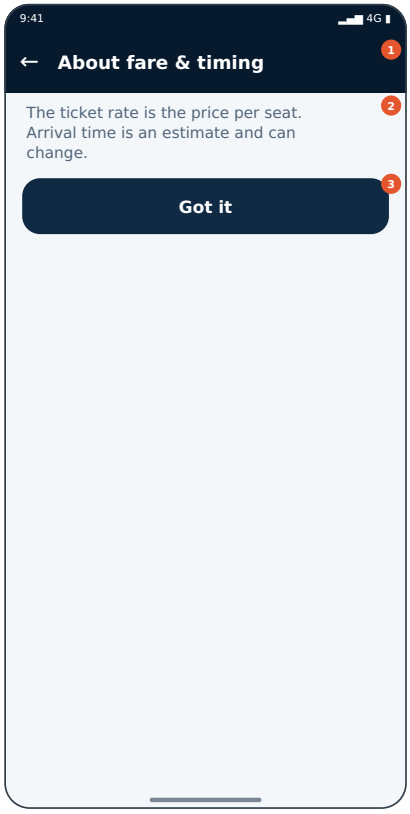

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Explains ticket rate and that arrival is an estimate.

Login: **Per flow** · Incoming screens: P-038


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Got it (Button) → previous screen (system Back)

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–150 dp	Full width, 16 dp margins	above fold
3	Button	150–212 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	About fare & timing	Deep navy #071A2D, white 16sp bold	Per state	About fare & timing	Yes	Always in this state
2	C02 Body text	80–150 dp	328×70 dp	The ticket rate is the price per seat. Arrival time is an estimate and can change.	12–14sp secondary text	—	The ticket rate is the price per seat. A	No	Always in this state
3	C03 Button	150–212 dp	328×62 dp	Got it سمجھ گیا	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Got it, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	About fare & timing	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	The ticket rate is the price per seat. Arrival time is an estimate and can change.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Got it	سمجھ گیا	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
3	Button: Got it	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Sample value	Missing / freshness

Data	Source of truth	Req.
Data is static UI copy or derived from the action in §13.		

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Explains ticket rate and that arrival is an estimate.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. No toll/highway/luggage fee mentioned
2. Text readable at 200%
3. Offline copy available
4. Urdu text RTL and complete
5. Policy content respects confirmed rules
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-038


Open decisions: None specific (see Part 16).

P-041 CONFIRMED P2 v2.0

Estimated arrival unavailable

متوقع آمد دستیاب نہیں

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.eta_na`

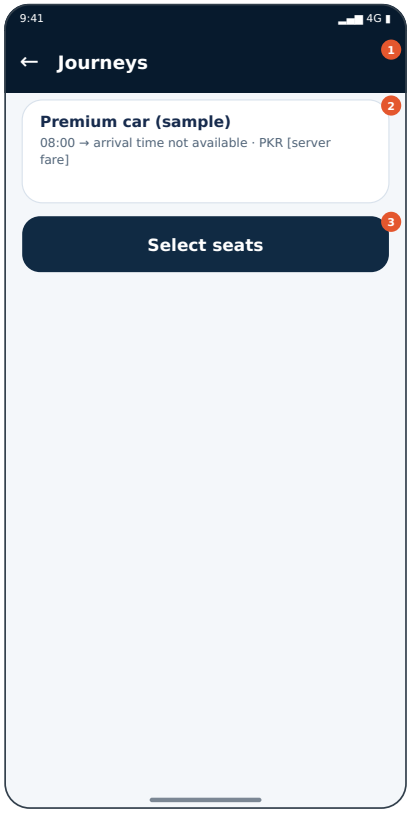

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

ETA not provided by server; show clear fallback.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Select seats (Button) → **P-046** Seat map — loading

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–184 dp	Full width, 16 dp margins	above fold
3	Button	184–246 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Info card	80–184 dp	328×104 dp	Premium car (sample); 08:00 → arrival time not available · PKR [server fare]	White card, border #D9E2EC, radius 18dp	—	Premium car (sample)	No	Always in this state
3	C03 Button	184–246 dp	328×62 dp	Select seats سیٹیں منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Select seats, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Premium car (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	08:00 → arrival time not available · PKR [server fare]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Select seats	سیٹیں منتخب کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Button: Select seats	≥48 dp	Enabled	Navigate to **P-046** Seat map — loading	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	ETA not provided by server; show clear fallback.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-046 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-042 CONFIRMED P1 v2.0

Seats sold out

سیٹیں ختم

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.soldout`

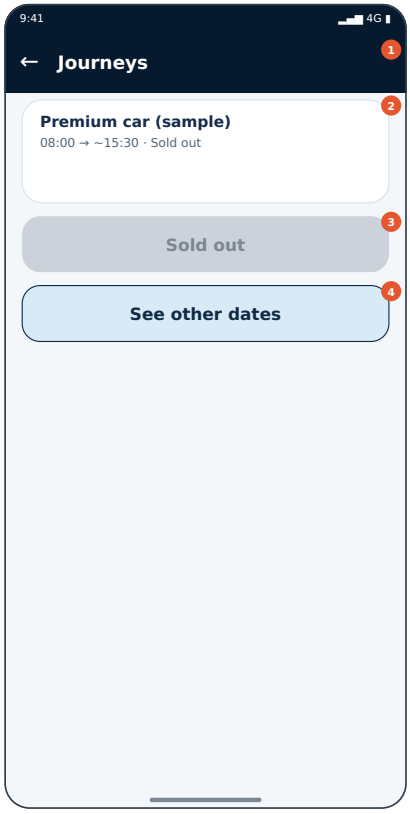

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Journey fully booked; selection disabled.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- See other dates (Button) → **P-026** Select travel date

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–184 dp	Full width, 16 dp margins	above fold
3	Button	184–246 dp	Full width, 16 dp margins	above fold
4	Button	246–308 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Info card	80–184 dp	328×104 dp	Premium car (sample); 08:00 → ~15:30 · Sold out	White card, border #D9E2EC, radius 18dp	—	Premium car (sample)	No	Always in this state
3	C03 Button	184–246 dp	328×62 dp	Sold out سیٹیں ختم	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Sold out, button	Yes	Visible, disabled until conditions met
4	C04 Button	246–308 dp	328×62 dp	See other dates دوسری تاریخیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	See other dates, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Premium car (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	08:00 → ~15:30 · Sold out	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Sold out	سیٹیں ختم	Needs native review
4	See other dates	دوسری تاریخیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

4	Button: See other dates	≥48 dp	Enabled	Navigate to **P-026** Select travel date	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Journey fully booked; selection disabled.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-026 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-043 CONFIRMED P0 v2.0

Trip unavailable at selection

انتخاب پر سفر دستیاب نہیں

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.unavail_sel`

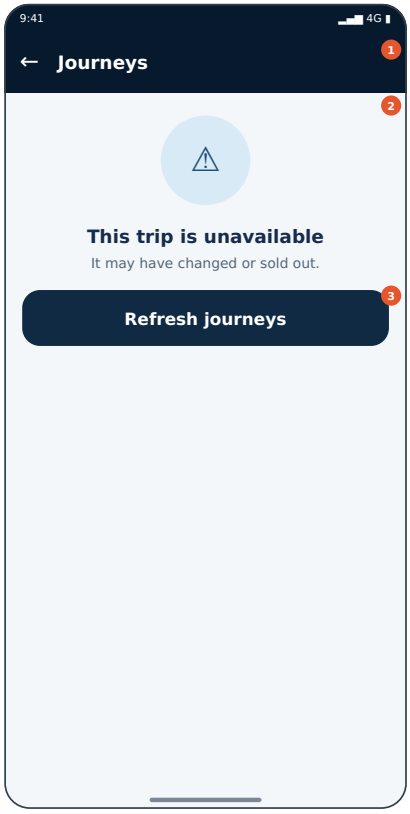

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Trip changed between search and tap.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refresh journeys (Button) → **P-030** Results — loading

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	This trip is unavailable; It may have changed or sold out.	Light-blue circle icon + 16sp title + 12sp body	—	This trip is unavailable	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Refresh journeys سفر ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh journeys, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This trip is unavailable	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	It may have changed or sold out.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refresh journeys	سفر ریفریش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12, E13 copy; no false success	Retry debounced.
3	Button: Refresh journeys	≥48 dp	Enabled	Navigate to **P-030** Results — loading	Instant	—	E12, E13 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Trip changed between search and tap.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_journey_detail (read)
Inputs	journey id, date
Server checks / RLS	fare, times, boarding/arrival points, status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12, E13
Retry / idempotency	Safe read
Offline	Cached detail flagged stale
Cache	Short TTL

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-030 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-044 CONFIRMED P1 v2.0

Results — error

نتائج — خرابی

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.res_err`

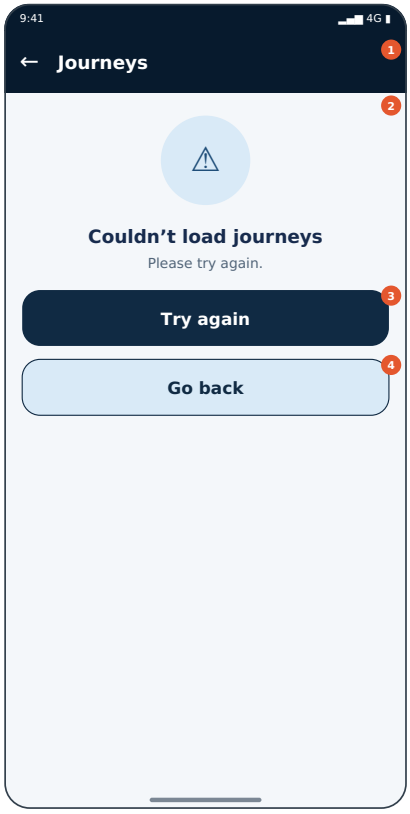

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Search failed (network/server).

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **P-030** Results — loading
- Go back (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Journeys	Deep navy #071A2D, white 16sp bold	Per state	Journeys	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Couldn’t load journeys; Please try again.	Light-blue circle icon + 16sp title + 12sp body	—	Couldn’t load journeys	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Go back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Go back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Couldn’t load journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please try again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش	Needs native review
4	Go back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E06 copy; no false success	Retry debounced.
3	Button: Try again	≥48 dp	Enabled	Navigate to **P-030** Results — loading	Instant	—	E01, E06 copy; no false success	Retry debounced.

4	Button: Go back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E06 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Search failed (network/server).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E06
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-030 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-045 CONFIRMED NEEDS CONFIRMATION P2 v2.0

Return journeys (if configured)

واپسی کے سفر

Role: **Passenger** · Family: F3 Search results & journey detail · Key: `p.return`

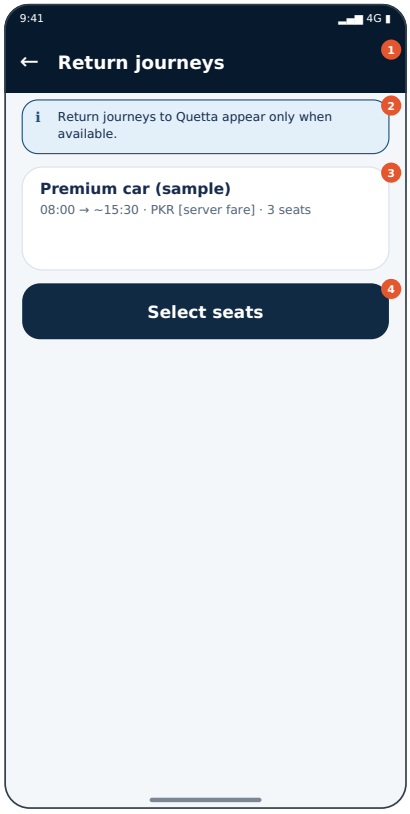

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Return trips to Quetta only when separately configured and available.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Select seats (Button) → **P-046** Seat map — loading

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Info card	140–244 dp	Full width, 16 dp margins	above fold
4	Button	244–306 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Return journeys	Deep navy #071A2D, white 16sp bold	Per state	Return journeys	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Return journeys to Quetta appear only when available.	Tinted background + border + icon + text (never colour alone)	—	Return journeys to Quetta appear only wh	No	Always in this state
3	C03 Info card	140–244 dp	328×104 dp	Premium car (sample); 08:00 → ~15:30 · PKR [server fare] · 3 seats	White card, border #D9E2EC, radius 18dp	—	Premium car (sample)	No	Always in this state
4	C04 Button	244–306 dp	328×62 dp	Select seats سیٹیں منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Select seats, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Return journeys	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Return journeys to Quetta appear only when available.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Premium car (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	08:00 → ~15:30 · PKR [server fare] · 3 seats	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Select seats	سیٹیں منتخب کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system	Instant	—	E01, E03 copy; no false	Row tap navigates once; navigation

				Back)			success	debounced.
4	Button: Select seats	≥48 dp	Enabled	Navigate to **P-046** Seat map — loading	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Return trips to Quetta only when separately configured and available.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	search_journeys (read)
Inputs	origin, destination, category, date
Server checks / RLS	only configured active journeys; real fare/time/availability; return trips only if configured; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached results flagged stale; Select Seats disabled
Cache	Short TTL; never reused for booking

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-046 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-046 CONFIRMED P0 v2.0

Seat map — loading

سیٹ نقشہ — لوڈ

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.seat_load`

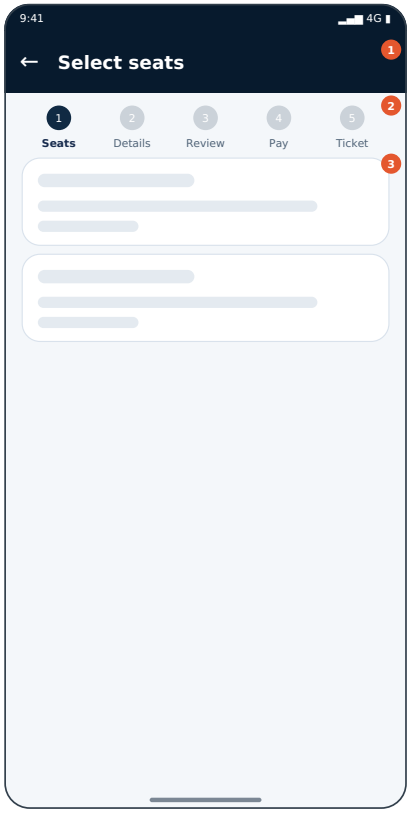

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Skeleton while layout and inventory load.

Login: **Yes** · Incoming screens: P-031, P-035, P-038, P-041, P-045

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back asks before releasing hold; hold stays server-side until expiry/release. **Bottom nav:** Hidden (hold banner visible). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Skeleton cards	132–314 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Select seats	Deep navy #071A2D, white 16sp bold	Per state	Select seats	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Skeleton cards	132–314 dp	328×182 dp	2 skeleton cards	Grey blocks on white cards	—	2 skeleton cards	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Select seats	سیٹیں منتخب کریں	Needs native review
2	Seats	سیٹیں	Needs native review
2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review
2	Ticket	ٹکٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E02 copy; no false success	Hold request carries idempotency key; double tap = one hold.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Skeleton while layout and inventory load.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E02 Request slower than 8 s (threshold PROPOSED)	Banner or full screen **ERR-001** Slow network — with cancel	Slow connection — This is taking longer than usual. You can keep waiting or cancel.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_seat_map (read)
Inputs	journey id, segment
Server checks / RLS	vehicle layout (data-driven), seat inventory per segment, holds; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E02, E03, E06
Retry / idempotency	Safe read
Offline	Blocked for selection (cached view only)
Cache	No reuse for booking

14. Security, privacy & safety

Seat inventory and hold are server-authoritative; no passenger names of other users shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Seat state: icon + text + colour; seat list alternative; min 48 dp seat targets. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Driver seat never selectable
2. Standard car shows exactly 5 seats (1 driver + 4 passenger)
3. Hold timer follows server time
4. Seat conflict handled without charge
5. Seat list and map stay in sync
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-031, P-035, P-038, P-041, P-045


Open decisions: None specific (see Part 16).

P-047 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Seat map — available

سیٹ نقشہ — دستیاب

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.seat`

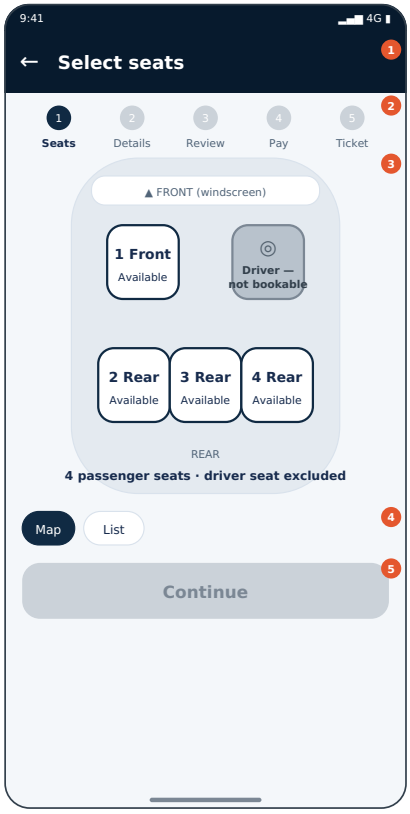

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Standard 5-seat car: driver seat not bookable; 1 front passenger + 3 rear passenger seats. Visual map with list alternative.

Login: **Yes** · Incoming screens: ERR-010, P-051, P-053, P-054, P-055, P-064


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- List (Chip) → **P-055** Seat list alternative
- Continue (Button) → **P-048** Seats selected

Android system Back: Back asks before releasing hold; hold stays server-side until expiry/release. **Bottom nav:** Hidden (hold banner visible). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Seat map (standard car)	132–448 dp	Full width, 16 dp margins	above fold
4	Chips	448–494 dp	Full width, 16 dp margins	above fold
5	Button	494–556 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Select seats	Deep navy #071A2D, white 16sp bold	Per state	Select seats	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Seat map (standard car)	132–448 dp	328×316 dp	Seat map: seats 1 (front passenger), 2–4 (rear); driver seat not bookable	Seat 64×66dp; states: Available/Selected/Booked/Held/My hold (icon+text+colour)	Per state	Seat map: seats 1 (front passenger), 2–4	Yes	Always in this state
4	C04 Chips	448–494 dp	328×46 dp	Map; List	Pill 30dp high; selected navy fill	Per state	Map	Yes	Always in this state
5	C05 Button	494–556 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Select seats	سیٹیں منتخب کریں	Needs native review
2	Seats	سیٹیں	Needs native review
2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review
2	Ticket	ٹکٹ	Needs native review

4	Map	نقشہ	Needs native review
4	List	فہرست	Needs native review
5	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
4	Chip: List	≥48 dp	Enabled	Navigate to **P-055** Seat list alternative	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
5	Button: Continue	≥48 dp	Enabled	Navigate to **P-048** Seats selected	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
3	Seat map (standard car)	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Hold request carries idempotency key; double tap = one hold.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Standard 5-seat car: driver seat not bookable; 1 front passenger + 3 rear passenger seats. Visual map with list alternative.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_seat_map (read)
Inputs	journey id, segment
Server checks / RLS	vehicle layout (data-driven), seat inventory per segment, holds; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E13, E14, E06
Retry / idempotency	Safe read
Offline	Blocked for selection (cached view only)
Cache	No reuse for booking

14. Security, privacy & safety

Seat inventory and hold are server-authoritative; no passenger names of other users shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Seat state: icon + text + colour; seat list alternative; min 48 dp seat targets. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Exactly 5 seat positions drawn; driver labelled “Driver — not bookable”
2. Driver seat has no tap action
3. Layout drawn from server layout data (sample shown)
4. Driver seat never selectable

5. Standard car shows exactly 5 seats (1 driver + 4 passenger)
6. Hold timer follows server time
7. Seat conflict handled without charge
8. Seat list and map stay in sync
9. Android Back follows §3 on every state
10. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
11. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-048, P-055 · Incoming: ERR-010, P-051, P-053, P-054, P-055, P-064


Open decisions: OD-07 (see Part 16).

P-048 CONFIRMED P0 v2.0

Seats selected

سیٹیں منتخب

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.seat_sel`

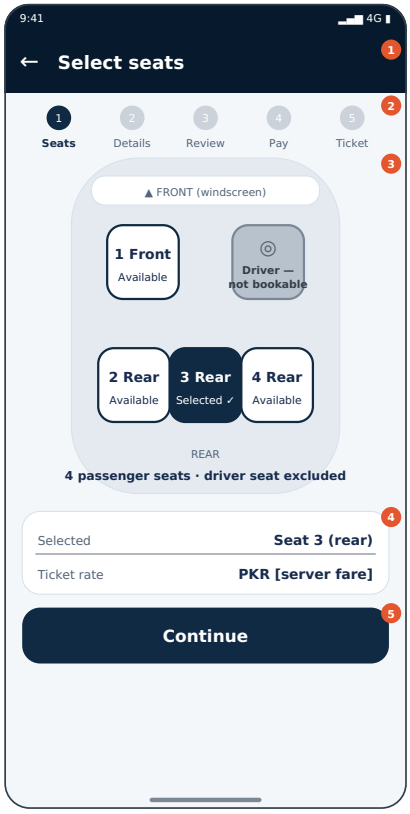

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Selected seat highlighted; Continue creates a 10-minute server hold.

Login: **Yes** · Incoming screens: P-047


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **P-050** Seat hold active — 10-minute timer

Android system Back: Back asks before releasing hold; hold stays server-side until expiry/release. **Bottom nav:** Hidden (hold banner visible). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Seat map (standard car)	132–448 dp	Full width, 16 dp margins	above fold
4	Key-value card	448–534 dp	Full width, 16 dp margins	above fold
5	Button	534–596 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Select seats	Deep navy #071A2D, white 16sp bold	Per state	Select seats	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Seat map (standard car)	132–448 dp	328×316 dp	Seat map: seats 1 (front passenger), 2–4 (rear); driver seat not bookable	Seat 64×66dp; states: Available/Selected/Booked/Held/My hold (icon+text+colour)	Per state	Seat map: seats 1 (front passenger), 2–4	Yes	Always in this state
4	C04 Key-value card	448–534 dp	328×86 dp	Selected: Seat 3 (rear); Ticket rate: PKR [server fare]	White card, 30dp rows, label grey / value bold	—	Selected: Seat 3 (rear)	No	Always in this state
5	C05 Button	534–596 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Select seats	سیٹیں منتخب کریں	Needs native review
2	Seats	سیٹیں	Needs native review
2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review

2	Ticket	ٹکٹ	Needs native review
4	Selected: Seat 3 (rear)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Ticket rate: PKR [server fare]	ٹکٹ کا کرایہ	Needs native review
5	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
5	Button: Continue	≥48 dp	Enabled	Navigate to **P-050** Seat hold active — 10-minute timer	Inline spinner; other controls locked	Server-confirmed result only	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
3	Seat map (standard car)	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Hold request carries idempotency key; double tap = one hold.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Selected	Seat 3 (rear)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Ticket rate	PKR [server fare]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Selected seat highlighted; Continue creates a 10-minute server hold.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	create_seat_hold (write)
Inputs	journey id, seat ids, segment, idempotency key
Server checks / RLS	seat free for segment, 10-minute hold, server clock, per-user limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E13, E14, E06
Retry / idempotency	Required idempotency key; same key returns same hold
Offline	Blocked
Cache	Hold state server-only

14. Security, privacy & safety

Seat inventory and hold are server-authoritative; no passenger names of other users shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Seat state: icon + text + colour; seat list alternative; min 48 dp seat targets. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Continue calls hold with idempotency key; double tap = one hold
2. Driver seat never selectable
3. Standard car shows exactly 5 seats (1 driver + 4 passenger)
4. Hold timer follows server time

5. Seat conflict handled without charge
6. Seat list and map stay in sync
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-050 · Incoming: P-047


Open decisions: None specific (see Part 16).

P-049 CONFIRMED PROPOSED P0 v2.0

Booked & held seats shown

بُک اور روکی ہوئی سیٹیں

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.seat_booked`

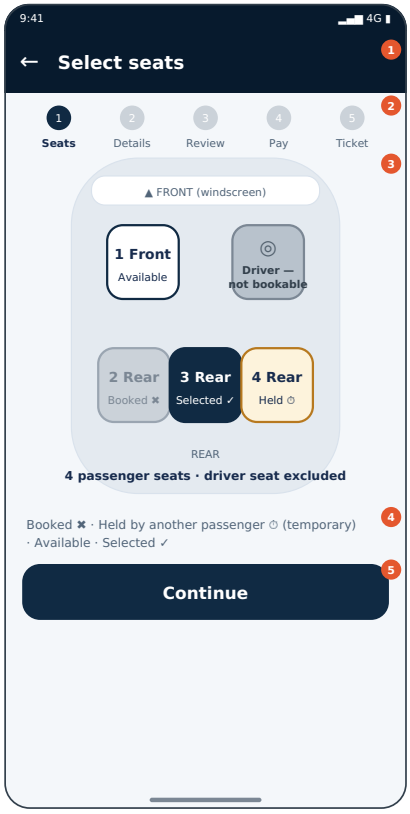

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Booked and temporarily held (by others) seats visually distinct, non-selectable.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **P-050** Seat hold active — 10-minute timer

Android system Back: Back asks before releasing hold; hold stays server-side until expiry/release. **Bottom nav:** Hidden (hold banner visible). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Seat map (standard car)	132–448 dp	Full width, 16 dp margins	above fold
4	Body text	448–495 dp	Full width, 16 dp margins	above fold
5	Button	495–557 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Select seats	Deep navy #071A2D, white 16sp bold	Per state	Select seats	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Seat map (standard car)	132–448 dp	328×316 dp	Seat map: seats 1 (front passenger), 2–4 (rear); driver seat not bookable	Seat 64×66dp; states: Available/Selected/Booked/Held/My hold (icon+text+colour)	Per state	Seat map: seats 1 (front passenger), 2–4	Yes	Always in this state
4	C04 Body text	448–495 dp	328×47 dp	Booked ✖ · Held by another passenger ⏱ (temporary) · Available · Selected ✓	12–14sp secondary text	—	Booked ✖ · Held by another passenger ⏱ (	No	Always in this state
5	C05 Button	495–557 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Select seats	سیٹیں منتخب کریں	Needs native review
2	Seats	سیٹیں	Needs native review
2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review

2	Ticket	ٹکٹ	Needs native review
4	Booked ✖ · Held by another passenger ⏱ (temporary) · Available · Selected ✓	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
5	Button: Continue	≥48 dp	Enabled	Navigate to **P-050** Seat hold active — 10-minute timer	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
3	Seat map (standard car)	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Hold request carries idempotency key; double tap = one hold.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Booked and temporarily held (by others) seats visually distinct, non-selectable.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_seat_map (read)
Inputs	journey id, segment
Server checks / RLS	vehicle layout (data-driven), seat inventory per segment, holds; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E13, E14, E06
Retry / idempotency	Safe read
Offline	Blocked for selection (cached view only)
Cache	No reuse for booking

14. Security, privacy & safety

Seat inventory and hold are server-authoritative; no passenger names of other users shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Seat state: icon + text + colour; seat list alternative; min 48 dp seat targets. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Driver seat never selectable
2. Standard car shows exactly 5 seats (1 driver + 4 passenger)
3. Hold timer follows server time
4. Seat conflict handled without charge
5. Seat list and map stay in sync
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible

8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-050 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-050 CONFIRMED P0 v2.0

Seat hold active — 10-minute timer

سیٹ ہولڈ — ۱۰ منٹ

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.seat_held`

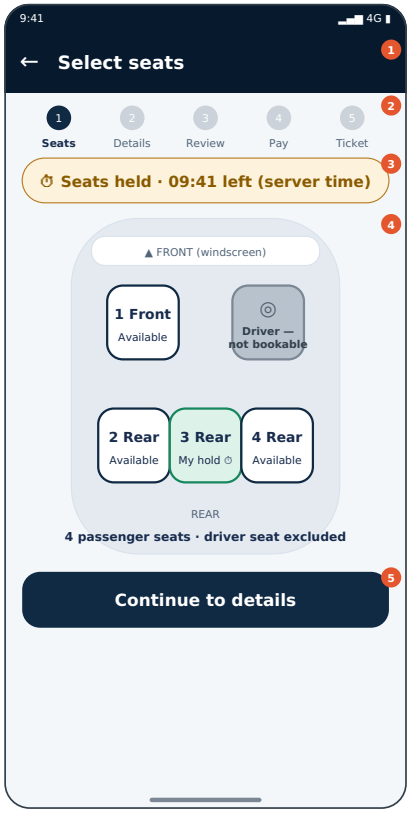

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Hold confirmed by server; countdown follows server expiry time.

Login: **Yes** · Incoming screens: P-048, P-049, P-054, P-055, P-056


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue to details (Button) → **P-057** Passenger details

Android system Back: Back asks before releasing hold; hold stays server-side until expiry/release. **Bottom nav:** Hidden (hold banner visible). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Hold timer banner	132–186 dp	Full width, 16 dp margins	above fold
4	Seat map (standard car)	186–502 dp	Full width, 16 dp margins	above fold
5	Button	502–564 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Select seats	Deep navy #071A2D, white 16sp bold	Per state	Select seats	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Hold timer banner	132–186 dp	328×54 dp	Seats held · 09:41 left (server time)	Amber pill with clock icon and server-time countdown	—	Seats held · 09:41 left (server time)	No	Always in this state
4	C04 Seat map (standard car)	186–502 dp	328×316 dp	Seat map: seats 1 (front passenger), 2–4 (rear); driver seat not bookable	Seat 64×66dp; states: Available/Selected/Booked/Held/My hold (icon+text+colour)	Per state	Seat map: seats 1 (front passenger), 2–4	Yes	Always in this state
5	C05 Button	502–564 dp	328×62 dp	Continue to details تفصیلات پر جائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue to details, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Select seats	سیٹیں منتخب کریں	Needs native review
2	Seats	سیٹیں	Needs native review
2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review

2	Ticket	ٹکٹ	Needs native review
3	Seats held · 09:41 left (server time)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Continue to details	تفصیلات پر جائیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
5	Button: Continue to details	≥48 dp	Enabled	Navigate to **P-057** Passenger details	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
4	Seat map (standard car)	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Hold request carries idempotency key; double tap = one hold.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Hold confirmed by server; countdown follows server expiry time.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_hold_status (read)
Inputs	hold id
Server checks / RLS	expiry (server time), ownership; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E13, E14, E06
Retry / idempotency	Safe read
Offline	Shows last known; warns not authoritative
Cache	None

14. Security, privacy & safety

Seat inventory and hold are server-authoritative; no passenger names of other users shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Seat state: icon + text + colour; seat list alternative; min 48 dp seat targets. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Timer derived from server expiry, corrected for clock skew
2. Hold survives tab switch; visible banner on other tabs (PROPOSED)
3. Driver seat never selectable
4. Standard car shows exactly 5 seats (1 driver + 4 passenger)
5. Hold timer follows server time
6. Seat conflict handled without charge
7. Seat list and map stay in sync

8. Android Back follows §3 on every state
9. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
10. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-057 · Incoming: P-048, P-049, P-054, P-055, P-056


Open decisions: None specific (see Part 16).

P-051 CONFIRMED P0 v2.0

Seat no longer available

سیٹ اب دستیاب نہیں

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.seat_gone`

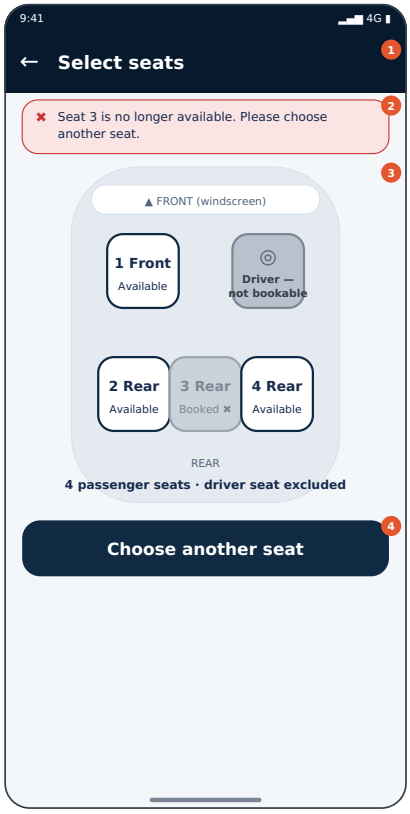

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Another passenger took the seat first; map refreshed.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Choose another seat (Button) → **P-047** Seat map — available

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Seat map (standard car)	140–456 dp	Full width, 16 dp margins	above fold
4	Button	456–518 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Select seats	Deep navy #071A2D, white 16sp bold	Per state	Select seats	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Seat 3 is no longer available. Please choose another seat.	Tinted background + border + icon + text (never colour alone)	—	Seat 3 is no longer available. Please ch	No	Always in this state
3	C03 Seat map (standard car)	140–456 dp	328×316 dp	Seat map: seats 1 (front passenger), 2–4 (rear); driver seat not bookable	Seat 64×66dp; states: Available/Selected/Booked/Held/My hold (icon+text+colour)	Per state	Seat map: seats 1 (front passenger), 2–4	Yes	Always in this state
4	C04 Button	456–518 dp	328×62 dp	Choose another seat دوسری سیٹ منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Choose another seat, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Select seats	سیٹیں منتخب کریں	Needs native review
2	Seat 3 is no longer available. Please choose another seat.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Choose another seat	دوسری سیٹ منتخب کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E13 copy; no false success	Retry debounced.

4	Button: Choose another seat	≥48 dp	Enabled	Navigate to **P-047** Seat map — available	Inline spinner; other controls locked	Server-confirmed result only	E13 copy; no false success	Retry debounced.
3	Seat map (standard car)	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Another passenger took the seat first; map refreshed.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	create_seat_hold (write)
Inputs	journey id, seat ids, segment, idempotency key
Server checks / RLS	seat free for segment, 10-minute hold, server clock, per-user limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E13
Retry / idempotency	Required idempotency key; same key returns same hold
Offline	Blocked
Cache	Hold state server-only

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-047 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-052 CONFIRMED PROPOSED P0 v2.0

Hold expiring soon

ہولڈ ختم ہونے والا ہے

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.hold_warn`

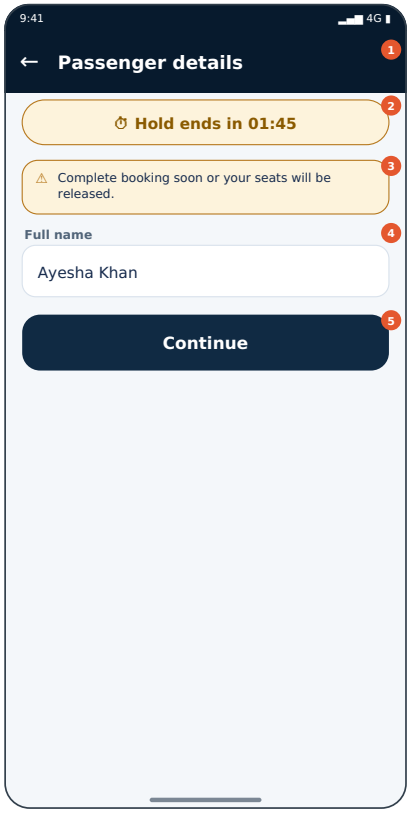

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Warning under 2 minutes (threshold PROPOSED).

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **P-060** Booking review

Android system Back: Back asks before releasing hold; hold stays server-side until expiry/release. **Bottom nav:** Hidden (hold banner visible). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Hold timer banner	80–134 dp	Full width, 16 dp margins	above fold
3	Banner	134–194 dp	Full width, 16 dp margins	above fold
4	Text field	194–272 dp	Full width, 16 dp margins	above fold
5	Button	272–334 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Passenger details	Deep navy #071A2D, white 16sp bold	Per state	Passenger details	Yes	Always in this state
2	C02 Hold timer banner	80–134 dp	328×54 dp	Hold ends in 01:45	Amber pill with clock icon and server-time countdown	—	Hold ends in 01:45	No	Always in this state
3	C03 Banner	134–194 dp	328×60 dp	Complete booking soon or your seats will be released.	Tinted background + border + icon + text (never colour alone)	—	Complete booking soon or your seats will	No	Always in this state
4	C04 Text field	194–272 dp	328×78 dp	Full name: “Ayesha Khan”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “Ayesha Khan”	Yes	Always in this state
5	C05 Button	272–334 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Passenger details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Hold ends in 01:45	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Complete booking soon or your seats will be released.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Full name	پورا نام	Needs native review
5	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E14 copy; no false success	Hold request carries idempotency key; double tap = one hold.
5	Button: Continue	≥48 dp	Enabled	Navigate to **P-060** Booking review	Instant	—	E14 copy; no false success	Hold request carries idempotency key; double tap = one hold.
4	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Hold request carries idempotency key; double tap = one hold.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Warning under 2 minutes (threshold PROPOSED).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_hold_status (read)
Inputs	hold id
Server checks / RLS	expiry (server time), ownership; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E14
Retry / idempotency	Safe read
Offline	Shows last known; warns not authoritative
Cache	None

14. Security, privacy & safety

Seat inventory and hold are server-authoritative; no passenger names of other users shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Seat state: icon + text + colour; seat list alternative; min 48 dp seat targets. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Driver seat never selectable
2. Standard car shows exactly 5 seats (1 driver + 4 passenger)
3. Hold timer follows server time
4. Seat conflict handled without charge
5. Seat list and map stay in sync
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-060 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-053 CONFIRMED P0 v2.0

Hold expired

ہولڈ ختم

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.hold_expired`

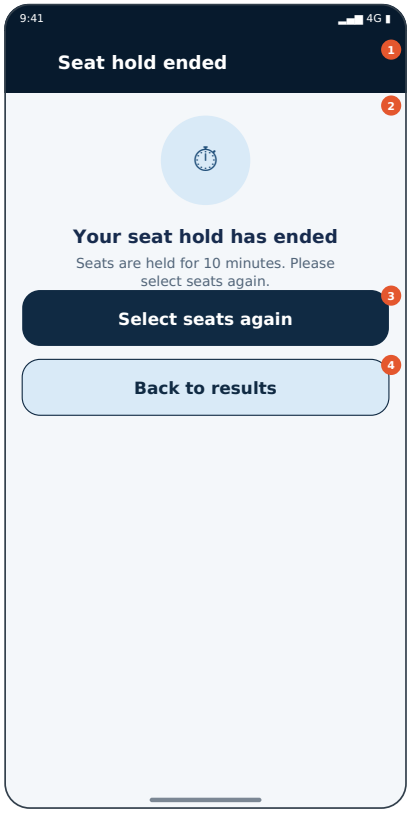

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server says hold ended; explain honestly and restart seat selection.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Select seats again (Button) → **P-047** Seat map — available
- Back to results (Button) → **P-031** Available journeys — premium cards

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Seat hold ended	Deep navy #071A2D, white 16sp bold	Per state	Seat hold ended	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Your seat hold has ended; Seats are held for 10 minutes. Please select seats again.	Light-blue circle icon + 16sp title + 12sp body	—	Your seat hold has ended	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Select seats again دوبارہ سیٹ منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Select seats again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Back to results نتائج پر واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back to results, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Seat hold ended	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your seat hold has ended	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Seats are held for 10 minutes. Please select seats again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Select seats again	دوبارہ سیٹ منتخب کریں	Needs native review
4	Back to results	نتائج پر واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Select seats again	≥48 dp	Enabled	Navigate to **P-047** Seat map — available	Instant	—	E14 copy; no false success	Retry debounced.
4	Button: Back to results	≥48 dp	Enabled	Navigate to **P-031** Available journeys — premium cards	Instant	—	E14 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server says hold ended; explain honestly and restart seat selection.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_hold_status (read)
Inputs	hold id
Server checks / RLS	expiry (server time), ownership; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E14
Retry / idempotency	Safe read
Offline	Shows last known; warns not authoritative
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-031, P-047 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-054 PROPOSED NEEDS CONFIRMATION P2 v2.0

Extend / reselect hold (if supported)

ہولڈ بڑھائیں

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.hold_ext`

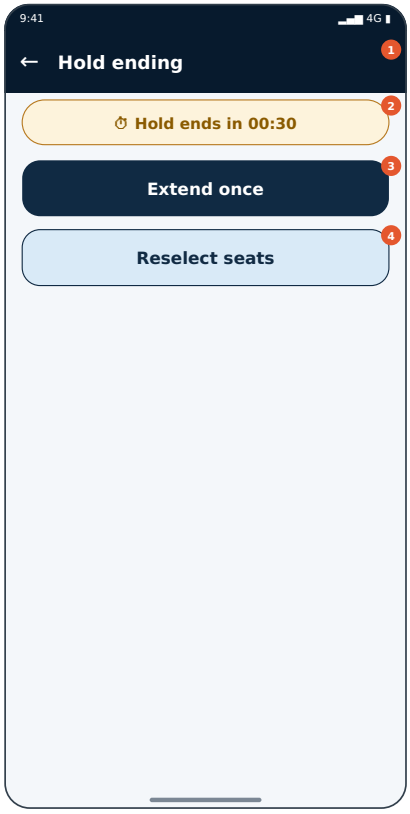

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

If server supports one-time extension, offer it; otherwise reselect.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Extend once (Button) → **P-050** Seat hold active — 10-minute timer
- Reselect seats (Button) → **P-047** Seat map — available

Android system Back: Back asks before releasing hold; hold stays server-side until expiry/release. **Bottom nav:** Hidden (hold banner visible). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Hold timer banner	80–134 dp	Full width, 16 dp margins	above fold
3	Button	134–196 dp	Full width, 16 dp margins	above fold
4	Button	196–258 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Hold ending	Deep navy #071A2D, white 16sp bold	Per state	Hold ending	Yes	Always in this state
2	C02 Hold timer banner	80–134 dp	328×54 dp	Hold ends in 00:30	Amber pill with clock icon and server-time countdown	—	Hold ends in 00:30	No	Always in this state
3	C03 Button	134–196 dp	328×62 dp	Extend once ایک بار بڑھائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Extend once, button	Yes	Always in this state
4	C04 Button	196–258 dp	328×62 dp	Reselect seats دوبارہ منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Reselect seats, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Hold ending	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Hold ends in 00:30	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Extend once	ایک بار بڑھائیں	Needs native review
4	Reselect seats	دوبارہ منتخب کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
3	Button:	≥48 dp	Enabled	Navigate to **P-050** Seat hold	Inline spinner; other	Server-confirmed	E01, E03 copy; no	Hold request carries idempotency key;

	Extend once			active — 10-minute timer	controls locked	result only	false success	double tap = one hold.
4	Button: Reselect seats	≥48 dp	Enabled	Navigate to **P-047** Seat map — available	Inline spinner; other controls locked	Server-confirmed result only	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	If server supports one-time extension, offer it; otherwise reselect.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	create_seat_hold (write)
Inputs	journey id, seat ids, segment, idempotency key
Server checks / RLS	seat free for segment, 10-minute hold, server clock, per-user limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E13, E14, E06
Retry / idempotency	Required idempotency key; same key returns same hold
Offline	Blocked
Cache	Hold state server-only

14. Security, privacy & safety

Seat inventory and hold are server-authoritative; no passenger names of other users shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Seat state: icon + text + colour; seat list alternative; min 48 dp seat targets. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Driver seat never selectable
2. Standard car shows exactly 5 seats (1 driver + 4 passenger)
3. Hold timer follows server time
4. Seat conflict handled without charge
5. Seat list and map stay in sync
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-047, P-050 · Incoming: Entry point / system-launched


Open decisions: OD-06 (see Part 16).

P-055 CONFIRMED P1 v2.0

Seat list alternative

سیٹ فہرست

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.seat_list`

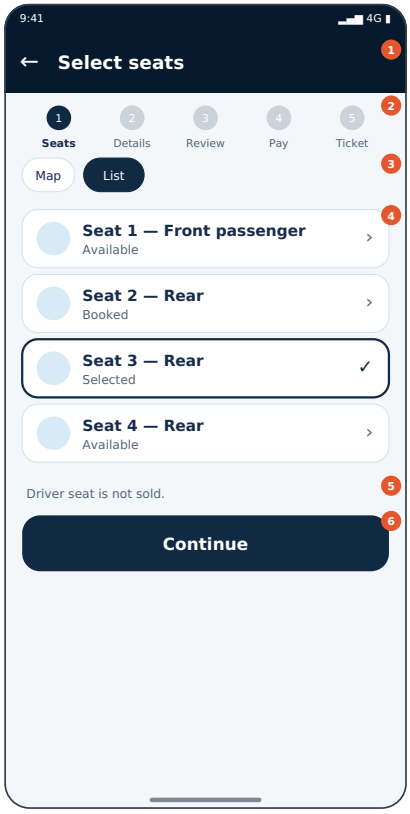

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Simple list of seats for easier selection and screen readers.

Login: **Yes** · Incoming screens: P-047


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Map (Chip) → **P-047** Seat map — available
- Continue (Button) → **P-050** Seat hold active — 10-minute timer

Android system Back: Back asks before releasing hold; hold stays server-side until expiry/release. **Bottom nav:** Hidden (hold banner visible). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Chips	132–178 dp	Full width, 16 dp margins	above fold
4	List rows	178–420 dp	Full width, 16 dp margins	above fold
5	Body text	420–451 dp	Full width, 16 dp margins	above fold
6	Button	451–513 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Select seats	Deep navy #071A2D, white 16sp bold	Per state	Select seats	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Chips	132–178 dp	328×46 dp	Map; List	Pill 30dp high; selected navy fill	Per state	Map	Yes	Always in this state
4	C04 List rows	178–420 dp	328×242 dp	Seat 1 — Front passenger|Available; Seat 2 — Rear|Booked; Seat 3 — Rear|Selected; Seat 4 — Rear|Available	White rows radius 14dp, 52dp high, chevron/check	Per state	Seat 1 — Front passenger|Available	Yes	Always in this state
5	C05 Body text	420–451 dp	328×31 dp	Driver seat is not sold.	12–14sp secondary text	—	Driver seat is not sold.	No	Always in this state
6	C06 Button	451–513 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Select seats	سیٹیں منتخب کریں	Needs native review
2	Seats	سیٹیں	Needs native review
2	Details		Needs native review

		تفصیلات	
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review
2	Ticket	ٹکٹ	Needs native review
3	Map	نقشہ	Needs native review
3	List	فہرست	Needs native review
4	Seat 1 — Front passenger|Available	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Seat 2 — Rear|Booked	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Seat 3 — Rear|Selected	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Seat 4 — Rear|Available	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Driver seat is not sold.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
6	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
3	Chip: Map	≥48 dp	Enabled	Navigate to **P-047** Seat map — available	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
6	Button: Continue	≥48 dp	Enabled	Navigate to **P-050** Seat hold active — 10-minute timer	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Simple list of seats for easier selection and screen readers.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_seat_map (read)
Inputs	journey id, segment
Server checks / RLS	vehicle layout (data-driven), seat inventory per segment, holds; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E13, E14, E06
Retry / idempotency	Safe read
Offline	Blocked for selection (cached view only)
Cache	No reuse for booking

14. Security, privacy & safety

Seat inventory and hold are server-authoritative; no passenger names of other users shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Seat state: icon + text + colour; seat list alternative; min 48 dp seat targets. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. List and map stay in sync
2. Driver seat never selectable
3. Standard car shows exactly 5 seats (1 driver + 4 passenger)
4. Hold timer follows server time
5. Seat conflict handled without charge
6. Seat list and map stay in sync
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-047, P-050 · Incoming: P-047


Open decisions: None specific (see Part 16).

P-056 PROPOSED NEEDS CONFIRMATION P1 v2.0

Vehicle layout — data-driven (bus)

گاڑی کا نقشہ — بس

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.seat_bus`

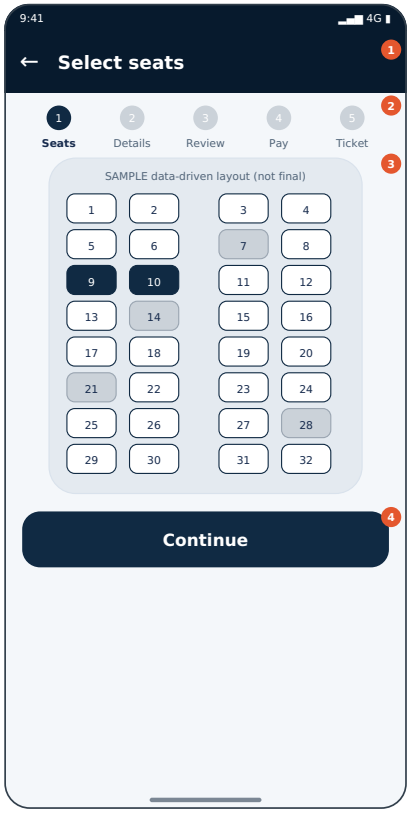

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Non-standard layouts are rendered from server layout data; never guessed.

Login: **Yes** · Incoming screens: Entry point / system-launched

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **P-050** Seat hold active — 10-minute timer

Android system Back: Back asks before releasing hold; hold stays server-side until expiry/release. **Bottom nav:** Hidden (hold banner visible). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Seat map (data-driven)	132–448 dp	Full width, 16 dp margins	above fold
4	Button	448–510 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Select seats	Deep navy #071A2D, white 16sp bold	Per state	Select seats	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Seat map (data-driven)	132–448 dp	328×316 dp	Data-driven seat layout (sample)	Data-driven grid; states as seat map	Per state	Data-driven seat layout (sample)	Yes	Always in this state
4	C04 Button	448–510 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Select seats	سیٹیں منتخب کریں	Needs native review
2	Seats	سیٹیں	Needs native review
2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review
2	Ticket	ٹکٹ	Needs native review
4	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
4	Button: Continue	≥48 dp	Enabled	Navigate to **P-050** Seat hold active — 10-minute timer	Instant	—	E01, E03 copy; no false success	Hold request carries idempotency key; double tap = one hold.
3	Seat map (data-driven)	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	Hold request carries idempotency key; double tap = one hold.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Non-standard layouts are rendered from server layout data; never guessed.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_seat_map (read)
Inputs	journey id, segment
Server checks / RLS	vehicle layout (data-driven), seat inventory per segment, holds; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E13, E14, E06
Retry / idempotency	Safe read
Offline	Blocked for selection (cached view only)
Cache	No reuse for booking

14. Security, privacy & safety

Seat inventory and hold are server-authoritative; no passenger names of other users shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Seat state: icon + text + colour; seat list alternative; min 48 dp seat targets. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Unknown layout → list-only fallback, never a guessed map
2. Driver seat never selectable
3. Standard car shows exactly 5 seats (1 driver + 4 passenger)
4. Hold timer follows server time
5. Seat conflict handled without charge
6. Seat list and map stay in sync
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-050 · Incoming: Entry point / system-launched


Open decisions: OD-07 (see Part 16).

P-057 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Passenger details

مسافر کی تفصیلات

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pax`

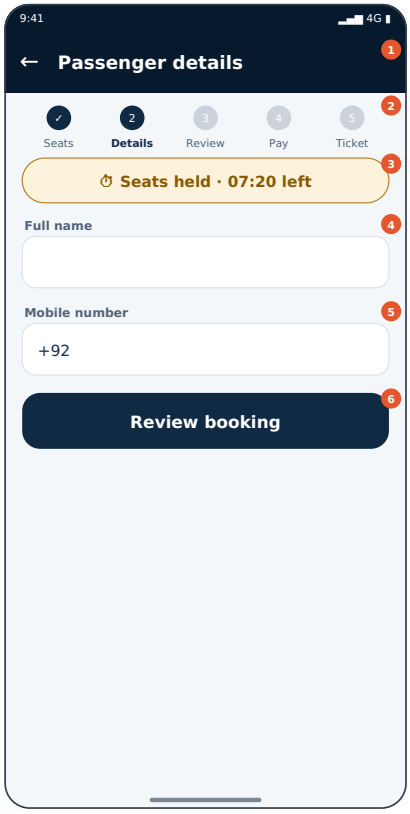

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Collect only required passenger details (identity fields NEEDS CONFIRMATION).

Login: **As per flow** · Incoming screens: P-050


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Review booking (Button) → **P-060** Booking review

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Hold timer banner	132–186 dp	Full width, 16 dp margins	above fold
4	Text field	186–264 dp	Full width, 16 dp margins	above fold
5	Text field	264–342 dp	Full width, 16 dp margins	above fold
6	Button	342–404 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Passenger details	Deep navy #071A2D, white 16sp bold	Per state	Passenger details	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Hold timer banner	132–186 dp	328×54 dp	Seats held · 07:20 left	Amber pill with clock icon and server-time countdown	—	Seats held · 07:20 left	No	Always in this state
4	C04 Text field	186–264 dp	328×78 dp	Full name: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “”	Yes	Always in this state
5	C05 Text field	264–342 dp	328×78 dp	Mobile number: “+92 ”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Mobile number: “+92 ”	Yes	Always in this state
6	C06 Button	342–404 dp	328×62 dp	Review booking بکنگ دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Review booking, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Passenger details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Seats	سیٹیں	Needs native review
2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review

2	Ticket	ٹکٹ	Needs native review
3	Seats held · 07:20 left	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Full name	پورا نام	Needs native review
5	Mobile number	موبائل نمبر	Needs native review
6	Review booking	بکنگ دیکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
6	Button: Review booking	≥48 dp	Enabled	Navigate to **P-060** Booking review	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.
5	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text	Required	NEEDS CONFIRMATION	Blur+submit	Text
Mobile	tel	Required	Valid mobile	Blur+submit	Phone

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Collect only required passenger details (identity fields NEEDS CONFIRMATION).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_hold_status (read)
Inputs	hold id
Server checks / RLS	expiry (server time), ownership; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Safe read
Offline	Shows last known; warns not authoritative
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Keyboard does not cover primary button
2. Empty submit shows field errors and focuses first error
3. Keyboard never hides focused field or primary button
4. Rotate/background keeps entered values
5. Urdu RTL: input alignment and caret correct, digits/phone legible
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-060 · Incoming: P-050


Open decisions: OD-04 (see Part 16).

P-058 CONFIRMED P1 v2.0

Passenger details — errors

مسافر کی تفصیلات — غلطیاں

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pax_err`

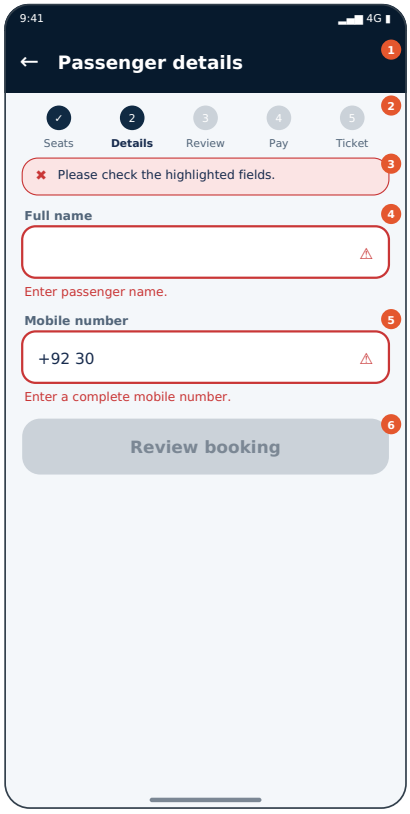

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Validation errors shown inline and in a summary.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Review booking (Button) → **P-060** Booking review

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Banner	132–177 dp	Full width, 16 dp margins	above fold
4	Text field	177–271 dp	Full width, 16 dp margins	above fold
5	Text field	271–365 dp	Full width, 16 dp margins	above fold
6	Button	365–427 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Passenger details	Deep navy #071A2D, white 16sp bold	Per state	Passenger details	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Banner	132–177 dp	328×45 dp	Please check the highlighted fields.	Tinted background + border + icon + text (never colour alone)	—	Please check the highlighted fields.	No	Always in this state
4	C04 Text field	177–271 dp	328×94 dp	Full name: “” Enter passenger name.	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “” Enter passenger name.	Yes	Always in this state
5	C05 Text field	271–365 dp	328×94 dp	Mobile number: “+92 30” Enter a complete mobile number.	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Mobile number: “+92 30” Enter a complete	Yes	Always in this state
6	C06 Button	365–427 dp	328×62 dp	Review booking بکنگ دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Review booking, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Passenger details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Seats	سیٹیں	Needs native review
2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review

2	Pay	ادائیگی	Needs native review
2	Ticket	ٹکٹ	Needs native review
3	Please check the highlighted fields.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Full name	پورا نام	Needs native review
4	Enter passenger name.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Mobile number	موبائل نمبر	Needs native review
5	Enter a complete mobile number.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
6	Review booking	بکنگ دیکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
6	Button: Review booking	≥48 dp	Enabled	Navigate to **P-060** Booking review	Instant	—	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.
5	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default
Mobile number	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Validation errors shown inline and in a summary.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E27
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible

5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-060 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-059 CONFIRMED PROPOSED P1 v2.0

Edit passenger details

تفصیلات میں ترمیم

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pax_edit`

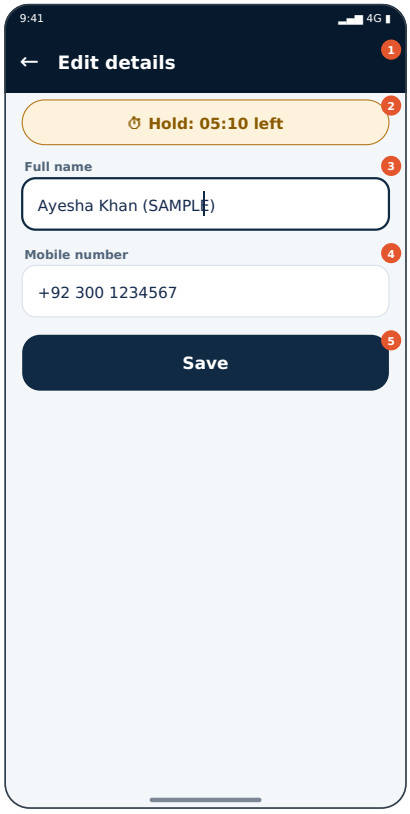

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Edit details from review without losing the hold.

Login: **As per flow** · Incoming screens: P-060

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Save (Button) → **P-060** Booking review

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Hold timer banner	80–134 dp	Full width, 16 dp margins	above fold
3	Text field	134–212 dp	Full width, 16 dp margins	above fold
4	Text field	212–290 dp	Full width, 16 dp margins	above fold
5	Button	290–352 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Edit details	Deep navy #071A2D, white 16sp bold	Per state	Edit details	Yes	Always in this state
2	C02 Hold timer banner	80–134 dp	328×54 dp	Hold: 05:10 left	Amber pill with clock icon and server-time countdown	—	Hold: 05:10 left	No	Always in this state
3	C03 Text field	134–212 dp	328×78 dp	Full name: “Ayesha Khan (SAMPLE)”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “Ayesha Khan (SAMPLE)”	Yes	Always in this state
4	C04 Text field	212–290 dp	328×78 dp	Mobile number: “+92 300 1234567”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Mobile number: “+92 300 1234567”	Yes	Always in this state
5	C05 Button	290–352 dp	328×62 dp	Save محفوظ کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Save, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Edit details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Hold: 05:10 left	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Full name	پورا نام	Needs native review
4	Mobile number	موبائل نمبر	Needs native review
5	Save	محفوظ کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
5	Button: Save	≥48 dp	Enabled	Navigate to **P-060** Booking review	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.
4	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default
Mobile number	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Edit details from review without losing the hold.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible

7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-060 · Incoming: P-060


Open decisions: None specific (see Part 16).

P-060 CONFIRMED P0 v2.0

Booking review

بکنگ کا جائزہ

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.review`

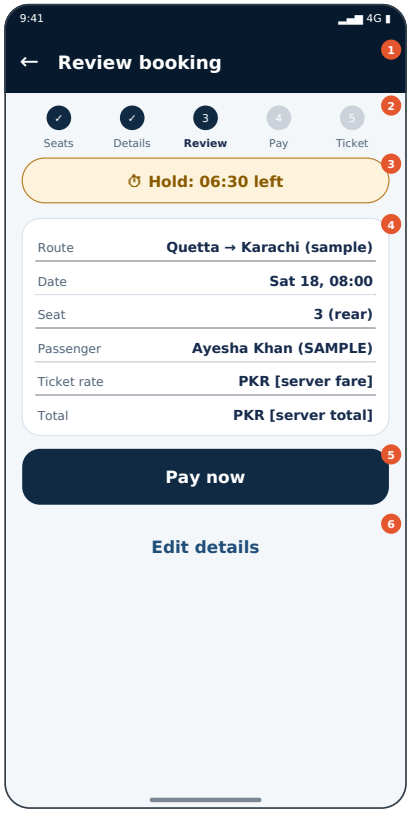

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Review route, date, seats, passenger and ticket rate; confirm before payment.

Login: **Yes** · Incoming screens: P-052, P-057, P-058, P-059, P-061, P-062, P-065, P-073


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Pay now (Button) → **P-068** Payment method
- Edit details (Button) → **P-059** Edit passenger details

Android system Back: Back asks to confirm leaving; hold continues until expiry. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Hold timer banner	132–186 dp	Full width, 16 dp margins	above fold
4	Key-value card	186–392 dp	Full width, 16 dp margins	above fold
5	Button	392–454 dp	Full width, 16 dp margins	above fold
6	Button	454–516 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Review booking	Deep navy #071A2D, white 16sp bold	Per state	Review booking	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Hold timer banner	132–186 dp	328×54 dp	Hold: 06:30 left	Amber pill with clock icon and server-time countdown	—	Hold: 06:30 left	No	Always in this state
4	C04 Key-value card	186–392 dp	328×206 dp	Route: Quetta → Karachi (sample); Date: Sat 18, 08:00; Seat: 3 (rear); Passenger: Ayesha Khan (SAMPLE); Ticket rate: PKR [server fare]; Total: PKR [server total]	White card, 30dp rows, label grey / value bold	—	Route: Quetta → Karachi (sample)	No	Always in this state
5	C05 Button	392–454 dp	328×62 dp	Pay now ادائیگی کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Pay now, button	Yes	Always in this state
6	C06 Button	454–516 dp	328×62 dp	Edit details ترمیم	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Edit details, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Review booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Seats	سیٹیں	Needs native review

2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review
2	Ticket	ٹکٹ	Needs native review
3	Hold: 06:30 left	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Route: Quetta → Karachi (sample)	روٹ	Needs native review
4	Date: Sat 18, 08:00	تاریخ	Needs native review
4	Seat: 3 (rear)	سیٹ	Needs native review
4	Passenger: Ayesha Khan (SAMPLE)	مسافر	Needs native review
4	Ticket rate: PKR [server fare]	ٹکٹ کا کرایہ	Needs native review
4	Total: PKR [server total]	کل	Needs native review
5	Pay now	ادائیگی کریں	Needs native review
6	Edit details	ترمیم	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
5	Button: Pay now	≥48 dp	Enabled	Navigate to **P-068** Payment method	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
6	Button: Edit details	≥48 dp	Enabled	Navigate to **P-059** Edit passenger details	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Route	Quetta → Karachi (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Date	Sat 18, 08:00	Server-derived	Required	Show “Not available” if missing; never blank/invented
Seat	3 (rear)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Passenger	Ayesha Khan (SAMPLE)	User-entered	Required	Show “Not available” if missing; never blank/invented
Ticket rate	PKR [server fare]	Server-derived	Required	Show “Not available” if missing; never blank/invented
Total	PKR [server total]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Review route, date, seats, passenger and ticket rate; confirm before payment.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E15 Fare differs from earlier display	Banner or full screen **P-062** Fare changed — acknowledge	The fare has changed — The ticket rate is now PKR [server fare]. Review before continuing.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_booking_quote (read)
Inputs	hold id
Server checks / RLS	ticket rate for seats (ticket rate only — no toll/highway/luggage fee); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E14, E15, E16, E17

Retry / idempotency	Safe read
Offline	Blocked
Cache	Short TTL

14. Security, privacy & safety

No card numbers stored/logged; provider handoff only via configured methods; amounts from server quote. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Amounts large and high-contrast; method as icon + text; status icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Total = ticket rate × seats only
2. No highway/toll/luggage rows; no luggage-limit notice here
3. Ticket rate only; no toll/highway/luggage lines
4. Unknown payment never offers “pay again”
5. Success shown only after server confirms
6. Back during handoff is safe
7. Hold expiry during payment handled
8. Android Back follows §3 on every state
9. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
10. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-059, P-068 · Incoming: P-052, P-057, P-058, P-059, P-061, P-062, P-065, P-073


Open decisions: None specific (see Part 16).

P-061 CONFIRMED P1 v2.0

Fare calculation

کرایہ کی تفصیل

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.fare_break`

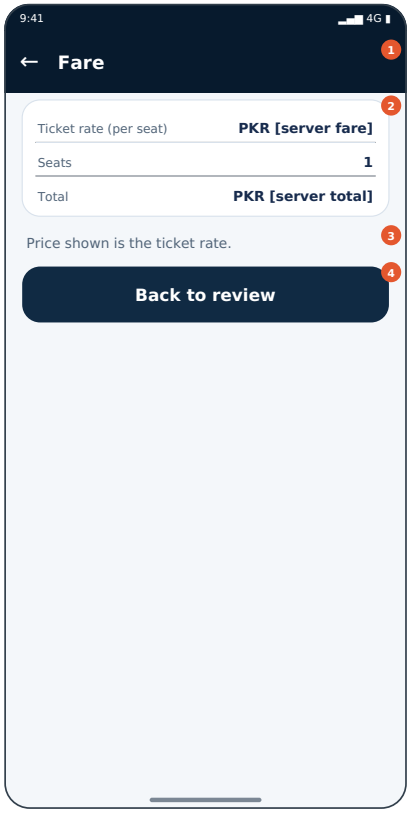

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Shows ticket rate × seats only, with plain-language explanation.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Back to review (Button) → **P-060** Booking review

Android system Back: Back asks to confirm leaving; hold continues until expiry. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–196 dp	Full width, 16 dp margins	above fold
3	Body text	196–229 dp	Full width, 16 dp margins	above fold
4	Button	229–291 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Fare	Deep navy #071A2D, white 16sp bold	Per state	Fare	Yes	Always in this state
2	C02 Key-value card	80–196 dp	328×116 dp	Ticket rate (per seat): PKR [server fare]; Seats: 1; Total: PKR [server total]	White card, 30dp rows, label grey / value bold	—	Ticket rate (per seat): PKR [server fare	No	Always in this state
3	C03 Body text	196–229 dp	328×33 dp	Price shown is the ticket rate.	12–14sp secondary text	—	Price shown is the ticket rate.	No	Always in this state
4	C04 Button	229–291 dp	328×62 dp	Back to review جائزہ پر واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back to review, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Fare	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Ticket rate (per seat): PKR [server fare]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Seats: 1	سیٹیں	Needs native review
2	Total: PKR [server total]	کل	Needs native review
3	Price shown is the ticket rate.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Back to review	جائزہ پر واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
4	Button: Back to review	≥48 dp	Enabled	Navigate to **P-060** Booking review	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Ticket rate (per seat)	PKR [server fare]	Server-derived	Required	Show “Not available” if missing; never blank/invented
Seats	1	Server-derived	Required	Show “Not available” if missing; never blank/invented
Total	PKR [server total]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Shows ticket rate × seats only, with plain-language explanation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E15 Fare differs from earlier display	Banner or full screen **P-062** Fare changed — acknowledge	The fare has changed — The ticket rate is now PKR [server fare]. Review before continuing.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_booking_quote (read)
Inputs	hold id
Server checks / RLS	ticket rate for seats (ticket rate only — no toll/highway/luggage fee); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E14, E15, E16, E17
Retry / idempotency	Safe read
Offline	Blocked
Cache	Short TTL

14. Security, privacy & safety

No card numbers stored/logged; provider handoff only via configured methods; amounts from server quote. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Amounts large and high-contrast; method as icon + text; status icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. No additional fee lines of any kind
2. Ticket rate only; no toll/highway/luggage lines
3. Unknown payment never offers “pay again”
4. Success shown only after server confirms
5. Back during handoff is safe
6. Hold expiry during payment handled
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-060 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-062 CONFIRMED P0 v2.0

Fare changed — acknowledge

کرایہ تبدیل

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.fare_changed`

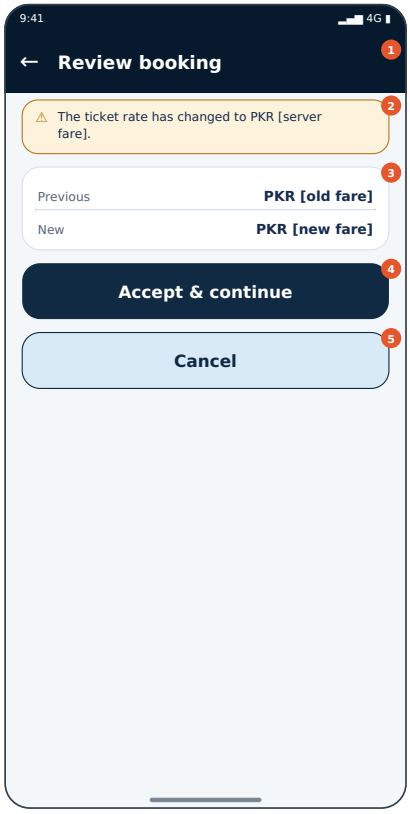

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server fare differs from displayed; require explicit acknowledgement.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Accept & continue (Button) → **P-060** Booking review
- Cancel (Button) → **P-031** Available journeys — premium cards

Android system Back: Back asks to confirm leaving; hold continues until expiry. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Key-value card	140–226 dp	Full width, 16 dp margins	above fold
4	Button	226–288 dp	Full width, 16 dp margins	above fold
5	Button	288–350 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Review booking	Deep navy #071A2D, white 16sp bold	Per state	Review booking	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	The ticket rate has changed to PKR [server fare].	Tinted background + border + icon + text (never colour alone)	—	The ticket rate has changed to PKR [serv	No	Always in this state
3	C03 Key-value card	140–226 dp	328×86 dp	Previous: PKR [old fare]; New: PKR [new fare]	White card, 30dp rows, label grey / value bold	—	Previous: PKR [old fare]	No	Always in this state
4	C04 Button	226–288 dp	328×62 dp	Accept & continue قبول کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Accept & continue, button	Yes	Always in this state
5	C05 Button	288–350 dp	328×62 dp	Cancel منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Review booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	The ticket rate has changed to PKR [server fare].	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Previous: PKR [old fare]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	New: PKR [new fare]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Accept & continue	قبول کریں	Needs native review
5	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E15 copy; no false success	Pay disabled after tap; same idempotency key until status known.
4	Button: Accept & continue	≥48 dp	Enabled	Navigate to **P-060** Booking review	Instant	—	E15 copy; no false success	Pay disabled after tap; same idempotency key until status known.
5	Button: Cancel	≥48 dp	Enabled	Navigate to **P-031** Available journeys — premium cards	Instant	—	E15 copy; no false success	Pay disabled after tap; same idempotency key until status known.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Previous	PKR [old fare]	Server-derived	Required	Show “Not available” if missing; never blank/invented
New	PKR [new fare]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server fare differs from displayed; require explicit acknowledgement.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E15 Fare differs from earlier display	Banner or full screen **P-062** Fare changed — acknowledge	The fare has changed — The ticket rate is now PKR [server fare]. Review before continuing.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_booking_quote (read)
Inputs	hold id
Server checks / RLS	ticket rate for seats (ticket rate only — no toll/highway/luggage fee); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E15
Retry / idempotency	Safe read
Offline	Blocked
Cache	Short TTL

14. Security, privacy & safety

No card numbers stored/logged; provider handoff only via configured methods; amounts from server quote. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Amounts large and high-contrast; method as icon + text; status icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Ticket rate only; no toll/highway/luggage lines
2. Unknown payment never offers “pay again”
3. Success shown only after server confirms
4. Back during handoff is safe
5. Hold expiry during payment handled
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-031, P-060 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-063 CONFIRMED P0 v2.0

Submitting booking

بکنگ جمع ہو رہی ہے

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.submit`

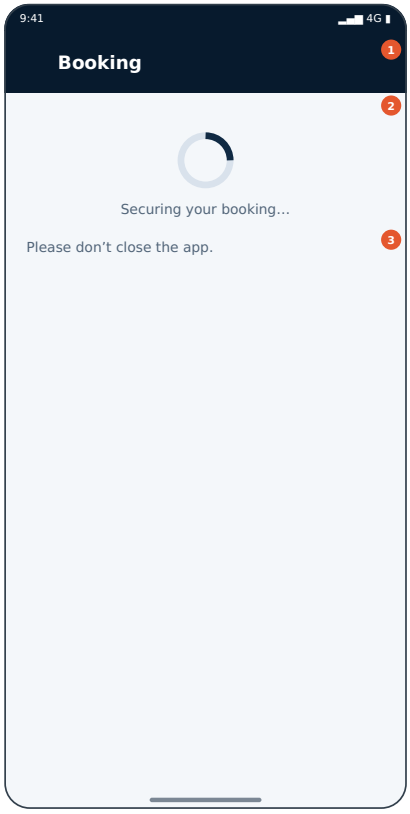

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Request in flight; screen locked against duplicate actions.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Body text	200–232 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Booking	Deep navy #071A2D, white 16sp bold	Per state	Booking	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Securing your booking...	Navy arc on grey ring	—	Securing your booking...	No	Always in this state
3	C03 Body text	200–232 dp	328×32 dp	Please don't close the app.	12–14sp secondary text	—	Please don't close the app.	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Booking	بکنگ	Needs native review
2	Securing your booking...	Translation review required	—
3	Please don't close the app.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Request in flight; screen locked against duplicate actions.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	create_booking (write)
Inputs	hold id, passenger details, quote id, idempotency key
Server checks / RLS	hold valid, fare unchanged, details valid; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E05, E17
Retry / idempotency	Required idempotency key
Offline	Blocked; never create pending-confirmed locally
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back disabled/ignored with message while in flight (PROPOSED)
2. Never shows success without server confirmation
3. Back never resubmits a write
4. App kill/relaunch restores correct status
5. Urdu RTL copy matches catalogue
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-064 CONFIRMED P0 v2.0

Reservation conflict

بکنگ میں تصادم

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.res_conflict`

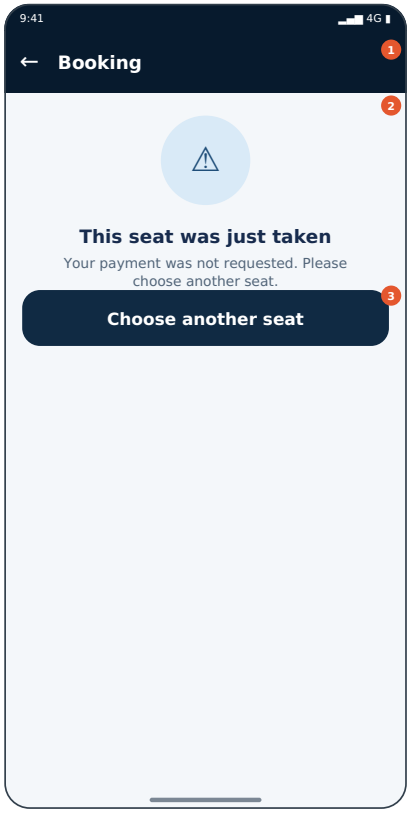

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server rejects due to seat/hold conflict.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Choose another seat (Button) → **P-047** Seat map — available

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Booking	Deep navy #071A2D, white 16sp bold	Per state	Booking	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	This seat was just taken; Your payment was not requested. Please choose another seat.	Light-blue circle icon + 16sp title + 12sp body	—	This seat was just taken	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Choose another seat دوسری سیٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Choose another seat, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Booking	بکنگ	Needs native review
2	This seat was just taken	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your payment was not requested. Please choose another seat.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Choose another seat	دوسری سیٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E13 copy; no false success	Retry debounced.
3	Button: Choose another seat	≥48 dp	Enabled	Navigate to **P-047** Seat map — available	Inline spinner; other controls locked	Server-confirmed result only	E13 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server rejects due to seat/hold conflict.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E13 Seat taken by another user	Banner or full screen **ERR-010** Conflicting seat reservation	Seat no longer available — Someone else took this seat. Please choose another.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	create_booking (write)
Inputs	hold id, passenger details, quote id, idempotency key
Server checks / RLS	hold valid, fare unchanged, details valid; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E13
Retry / idempotency	Required idempotency key
Offline	Blocked; never create pending-confirmed locally
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-047 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-065 CONFIRMED P0 v2.0

Server rejected booking

سرور نے بکنگ مسترد کی

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.reject`

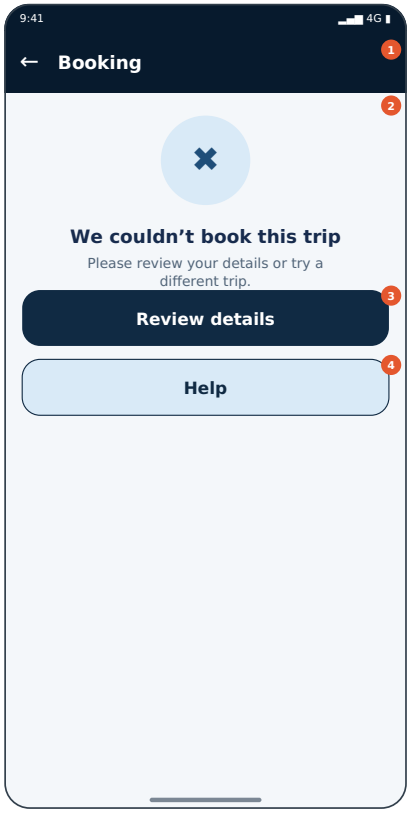

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Booking refused (validation/eligibility); safe message.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Review details (Button) → **P-060** Booking review
- Help (Button) → **P-139** Help hub

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Booking	Deep navy #071A2D, white 16sp bold	Per state	Booking	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	We couldn’t book this trip; Please review your details or try a different trip.	Light-blue circle icon + 16sp title + 12sp body	—	We couldn’t book this trip	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Review details تفصیلات دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Review details, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Help مدد	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Help, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Booking	بکنگ	Needs native review
2	We couldn’t book this trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please review your details or try a different trip.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Review details	تفصیلات دیکھیں	Needs native review
4	Help	مدد	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Loading	Success	Failure	Dup-tap /

				Tap result				retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E27, E06 copy; no false success	Retry debounced.
3	Button: Review details	≥48 dp	Enabled	Navigate to **P-060** Booking review	Inline spinner; other controls locked	Server-confirmed result only	E27, E06 copy; no false success	Retry debounced.
4	Button: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Inline spinner; other controls locked	Server-confirmed result only	E27, E06 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Booking refused (validation/eligibility); safe message.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	create_booking (write)
Inputs	hold id, passenger details, quote id, idempotency key
Server checks / RLS	hold valid, fare unchanged, details valid; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E27, E06
Retry / idempotency	Required idempotency key
Offline	Blocked; never create pending-confirmed locally
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-060, P-139 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-066 CONFIRMED P0 v2.0

App closed mid-booking — recovery

بکنگ کے دوران ایپ بند — بحالی

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.mid_recover`

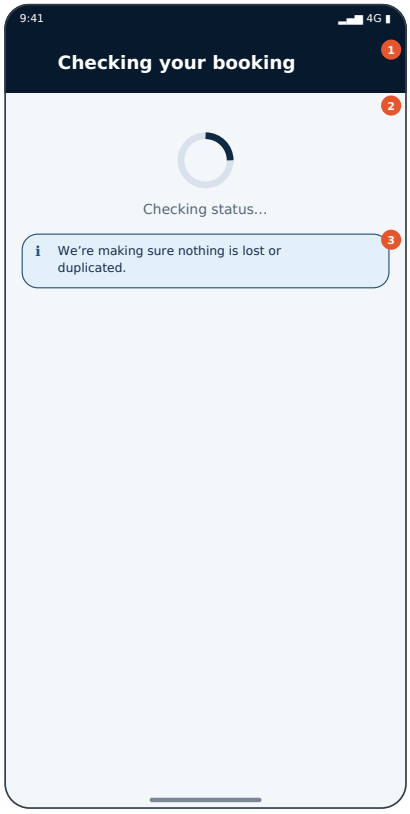

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Relaunch during booking: re-check booking/payment status with the server before showing any action.

Login: **Per flow** · Incoming screens: ERR-004


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Banner	200–260 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Checking your booking	Deep navy #071A2D, white 16sp bold	Per state	Checking your booking	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Checking status...	Navy arc on grey ring	—	Checking status...	No	Always in this state
3	C03 Banner	200–260 dp	328×60 dp	We're making sure nothing is lost or duplicated.	Tinted background + border + icon + text (never colour alone)	—	We're making sure nothing is lost or dup	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Checking your booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Checking status...	Translation review required	—
3	We're making sure nothing is lost or duplicated.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Relaunch during booking: re-check booking/payment status with the server before showing any action.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E23 Relaunch after interruption	Banner or full screen **SH-020** Session recovery after process death	Welcome back — We restored where you left off. Checking the latest status…
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_booking_status (read)
Inputs	booking id
Server checks / RLS	server-confirmed status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E23, E04
Retry / idempotency	Safe read
Offline	Show cached with freshness label
Cache	Status cache labelled

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. No automatic re-submission
2. Outcome routes to confirmed / pending / hold expired / failed screens
3. Never shows success without server confirmation
4. Back never resubmits a write
5. App kill/relaunch restores correct status
6. Urdu RTL copy matches catalogue
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: ERR-004


Open decisions: None specific (see Part 16).

P-067 CONFIRMED P0 v2.0

Booking created — payment pending

بکنگ بنی — ادائیگی زیر التوا

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.bk_pay_pending`

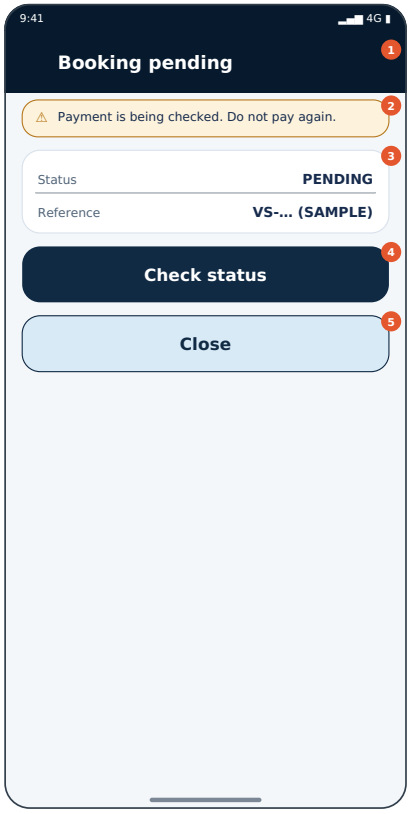

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Booking exists but payment not yet confirmed; show pending (not confirmed).

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Check status (Button) → **P-076** Payment status re-check
- Close (Button) → **P-094** My Trips — Upcoming

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Key-value card	125–211 dp	Full width, 16 dp margins	above fold
4	Button	211–273 dp	Full width, 16 dp margins	above fold
5	Button	273–335 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Booking pending	Deep navy #071A2D, white 16sp bold	Per state	Booking pending	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Payment is being checked. Do not pay again.	Tinted background + border + icon + text (never colour alone)	—	Payment is being checked. Do not pay aga	No	Always in this state
3	C03 Key-value card	125–211 dp	328×86 dp	Status: PENDING; Reference: VS-... (SAMPLE)	White card, 30dp rows, label grey / value bold	—	Status: PENDING	No	Always in this state
4	C04 Button	211–273 dp	328×62 dp	Check status حالت چیک	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Check status, button	Yes	Always in this state
5	C05 Button	273–335 dp	328×62 dp	Close بند کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Close, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Booking pending	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Payment is being checked. Do not pay again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Status: PENDING	حالت	Needs native review
3	Reference: VS-... (SAMPLE)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Check status	حالت چیک	Needs native review
5	Close	بند کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
4	Button: Check status	≥48 dp	Enabled	Navigate to **P-076** Payment status re-check	Instant	—	E16, E30 copy; no false success	Status check button debounced; no write retries.
5	Button: Close	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E16, E30 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	PENDING	Server-derived	Required	Show “Not available” if missing; never blank/invented
Reference	VS-… (SAMPLE)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Booking exists but payment not yet confirmed; show pending (not confirmed).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_payment_status (read)
Inputs	booking id / payment attempt id
Server checks / RLS	authoritative payment + booking state (reconciliation); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E16, E30
Retry / idempotency	Safe read
Offline	Blocked; show last known
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-076, P-094 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-068 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Payment method

ادائیگی کا طریقہ

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.paym`

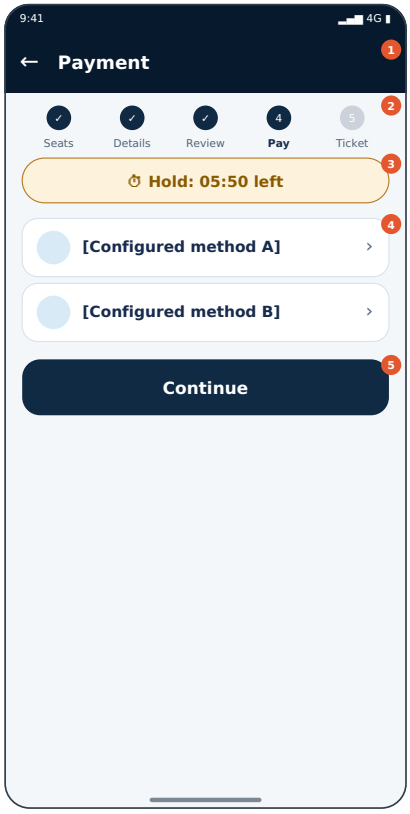

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Show only configured methods from backend; names only if verified.

Login: **Yes** · Incoming screens: P-060, P-073, P-074


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **P-070** Payment handoff

Android system Back: Back asks to confirm leaving; hold continues until expiry. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Step indicator	80–132 dp	Full width, 16 dp margins	above fold
3	Hold timer banner	132–186 dp	Full width, 16 dp margins	above fold
4	List rows	186–312 dp	Full width, 16 dp margins	above fold
5	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment	Deep navy #071A2D, white 16sp bold	Per state	Payment	Yes	Always in this state
2	C02 Step indicator	80–132 dp	328×52 dp	Seats; Details; Review; Pay; Ticket	Numbered dots, current bold	—	Seats	No	Always in this state
3	C03 Hold timer banner	132–186 dp	328×54 dp	Hold: 05:50 left	Amber pill with clock icon and server-time countdown	—	Hold: 05:50 left	No	Always in this state
4	C04 List rows	186–312 dp	328×126 dp	[Configured method A]; [Configured method B]	White rows radius 14dp, 52dp high, chevron/check	Per state	[Configured method A]	Yes	Always in this state
5	C05 Button	312–374 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment	ادائیگی	Needs native review
2	Seats	سیٹیں	Needs native review
2	Details	تفصیلات	Needs native review
2	Review	جائزہ	Needs native review
2	Pay	ادائیگی	Needs native review

2	Ticket	ٹکٹ	Needs native review
3	Hold: 05:50 left	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	[Configured method A]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	[Configured method B]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
5	Button: Continue	≥48 dp	Enabled	Navigate to **P-070** Payment handoff	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Show only configured methods from backend; names only if verified.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E15 Fare differs from earlier display	Banner or full screen **P-062** Fare changed — acknowledge	The fare has changed — The ticket rate is now PKR [server fare]. Review before continuing.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_payment_methods (read)
Inputs	—
Server checks / RLS	configured, enabled methods only; provider names shown only if verified; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E14, E15, E16, E17
Retry / idempotency	Safe read
Offline	Blocked
Cache	Config TTL

14. Security, privacy & safety

No card numbers stored/logged; provider handoff only via configured methods; amounts from server quote. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Amounts large and high-contrast; method as icon + text; status icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Ticket rate only; no toll/highway/luggage lines

2. Unknown payment never offers “pay again”
3. Success shown only after server confirms
4. Back during handoff is safe
5. Hold expiry during payment handled
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-070 · Incoming: P-060, P-073, P-074


Open decisions: OD-02 (see Part 16).

P-069 CONFIRMED NEEDS CONFIRMATION P0 v2.0

No payment methods configured

کوئی ادائیگی کا طریقہ نہیں

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.paym_none`

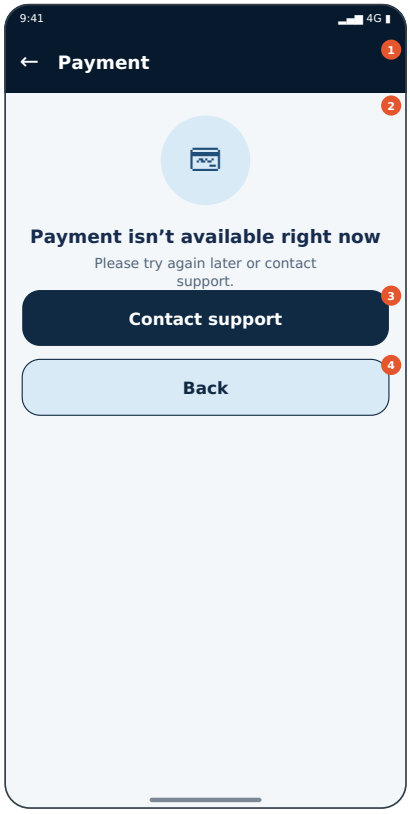

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No enabled methods; booking cannot be paid.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Contact support (Button) → **P-143** Contact support
- Back (Button) → previous screen (system Back)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment	Deep navy #071A2D, white 16sp bold	Per state	Payment	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Payment isn’t available right now; Please try again later or contact support.	Light-blue circle icon + 16sp title + 12sp body	—	Payment isn’t available right now	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment	ادائیگی	Needs native review
2	Payment isn’t available right now	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please try again later or contact support.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Contact support	سپورٹ	Needs native review
4	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Loading	Success	Failure

				Tap result				Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Retry debounced.
3	Button: Contact support	≥48 dp	Enabled	Navigate to **P-143** Contact support	Instant	—	E12 copy; no false success	Retry debounced.
4	Button: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E12 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No enabled methods; booking cannot be paid.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_payment_methods (read)
Inputs	—
Server checks / RLS	configured, enabled methods only; provider names shown only if verified; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E12
Retry / idempotency	Safe read
Offline	Blocked
Cache	Config TTL

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-143 · Incoming: Entry point / system-launched


Open decisions: OD-02 (see Part 16).

P-070 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Payment handoff

ادائیگی کی منتقلی

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pay_hand`

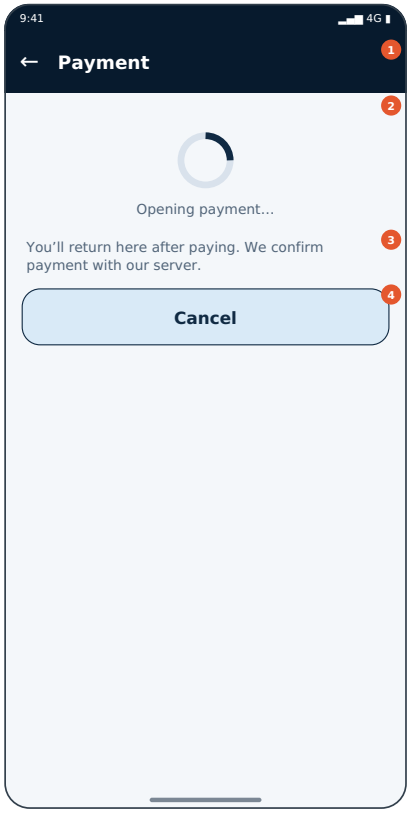

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Hand off to configured provider flow; return handled safely.

Login: **Yes** · Incoming screens: P-068


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Cancel (Button) → **P-074** Payment cancelled by user

Android system Back: Back asks to confirm leaving; hold continues until expiry. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Body text	200–249 dp	Full width, 16 dp margins	above fold
4	Button	249–311 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment	Deep navy #071A2D, white 16sp bold	Per state	Payment	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Opening payment...	Navy arc on grey ring	—	Opening payment...	No	Always in this state
3	C03 Body text	200–249 dp	328×49 dp	You'll return here after paying. We confirm payment with our server.	12–14sp secondary text	—	You'll return here after paying. We conf	No	Always in this state
4	C04 Button	249–311 dp	328×62 dp	Cancel منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment	ادائیگی	Needs native review
2	Opening payment...	Translation review required	—
3	You'll return here after paying. We confirm payment with our server.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E04, E05 copy; no false success	Pay disabled after tap; same idempotency key until status known.

	Back							
4	Button: Cancel	≥48 dp	Enabled	Navigate to **P-074** Payment cancelled by user	Inline spinner; other controls locked	Server-confirmed result only	E04, E05 copy; no false success	Pay disabled after tap; same idempotency key until status known.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Hand off to configured provider flow; return handled safely.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	start_payment (write)
Inputs	booking id, method id, idempotency key
Server checks / RLS	booking pending, hold valid, method enabled; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E05, E17
Retry / idempotency	Required key; duplicate returns same attempt
Offline	Blocked
Cache	None

14. Security, privacy & safety

No card numbers stored/logged; provider handoff only via configured methods; amounts from server quote. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Amounts large and high-contrast; method as icon + text; status icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back during handoff goes to pending check, never to a second payment
2. Ticket rate only; no toll/highway/luggage lines
3. Unknown payment never offers “pay again”
4. Success shown only after server confirms
5. Back during handoff is safe
6. Hold expiry during payment handled
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-074 · Incoming: P-068


Open decisions: None specific (see Part 16).

P-071 CONFIRMED P0 v2.0

Payment confirmed by server

ادائیگی کی تصدیق

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pay_ok`

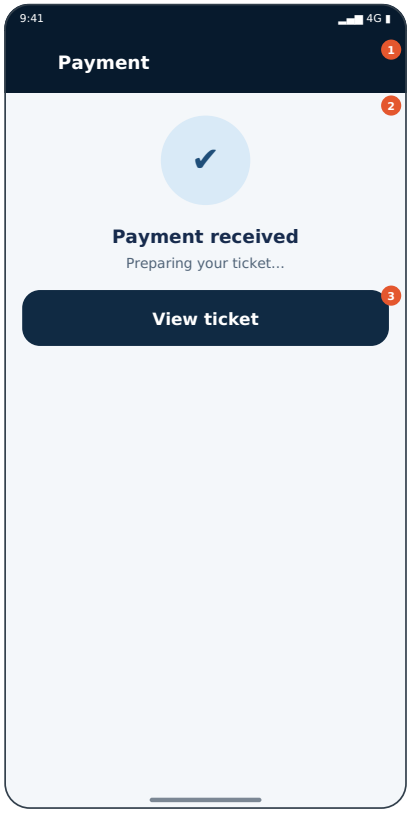

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Shown only after authoritative server confirmation.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- View ticket (Button) → **P-078** Booking confirmed

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment	Deep navy #071A2D, white 16sp bold	Per state	Payment	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Payment received; Preparing your ticket...	Light-blue circle icon + 16sp title + 12sp body	—	Payment received	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	View ticket ٹکٹ دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View ticket, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment	ادائیگی	Needs native review
2	Payment received	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Preparing your ticket...	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View ticket	ٹکٹ دیکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: View ticket	≥48 dp	Enabled	Navigate to **P-078** Booking confirmed	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Shown only after authoritative server confirmation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_payment_status (read)
Inputs	booking id / payment attempt id
Server checks / RLS	authoritative payment + booking state (reconciliation); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Blocked; show last known
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shown on client-side success callback alone
2. Never shows success without server confirmation
3. Back never resubmits a write
4. App kill/relaunch restores correct status
5. Urdu RTL copy matches catalogue
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-078 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-072 CONFIRMED P0 v2.0

Payment pending

ادائیگی زیر التوا

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pay_pending`

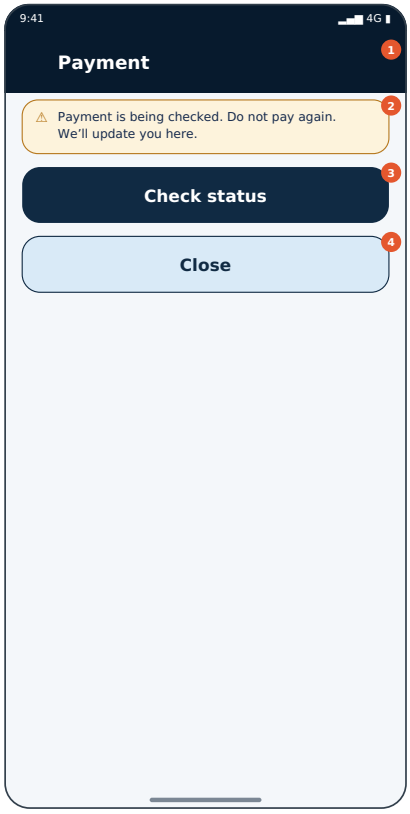

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Provider/server not yet reconciled; user told not to pay again.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Check status (Button) → **P-076** Payment status re-check
- Close (Button) → **P-094** My Trips — Upcoming

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment	Deep navy #071A2D, white 16sp bold	Per state	Payment	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Payment is being checked. Do not pay again. We'll update you here.	Tinted background + border + icon + text (never colour alone)	—	Payment is being checked. Do not pay aga	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Check status حالت چیک	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Check status, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	Close بند کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Close, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment	ادائیگی	Needs native review
2	Payment is being checked. Do not pay again. We'll update you here.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Check status	حالت چیک	Needs native review
4	Close	بند کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Check	≥48 dp	Enabled	Navigate to **P-076** Payment status re-	Instant	—	E16 copy; no false	Status check button debounced; no write

	status			check			success	retries.
4	Button: Close	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E16 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Provider/server not yet reconciled; user told not to pay again.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_payment_status (read)
Inputs	booking id / payment attempt id
Server checks / RLS	authoritative payment + booking state (reconciliation); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E16
Retry / idempotency	Safe read
Offline	Blocked; show last known
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-076, P-094 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-073 CONFIRMED P0 v2.0

Payment failed

ادائیگی ناکام

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pay_fail`

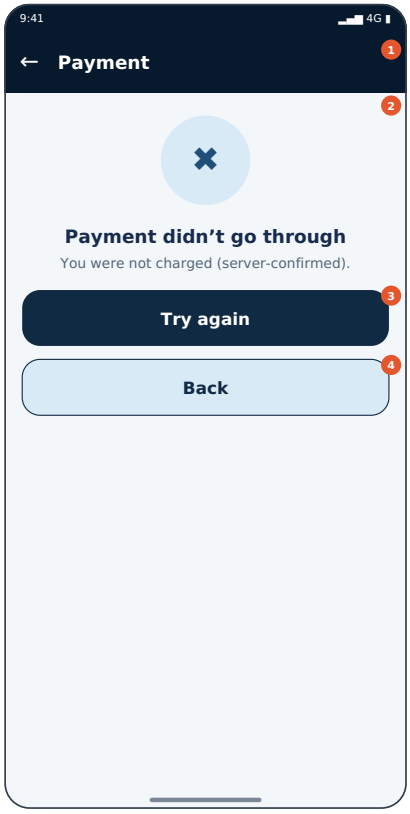

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server confirms failure; safe retry allowed.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **P-068** Payment method
- Back (Button) → **P-060** Booking review

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment	Deep navy #071A2D, white 16sp bold	Per state	Payment	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Payment didn’t go through; You were not charged (server-confirmed).	Light-blue circle icon + 16sp title + 12sp body	—	Payment didn’t go through	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment	ادائیگی	Needs native review
2	Payment didn’t go through	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You were not charged (server-confirmed).	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش	Needs native review
4	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E06 copy; no false success	Retry debounced.
3	Button: Try again	≥48 dp	Enabled	Navigate to **P-068** Payment method	Instant	—	E06 copy; no false success	Retry debounced.
4	Button: Back	≥48 dp	Enabled	Navigate to **P-060** Booking review	Instant	—	E06 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server confirms failure; safe retry allowed.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_payment_status (read)
Inputs	booking id / payment attempt id
Server checks / RLS	authoritative payment + booking state (reconciliation); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E06
Retry / idempotency	Safe read
Offline	Blocked; show last known
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-060, P-068 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-074 CONFIRMED P1 v2.0

Payment cancelled by user

ادائیگی منسوخ

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pay_cancel`

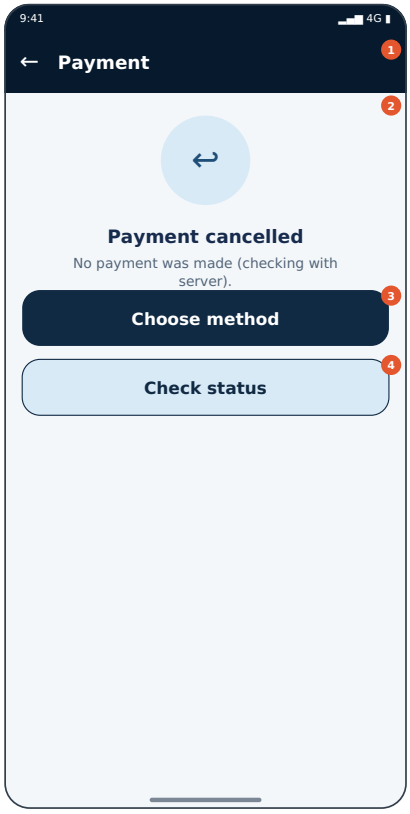

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

User cancelled at provider; status verified before allowing retry.

Login: **Per flow** · Incoming screens: P-070


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Choose method (Button) → **P-068** Payment method
- Check status (Button) → **P-076** Payment status re-check

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment	Deep navy #071A2D, white 16sp bold	Per state	Payment	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Payment cancelled; No payment was made (checking with server).	Light-blue circle icon + 16sp title + 12sp body	—	Payment cancelled	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Choose method طریقہ منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Choose method, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Check status حالت چیک	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Check status, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment	ادائیگی	Needs native review
2	Payment cancelled	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	No payment was made (checking with server).	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Choose method	طریقہ منتخب کریں	Needs native review
4	Check status	حالت چیک	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E28 copy; no false success	Retry debounced.
3	Button: Choose method	≥48 dp	Enabled	Navigate to **P-068** Payment method	Instant	—	E28 copy; no false success	Retry debounced.
4	Button: Check status	≥48 dp	Enabled	Navigate to **P-076** Payment status re-check	Instant	—	E28 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	User cancelled at provider; status verified before allowing retry.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_payment_status (read)
Inputs	booking id / payment attempt id
Server checks / RLS	authoritative payment + booking state (reconciliation); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E28
Retry / idempotency	Safe read
Offline	Blocked; show last known
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-068, P-076 · Incoming: P-070


Open decisions: None specific (see Part 16).

P-075 CONFIRMED P0 v2.0

Payment timeout — unknown status

ادائیگی ٹائم آؤٹ — حالت نامعلوم

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pay_unknown`

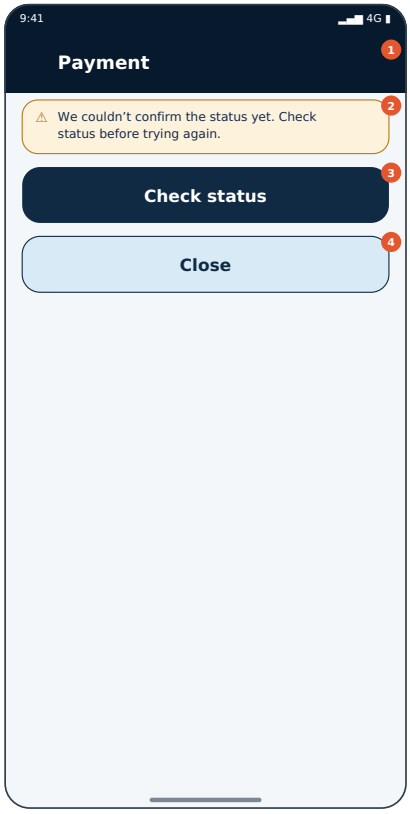

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Timeout leaves outcome unknown; neutral copy; no retry of payment.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Check status (Button) → **P-076** Payment status re-check
- Close (Button) → **P-094** My Trips — Upcoming

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment	Deep navy #071A2D, white 16sp bold	Per state	Payment	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	We couldn't confirm the status yet. Check status before trying again.	Tinted background + border + icon + text (never colour alone)	—	We couldn't confirm the status yet. Chec	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Check status حالت چیک	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Check status, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	Close بند کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Close, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment	ادائیگی	Needs native review
2	We couldn't confirm the status yet. Check status before trying again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Check status	حالت چیک	Needs native review
4	Close	بند کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Check	≥48 dp	Enabled	Navigate to **P-076** Payment status re-	Instant	—	E05, E16 copy; no false	Status check button debounced; no write

	status			check			success	retries.
4	Button: Close	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E05, E16 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Timeout leaves outcome unknown; neutral copy; no retry of payment.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_payment_status (read)
Inputs	booking id / payment attempt id
Server checks / RLS	authoritative payment + booking state (reconciliation); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E05, E16
Retry / idempotency	Safe read
Offline	Blocked; show last known
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. No “Pay again” anywhere on this screen
2. Never shows success without server confirmation
3. Back never resubmits a write
4. App kill/relaunch restores correct status
5. Urdu RTL copy matches catalogue
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-076, P-094 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-076 CONFIRMED P0 v2.0

Payment status re-check

ادائیگی کی حالت دوبارہ چیک

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.pay_recheck`

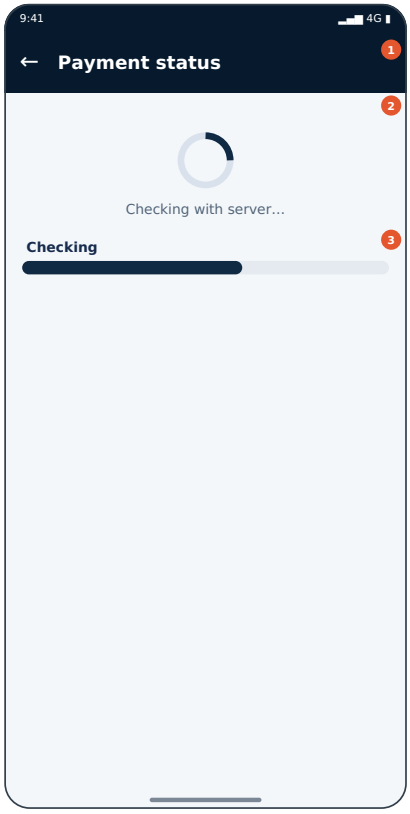

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Poll/recheck authoritative status; routes to the correct outcome screen.

Login: **Per flow** · Incoming screens: ERR-011, P-067, P-072, P-074, P-075


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Progress bar	200–256 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Payment status	Deep navy #071A2D, white 16sp bold	Per state	Payment status	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Checking with server…	Navy arc on grey ring	—	Checking with server…	No	Always in this state
3	C03 Progress bar	200–256 dp	328×56 dp	Checking	12dp track	—	Checking	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Payment status	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Checking with server…	Translation review required	—
3	Checking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E16 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Poll/recheck authoritative status; routes to the correct outcome screen.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_payment_status (read)
Inputs	booking id / payment attempt id
Server checks / RLS	authoritative payment + booking state (reconciliation); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E16
Retry / idempotency	Safe read
Offline	Blocked; show last known
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: ERR-011, P-067, P-072, P-074, P-075


Open decisions: None specific (see Part 16).

P-077 PROPOSED NEEDS CONFIRMATION P2 v2.0

Counter / cash flow (if configured)

کاؤنٹر / نقد (اگر دستیاب)

Role: **Passenger** · Family: F4 Seat map, details, booking & payment · Key: `p.counter`

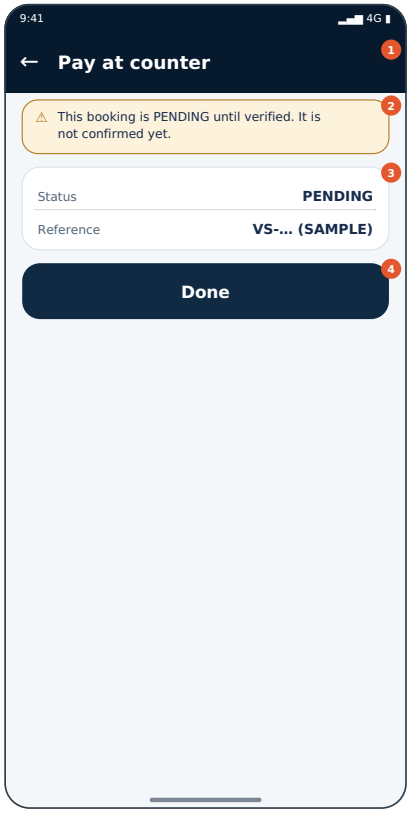

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Counter booking remains pending until server verifies inventory; never confirmed offline.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Done (Button) → **P-094** My Trips — Upcoming

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Key-value card	140–226 dp	Full width, 16 dp margins	above fold
4	Button	226–288 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Pay at counter	Deep navy #071A2D, white 16sp bold	Per state	Pay at counter	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	This booking is PENDING until verified. It is not confirmed yet.	Tinted background + border + icon + text (never colour alone)	—	This booking is PENDING until verified.	No	Always in this state
3	C03 Key-value card	140–226 dp	328×86 dp	Status: PENDING; Reference: VS-... (SAMPLE)	White card, 30dp rows, label grey / value bold	—	Status: PENDING	No	Always in this state
4	C04 Button	226–288 dp	328×62 dp	Done مکمل	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Done, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Pay at counter	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This booking is PENDING until verified. It is not confirmed yet.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Status: PENDING	حالت	Needs native review
3	Reference: VS-... (SAMPLE)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Done	مکمل	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same as system	Instant	—	E30 copy: no false	Status check button debounced: no write

	Back			Back)			success	retries.
4	Button: Done	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E30 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	PENDING	Server-derived	Required	Show “Not available” if missing; never blank/invented
Reference	VS-… (SAMPLE)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Counter booking remains pending until server verifies inventory; never confirmed offline.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_booking_status (read)
Inputs	booking id
Server checks / RLS	server-confirmed status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E30
Retry / idempotency	Safe read
Offline	Show cached with freshness label
Cache	Status cache labelled

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-094 · Incoming: Entry point / system-launched


Open decisions: OD-02 (see Part 16).

P-078 CONFIRMED P0 v2.0

Booking confirmed

بکنگ کنفرم

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.confirmed`

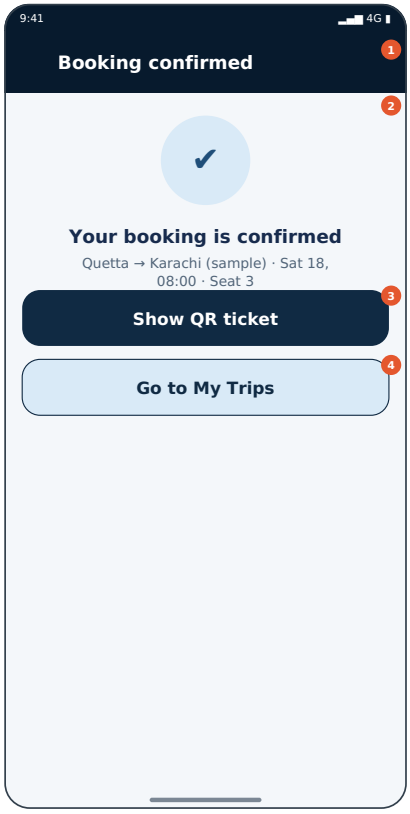

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Shown only after server confirms booking; links to QR ticket.

Login: **Yes** · Incoming screens: P-071


3. Exit & navigation map

- Show QR ticket (Button) → **P-084** QR ticket — confirmed
- Go to My Trips (Button) → **P-094** My Trips — Upcoming

Android system Back: Back returns to ticket list/trip. **Bottom nav:** Per origin (My Tickets tab active). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Booking confirmed	Deep navy #071A2D, white 16sp bold	Per state	Booking confirmed	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Your booking is confirmed; Quetta → Karachi (sample) · Sat 18, 08:00 · Seat 3	Light-blue circle icon + 16sp title + 12sp body	—	Your booking is confirmed	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Show QR ticket کیو آر ٹکٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Show QR ticket, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Go to My Trips میرے سفر	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Go to My Trips, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Booking confirmed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your booking is confirmed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta → Karachi (sample) · Sat 18, 08:00 · Seat 3	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Show QR ticket	کیو آر ٹکٹ	Needs native review
4	Go to My Trips	میرے سفر	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Show QR ticket	≥48 dp	Enabled	Navigate to **P-084** QR ticket — confirmed	Instant	—	E01, E03 copy; no false success	Share/open actions debounced.

4	Button: Go to My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Share/open actions debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Shown only after server confirms booking; links to QR ticket.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_ticket (read)
Inputs	booking id
Server checks / RLS	booking confirmed; QR payload only if confirmed; owner check; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E11, E30
Retry / idempotency	Safe read
Offline	Cached confirmed ticket shown with freshness; pending never shows QR
Cache	Secure local cache (PROPOSED)

14. Security, privacy & safety

QR shown only for server-confirmed bookings; share must not expose unnecessary personal data. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

QR large, high contrast, status text beside it; brightness boost with restore. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never reachable without server-confirmed state
2. Pending never shows QR
3. Confirmed QR scannable at brightness
4. Offline cached ticket shows freshness
5. Urdu RTL: QR and IDs not mirrored
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-084, P-094 · Incoming: P-071


Open decisions: None specific (see Part 16).

P-079 CONFIRMED P0 v2.0

Pending confirmation

تصدیق زیرِ التوا

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.pending`

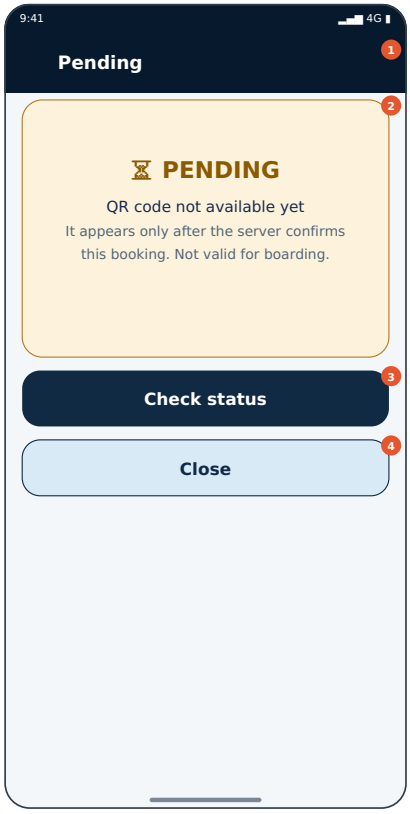

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Booking waiting for server confirmation; no QR.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Check status (Button) → stays on screen (action)
- Close (Button) → **P-094** My Trips — Upcoming

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	QR ticket panel	80–322 dp	Full width, 16 dp margins	above fold
3	Button	322–384 dp	Full width, 16 dp margins	above fold
4	Button	384–446 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Pending	Deep navy #071A2D, white 16sp bold	Per state	Pending	Yes	Always in this state
2	C02 QR ticket panel	80–322 dp	328×242 dp	QR withheld — PENDING	White panel, black QR, status chip	—	QR withheld — PENDING	No	Always in this state
3	C03 Button	322–384 dp	328×62 dp	Check status حالت چیک	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Check status, button	Yes	Always in this state
4	C04 Button	384–446 dp	328×62 dp	Close بند کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Close, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Pending	زیرِ التوا	Needs native review
3	Check status	حالت چیک	Needs native review
4	Close	بند کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Check status	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E30 copy; no false success	Status check button debounced; no write retries.
4	Button: Close	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E30 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Booking waiting for server confirmation; no QR.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_booking_status (read)
Inputs	booking id
Server checks / RLS	server-confirmed status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E30
Retry / idempotency	Safe read
Offline	Show cached with freshness label
Cache	Status cache labelled

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-094 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-080 CONFIRMED P0 v2.0

Confirmation failed

تصدیق ناکام

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.confirm_fail`

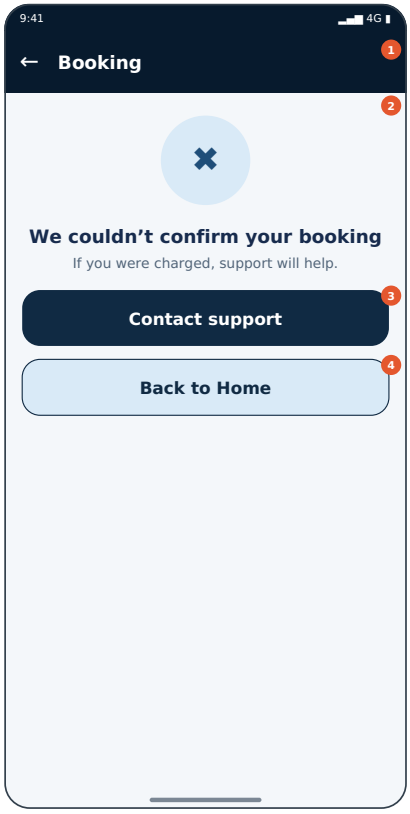

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server could not confirm booking; explains refund/next steps if payment taken.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Contact support (Button) → **P-105** Ticket support
- Back to Home (Button) → **P-001** Passenger Home — default

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Booking	Deep navy #071A2D, white 16sp bold	Per state	Booking	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	We couldn’t confirm your booking; If you were charged, support will help.	Light-blue circle icon + 16sp title + 12sp body	—	We couldn’t confirm your booking	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Back to Home ہوم	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back to Home, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Booking	بکنگ	Needs native review
2	We couldn’t confirm your booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	If you were charged, support will help.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Contact support	سپورٹ	Needs native review
4	Back to Home	ہوم	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Loading	Success	Failure

				Tap result				Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E06, E16 copy; no false success	Retry debounced.
3	Button: Contact support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E06, E16 copy; no false success	Retry debounced.
4	Button: Back to Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E06, E16 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server could not confirm booking; explains refund/next steps if payment taken.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_booking_status (read)
Inputs	booking id
Server checks / RLS	server-confirmed status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E06, E16
Retry / idempotency	Safe read
Offline	Show cached with freshness label
Cache	Status cache labelled

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-105 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-081 CONFIRMED P0 v2.0

My Tickets

میرے ٹکٹ

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.tickets`

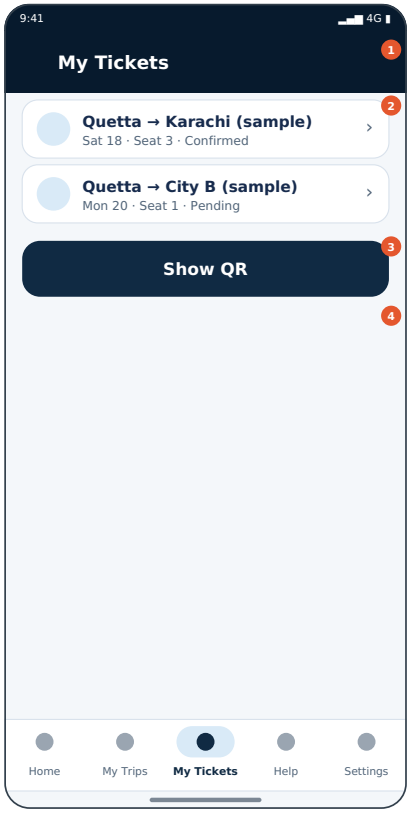

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Tab: confirmed tickets list with quick Show QR.

Login: **Per flow** · Incoming screens: P-001, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-082, P-083, P-093, P-094, P-095, P-096, P-097, P-098, P-099, P-139, P-150, P-159, SH-021


3. Exit & navigation map

- Show QR (Button) → **P-084** QR ticket — confirmed
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–206 dp	Full width, 16 dp margins	above fold
3	Button	206–268 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	268–268 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Tickets	Deep navy #071A2D, white 16sp bold	Per state	My Tickets	Yes	Always in this state
2	C02 List rows	80–206 dp	328×126 dp	Quetta → Karachi (sample)|Sat 18 · Seat 3 · Confirmed; Quetta → City B (sample)|Mon 20 · Seat 1 · Pending	White rows radius 14dp, 52dp high, chevron/check	Per state	Quetta → Karachi (sample)|Sat 18 · Seat	Yes	Always in this state
3	C03 Button	206–268 dp	328×62 dp	Show QR کیو آر دکھائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Show QR, button	Yes	Always in this state
4	C04 Bottom navigation	268–268 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Tickets	میرے ٹکٹ	Needs native review
2	Quetta → Karachi (sample)|Sat 18 · Seat 3 · Confirmed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta → City B (sample)|Mon 20 · Seat 1 · Pending	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Show QR	کیو آر دکھائیں	Needs native review
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review

4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Show QR	≥48 dp	Enabled	Navigate to **P-084** QR ticket — confirmed	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Tab: confirmed tickets list with quick Show QR.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_tickets (read)
Inputs	auth user
Server checks / RLS	owner-only rows (RLS); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pending tickets show Pending chip, no QR button
2. Pull-to-refresh works and shows timestamp
3. Empty and error states are distinct

4. Scroll position retained on Back
5. Urdu RTL row mirroring correct, numbers legible
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-084, P-094, P-139, P-150 · Incoming: P-001, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-082, P-083, P-093, P-094, P-095, P-096, P-097, P-098, P-099, P-139, P-150, P-159, SH-021


Open decisions: None specific (see Part 16).

P-082 CONFIRMED P1 v2.0

My Tickets — empty

میرے ٹکٹ — خالی

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.tickets_empty`

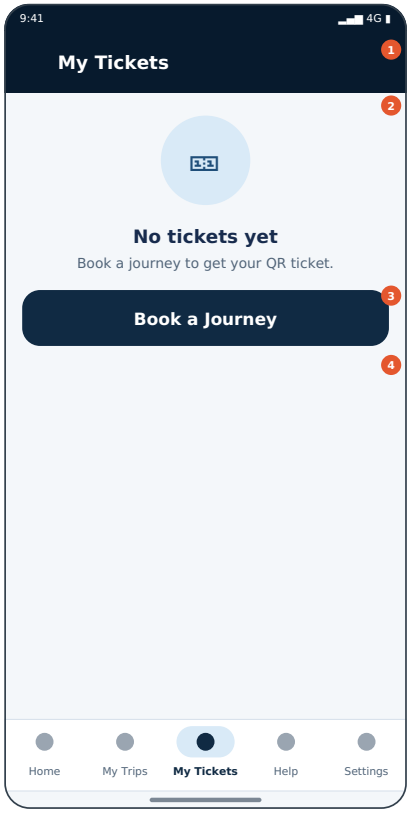

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No tickets yet.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Book a Journey (Button) → **P-017** Province / region selection
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	312–312 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Tickets	Deep navy #071A2D, white 16sp bold	Per state	My Tickets	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	No tickets yet; Book a journey to get your QR ticket.	Light-blue circle icon + 16sp title + 12sp body	—	No tickets yet	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Book a Journey سفر بُک کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Book a Journey, button	Yes	Always in this state
4	C04 Bottom navigation	312–312 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Tickets	میرے ٹکٹ	Needs native review
2	No tickets yet	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Book a journey to get your QR ticket.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Book a Journey	سفر بُک کریں	Needs native review
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review

4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Book a Journey	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No tickets yet.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_tickets (read)
Inputs	auth user
Server checks / RLS	owner-only rows (RLS); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back

4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-017, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-083 CONFIRMED P0 v2.0

My Tickets — offline

میرے ٹکٹ — آف لائن

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.tickets_off`

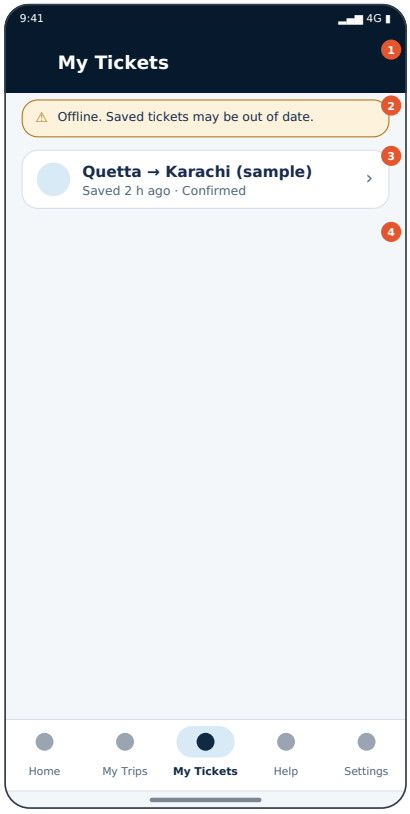

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Offline: cached confirmed tickets shown with freshness label.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Quetta → Karachi (sample)|Saved 2 h ago · Confirmed (Row) → **P-088** Cached ticket — offline
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	List rows	125–193 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	193–193 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Tickets	Deep navy #071A2D, white 16sp bold	Per state	My Tickets	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Offline. Saved tickets may be out of date.	Tinted background + border + icon + text (never colour alone)	—	Offline. Saved tickets may be out of dat	No	Always in this state
3	C03 List rows	125–193 dp	328×68 dp	Quetta → Karachi (sample)|Saved 2 h ago · Confirmed	White rows radius 14dp, 52dp high, chevron/check	Per state	Quetta → Karachi (sample)|Saved 2 h ago	Yes	Always in this state
4	C04 Bottom navigation	193–193 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Tickets	میرے ٹکٹ	Needs native review
2	Offline. Saved tickets may be out of date.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Quetta → Karachi (sample)|Saved 2 h ago · Confirmed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review
4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Row: Quetta → Karachi (sample)|Saved 2 h ago · Confirmed	≥48 dp	Enabled	Navigate to **P-088** Cached ticket — offline	Instant	—	E01, E11 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E11 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E11 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E11 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E11 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E11 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Offline: cached confirmed tickets shown with freshness label.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_tickets (read)
Inputs	auth user
Server checks / RLS	owner-only rows (RLS); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E11
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-088, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-084 CONFIRMED P0 v2.0

QR ticket — confirmed

کیو آر ٹکٹ — کنفرم

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.qr`

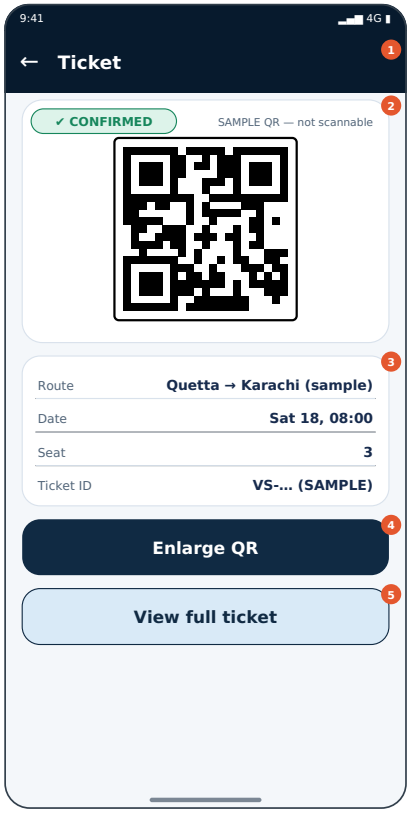

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Confirmed ticket QR with essential details; large and high contrast.

Login: **Yes** · Incoming screens: ERR-012, ERR-016, P-003, P-078, P-081, P-100, P-104

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Enlarge QR (Button) → **P-085** QR enlarged — high contrast
- View full ticket (Button) → **P-086** Full ticket details

Android system Back: Back returns to ticket list/trip. **Bottom nav:** Per origin (My Tickets tab active). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	QR ticket panel	80–309 dp	Full width, 16 dp margins	above fold
3	Key-value card	309–455 dp	Full width, 16 dp margins	above fold
4	Button	455–517 dp	Full width, 16 dp margins	above fold
5	Button	517–579 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket	Deep navy #071A2D, white 16sp bold	Per state	Ticket	Yes	Always in this state
2	C02 QR ticket panel	80–309 dp	328×229 dp	QR ticket (CONFIRMED)	White panel, black QR, status chip	—	QR ticket (CONFIRMED)	No	Always in this state
3	C03 Key-value card	309–455 dp	328×146 dp	Route: Quetta → Karachi (sample); Date: Sat 18, 08:00; Seat: 3; Ticket ID: VS-… (SAMPLE)	White card, 30dp rows, label grey / value bold	—	Route: Quetta → Karachi (sample)	No	Always in this state
4	C04 Button	455–517 dp	328×62 dp	Enlarge QR بڑا کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Enlarge QR, button	Yes	Always in this state
5	C05 Button	517–579 dp	328×62 dp	View full ticket مکمل ٹکٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View full ticket, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket	ٹکٹ	Needs native review
3	Route: Quetta → Karachi (sample)	روٹ	Needs native review
3	Date: Sat 18, 08:00	تاریخ	Needs native review
3	Seat: 3	سیٹ	Needs native review
3	Ticket ID: VS-… (SAMPLE)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

4	Enlarge QR	بڑا کریں	Needs native review
5	View full ticket	مکمل ٹکٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Share/open actions debounced.
4	Button: Enlarge QR	≥48 dp	Enabled	Navigate to **P-085** QR enlarged — high contrast	Instant	—	E01, E03 copy; no false success	Share/open actions debounced.
5	Button: View full ticket	≥48 dp	Enabled	Navigate to **P-086** Full ticket details	Instant	—	E01, E03 copy; no false success	Share/open actions debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Route	Quetta → Karachi (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Date	Sat 18, 08:00	Server-derived	Required	Show “Not available” if missing; never blank/invented
Seat	3	Server-derived	Required	Show “Not available” if missing; never blank/invented
Ticket ID	VS-… (SAMPLE)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Confirmed ticket QR with essential details; large and high contrast.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_ticket (read)
Inputs	booking id
Server checks / RLS	booking confirmed; QR payload only if confirmed; owner check; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E11, E30
Retry / idempotency	Safe read
Offline	Cached confirmed ticket shown with freshness; pending never shows QR
Cache	Secure local cache (PROPOSED)

14. Security, privacy & safety

QR shown only for server-confirmed bookings; share must not expose unnecessary personal data. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

QR large, high contrast, status text beside it; brightness boost with restore. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Brightness raised while open; restored on exit
2. Pending never shows QR
3. Confirmed QR scannable at brightness
4. Offline cached ticket shows freshness
5. Urdu RTL: QR and IDs not mirrored
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-085, P-086 · Incoming: ERR-012, ERR-016, P-003, P-078, P-081, P-100, P-104

Open decisions: None specific (see Part 16).

P-085 CONFIRMED P0 v2.0

QR enlarged — high contrast

کیو آر بڑا

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.qr_big`



5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Full-width QR on white, maximum brightness, for scanning.

Login: **Yes** · Incoming screens: P-084

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Close (Button) → previous screen (system Back)

Android system Back: Back returns to ticket list/trip. **Bottom nav:** Per origin (My Tickets tab active). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	QR ticket panel	80–393 dp	Full width, 16 dp margins	above fold
3	Button	393–455 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Show to driver	Deep navy #071A2D, white 16sp bold	Per state	Show to driver	Yes	Always in this state
2	C02 QR ticket panel	80–393 dp	328×313 dp	QR ticket (CONFIRMED)	White panel, black QR, status chip	—	QR ticket (CONFIRMED)	No	Always in this state
3	C03 Button	393–455 dp	328×62 dp	Close بند کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Close, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Show to driver	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Close	بند کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Share/open actions debounced.
3	Button: Close	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Share/open actions debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Full-width QR on white, maximum brightness, for scanning.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_ticket (read)
Inputs	booking id
Server checks / RLS	booking confirmed; QR payload only if confirmed; owner check; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E11, E30
Retry / idempotency	Safe read
Offline	Cached confirmed ticket shown with freshness; pending never shows QR
Cache	Secure local cache (PROPOSED)

14. Security, privacy & safety

QR shown only for server-confirmed bookings; share must not expose unnecessary personal data. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

QR large, high contrast, status text beside it; brightness boost with restore. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. QR ≥ 70% of screen width; quiet zone preserved
2. Screen stays awake while open (PROPOSED)
3. Pending never shows QR
4. Confirmed QR scannable at brightness
5. Offline cached ticket shows freshness
6. Urdu RTL: QR and IDs not mirrored
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-084


Open decisions: None specific (see Part 16).

P-086 CONFIRMED P1 v2.0

Full ticket details

ٹکٹ کی مکمل تفصیل

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.ticket_full`

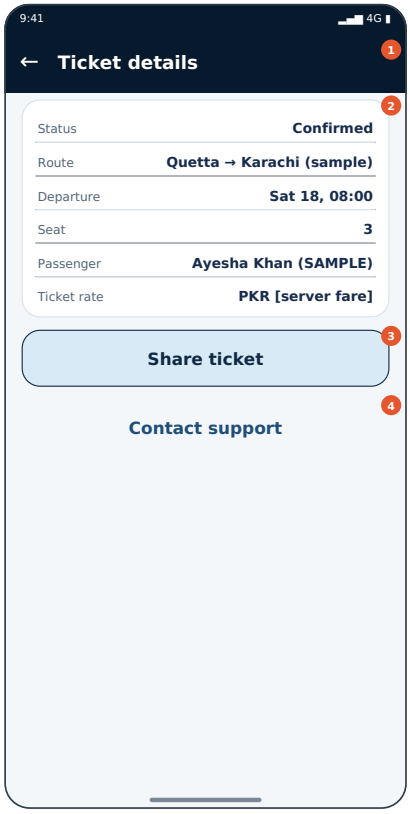

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

All ticket fields, status, boarding point, share and support actions.

Login: **Per flow** · Incoming screens: P-084


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Share ticket (Button) → **P-090** Share ticket
- Contact support (Button) → **P-105** Ticket support

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–286 dp	Full width, 16 dp margins	above fold
3	Button	286–348 dp	Full width, 16 dp margins	above fold
4	Button	348–410 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket details	Deep navy #071A2D, white 16sp bold	Per state	Ticket details	Yes	Always in this state
2	C02 Key-value card	80–286 dp	328×206 dp	Status: Confirmed; Route: Quetta → Karachi (sample); Departure: Sat 18, 08:00; Seat: 3; Passenger: Ayesha Khan (SAMPLE); Ticket rate: PKR [server fare]	White card, 30dp rows, label grey / value bold	—	Status: Confirmed	No	Always in this state
3	C03 Button	286–348 dp	328×62 dp	Share ticket ٹکٹ شیئر	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Share ticket, button	Yes	Always in this state
4	C04 Button	348–410 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Status: Confirmed	حالت	Needs native review
2	Route: Quetta → Karachi (sample)	روٹ	Needs native review
2	Departure: Sat 18, 08:00	روانگی	Needs native review
2	Seat: 3	سیٹ	Needs native review
2	Passenger: Ayesha Khan (SAMPLE)	مسافر	Needs native review
2	Ticket rate: PKR [server fare]	ٹکٹ کا کرایہ	Needs native review
3	Share ticket		Needs native review

3	Share ticket	ٹکٹ شیئر	Needs native review
4	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Button: Share ticket	≥48 dp	Enabled	Navigate to **P-090** Share ticket	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
4	Button: Contact support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	Confirmed	Server-derived	Required	Show “Not available” if missing; never blank/invented
Route	Quetta → Karachi (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Departure	Sat 18, 08:00	Server-derived	Required	Show “Not available” if missing; never blank/invented
Seat	3	Server-derived	Required	Show “Not available” if missing; never blank/invented
Passenger	Ayesha Khan (SAMPLE)	User-entered	Required	Show “Not available” if missing; never blank/invented
Ticket rate	PKR [server fare]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	All ticket fields, status, boarding point, share and support actions.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_ticket (read)
Inputs	booking id
Server checks / RLS	booking confirmed; QR payload only if confirmed; owner check; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached confirmed ticket shown with freshness; pending never shows QR
Cache	Secure local cache (PROPOSED)

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-090, P-105 · Incoming: P-084


Open decisions: None specific (see Part 16).

P-087 CONFIRMED P0 v2.0

Ticket — pending (no QR)

ٹکٹ — زیر التوا

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.ticket_pend`

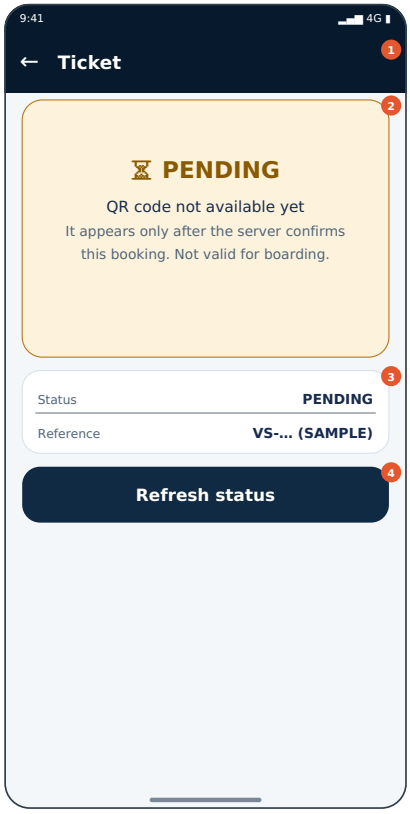

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Pending booking shows status only; QR withheld.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refresh status (Button) → stays on screen (action)

Android system Back: Back returns to ticket list/trip. **Bottom nav:** Per origin (My Tickets tab active). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	QR ticket panel	80–322 dp	Full width, 16 dp margins	above fold
3	Key-value card	322–408 dp	Full width, 16 dp margins	above fold
4	Button	408–470 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket	Deep navy #071A2D, white 16sp bold	Per state	Ticket	Yes	Always in this state
2	C02 QR ticket panel	80–322 dp	328×242 dp	QR withheld — PENDING	White panel, black QR, status chip	—	QR withheld — PENDING	No	Always in this state
3	C03 Key-value card	322–408 dp	328×86 dp	Status: PENDING; Reference: VS-... (SAMPLE)	White card, 30dp rows, label grey / value bold	—	Status: PENDING	No	Always in this state
4	C04 Button	408–470 dp	328×62 dp	Refresh status حالت ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh status, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket	ٹکٹ	Needs native review
3	Status: PENDING	حالت	Needs native review
3	Reference: VS-... (SAMPLE)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Refresh status	حالت ریفریش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E30 copy; no false success	Share/open actions debounced.

4	Button: Refresh status	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E30 copy; no false success	Share/open actions debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	PENDING	Server-derived	Required	Show “Not available” if missing; never blank/invented
Reference	VS-… (SAMPLE)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Pending booking shows status only; QR withheld.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_ticket (read)
Inputs	booking id
Server checks / RLS	booking confirmed; QR payload only if confirmed; owner check; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E30
Retry / idempotency	Safe read
Offline	Cached confirmed ticket shown with freshness; pending never shows QR
Cache	Secure local cache (PROPOSED)

14. Security, privacy & safety

QR shown only for server-confirmed bookings; share must not expose unnecessary personal data. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

QR large, high contrast, status text beside it; brightness boost with restore. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pending never shows QR
2. Confirmed QR scannable at brightness
3. Offline cached ticket shows freshness
4. Urdu RTL: QR and IDs not mirrored
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched

Open decisions: None specific (see Part 16).

P-088 CONFIRMED P0 v2.0

Cached ticket — offline

محفوظ ٹکٹ — آف لائن

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.ticket_cached`



5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Cached confirmed ticket with clear freshness and “status may have changed”.

Login: **Yes** · Incoming screens: P-083, P-092


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refresh when online (Button) → stays on screen (action)

Android system Back: Back returns to ticket list/trip. **Bottom nav:** Per origin (My Tickets tab active). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	QR ticket panel	140–369 dp	Full width, 16 dp margins	above fold
4	Button	369–431 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket	Deep navy #071A2D, white 16sp bold	Per state	Ticket	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Offline. Saved 2 hours ago. Status may have changed.	Tinted background + border + icon + text (never colour alone)	—	Offline. Saved 2 hours ago. Status may h	No	Always in this state
3	C03 QR ticket panel	140–369 dp	328×229 dp	QR ticket (CONFIRMED)	White panel, black QR, status chip	—	QR ticket (CONFIRMED)	No	Always in this state
4	C04 Button	369–431 dp	328×62 dp	Refresh when online آن لائن ہونے پر ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh when online, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket	ٹکٹ	Needs native review
2	Offline. Saved 2 hours ago. Status may have changed.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Refresh when online	آن لائن ہونے پر ریفریش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E11 copy; no false success	Share/open actions debounced.
4	Button: Refresh when	≥48 dp	Enabled	Runs the on-screen action (see §13); stays	Instant	—	E01, E11 copy; no false	Share/open actions

	online			here			success	debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Cached confirmed ticket with clear freshness and "status may have changed".
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_ticket (read)
Inputs	booking id
Server checks / RLS	booking confirmed; QR payload only if confirmed; owner check; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E11
Retry / idempotency	Safe read
Offline	Cached confirmed ticket shown with freshness; pending never shows QR
Cache	Secure local cache (PROPOSED)

14. Security, privacy & safety

QR shown only for server-confirmed bookings; share must not expose unnecessary personal data. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

QR large, high contrast, status text beside it; brightness boost with restore. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Freshness time visible next to QR
2. Pending never shows QR
3. Confirmed QR scannable at brightness
4. Offline cached ticket shows freshness
5. Urdu RTL: QR and IDs not mirrored
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-083, P-092


Open decisions: None specific (see Part 16).

P-089 CONFIRMED P1 v2.0

Ticket unavailable

ٹکٹ دستیاب نہیں

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.ticket_na`

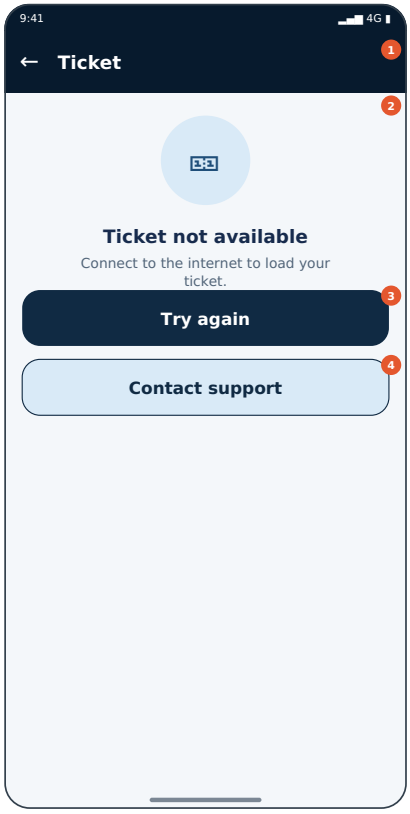

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Ticket cannot be loaded (not cached, no network).

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → stays on screen (action)
- Contact support (Button) → **P-105** Ticket support

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket	Deep navy #071A2D, white 16sp bold	Per state	Ticket	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Ticket not available; Connect to the internet to load your ticket.	Light-blue circle icon + 16sp title + 12sp body	—	Ticket not available	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket	ٹکٹ	Needs native review
2	Ticket not available	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Connect to the internet to load your ticket.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش	Needs native review
4	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Retry debounced.
3	Button: Try again	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E01, E03 copy; no false success	Retry debounced.
4	Button: Contact support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E01, E03 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Ticket cannot be loaded (not cached, no network).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_ticket (read)
Inputs	booking id
Server checks / RLS	booking confirmed; QR payload only if confirmed; owner check; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03
Retry / idempotency	Safe read
Offline	Cached confirmed ticket shown with freshness; pending never shows QR
Cache	Secure local cache (PROPOSED)

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-105 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-090 CONFIRMED PROPOSED P1 v2.0

Share ticket

ٹکٹ شیئر

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.share`

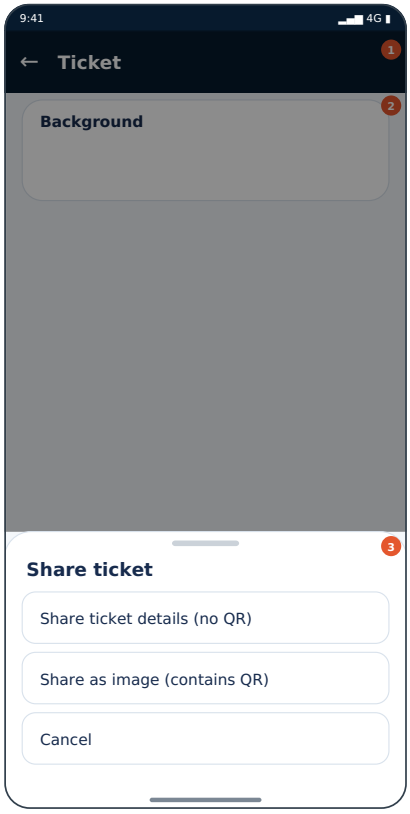

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Choose what to share; privacy warning; Android share sheet.

Login: **n/a (shared pattern)** · Incoming screens: P-086


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Share as image (contains QR) (Sheet option) → **P-091** Share fallback (system sheet)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–182 dp	Full width, 16 dp margins	above fold
3	Bottom sheet	472–704 dp	Full width, 16 dp margins	partly below fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket	Deep navy #071A2D, white 16sp bold	Per state	Ticket	Yes	Always in this state
2	C02 Info card	80–182 dp	328×102 dp	Background	White card, border #D9E2EC, radius 18dp	—	Background	No	Always in this state
3	C03 Bottom sheet	472–704 dp	328×232 dp	Share ticket; Share ticket details (no QR); Share as image (contains QR); Cancel	Radius-24dp top corners, scrim 45%	Per state	Share ticket	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket	ٹکٹ	Needs native review
2	Background	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Share ticket	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Share ticket details (no QR)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Share as image (contains QR)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Cancel	منسوخ کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.
3	Sheet option: Share as image (contains QR)	≥48 dp	Enabled	Navigate to **P-091** Share fallback (system sheet)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Choose what to share; privacy warning; Android share sheet.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Warns that QR grants boarding if misused
2. Back dismisses (unless blocking)
3. Focus returns to trigger
4. Urdu RTL mirrored
5. Text scale 200% no clipping
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-091 · Incoming: P-086


Open decisions: None specific (see Part 16).

P-091 CONFIRMED PROPOSED P2 v2.0

Share fallback (system sheet)

شیئر — سسٹم شیٹ

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.share_fb`

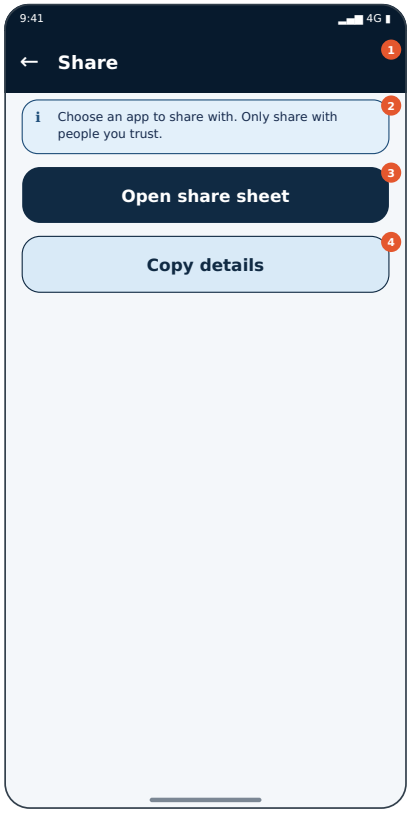

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

If custom share fails, fall back to Android share sheet / copy text.

Login: **n/a (shared pattern)** · Incoming screens: P-090


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open share sheet (Button) → external app: EXT:share
- Copy details (Button) → stays on screen (action)

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Share	Deep navy #071A2D, white 16sp bold	Per state	Share	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Choose an app to share with. Only share with people you trust.	Tinted background + border + icon + text (never colour alone)	—	Choose an app to share with. Only share	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Open share sheet شیئر شیٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open share sheet, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	Copy details کاپی	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Copy details, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Share	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Choose an app to share with. Only share with people you trust.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open share sheet	شیئر شیٹ	Needs native review
4	Copy details	کاپی	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.

3	Button: Open share sheet	≥48 dp	Enabled	Hands off to external app (EXT:share); returning restores this screen	Instant	—	E17, E28 copy; no false success	Buttons debounced.
4	Button: Copy details	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	If custom share fails, fall back to Android share sheet / copy text.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-090


Open decisions: None specific (see Part 16).

P-092 PROPOSED NEEDS CONFIRMATION P2 v2.0

Save / show ticket offline

ٹکٹ محفوظ کریں

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.save`

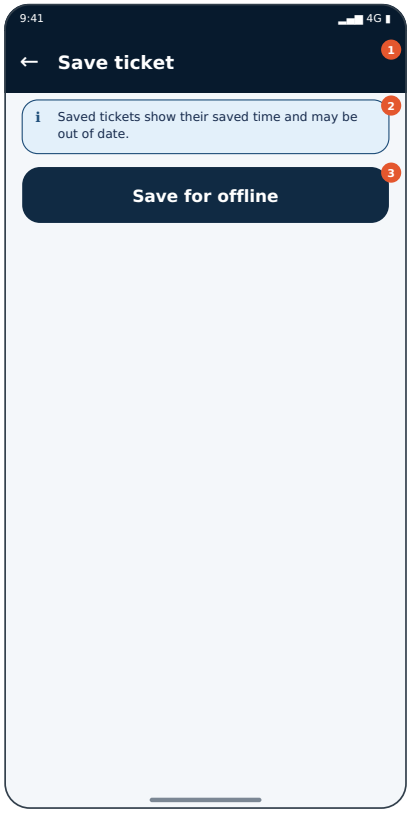

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Save confirmed ticket for offline viewing if supported.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Save for offline (Button) → **P-088** Cached ticket — offline

Android system Back: Back returns to ticket list/trip. **Bottom nav:** Per origin (My Tickets tab active). Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Save ticket	Deep navy #071A2D, white 16sp bold	Per state	Save ticket	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Saved tickets show their saved time and may be out of date.	Tinted background + border + icon + text (never colour alone)	—	Saved tickets show their saved time and	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Save for offline آف لائن محفوظ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Save for offline, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Save ticket	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Saved tickets show their saved time and may be out of date.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Save for offline	آف لائن محفوظ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Share/open actions debounced.
3	Button: Save for offline	≥48 dp	Enabled	Navigate to **P-088** Cached ticket — offline	Instant	—	E01, E03 copy; no false success	Share/open actions debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Save confirmed ticket for offline viewing if supported.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E11, E30
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

QR shown only for server-confirmed bookings; share must not expose unnecessary personal data. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

QR large, high contrast, status text beside it; brightness boost with restore. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pending never shows QR
2. Confirmed QR scannable at brightness
3. Offline cached ticket shows freshness
4. Urdu RTL: QR and IDs not mirrored
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-088 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-093 CONFIRMED P2 v2.0

Ticket history

ٹکٹ کی تاریخ

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.ticket_hist`

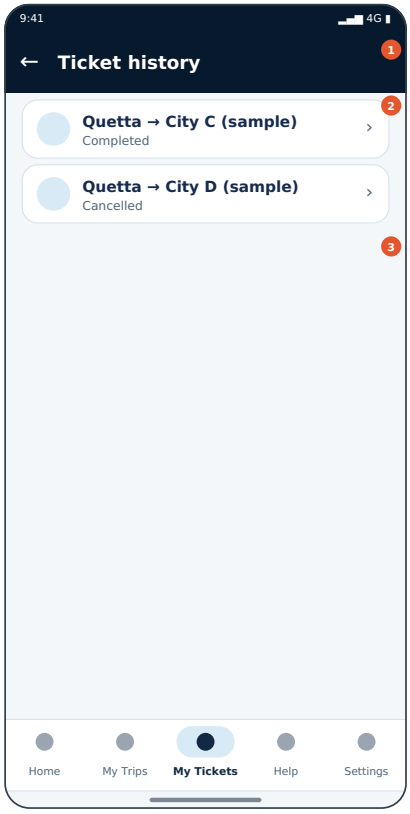

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Past tickets (read-only).

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–206 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	206–206 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket history	Deep navy #071A2D, white 16sp bold	Per state	Ticket history	Yes	Always in this state
2	C02 List rows	80–206 dp	328×126 dp	Quetta → City C (sample)|Completed; Quetta → City D (sample)|Cancelled	White rows radius 14dp, 52dp high, chevron/check	Per state	Quetta → City C (sample)|Completed	Yes	Always in this state
3	C03 Bottom navigation	206–206 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket history	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta → City C (sample)|Completed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta → City D (sample)|Cancelled	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Home	ہوم	Needs native review
3	My Trips	میرے سفر	Needs native review
3	My Tickets	میرے ٹکٹ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Past tickets (read-only).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_tickets (read)
Inputs	auth user
Server checks / RLS	owner-only rows (RLS); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-094 CONFIRMED P0 v2.0

My Trips — Upcoming

میرے سفر — آنے والے

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.trips`

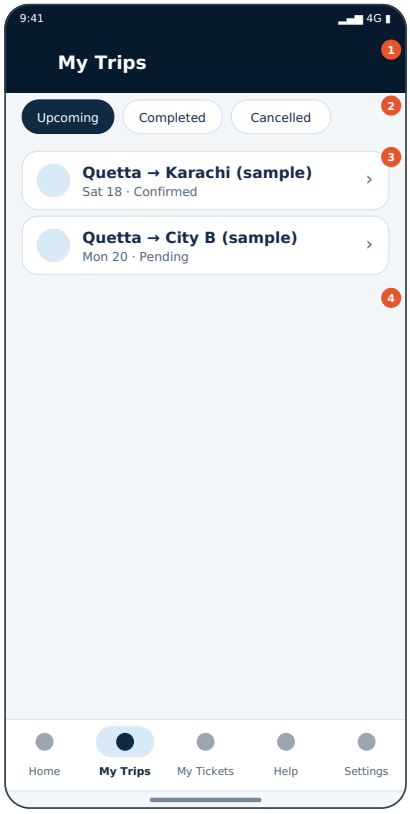

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Tab: upcoming trips with Upcoming/Completed/Cancelled tabs.

Login: **Per flow** · Incoming screens: ERR-004, ERR-016, P-001, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-067, P-072, P-075, P-077, P-078, P-079, P-081, P-082, P-083, P-093, P-095, P-096, P-097, P-098, P-099, P-111, P-115, P-139, P-150, P-159


3. Exit & navigation map

- Completed (Chip) → **P-095** My Trips — Completed
- Cancelled (Chip) → **P-096** My Trips — Cancelled
- Quetta → Karachi (sample)|Sat 18 · Confirmed (Row) → **P-100** Trip details
- Quetta → City B (sample)|Mon 20 · Pending (Row) → **P-100** Trip details
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–126 dp	Full width, 16 dp margins	above fold
3	List rows	126–252 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	252–252 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Trips	Deep navy #071A2D, white 16sp bold	Per state	My Trips	Yes	Always in this state
2	C02 Chips	80–126 dp	328×46 dp	Upcoming; Completed; Cancelled	Pill 30dp high; selected navy fill	Per state	Upcoming	Yes	Always in this state
3	C03 List rows	126–252 dp	328×126 dp	Quetta → Karachi (sample)|Sat 18 · Confirmed; Quetta → City B (sample)|Mon 20 · Pending	White rows radius 14dp, 52dp high, chevron/check	Per state	Quetta → Karachi (sample)|Sat 18 · Confi	Yes	Always in this state
4	C04 Bottom navigation	252–252 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Trips	میرے سفر	Needs native review
2	Upcoming	آنے والے	Needs native review
2	Completed	مکمل	Needs native review
2	Cancelled	منسوخ	Needs native review
3	Quetta → Karachi (sample)|Sat 18 · Confirmed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Quetta → City B (sample)|Mon 20 · Pending	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review

4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review
4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Chip: Completed	≥48 dp	Enabled	Navigate to **P-095** My Trips — Completed	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Chip: Cancelled	≥48 dp	Enabled	Navigate to **P-096** My Trips — Cancelled	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Row: Quetta → Karachi (sample)|Sat 18 · Confirmed	≥48 dp	Enabled	Navigate to **P-100** Trip details	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Row: Quetta → City B (sample)|Mon 20 · Pending	≥48 dp	Enabled	Navigate to **P-100** Trip details	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Tab: upcoming trips with Upcoming/Completed/Cancelled tabs.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trips (read)
Inputs	status filter, page
Server checks / RLS	owner-only rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-095, P-096, P-100, P-139, P-150 · Incoming: ERR-004, ERR-016, P-001, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-067, P-072, P-075, P-077, P-078, P-079, P-081, P-082, P-083, P-093, P-095, P-096, P-097, P-098, P-099, P-111, P-115, P-139, P-150, P-159


Open decisions: None specific (see Part 16).

P-095 CONFIRMED P1 v2.0

My Trips — Completed

میرے سفر — مکمل

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.trips_done`

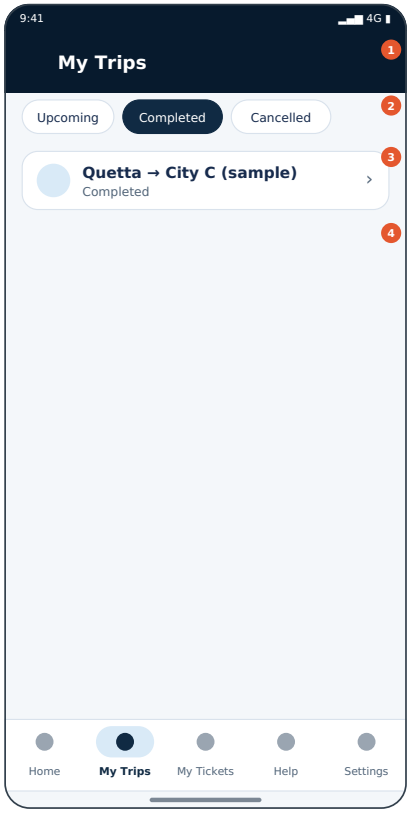

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Completed trips.

Login: **Per flow** · Incoming screens: P-094, P-096


3. Exit & navigation map

- Upcoming (Chip) → **P-094** My Trips — Upcoming
- Cancelled (Chip) → **P-096** My Trips — Cancelled
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–126 dp	Full width, 16 dp margins	above fold
3	List rows	126–194 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	194–194 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Trips	Deep navy #071A2D, white 16sp bold	Per state	My Trips	Yes	Always in this state
2	C02 Chips	80–126 dp	328×46 dp	Upcoming; Completed; Cancelled	Pill 30dp high; selected navy fill	Per state	Upcoming	Yes	Always in this state
3	C03 List rows	126–194 dp	328×68 dp	Quetta → City C (sample)|Completed	White rows radius 14dp, 52dp high, chevron/check	Per state	Quetta → City C (sample)|Completed	Yes	Always in this state
4	C04 Bottom navigation	194–194 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Trips	میرے سفر	Needs native review
2	Upcoming	آنے والے	Needs native review
2	Completed	مکمل	Needs native review
2	Cancelled	منسوخ	Needs native review
3	Quetta → City C (sample)|Completed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review
4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Chip: Upcoming	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Chip: Cancelled	≥48 dp	Enabled	Navigate to **P-096** My Trips — Cancelled	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Completed trips.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trips (read)
Inputs	status filter, page
Server checks / RLS	owner-only rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible

5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-096, P-139, P-150 · Incoming: P-094, P-096


Open decisions: None specific (see Part 16).

P-096 CONFIRMED P1 v2.0

My Trips — Cancelled

میرے سفر — منسوخ

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.trips_canc`

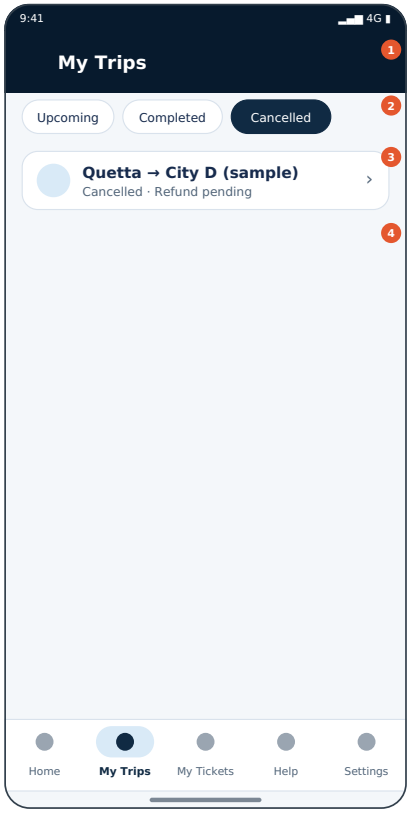

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Cancelled trips with refund status chip.

Login: **Per flow** · Incoming screens: P-094, P-095


3. Exit & navigation map

- Upcoming (Chip) → **P-094** My Trips — Upcoming
- Completed (Chip) → **P-095** My Trips — Completed
- Quetta → City D (sample)|Cancelled · Refund pending (Row) → **P-102** Cancelled trip details
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–126 dp	Full width, 16 dp margins	above fold
3	List rows	126–194 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	194–194 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Trips	Deep navy #071A2D, white 16sp bold	Per state	My Trips	Yes	Always in this state
2	C02 Chips	80–126 dp	328×46 dp	Upcoming; Completed; Cancelled	Pill 30dp high; selected navy fill	Per state	Upcoming	Yes	Always in this state
3	C03 List rows	126–194 dp	328×68 dp	Quetta → City D (sample)|Cancelled · Refund pending	White rows radius 14dp, 52dp high, chevron/check	Per state	Quetta → City D (sample)|Cancelled · Ref	Yes	Always in this state
4	C04 Bottom navigation	194–194 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Trips	میرے سفر	Needs native review
2	Upcoming	آنے والے	Needs native review
2	Completed	مکمل	Needs native review
2	Cancelled	منسوخ	Needs native review
3	Quetta → City D (sample)|Cancelled · Refund pending	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review
4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Chip: Upcoming	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Chip: Completed	≥48 dp	Enabled	Navigate to **P-095** My Trips — Completed	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Row: Quetta → City D (sample)|Cancelled · Refund pending	≥48 dp	Enabled	Navigate to **P-102** Cancelled trip details	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Cancelled trips with refund status chip.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trips (read)
Inputs	status filter, page
Server checks / RLS	owner-only rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp

2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-095, P-102, P-139, P-150 · Incoming: P-094, P-095


Open decisions: None specific (see Part 16).

P-097 CONFIRMED P1 v2.0

My Trips — no upcoming

میرے سفر — کوئی آنے والا نہیں

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.trips_e1`

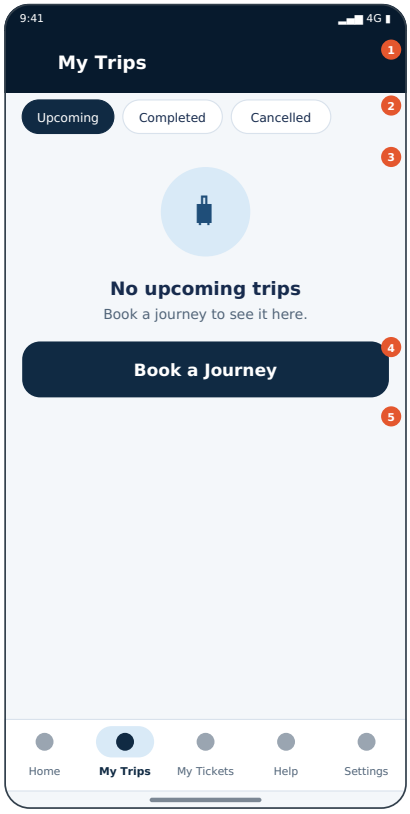

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Empty Upcoming.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Book a Journey (Button) → **P-017** Province / region selection
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–126 dp	Full width, 16 dp margins	above fold
3	Empty/status block	126–296 dp	Full width, 16 dp margins	above fold
4	Button	296–358 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	358–358 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Trips	Deep navy #071A2D, white 16sp bold	Per state	My Trips	Yes	Always in this state
2	C02 Chips	80–126 dp	328×46 dp	Upcoming; Completed; Cancelled	Pill 30dp high; selected navy fill	Per state	Upcoming	Yes	Always in this state
3	C03 Empty/status block	126–296 dp	328×170 dp	No upcoming trips; Book a journey to see it here.	Light-blue circle icon + 16sp title + 12sp body	—	No upcoming trips	No	Always in this state
4	C04 Button	296–358 dp	328×62 dp	Book a Journey سفر بُک کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Book a Journey, button	Yes	Always in this state
5	C05 Bottom navigation	358–358 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Trips	میرے سفر	Needs native review
2	Upcoming	آنے والے	Needs native review
2	Completed	مکمل	Needs native review
2	Cancelled	منسوخ	Needs native review
3	No upcoming trips	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

3	Book a journey to see it here.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Book a Journey	سفر بُک کریں	Needs native review
5	Home	ہوم	Needs native review
5	My Trips	میرے سفر	Needs native review
5	My Tickets	میرے ٹکٹ	Needs native review
5	Help	مدد	Needs native review
5	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
4	Button: Book a Journey	≥48 dp	Enabled	Navigate to **P-017** Province / region selection	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
5	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Empty Upcoming.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trips (read)
Inputs	status filter, page
Server checks / RLS	owner-only rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-017, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-098 CONFIRMED P2 v2.0

My Trips — no completed

میرے سفر — کوئی مکمل نہیں

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.trips_e2`

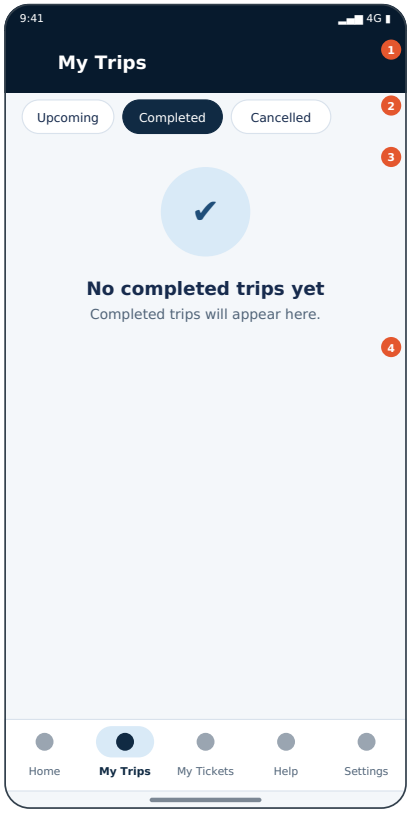

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Empty Completed.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–126 dp	Full width, 16 dp margins	above fold
3	Empty/status block	126–296 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	296–296 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Trips	Deep navy #071A2D, white 16sp bold	Per state	My Trips	Yes	Always in this state
2	C02 Chips	80–126 dp	328×46 dp	Upcoming; Completed; Cancelled	Pill 30dp high; selected navy fill	Per state	Upcoming	Yes	Always in this state
3	C03 Empty/status block	126–296 dp	328×170 dp	No completed trips yet; Completed trips will appear here.	Light-blue circle icon + 16sp title + 12sp body	—	No completed trips yet	No	Always in this state
4	C04 Bottom navigation	296–296 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Trips	میرے سفر	Needs native review
2	Upcoming	آنے والے	Needs native review
2	Completed	مکمل	Needs native review
2	Cancelled	منسوخ	Needs native review
3	No completed trips yet	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Completed trips will appear here.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review

4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Empty Completed.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trips (read)
Inputs	status filter, page
Server checks / RLS	owner-only rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible

7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-099 CONFIRMED P2 v2.0

My Trips — no cancelled

میرے سفر — کوئی منسوخ نہیں

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.trips_e3`

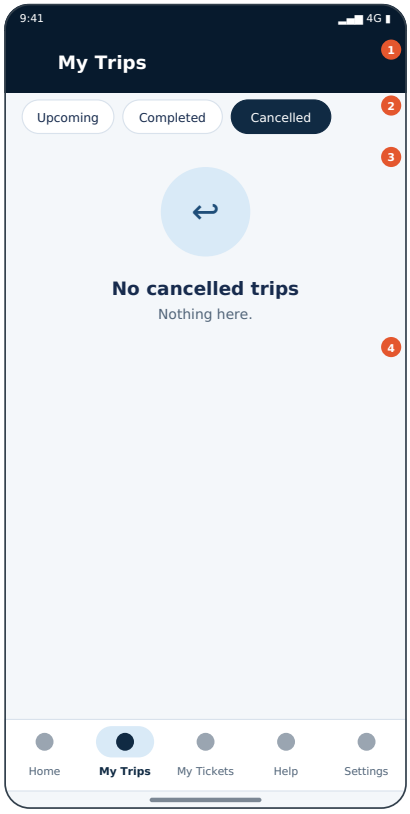

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Empty Cancelled.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–126 dp	Full width, 16 dp margins	above fold
3	Empty/status block	126–296 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	296–296 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Trips	Deep navy #071A2D, white 16sp bold	Per state	My Trips	Yes	Always in this state
2	C02 Chips	80–126 dp	328×46 dp	Upcoming; Completed; Cancelled	Pill 30dp high; selected navy fill	Per state	Upcoming	Yes	Always in this state
3	C03 Empty/status block	126–296 dp	328×170 dp	No cancelled trips; Nothing here.	Light-blue circle icon + 16sp title + 12sp body	—	No cancelled trips	No	Always in this state
4	C04 Bottom navigation	296–296 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Trips	میرے سفر	Needs native review
2	Upcoming	آنے والے	Needs native review
2	Completed	مکمل	Needs native review
2	Cancelled	منسوخ	Needs native review
3	No cancelled trips	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Nothing here.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review

4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Empty Cancelled.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trips (read)
Inputs	status filter, page
Server checks / RLS	owner-only rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached list labelled
Cache	Cache with timestamp

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible

7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-139, P-150 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-100 CONFIRMED P0 v2.0

Trip details

سفر کی تفصیل

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.trip_detail`

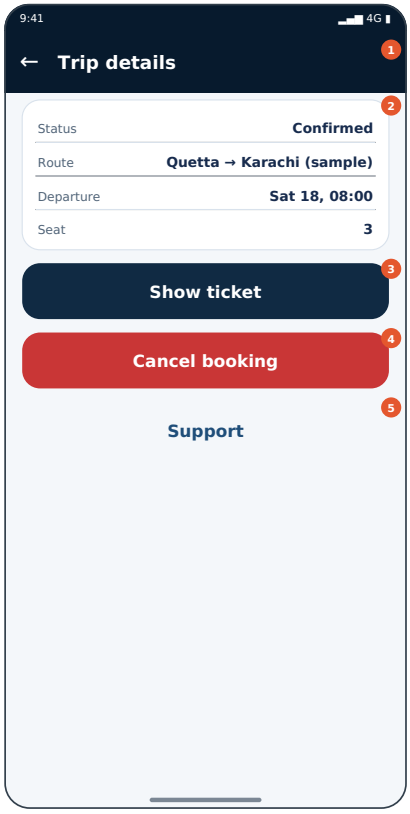

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Trip status, route, ticket access, cancel option, support.

Login: **Per flow** · Incoming screens: P-094, P-109, P-112, P-113, P-119, P-121, P-122


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Show ticket (Button) → **P-084** QR ticket — confirmed
- Cancel booking (Button) → **P-106** Cancellation — checking eligibility
- Support (Button) → **P-105** Ticket support

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–226 dp	Full width, 16 dp margins	above fold
3	Button	226–288 dp	Full width, 16 dp margins	above fold
4	Button	288–350 dp	Full width, 16 dp margins	above fold
5	Button	350–412 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip details	Deep navy #071A2D, white 16sp bold	Per state	Trip details	Yes	Always in this state
2	C02 Key-value card	80–226 dp	328×146 dp	Status: Confirmed; Route: Quetta → Karachi (sample); Departure: Sat 18, 08:00; Seat: 3	White card, 30dp rows, label grey / value bold	—	Status: Confirmed	No	Always in this state
3	C03 Button	226–288 dp	328×62 dp	Show ticket ٹکٹ دکھائیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Show ticket, button	Yes	Always in this state
4	C04 Button	288–350 dp	328×62 dp	Cancel booking بکنگ منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel booking, button	Yes	Always in this state
5	C05 Button	350–412 dp	328×62 dp	Support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip details	سفر کی تفصیل	Needs native review
2	Status: Confirmed	حالت	Needs native review
2	Route: Quetta → Karachi (sample)	روٹ	Needs native review
2	Departure: Sat 18, 08:00	روانگی	Needs native review

2	Seat: 3	سیٹ	Needs native review
3	Show ticket	ٹکٹ دکھائیں	Needs native review
4	Cancel booking	بکنگ منسوخ	Needs native review
5	Support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Button: Show ticket	≥48 dp	Enabled	Navigate to **P-084** QR ticket — confirmed	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
4	Button: Cancel booking	≥48 dp	Enabled	Navigate to **P-106** Cancellation — checking eligibility	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
5	Button: Support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	Confirmed	Server-derived	Required	Show “Not available” if missing; never blank/invented
Route	Quetta → Karachi (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Departure	Sat 18, 08:00	Server-derived	Required	Show “Not available” if missing; never blank/invented
Seat	3	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Trip status, route, ticket access, cancel option, support.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_trip_detail (read)
Inputs	booking id
Server checks / RLS	owner check, live status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Cancel opens server-calculated eligibility first

2. All fields show server values or explicit “not available”
3. Back returns to origin list
4. TalkBack order matches visual order
5. Urdu RTL: mixed route/ID/date direction legible
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-084, P-105, P-106 · Incoming: P-094, P-109, P-112, P-113, P-119, P-121, P-122


Open decisions: None specific (see Part 16).

P-101 CONFIRMED P2 v2.0

Trip detail — refreshing

سفر — ریفریش

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.trip_refresh`

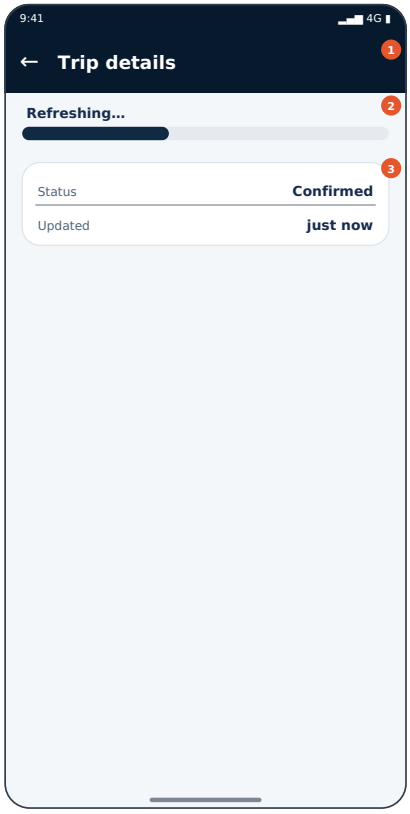

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Pull-to-refresh state with timestamp.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Progress bar	80–136 dp	Full width, 16 dp margins	above fold
3	Key-value card	136–222 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip details	Deep navy #071A2D, white 16sp bold	Per state	Trip details	Yes	Always in this state
2	C02 Progress bar	80–136 dp	328×56 dp	Refreshing…	12dp track	—	Refreshing…	No	Always in this state
3	C03 Key-value card	136–222 dp	328×86 dp	Status: Confirmed; Updated: just now	White card, 30dp rows, label grey / value bold	—	Status: Confirmed	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip details	سفر کی تفصیل	Needs native review
2	Refreshing…	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Status: Confirmed	حالت	Needs native review
3	Updated: just now	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	Confirmed	Server-derived	Required	Show “Not available” if missing; never blank/invented
Updated	just now	Server-derived	Required	Show “Not available” if missing; never blank/invented

Updated	just now	Server-derived	Required	Show "Not available" if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Pull-to-refresh state with timestamp.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_trip_detail (read)
Inputs	booking id
Server checks / RLS	owner check, live status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit "not available"
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-102 CONFIRMED P1 v2.0

Cancelled trip details

منسوخ سفر کی تفصیل

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.trip_canc_detail`

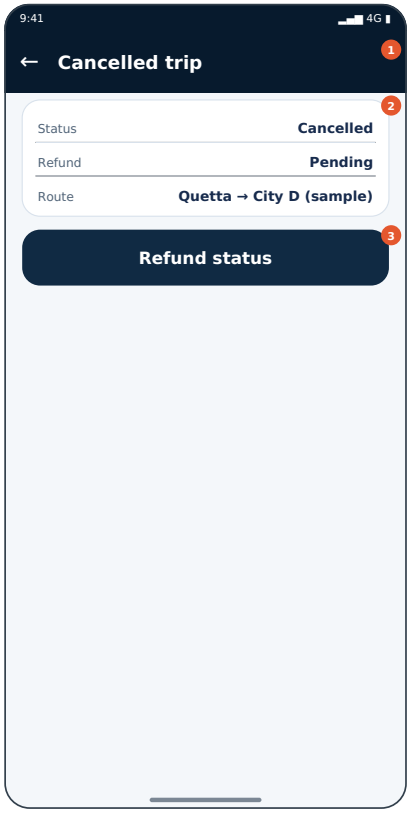

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Cancelled trip with refund status.

Login: **Per flow** · Incoming screens: P-096


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refund status (Button) → **P-114** Refund pending

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–196 dp	Full width, 16 dp margins	above fold
3	Button	196–258 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Cancelled trip	Deep navy #071A2D, white 16sp bold	Per state	Cancelled trip	Yes	Always in this state
2	C02 Key-value card	80–196 dp	328×116 dp	Status: Cancelled; Refund: Pending; Route: Quetta → City D (sample)	White card, 30dp rows, label grey / value bold	—	Status: Cancelled	No	Always in this state
3	C03 Button	196–258 dp	328×62 dp	Refund status رقم واپسی کی حالت	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refund status, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Cancelled trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Status: Cancelled	حالت	Needs native review
2	Refund: Pending	رقم واپسی	Needs native review
2	Route: Quetta → City D (sample)	روٹ	Needs native review
3	Refund status	رقم واپسی کی حالت	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Button: Refund status	≥48 dp	Enabled	Navigate to **P-114** Refund pending	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	Cancelled	Server-derived	Required	Show “Not available” if missing; never blank/invented
Refund	Pending	Server-derived	Required	Show “Not available” if missing; never blank/invented
Route	Quetta → City D (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Cancelled trip with refund status.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_refund_status (read)
Inputs	booking id
Server checks / RLS	refund state: pending/succeeded/failed/needs review; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-114 · Incoming: P-096


Open decisions: None specific (see Part 16).

P-103 CONFIRMED P1 v2.0

Booking status changed

بکنگ کی حالت بدل گئی

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.status_chg`

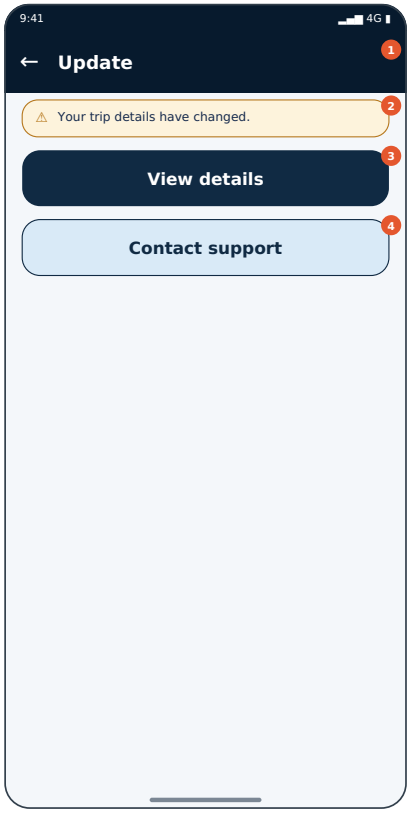

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server-side change detected (e.g., trip updated); explain and link.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- View details (Button) → **P-122** Trip details changed
- Contact support (Button) → **P-105** Ticket support

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Update	Deep navy #071A2D, white 16sp bold	Per state	Update	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Your trip details have changed.	Tinted background + border + icon + text (never colour alone)	—	Your trip details have changed.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	View details تفصیل	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View details, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Update	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your trip details have changed.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View details	تفصیل	Needs native review
4	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
3	Button: View details	≥48 dp	Enabled	Navigate to **P-122** Trip details changed	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

4	Button: Contact support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server-side change detected (e.g., trip updated); explain and link.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_disruption_status (read)
Inputs	booking/trip id
Server checks / RLS	driver cancellation, replacement attempts, delay, changes; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-105, P-122 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-104 PROPOSED NEEDS CONFIRMATION P2 v2.0

Boarding point & departure reminder

بورڈنگ اور روانگی یاد دہانی

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.remind`

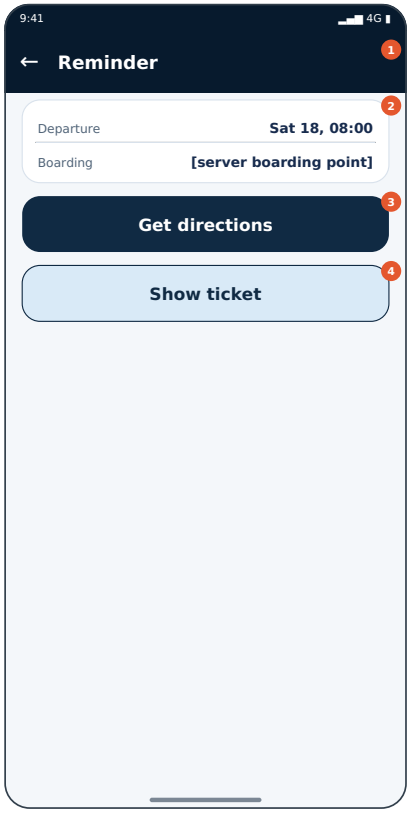

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Reminder content if notifications configured.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Get directions (Button) → external app: EXT:maps
- Show ticket (Button) → **P-084** QR ticket — confirmed

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–166 dp	Full width, 16 dp margins	above fold
3	Button	166–228 dp	Full width, 16 dp margins	above fold
4	Button	228–290 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Reminder	Deep navy #071A2D, white 16sp bold	Per state	Reminder	Yes	Always in this state
2	C02 Key-value card	80–166 dp	328×86 dp	Departure: Sat 18, 08:00; Boarding: [server boarding point]	White card, 30dp rows, label grey / value bold	—	Departure: Sat 18, 08:00	No	Always in this state
3	C03 Button	166–228 dp	328×62 dp	Get directions راستہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Get directions, button	Yes	Always in this state
4	C04 Button	228–290 dp	328×62 dp	Show ticket ٹکٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Show ticket, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Reminder	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Departure: Sat 18, 08:00	روانگی	Needs native review
2	Boarding: [server boarding point]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Get directions	راستہ	Needs native review
4	Show ticket	ٹکٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Button: Get directions	≥48 dp	Enabled	Hands off to external app (EXT:maps); returning restores this screen	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
4	Button: Show ticket	≥48 dp	Enabled	Navigate to **P-084** QR ticket — confirmed	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Departure	Sat 18, 08:00	Server-derived	Required	Show “Not available” if missing; never blank/invented
Boarding	[server boarding point]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Reminder content if notifications configured.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_trip_detail (read)
Inputs	booking id
Server checks / RLS	owner check, live status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-084 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-105 CONFIRMED P1 v2.0

Ticket support

ٹکٹ سپورٹ

Role: **Passenger** · Family: F5 Confirmation, tickets & My Trips · Key: `p.tsupport`

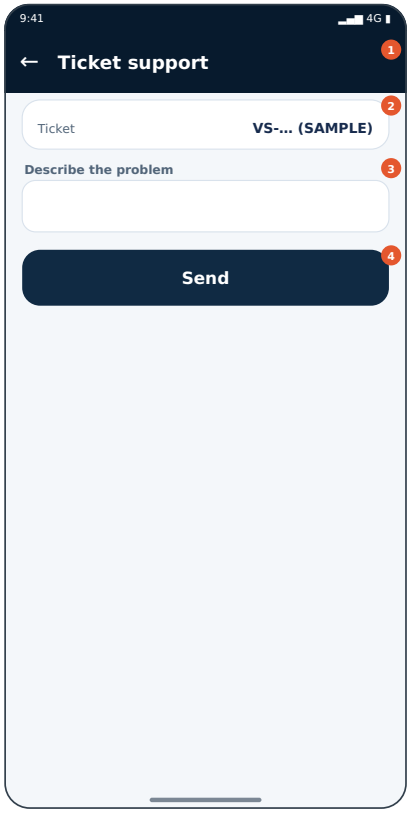

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Contact support linked to a ticket/booking.

Login: **As per flow** · Incoming screens: P-080, P-086, P-089, P-100, P-103, P-112, P-114, P-116, P-117, P-121, P-123


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send (Button) → **P-146** Submitting report

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–136 dp	Full width, 16 dp margins	above fold
3	Text field	136–214 dp	Full width, 16 dp margins	above fold
4	Button	214–276 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket support	Deep navy #071A2D, white 16sp bold	Per state	Ticket support	Yes	Always in this state
2	C02 Key-value card	80–136 dp	328×56 dp	Ticket: VS-… (SAMPLE)	White card, 30dp rows, label grey / value bold	—	Ticket: VS-… (SAMPLE)	No	Always in this state
3	C03 Text field	136–214 dp	328×78 dp	Describe the problem: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Describe the problem: “”	Yes	Always in this state
4	C04 Button	214–276 dp	328×62 dp	Send بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket support	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Ticket: VS-… (SAMPLE)	ٹکٹ	Needs native review
3	Describe the problem	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Send	بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button:	≥48 dp	Enabled	Navigate to **P-146**	Inline spinner; other	Server-confirmed	E01, E04 copy; no	Submit disabled while request in flight; one

	Send			Submitting report	controls locked	result only	false success	idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Ticket	VS-... (SAMPLE)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Describe the problem	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Contact support linked to a ticket/booking.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-146 · Incoming: P-080, P-086, P-089, P-100, P-103, P-112, P-114, P-116, P-117, P-121, P-123


Open decisions: None specific (see Part 16).

P-106 CONFIRMED P0 v2.0

Cancellation — checking eligibility

منسوخی — اہلیت کی جانچ

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.cq_load`

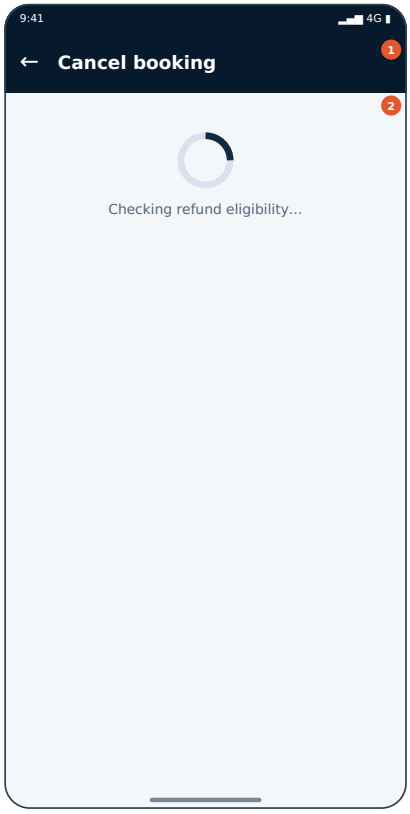

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server calculates eligibility and refund from time since booking confirmation.

Login: **Per flow** · Incoming screens: P-100


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Cancel booking	Deep navy #071A2D, white 16sp bold	Per state	Cancel booking	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Checking refund eligibility...	Navy arc on grey ring	—	Checking refund eligibility...	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Cancel booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Checking refund eligibility...	Translation review required	—

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server calculates eligibility and refund from time since booking confirmation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_cancellation_quote (read)
Inputs	booking id
Server checks / RLS	eligibility; server-time since confirmation (≤8 h → 100%; >8 h → 75%, 25% retained; exactly 8 h → 75%); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	Safe read
Offline	Blocked
Cache	None — always fresh

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Eligibility never computed from device clock
2. Never shows success without server confirmation
3. Back never resubmits a write
4. App kill/relaunch restores correct status
5. Urdu RTL copy matches catalogue
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-100


Open decisions: None specific (see Part 16).

P-107 CONFIRMED P0 v2.0

Refund estimate — 100% (within 8 h)

٪100 — رقم واپسی

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.cest100`

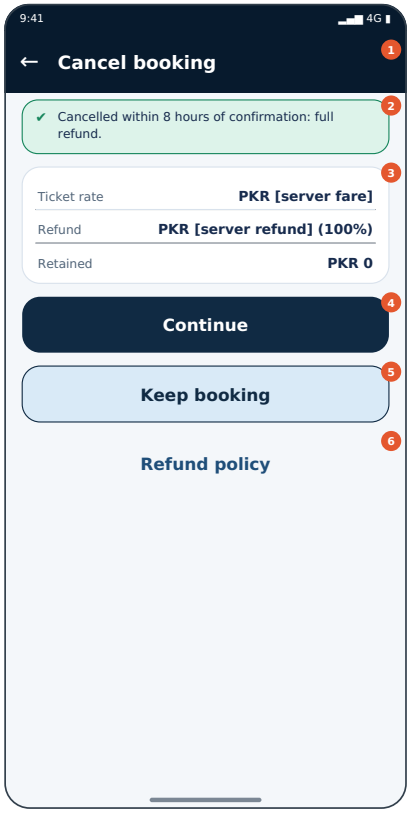

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Within first 8 hours after booking confirmation: 100% refund (server value).

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **P-109** Cancellation confirmation
- Keep booking (Button) → previous screen (system Back)
- Refund policy (Button) → **P-163** Cancellation & refund policy

Android system Back: Back asks to confirm leaving; hold continues until expiry. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Key-value card	140–256 dp	Full width, 16 dp margins	above fold
4	Button	256–318 dp	Full width, 16 dp margins	above fold
5	Button	318–380 dp	Full width, 16 dp margins	above fold
6	Button	380–442 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Cancel booking	Deep navy #071A2D, white 16sp bold	Per state	Cancel booking	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Cancelled within 8 hours of confirmation: full refund.	Tinted background + border + icon + text (never colour alone)	—	Cancelled within 8 hours of confirmation	No	Always in this state
3	C03 Key-value card	140–256 dp	328×116 dp	Ticket rate: PKR [server fare]; Refund: PKR [server refund] (100%); Retained: PKR 0	White card, 30dp rows, label grey / value bold	—	Ticket rate: PKR [server fare]	No	Always in this state
4	C04 Button	256–318 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state
5	C05 Button	318–380 dp	328×62 dp	Keep booking بکنگ رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Keep booking, button	Yes	Always in this state
6	C06 Button	380–442 dp	328×62 dp	Refund policy پالیسی	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refund policy, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Cancel booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Cancelled within 8 hours of confirmation: full refund.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Ticket rate: PKR [server fare]	ٹکٹ کا کرایہ	Needs native review

3	Refund: PKR [server refund] (100%)	رقم واپسی	Needs native review
3	Retained: PKR 0	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Continue	جاری رکھیں	Needs native review
5	Keep booking	بکنگ رکھیں	Needs native review
6	Refund policy	پالیسی	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
4	Button: Continue	≥48 dp	Enabled	Navigate to **P-109** Cancellation confirmation	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
5	Button: Keep booking	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
6	Button: Refund policy	≥48 dp	Enabled	Navigate to **P-163** Cancellation & refund policy	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Ticket rate	PKR [server fare]	Server-derived	Required	Show “Not available” if missing; never blank/invented
Refund	PKR [server refund] (100%)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Retained	PKR 0	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Within first 8 hours after booking confirmation: 100% refund (server value).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E15 Fare differs from earlier display	Banner or full screen **P-062** Fare changed — acknowledge	The fare has changed — The ticket rate is now PKR [server fare]. Review before continuing.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_cancellation_quote (read)
Inputs	booking id
Server checks / RLS	eligibility; server-time since confirmation (≤8 h → 100%; >8 h → 75%, 25% retained; exactly 8 h → 75%); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E14, E15, E16, E17
Retry / idempotency	Safe read
Offline	Blocked
Cache	None — always fresh

14. Security, privacy & safety

No card numbers stored/logged; provider handoff only via configured methods; amounts from server quote. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Amounts large and high-contrast; method as icon + text; status icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Timer starts at booking confirmation, not departure
2. Ticket rate only; no toll/highway/luggage lines
3. Unknown payment never offers “pay again”
4. Success shown only after server confirms
5. Back during handoff is safe
6. Hold expiry during payment handled
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-109, P-163 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-108 CONFIRMED P0 v2.0

Refund estimate — 75% (after 8 h)

٪75 — رقم واپسی

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.cest75`

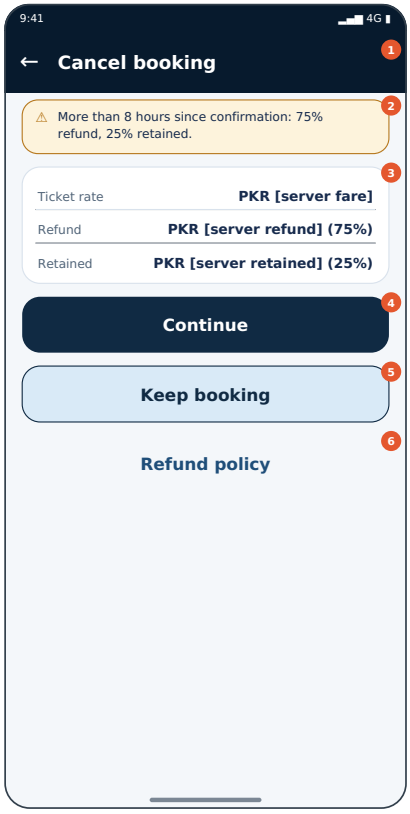

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

After 8 hours (exactly 8 h counts here): 75% refund, 25% retained (server value).

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **P-109** Cancellation confirmation
- Keep booking (Button) → previous screen (system Back)
- Refund policy (Button) → **P-163** Cancellation & refund policy

Android system Back: Back asks to confirm leaving; hold continues until expiry. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Key-value card	140–256 dp	Full width, 16 dp margins	above fold
4	Button	256–318 dp	Full width, 16 dp margins	above fold
5	Button	318–380 dp	Full width, 16 dp margins	above fold
6	Button	380–442 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Cancel booking	Deep navy #071A2D, white 16sp bold	Per state	Cancel booking	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	More than 8 hours since confirmation: 75% refund, 25% retained.	Tinted background + border + icon + text (never colour alone)	—	More than 8 hours since confirmation: 75	No	Always in this state
3	C03 Key-value card	140–256 dp	328×116 dp	Ticket rate: PKR [server fare]; Refund: PKR [server refund] (75%); Retained: PKR [server retained] (25%)	White card, 30dp rows, label grey / value bold	—	Ticket rate: PKR [server fare]	No	Always in this state
4	C04 Button	256–318 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state
5	C05 Button	318–380 dp	328×62 dp	Keep booking بکنگ رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Keep booking, button	Yes	Always in this state
6	C06 Button	380–442 dp	328×62 dp	Refund policy پالیسی	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refund policy, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Cancel booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	More than 8 hours since confirmation: 75% refund, 25% retained.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Ticket rate: PKR [server fare]	ٹکٹ کا کرایہ	Needs native review

3	Refund: PKR [server refund] (75%)	رقم واپسی	Needs native review
3	Retained: PKR [server retained] (25%)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Continue	جاری رکھیں	Needs native review
5	Keep booking	بکنگ رکھیں	Needs native review
6	Refund policy	پالیسی	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
4	Button: Continue	≥48 dp	Enabled	Navigate to **P-109** Cancellation confirmation	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
5	Button: Keep booking	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.
6	Button: Refund policy	≥48 dp	Enabled	Navigate to **P-163** Cancellation & refund policy	Instant	—	E01, E04 copy; no false success	Pay disabled after tap; same idempotency key until status known.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Ticket rate	PKR [server fare]	Server-derived	Required	Show “Not available” if missing; never blank/invented
Refund	PKR [server refund] (75%)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Retained	PKR [server retained] (25%)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	After 8 hours (exactly 8 h counts here): 75% refund, 25% retained (server value).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E14 10-minute hold expired (server time)	Banner or full screen **P-053** Hold expired	Your seat hold has ended — Seats are held for 10 minutes. Please select seats again.
E15 Fare differs from earlier display	Banner or full screen **P-062** Fare changed — acknowledge	The fare has changed — The ticket rate is now PKR [server fare]. Review before continuing.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_cancellation_quote (read)
Inputs	booking id
Server checks / RLS	eligibility; server-time since confirmation (≤8 h → 100%; >8 h → 75%, 25% retained; exactly 8 h → 75%); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E14, E15, E16, E17
Retry / idempotency	Safe read
Offline	Blocked
Cache	None — always fresh

14. Security, privacy & safety

No card numbers stored/logged; provider handoff only via configured methods; amounts from server quote. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Amounts large and high-contrast; method as icon + text; status icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Exactly 8:00:00 after confirmation → 75% category
2. Amounts come from server, not computed in UI
3. Ticket rate only; no toll/highway/luggage lines
4. Unknown payment never offers “pay again”
5. Success shown only after server confirms
6. Back during handoff is safe
7. Hold expiry during payment handled
8. Android Back follows §3 on every state
9. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
10. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-109, P-163 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-109 CONFIRMED P0 v2.0

Cancellation confirmation

منسوخی کی تصدیق

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.cconf`

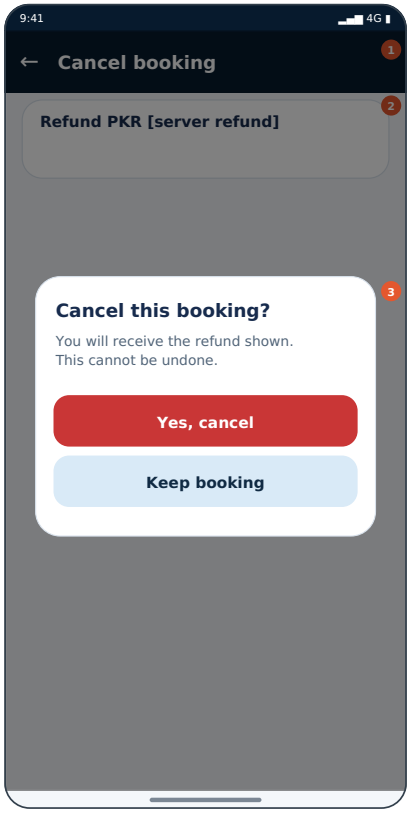

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Final confirmation showing server refund estimate before submitting.

Login: **n/a (shared pattern)** · Incoming screens: P-107, P-108


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Yes, cancel (Dialog button) → **P-110** Cancel request pending
- Keep booking (Dialog button) → **P-100** Trip details

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–162 dp	Full width, 16 dp margins	above fold
3	Dialog	244–476 dp	Full width, 16 dp margins	above fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Cancel booking	Deep navy #071A2D, white 16sp bold	Per state	Cancel booking	Yes	Always in this state
2	C02 Info card	80–162 dp	328×82 dp	Refund PKR [server refund]	White card, border #D9E2EC, radius 18dp	—	Refund PKR [server refund]	No	Always in this state
3	C03 Dialog	244–476 dp	328×232 dp	Cancel this booking?; You will receive the refund shown. This cannot be undone.; Yes, cancel; Keep booking ہاں، منسوخ کریں / بکنگ رکھیں	Radius 22dp, scrim 50%	Per state	Cancel this booking?	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Cancel booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Refund PKR [server refund]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Cancel this booking?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	You will receive the refund shown. This cannot be undone.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Yes, cancel	ہاں، منسوخ کریں	Needs native review
3	Keep booking	بکنگ رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E04, E29 copy; no false success	Buttons debounced.
3	Dialog button: Yes, cancel	≥48 dp	Enabled	Navigate to **P-110** Cancel request pending	Instant	—	E04, E29 copy; no false success	Buttons debounced.
3	Dialog button: Keep booking	≥48 dp	Enabled	Navigate to **P-100** Trip details	Instant	—	E04, E29 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Final confirmation showing server refund estimate before submitting.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E29 Cancellation rejected (state changed)	Banner or full screen **P-112** Cancellation rejected (state changed)	Cancellation not possible — This booking's status changed. Please review the latest details.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	cancel_booking (write)
Inputs	booking id, quote id, idempotency key
Server checks / RLS	state allows cancel; policy recomputed server-side; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E29
Retry / idempotency	Required key
Offline	Blocked
Cache	None

14. Security, privacy & safety

Copy must not leak technical detail. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-100, P-110 · Incoming: P-107, P-108


Open decisions: None specific (see Part 16).

P-110 CONFIRMED P0 v2.0

Cancel request pending

منسوخی کی درخواست زیر عمل

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.cpend`

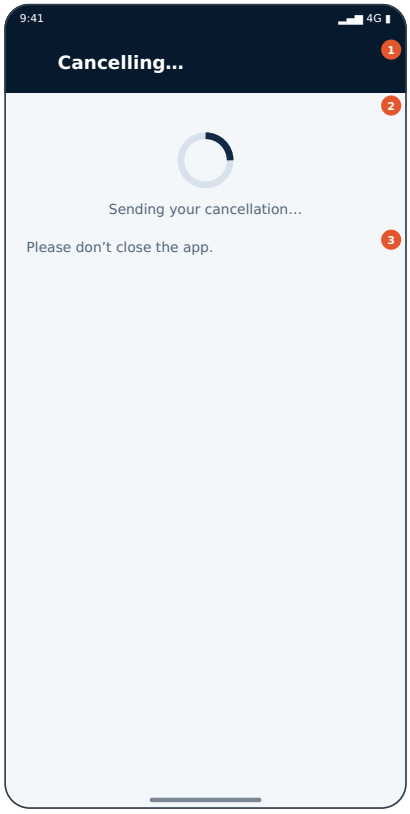

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Cancellation submitted; waiting for server result.

Login: **Per flow** · Incoming screens: P-109


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Body text	200–232 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Cancelling...	Deep navy #071A2D, white 16sp bold	Per state	Cancelling...	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Sending your cancellation...	Navy arc on grey ring	—	Sending your cancellation...	No	Always in this state
3	C03 Body text	200–232 dp	328×32 dp	Please don't close the app.	12–14sp secondary text	—	Please don't close the app.	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Cancelling...	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Sending your cancellation...	Translation review required	—
3	Please don't close the app.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Cancellation submitted; waiting for server result.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we’re still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	cancel_booking (write)
Inputs	booking id, quote id, idempotency key
Server checks / RLS	state allows cancel; policy recomputed server-side; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E05, E17
Retry / idempotency	Required key
Offline	Blocked
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-109


Open decisions: None specific (see Part 16).

P-111 CONFIRMED P0 v2.0

Cancellation successful

منسوخی کامیاب

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.cok`

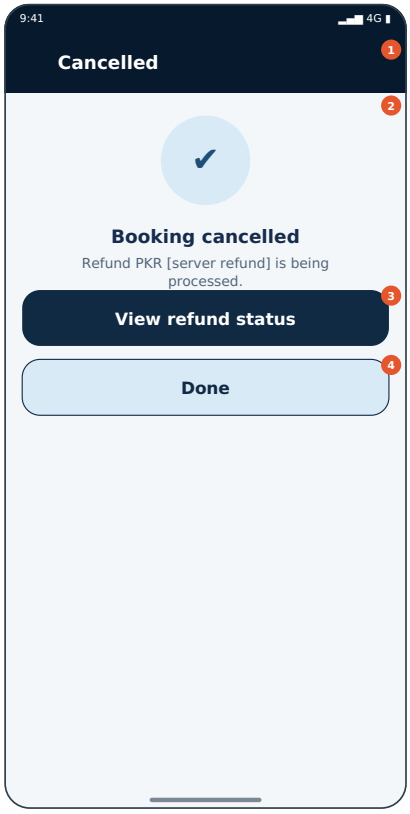

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server confirmed cancellation; show refund status.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- View refund status (Button) → **P-114** Refund pending
- Done (Button) → **P-094** My Trips — Upcoming

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Cancelled	Deep navy #071A2D, white 16sp bold	Per state	Cancelled	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Booking cancelled; Refund PKR [server refund] is being processed.	Light-blue circle icon + 16sp title + 12sp body	—	Booking cancelled	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	View refund status رقم واپسی کی حالت	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View refund status, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Done مکمل	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Done, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Cancelled	منسوخ	Needs native review
2	Booking cancelled	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Refund PKR [server refund] is being processed.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View refund status	رقم واپسی کی حالت	Needs native review
4	Done	مکمل	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

3	Button: View refund status	≥48 dp	Enabled	Navigate to **P-114** Refund pending	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Status check button debounced; no write retries.
4	Button: Done	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server confirmed cancellation; show refund status.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	cancel_booking (write)
Inputs	booking id, quote id, idempotency key
Server checks / RLS	state allows cancel; policy recomputed server-side; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Required key
Offline	Blocked
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-094, P-114 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-112 CONFIRMED P0 v2.0

Cancellation rejected (state changed)

منسوخی مسترد

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.cancel_rejected`

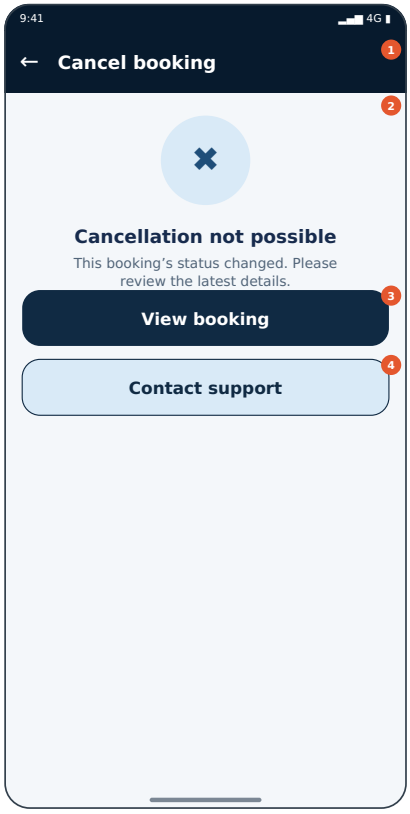

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server rejects because state changed (e.g., boarded or already cancelled).

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- View booking (Button) → **P-100** Trip details
- Contact support (Button) → **P-105** Ticket support

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Cancel booking	Deep navy #071A2D, white 16sp bold	Per state	Cancel booking	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Cancellation not possible; This booking's status changed. Please review the latest details.	Light-blue circle icon + 16sp title + 12sp body	—	Cancellation not possible	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	View booking بکنگ دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View booking, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Cancel booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Cancellation not possible	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This booking's status changed. Please review the latest details.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View booking	بکنگ دیکھیں	Needs native review
4	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

									Dup-tap /

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E29 copy; no false success	Retry debounced.
3	Button: View booking	≥48 dp	Enabled	Navigate to **P-100** Trip details	Inline spinner; other controls locked	Server-confirmed result only	E29 copy; no false success	Retry debounced.
4	Button: Contact support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Inline spinner; other controls locked	Server-confirmed result only	E29 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server rejects because state changed (e.g., boarded or already cancelled).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E29 Cancellation rejected (state changed)	Banner or full screen **P-112** Cancellation rejected (state changed)	Cancellation not possible — This booking’s status changed. Please review the latest details.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	cancel_booking (write)
Inputs	booking id, quote id, idempotency key
Server checks / RLS	state allows cancel; policy recomputed server-side; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E29
Retry / idempotency	Required key
Offline	Blocked
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-100, P-105 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-113 CONFIRMED P1 v2.0

Cancellation not available

منسوخی دستیاب نہیں

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.cno`

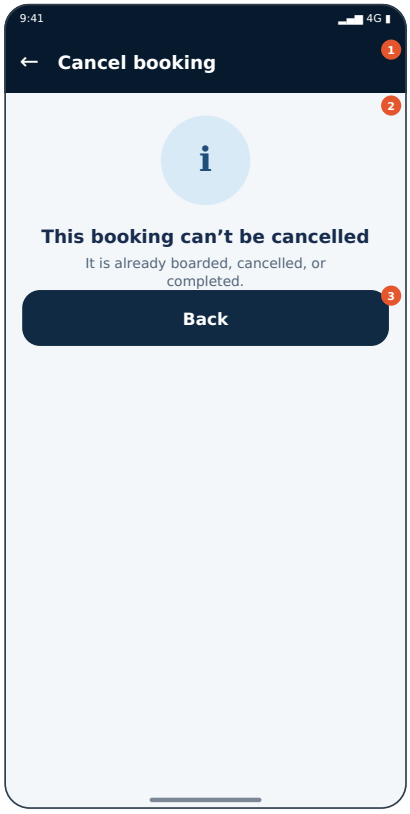

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Booking already cancelled/boarded/completed.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Back (Button) → **P-100** Trip details

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Cancel booking	Deep navy #071A2D, white 16sp bold	Per state	Cancel booking	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	This booking can’t be cancelled; It is already boarded, cancelled, or completed.	Light-blue circle icon + 16sp title + 12sp body	—	This booking can’t be cancelled	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Cancel booking	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This booking can’t be cancelled	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	It is already boarded, cancelled, or completed.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E29 copy; no false success	Retry debounced.
3	Button: Back	≥48 dp	Enabled	Navigate to **P-100** Trip details	Instant	—	E29 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Booking already cancelled/boarded/completed.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E29 Cancellation rejected (state changed)	Banner or full screen **P-112** Cancellation rejected (state changed)	Cancellation not possible — This booking’s status changed. Please review the latest details.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_cancellation_quote (read)
Inputs	booking id
Server checks / RLS	eligibility; server-time since confirmation (≤8 h → 100%; >8 h → 75%, 25% retained; exactly 8 h → 75%); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E29
Retry / idempotency	Safe read
Offline	Blocked
Cache	None — always fresh

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-100 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-114 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Refund pending

رقم واپسی زیرِ عمل

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.rf_pend`

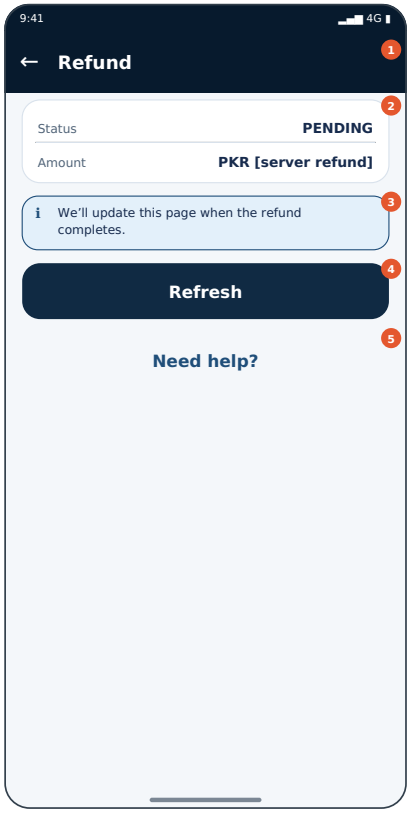

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Refund requested/processing (timelines NEEDS CONFIRMATION).

Login: **Per flow** · Incoming screens: P-102, P-111, P-120


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refresh (Button) → stays on screen (action)
- Need help? (Button) → **P-105** Ticket support

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–166 dp	Full width, 16 dp margins	above fold
3	Banner	166–226 dp	Full width, 16 dp margins	above fold
4	Button	226–288 dp	Full width, 16 dp margins	above fold
5	Button	288–350 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Refund	Deep navy #071A2D, white 16sp bold	Per state	Refund	Yes	Always in this state
2	C02 Key-value card	80–166 dp	328×86 dp	Status: PENDING; Amount: PKR [server refund]	White card, 30dp rows, label grey / value bold	—	Status: PENDING	No	Always in this state
3	C03 Banner	166–226 dp	328×60 dp	We'll update this page when the refund completes.	Tinted background + border + icon + text (never colour alone)	—	We'll update this page when the refund c	No	Always in this state
4	C04 Button	226–288 dp	328×62 dp	Refresh ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh, button	Yes	Always in this state
5	C05 Button	288–350 dp	328×62 dp	Need help? مدد	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Need help?, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Refund	رقم واپسی	Needs native review
2	Status: PENDING	حالت	Needs native review
2	Amount: PKR [server refund]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	We'll update this page when the refund completes.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Refresh	ریفریش	Needs native review
5	Need help?		Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
4	Button: Refresh	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
5	Button: Need help?	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	PENDING	Server-derived	Required	Show “Not available” if missing; never blank/invented
Amount	PKR [server refund]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Refund requested/processing (timelines NEEDS CONFIRMATION).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_refund_status (read)
Inputs	booking id
Server checks / RLS	refund state: pending/succeeded/failed/needs review; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-105 · Incoming: P-102, P-111, P-120


Open decisions: OD-02 (see Part 16).

P-115 CONFIRMED P1 v2.0

Refund completed

رقم واپسی مکمل

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.rf_ok`

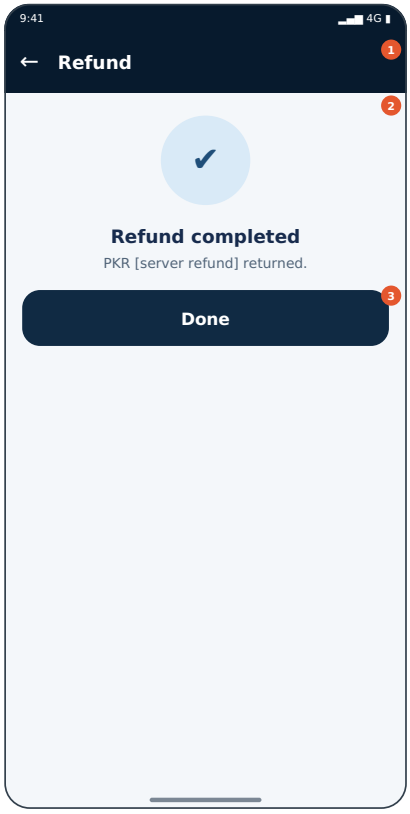

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Refund succeeded per server.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Done (Button) → **P-094** My Trips — Upcoming

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Refund	Deep navy #071A2D, white 16sp bold	Per state	Refund	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Refund completed; PKR [server refund] returned.	Light-blue circle icon + 16sp title + 12sp body	—	Refund completed	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Done مکمل	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Done, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Refund	رقم واپسی	Needs native review
2	Refund completed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	PKR [server refund] returned.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Done	مکمل	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
3	Button: Done	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Refund succeeded per server.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_refund_status (read)
Inputs	booking id
Server checks / RLS	refund state: pending/succeeded/failed/needs review; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-094 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-116 CONFIRMED P0 v2.0

Refund failed — needs support

رقم واپسی ناکام

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.rf_fail`

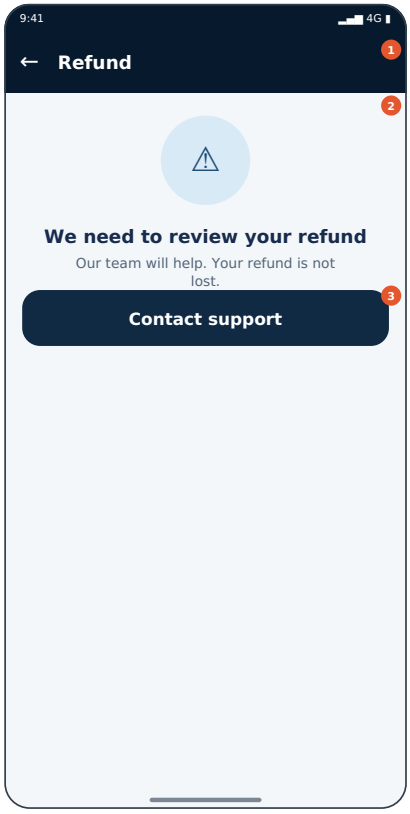

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Refund failed or needs review; direct to support.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Contact support (Button) → **P-105** Ticket support

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Refund	Deep navy #071A2D, white 16sp bold	Per state	Refund	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	We need to review your refund; Our team will help. Your refund is not lost.	Light-blue circle icon + 16sp title + 12sp body	—	We need to review your refund	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Refund	رقم واپسی	Needs native review
2	We need to review your refund	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Our team will help. Your refund is not lost.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E06 copy; no false success	Retry debounced.
3	Button: Contact support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E06 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Refund failed or needs review; direct to support.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_refund_status (read)
Inputs	booking id
Server checks / RLS	refund state: pending/succeeded/failed/needs review; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E06
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-105 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-117 CONFIRMED P0 v2.0

Driver cancellation notice

ڈرائیور کی منسوخی کا نوٹس

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.drv_cancel`

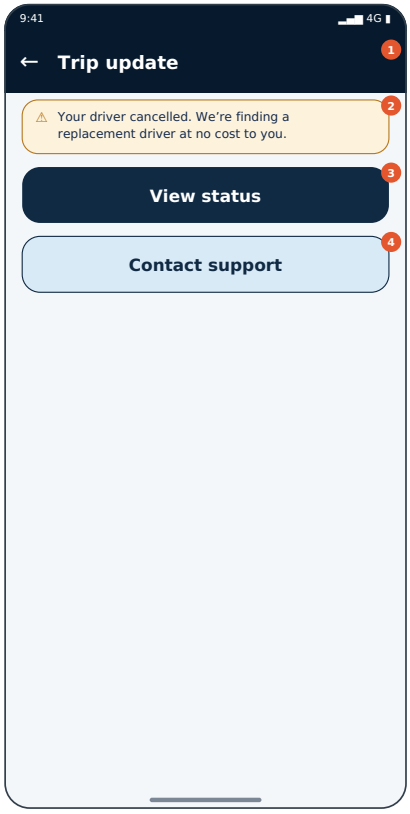

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Driver cancelled; company seeks replacement at company cost.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- View status (Button) → **P-118** Replacement being sought
- Contact support (Button) → **P-105** Ticket support

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip update	Deep navy #071A2D, white 16sp bold	Per state	Trip update	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Your driver cancelled. We're finding a replacement driver at no cost to you.	Tinted background + border + icon + text (never colour alone)	—	Your driver cancelled. We're finding a r	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	View status حالت دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View status, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip update	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your driver cancelled. We're finding a replacement driver at no cost to you.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View status	حالت دیکھیں	Needs native review
4	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

3	Button: View status	≥48 dp	Enabled	Navigate to **P-118** Replacement being sought	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
4	Button: Contact support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Driver cancelled; company seeks replacement at company cost.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_disruption_status (read)
Inputs	booking/trip id
Server checks / RLS	driver cancellation, replacement attempts, delay, changes; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-105, P-118 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-118 CONFIRMED P0 v2.0

Replacement being sought

متبادل ڈرائیور کی تلاش

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.repl_seek`

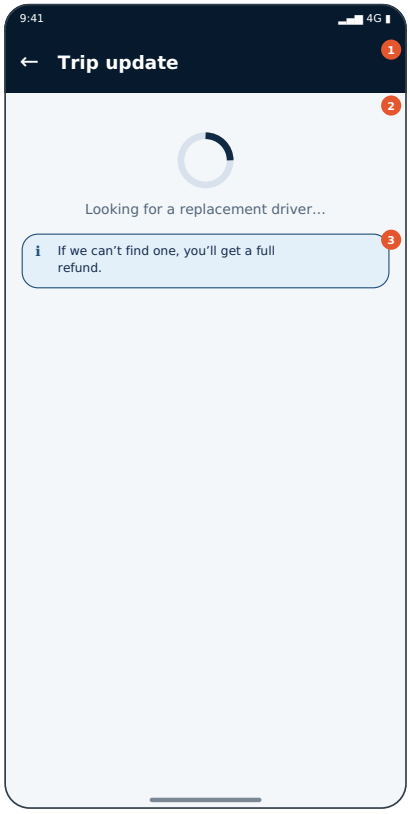

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Replacement attempt in progress.

Login: **Per flow** · Incoming screens: P-117


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Banner	200–260 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip update	Deep navy #071A2D, white 16sp bold	Per state	Trip update	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Looking for a replacement driver…	Navy arc on grey ring	—	Looking for a replacement driver…	No	Always in this state
3	C03 Banner	200–260 dp	328×60 dp	If we can’t find one, you’ll get a full refund.	Tinted background + border + icon + text (never colour alone)	—	If we can’t find one, you’ll get a full	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip update	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Looking for a replacement driver…	Translation review required	—
3	If we can’t find one, you’ll get a full refund.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Replacement attempt in progress.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_disruption_status (read)
Inputs	booking/trip id
Server checks / RLS	driver cancellation, replacement attempts, delay, changes; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-117


Open decisions: None specific (see Part 16).

P-119 CONFIRMED P0 v2.0

Replacement found

متبادل ڈرائیور مل گیا

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.repl_found`

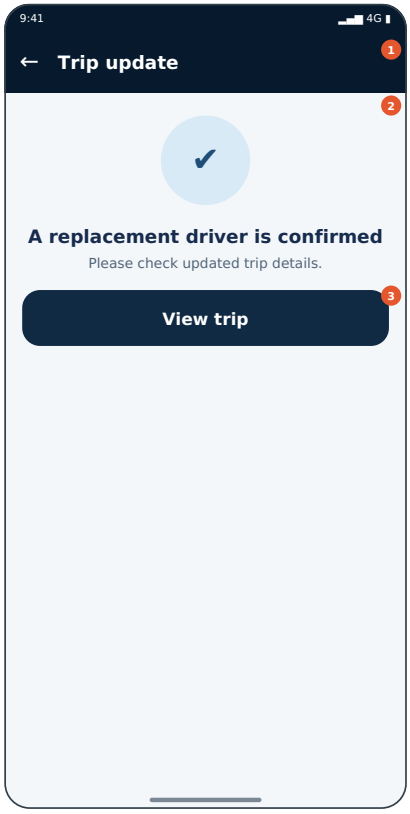

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Replacement driver assigned; show changed details.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- View trip (Button) → **P-100** Trip details

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip update	Deep navy #071A2D, white 16sp bold	Per state	Trip update	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	A replacement driver is confirmed; Please check updated trip details.	Light-blue circle icon + 16sp title + 12sp body	—	A replacement driver is confirmed	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	View trip سفر دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View trip, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip update	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	A replacement driver is confirmed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please check updated trip details.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View trip	سفر دیکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
3	Button: View trip	≥48 dp	Enabled	Navigate to **P-100** Trip details	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Replacement driver assigned; show changed details.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_disruption_status (read)
Inputs	booking/trip id
Server checks / RLS	driver cancellation, replacement attempts, delay, changes; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-100 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-120 CONFIRMED P0 v2.0

No replacement — full refund

کوئی متبادل نہیں — مکمل رقم واپسی

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.no_repl`

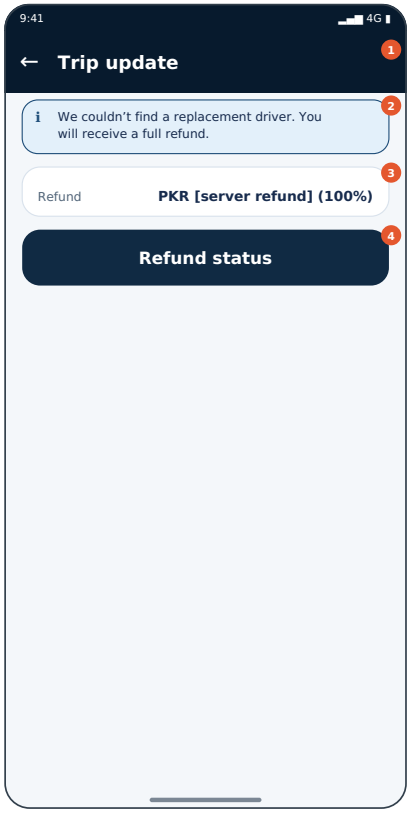

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No replacement available: full refund.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refund status (Button) → **P-114** Refund pending

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Key-value card	140–196 dp	Full width, 16 dp margins	above fold
4	Button	196–258 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip update	Deep navy #071A2D, white 16sp bold	Per state	Trip update	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	We couldn't find a replacement driver. You will receive a full refund.	Tinted background + border + icon + text (never colour alone)	—	We couldn't find a replacement driver. Y	No	Always in this state
3	C03 Key-value card	140–196 dp	328×56 dp	Refund: PKR [server refund] (100%)	White card, 30dp rows, label grey / value bold	—	Refund: PKR [server refund] (100%)	No	Always in this state
4	C04 Button	196–258 dp	328×62 dp	Refund status رقم واپسی	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refund status, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip update	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We couldn't find a replacement driver. You will receive a full refund.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refund: PKR [server refund] (100%)	رقم واپسی	Needs native review
4	Refund status	رقم واپسی	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

4	Button: Refund status	≥48 dp	Enabled	Navigate to **P-114** Refund pending	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Refund	PKR [server refund] (100%)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No replacement available: full refund.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_refund_status (read)
Inputs	booking id
Server checks / RLS	refund state: pending/succeeded/failed/needs review; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-114 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-121 CONFIRMED P1 v2.0

Delay notice

تاخیر کی اطلاع

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.delay`

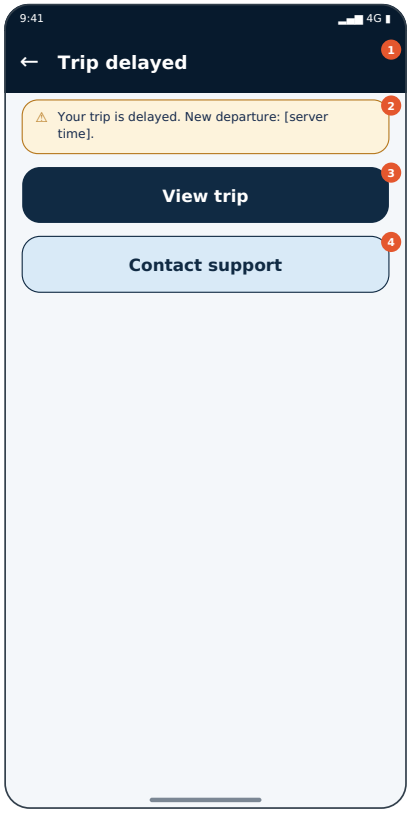

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Trip delayed; not passenger fault.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- View trip (Button) → **P-100** Trip details
- Contact support (Button) → **P-105** Ticket support

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip delayed	Deep navy #071A2D, white 16sp bold	Per state	Trip delayed	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Your trip is delayed. New departure: [server time].	Tinted background + border + icon + text (never colour alone)	—	Your trip is delayed. New departure: [se	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	View trip سفر دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View trip, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip delayed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your trip is delayed. New departure: [server time].	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View trip	سفر دیکھیں	Needs native review
4	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

3	Button: View trip	≥48 dp	Enabled	Navigate to **P-100** Trip details	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
4	Button: Contact support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Trip delayed; not passenger fault.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_disruption_status (read)
Inputs	booking/trip id
Server checks / RLS	driver cancellation, replacement attempts, delay, changes; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-100, P-105 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-122 CONFIRMED P1 v2.0

Trip details changed

سفر کی تفصیلات بدل گئیں

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.chg`

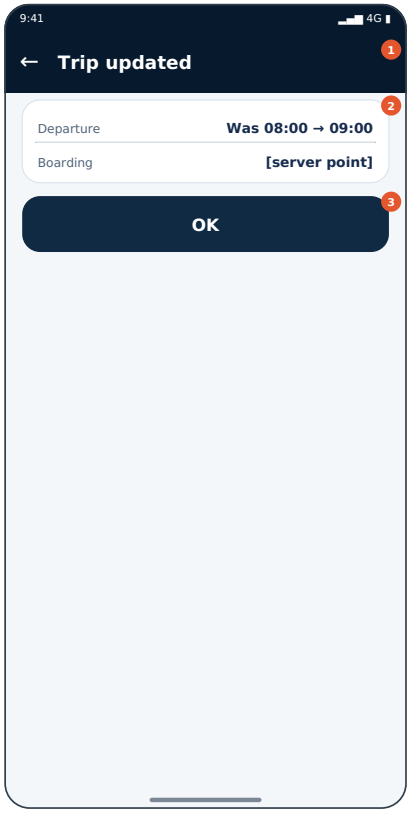

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Changed time/boarding/vehicle info shown with previous vs new.

Login: **Per flow** · Incoming screens: P-103


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- OK (Button) → **P-100** Trip details

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–166 dp	Full width, 16 dp margins	above fold
3	Button	166–228 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip updated	Deep navy #071A2D, white 16sp bold	Per state	Trip updated	Yes	Always in this state
2	C02 Key-value card	80–166 dp	328×86 dp	Departure: Was 08:00 → 09:00; Boarding: [server point]	White card, 30dp rows, label grey / value bold	—	Departure: Was 08:00 → 09:00	No	Always in this state
3	C03 Button	166–228 dp	328×62 dp	OK ٹھیک ہے	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	OK, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip updated	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Departure: Was 08:00 → 09:00	روانگی	Needs native review
2	Boarding: [server point]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	OK	ٹھیک ہے	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
3	Button: OK	≥48 dp	Enabled	Navigate to **P-100** Trip details	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Departure	Was 08:00 → 09:00	Server-derived	Required	Show “Not available” if missing; never blank/invented
Boarding	[server point]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Changed time/boarding/vehicle info shown with previous vs new.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_disruption_status (read)
Inputs	booking/trip id
Server checks / RLS	driver cancellation, replacement attempts, delay, changes; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Cached with label
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-100 · Incoming: P-103


Open decisions: None specific (see Part 16).

P-123 CONFIRMED P1 v2.0

No-show explanation

غیر حاضری کی وضاحت

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.noshow`

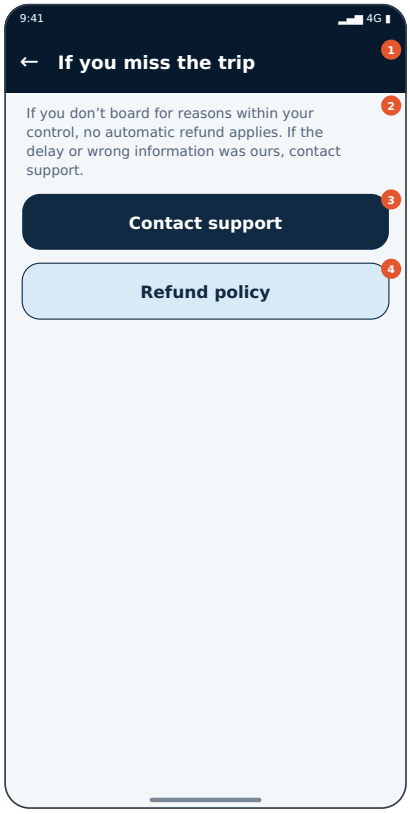

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Passenger no-show for passenger-controlled reasons has no automatic refund; company-caused issues are handled separately.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Contact support (Button) → **P-105** Ticket support
- Refund policy (Button) → **P-163** Cancellation & refund policy

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–164 dp	Full width, 16 dp margins	above fold
3	Button	164–226 dp	Full width, 16 dp margins	above fold
4	Button	226–288 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	If you miss the trip	Deep navy #071A2D, white 16sp bold	Per state	If you miss the trip	Yes	Always in this state
2	C02 Body text	80–164 dp	328×84 dp	If you don’t board for reasons within your control, no automatic refund applies. If the delay or wrong information was ours, contact support.	12–14sp secondary text	—	If you don’t board for reasons within yo	No	Always in this state
3	C03 Button	164–226 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state
4	C04 Button	226–288 dp	328×62 dp	Refund policy پالیسی	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refund policy, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	If you miss the trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	If you don’t board for reasons within your control, no automatic refund applies. If the delay or wrong information was ours, contact support.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Contact support	سپورٹ	Needs native review
4	Refund policy	پالیسی	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
3	Button: Contact support	≥48 dp	Enabled	Navigate to **P-105** Ticket support	Instant	—	E01, E03 copy; no false success	n/a
4	Button: Refund policy	≥48 dp	Enabled	Navigate to **P-163** Cancellation & refund policy	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Passenger no-show for passenger-controlled reasons has no automatic refund; company-caused issues are handled separately.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-105, P-163 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-124 CONFIRMED P0 v2.0

Company-caused disruption support

ادارے کی وجہ سے تعطل

Role: **Passenger** · Family: F6 Cancellation, refunds & disruptions · Key: `p.disrupt`

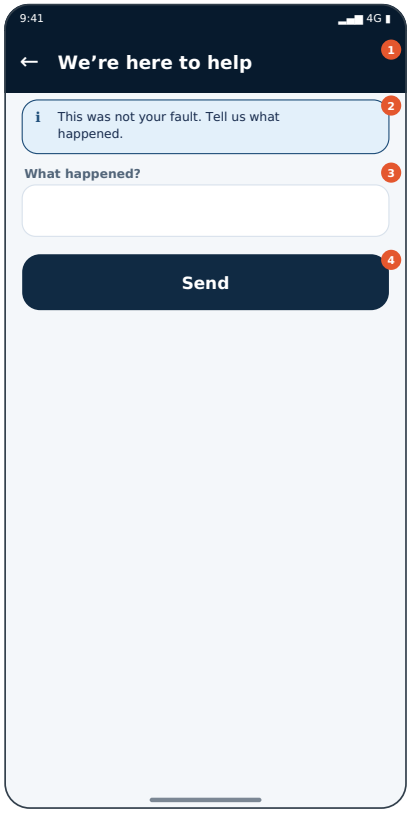

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Support path when the company caused a problem; never treated as passenger fault.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send (Button) → **P-146** Submitting report

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Text field	140–218 dp	Full width, 16 dp margins	above fold
4	Button	218–280 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	We're here to help	Deep navy #071A2D, white 16sp bold	Per state	We're here to help	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	This was not your fault. Tell us what happened.	Tinted background + border + icon + text (never colour alone)	—	This was not your fault. Tell us what ha	No	Always in this state
3	C03 Text field	140–218 dp	328×78 dp	What happened?: ""	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	What happened?: ""	Yes	Always in this state
4	C04 Button	218–280 dp	328×62 dp	Send بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	We're here to help	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This was not your fault. Tell us what happened.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	What happened?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Send	بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.

	Back							
4	Button: Send	≥48 dp	Enabled	Navigate to **P-146** Submitting report	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
What happened?	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Support path when the company caused a problem; never treated as passenger fault.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-146 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-125 CONFIRMED NEEDS CONFIRMATION P0 v2.0

SOS — how it works

SOS کیسے کام کرتا ہے —

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sos_edu`

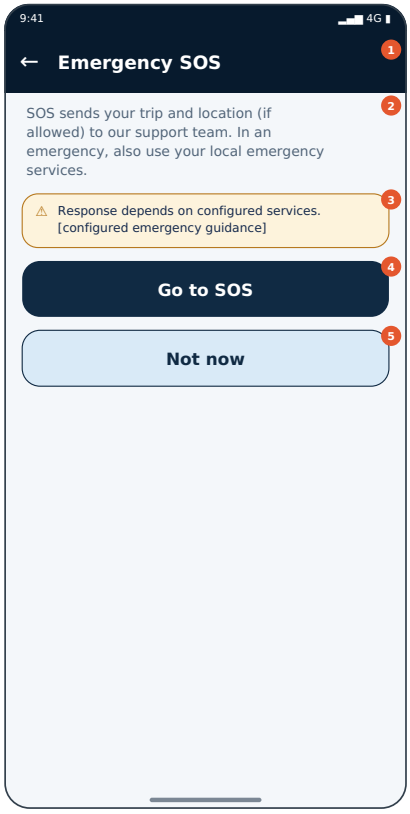

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Explain SOS before first use; no promise of response time.

Login: **Yes** · Incoming screens: P-139, P-149


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Go to SOS (Button) → **P-126** SOS — press and hold
- Not now (Button) → previous screen (system Back)

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–164 dp	Full width, 16 dp margins	above fold
3	Banner	164–224 dp	Full width, 16 dp margins	above fold
4	Button	224–286 dp	Full width, 16 dp margins	above fold
5	Button	286–348 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Emergency SOS	Deep navy #071A2D, white 16sp bold	Per state	Emergency SOS	Yes	Always in this state
2	C02 Body text	80–164 dp	328×84 dp	SOS sends your trip and location (if allowed) to our support team. In an emergency, also use your local emergency services.	12–14sp secondary text	—	SOS sends your trip and location (if all	No	Always in this state
3	C03 Banner	164–224 dp	328×60 dp	Response depends on configured services. [configured emergency guidance]	Tinted background + border + icon + text (never colour alone)	—	Response depends on configured services.	No	Always in this state
4	C04 Button	224–286 dp	328×62 dp	Go to SOS پر جائیں SOS	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Go to SOS, button	Yes	Always in this state
5	C05 Button	286–348 dp	328×62 dp	Not now ابھی نہیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Not now, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Emergency SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	SOS sends your trip and location (if allowed) to our support team. In an emergency, also use your local emergency services.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Response depends on configured services. [configured emergency guidance]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Go to SOS	SOS پر جائیں	Needs native review

5	Not now	ابھی نہیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
4	Button: Go to SOS	≥48 dp	Enabled	Navigate to **P-126** SOS — press and hold	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
5	Button: Not now	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Explain SOS before first use; no promise of response time.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can’t get a GPS signal. Move to an open area or check location settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E21, E22, E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says “delivered” without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-126 · Incoming: P-139, P-149


Open decisions: OD-10 (see Part 16).

P-126 CONFIRMED P0 v2.0

SOS — press and hold

دبائیں SOS کو —

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sos_hold`

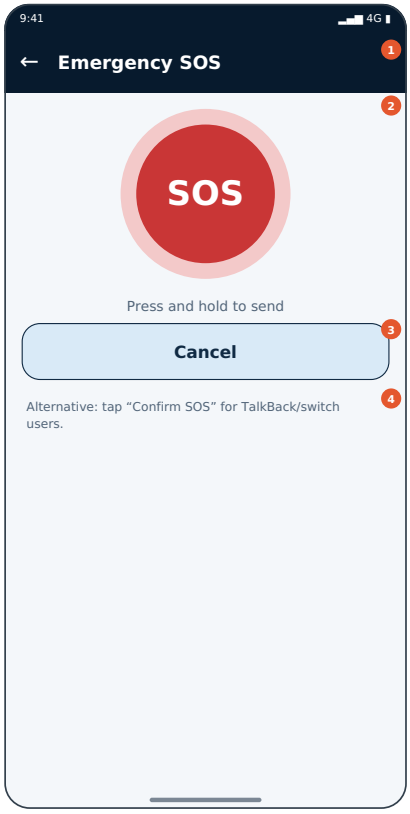

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Press-and-hold confirmation prevents accidental sends; accessible alternative provided.

Login: **Yes** · Incoming screens: P-125, P-135


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Cancel (Button) → **P-127** SOS — cancelled before sending

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	SOS hold button	80–280 dp	Full width, 16 dp margins	above fold
3	Button	280–342 dp	Full width, 16 dp margins	above fold
4	Body text	342–388 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Emergency SOS	Deep navy #071A2D, white 16sp bold	Per state	Emergency SOS	Yes	Always in this state
2	C02 SOS hold button	80–280 dp	328×200 dp	SOS	Red circle 124dp, white label	Per state	SOS	Yes	Always in this state
3	C03 Button	280–342 dp	328×62 dp	Cancel منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel, button	Yes	Always in this state
4	C04 Body text	342–388 dp	328×46 dp	Alternative: tap “Confirm SOS” for TalkBack/switch users.	12–14sp secondary text	—	Alternative: tap “Confirm SOS” for TalkB	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Emergency SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Cancel	منسوخ	Needs native review
4	Alternative: tap “Confirm SOS” for TalkBack/switch users.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same as	Instant	—	E01, E04 copy; no false	One SOS per idempotency key; duplicate tap does not

	Back			system Back)			success	create duplicates.
3	Button: Cancel	≥48 dp	Enabled	Navigate to **P-127** SOS — cancelled before sending	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
2	SOS hold button	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Press-and-hold confirmation prevents accidental sends; accessible alternative provided.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can't get a GPS signal. Move to an open area or check location settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E21, E22, E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Hold ≈ 2 s with progress ring (PROPOSED)
2. Releasing early cancels
3. Never says "delivered" without server ack
4. Accidental activation prevented
5. Location denied path works
6. Offline state honest
7. Retry reuses key
8. Android Back follows §3 on every state
9. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
10. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-127 · Incoming: P-125, P-135


Open decisions: None specific (see Part 16).

P-127 CONFIRMED P0 v2.0

SOS — cancelled before sending

بھیجنے سے پہلے SOS منسوخ —

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sos_cancel`

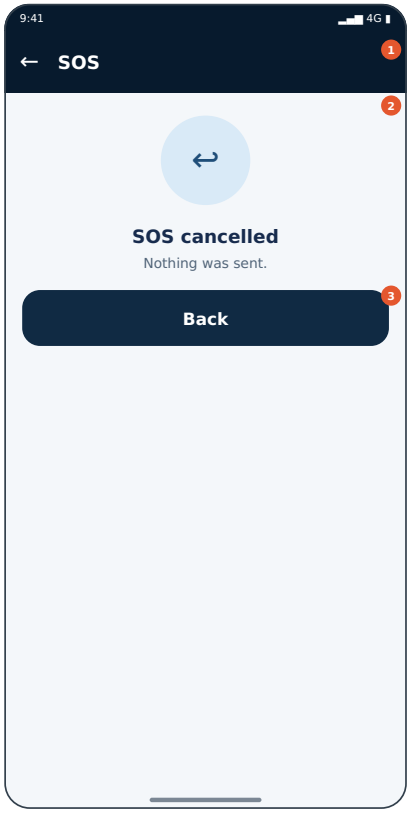

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

User released/cancelled; nothing was sent.

Login: **Per flow** · Incoming screens: P-126


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Back (Button) → previous screen (system Back)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	SOS cancelled; Nothing was sent.	Light-blue circle icon + 16sp title + 12sp body	—	SOS cancelled	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	SOS cancelled	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Nothing was sent.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
3	Button: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	User released/cancelled; nothing was sent.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. No network request made
2. Never shows success without server confirmation
3. Back never resubmits a write
4. App kill/relaunch restores correct status
5. Urdu RTL copy matches catalogue
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-126


Open decisions: None specific (see Part 16).

P-128 CONFIRMED P0 v2.0

SOS — sending

SOS بھیجا جا رہا ہے —

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sos_send`

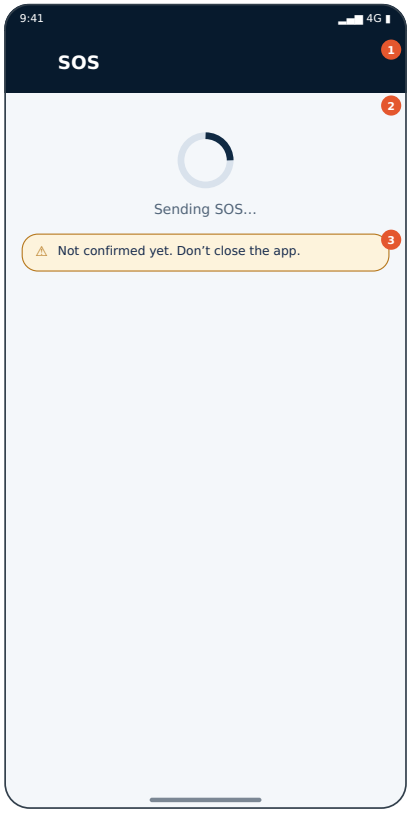

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Sending with location if permitted; waits for server acknowledgement.

Login: **Yes** · Incoming screens: P-130, P-131, P-132, P-133


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Banner	200–245 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Sending SOS...	Navy arc on grey ring	—	Sending SOS...	No	Always in this state
3	C03 Banner	200–245 dp	328×45 dp	Not confirmed yet. Don't close the app.	Tinted background + border + icon + text (never colour alone)	—	Not confirmed yet. Don't close the app.	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Sending SOS...	Translation review required	—
3	Not confirmed yet. Don't close the app.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Sending with location if permitted; waits for server acknowledgement.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can’t get a GPS signal. Move to an open area or check location settings.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	send_sos (write)
Inputs	trip id, location (if permitted), idempotency key
Server checks / RLS	auth, trip context, rate protection; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E21, E22
Retry / idempotency	Required key; retry reuses key
Offline	Local pending state only; never “delivered”
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says “delivered” without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-130, P-131, P-132, P-133


Open decisions: None specific (see Part 16).

P-129 CONFIRMED P0 v2.0

SOS — delivered (server confirmed)

(ایس او ایس سرور سے موصول) —

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sos_ok`

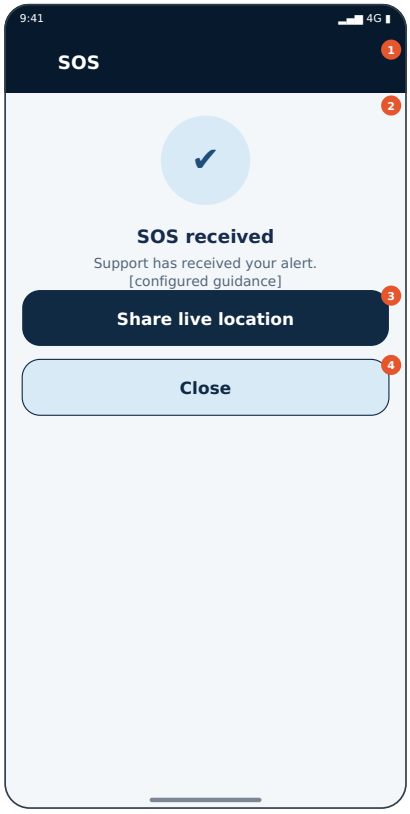

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Only after server acknowledgement.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Share live location (Button) → **P-136** Location sharing controls
- Close (Button) → previous screen (system Back)

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	SOS received; Support has received your alert. [configured guidance]	Light-blue circle icon + 16sp title + 12sp body	—	SOS received	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Share live location لائیو لوکیشن	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Share live location, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Close بند کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Close, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	SOS received	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Support has received your alert. [configured guidance]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Share live location	لائیو لوکیشن	Needs native review
4	Close	بند کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Share live	≥48 dp	Enabled	Navigate to **P-136** Location sharing	Instant	—	E01, E04 copy: no	One SOS per idempotency key; duplicate tap does

	location			controls			false success	not create duplicates.
4	Button: Close	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Only after server acknowledgement.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can't get a GPS signal. Move to an open area or check location settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_sos_status (read)
Inputs	sos id
Server checks / RLS	server acknowledgement state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E21, E22, E09, E10
Retry / idempotency	Safe read
Offline	Shows "not confirmed"
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shown without server ack
2. Never says "delivered" without server ack
3. Accidental activation prevented
4. Location denied path works
5. Offline state honest
6. Retry reuses key
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-136 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-130 CONFIRMED P0 v2.0

SOS — delivery unconfirmed

SOS — تصدیق نہیں ہوئی

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sos_unconf`

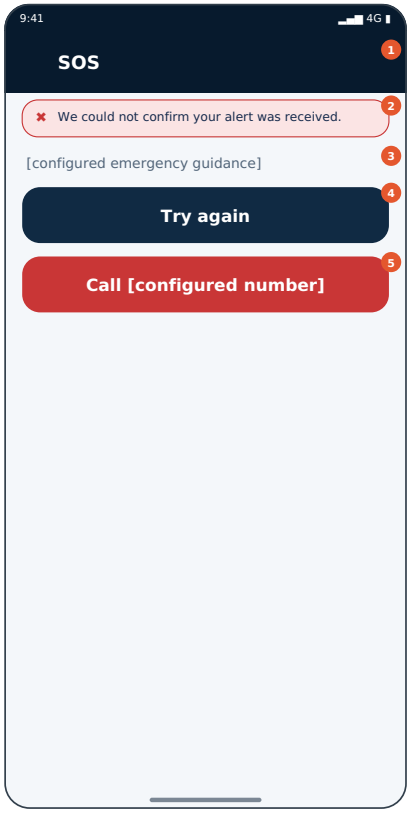

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No server ack: tell the truth and give configured alternatives.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Try again (Button) → **P-128** SOS — sending
- Call [configured number] (Button) → **P-134** Emergency call action

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Body text	125–158 dp	Full width, 16 dp margins	above fold
4	Button	158–220 dp	Full width, 16 dp margins	above fold
5	Button	220–282 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	We could not confirm your alert was received.	Tinted background + border + icon + text (never colour alone)	—	We could not confirm your alert was rece	No	Always in this state
3	C03 Body text	125–158 dp	328×33 dp	[configured emergency guidance]	12–14sp secondary text	—	[configured emergency guidance]	No	Always in this state
4	C04 Button	158–220 dp	328×62 dp	Try again دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
5	C05 Button	220–282 dp	328×62 dp	Call [configured number] کال	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Call [configured number], button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We could not confirm your alert was received.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	[configured emergency guidance]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Try again	دوبارہ کوشش	Needs native review
5	Call [configured number]	کال	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
4	Button: Try again	≥48 dp	Enabled	Navigate to **P-128** SOS — sending	Inline spinner; other controls locked	Server-confirmed result only	E21 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
5	Button: Call [configured number]	≥48 dp	Enabled	Navigate to **P-134** Emergency call action	Inline spinner; other controls locked	Server-confirmed result only	E21 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No server ack: tell the truth and give configured alternatives.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	send_sos (write)
Inputs	trip id, location (if permitted), idempotency key
Server checks / RLS	auth, trip context, rate protection; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E21
Retry / idempotency	Required key; retry reuses key
Offline	Local pending state only; never “delivered”
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says “delivered” without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-128, P-134 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-131 CONFIRMED P0 v2.0

SOS — offline

لائن SOS—

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sos_off`

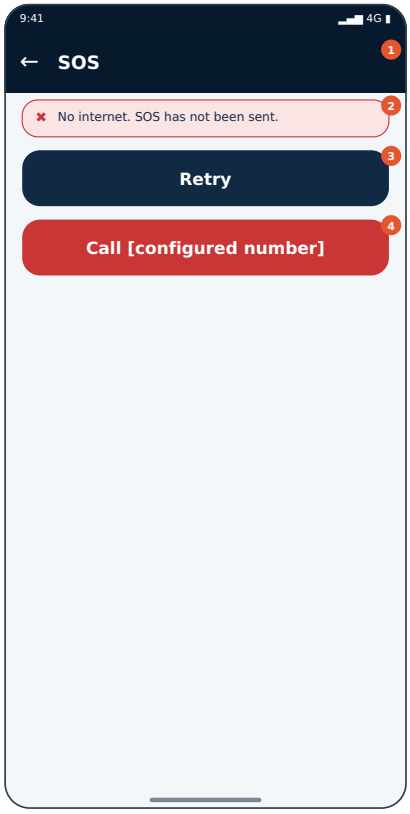

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No connection: honest state, retry on reconnect with same key, alternative contact.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Retry (Button) → **P-128** SOS — sending
- Call [configured number] (Button) → **P-134** Emergency call action

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	No internet. SOS has not been sent.	Tinted background + border + icon + text (never colour alone)	—	No internet. SOS has not been sent.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Retry دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Retry, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Call [configured number] کال	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Call [configured number], button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	No internet. SOS has not been sent.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Retry	دوبارہ کوشش	Needs native review
4	Call [configured number]	کال	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E21 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
3	Button: Retry	≥48 dp	Enabled	Navigate to **P-128** SOS —	Inline spinner; other	Server-	E01, E21 copy; no	One SOS per idempotency key; duplicate

				sending	controls locked	confirmed result only	false success	tap does not create duplicates.
4	Button: Call [configured number]	≥48 dp	Enabled	Navigate to **P-134** Emergency call action	Inline spinner; other controls locked	Server-confirmed result only	E01, E21 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No connection: honest state, retry on reconnect with same key, alternative contact.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	send_sos (write)
Inputs	trip id, location (if permitted), idempotency key
Server checks / RLS	auth, trip context, rate protection; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E21
Retry / idempotency	Required key; retry reuses key
Offline	Local pending state only; never “delivered”
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says “delivered” without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-128, P-134 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-132 CONFIRMED P0 v2.0

SOS — location unavailable/denied

SOS — لوکیشن دستیاب نہیں

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sos_locden`

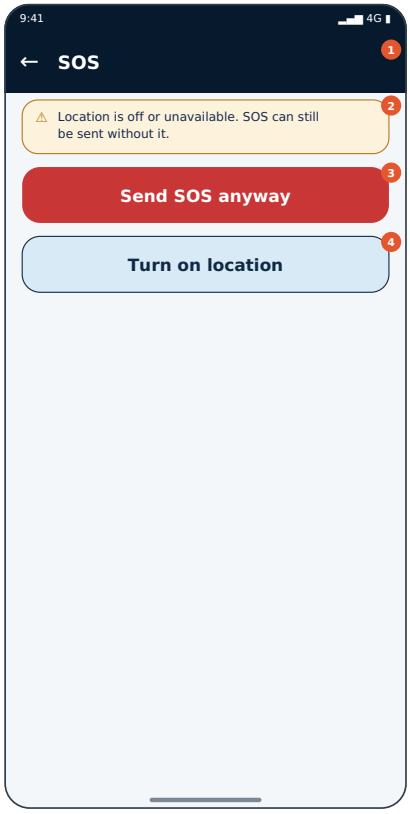

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Location denied/unavailable: SOS still sendable without location.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send SOS anyway (Button) → **P-128** SOS — sending
- Turn on location (Button) → **SH-010** Location blocked — open Settings

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Location is off or unavailable. SOS can still be sent without it.	Tinted background + border + icon + text (never colour alone)	—	Location is off or unavailable. SOS can	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Send SOS anyway پھر بھی SOS بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send SOS anyway, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	Turn on location لوکیشن آن کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Turn on location, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Location is off or unavailable. SOS can still be sent without it.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Send SOS anyway	پھر بھی SOS بھیجیں	Needs native review
4	Turn on location	لوکیشن آن کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same as	Instant	—	E22, E09 copy; no	One SOS per idempotency key; duplicate

	Back			system Back)			false success	tap does not create duplicates.
3	Button: Send SOS anyway	≥48 dp	Enabled	Navigate to **P-128** SOS — sending	Inline spinner; other controls locked	Server-confirmed result only	E22, E09 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
4	Button: Turn on location	≥48 dp	Enabled	Navigate to **SH-010** Location blocked — open Settings	Inline spinner; other controls locked	Server-confirmed result only	E22, E09 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Location denied/unavailable: SOS still sendable without location.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can’t get a GPS signal. Move to an open area or check location settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	send_sos (write)
Inputs	trip id, location (if permitted), idempotency key
Server checks / RLS	auth, trip context, rate protection; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E22, E09, E10
Retry / idempotency	Required key; retry reuses key
Offline	Local pending state only; never “delivered”
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says “delivered” without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-128, SH-010 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-133 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Retry & escalation guidance

دوبارہ کوشش اور رہنمائی

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sos_guide`

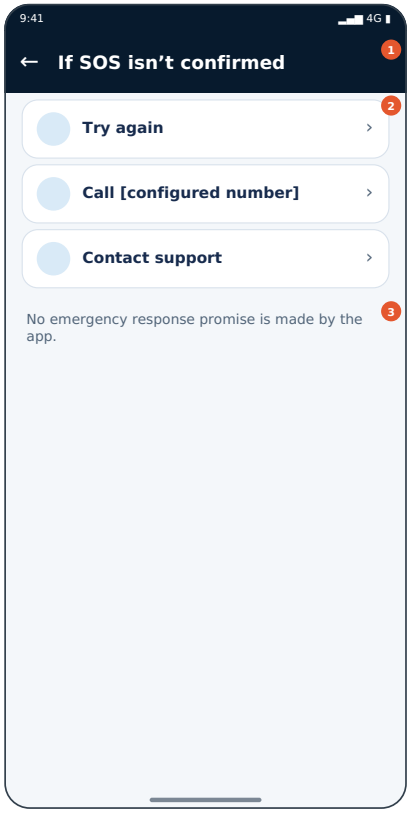

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Guidance based only on configured services.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Row) → **P-128** SOS — sending
- Call [configured number] (Row) → **P-134** Emergency call action
- Contact support (Row) → **P-143** Contact support

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold
3	Body text	264–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	If SOS isn't confirmed	Deep navy #071A2D, white 16sp bold	Per state	If SOS isn't confirmed	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	Try again; Call [configured number]; Contact support	White rows radius 14dp, 52dp high, chevron/check	Per state	Try again	Yes	Always in this state
3	C03 Body text	264–312 dp	328×48 dp	No emergency response promise is made by the app.	12–14sp secondary text	—	No emergency response promise is made by	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	If SOS isn't confirmed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Try again	دوبارہ کوشش کریں	Needs native review
2	Call [configured number]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Contact support	سپورٹ سے رابطہ	Needs native review
3	No emergency response promise is made by the app.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
2	Row: Try again	≥48 dp	Enabled	Navigate to **P-128** SOS — sending	Instant	—	E01, E03 copy; no false success	n/a
2	Row: Call [configured number]	≥48 dp	Enabled	Navigate to **P-134** Emergency call action	Instant	—	E01, E03 copy; no false success	n/a
2	Row: Contact support	≥48 dp	Enabled	Navigate to **P-143** Contact support	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Guidance based only on configured services.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-128, P-134, P-143 · Incoming: Entry point / system-launched


Open decisions: OD-10 (see Part 16).

P-134 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Emergency call action

ہنگامی کال

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.emerg_call`

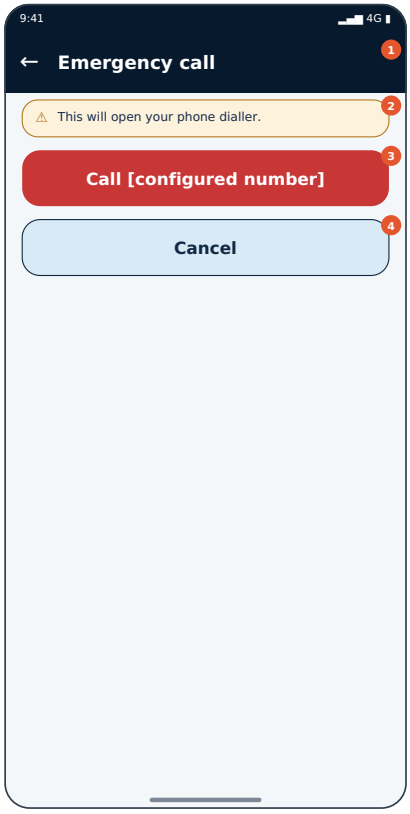

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Dial a configured emergency number only if available and clearly labelled.

Login: **Yes** · Incoming screens: P-130, P-131, P-133


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Call [configured number] (Button) → external app: EXT:dial
- Cancel (Button) → previous screen (system Back)

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Emergency call	Deep navy #071A2D, white 16sp bold	Per state	Emergency call	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	This will open your phone dialler.	Tinted background + border + icon + text (never colour alone)	—	This will open your phone dialler.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Call [configured number] کال	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Call [configured number], button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Cancel منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Emergency call	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This will open your phone dialler.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Call [configured number]	کال	Needs native review
4	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
3	Button: Call	≥48 dp	Enabled	Hands off to external app (EXT:dial);	Instant	—	E01, E04 copy; no	One SOS per idempotency key; duplicate

	[configured number]			returning restores this screen			false success	tap does not create duplicates.
4	Button: Cancel	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Dial a configured emergency number only if available and clearly labelled.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can’t get a GPS signal. Move to an open area or check location settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E21, E22, E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Number comes from configuration; never hard-coded or fake
2. Never says “delivered” without server ack
3. Accidental activation prevented
4. Location denied path works
5. Offline state honest
6. Retry reuses key
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-130, P-131, P-133


Open decisions: OD-10 (see Part 16).

P-135 CONFIRMED NEEDS CONFIRMATION P1 v2.0

Live trip tracking

لائیو سفر کی ٹریکنگ

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.live`

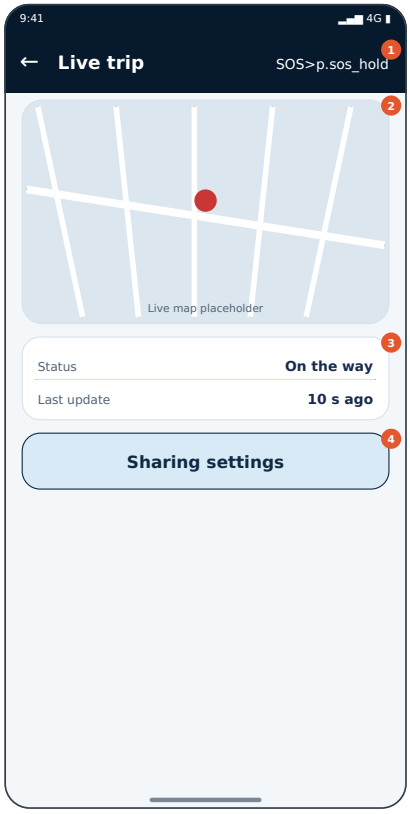

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

View trip progress if tracking is enabled and consented.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- SOS (App-bar action) → **P-126** SOS — press and hold
- Sharing settings (Button) → **P-136** Location sharing controls

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Map placeholder	80–292 dp	Full width, 16 dp margins	above fold
3	Key-value card	292–378 dp	Full width, 16 dp margins	above fold
4	Button	378–440 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Live trip; SOS	Deep navy #071A2D, white 16sp bold	Per state	Live trip	Yes	Always in this state
2	C02 Map placeholder	80–292 dp	328×212 dp	Live map placeholder	Provider NEEDS CONFIRMATION	—	Live map placeholder	No	Always in this state
3	C03 Key-value card	292–378 dp	328×86 dp	Status: On the way; Last update: 10 s ago	White card, 30dp rows, label grey / value bold	—	Status: On the way	No	Always in this state
4	C04 Button	378–440 dp	328×62 dp	Sharing settings شیئرنگ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Sharing settings, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Live trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Live map placeholder	Translation review required	—
3	Status: On the way	حالت	Needs native review
3	Last update: 10 s ago	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Sharing settings	شیئرنگ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as	Instant	—	E22, E11 copy; no	One SOS per idempotency key; duplicate tap does

				system Back)			false success	not create duplicates.
1	App-bar action: SOS	≥48 dp	Enabled	Navigate to **P-126** SOS — press and hold	Instant	—	E22, E11 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
4	Button: Sharing settings	≥48 dp	Enabled	Navigate to **P-136** Location sharing controls	Instant	—	E22, E11 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	On the way	Server-derived	Required	Show “Not available” if missing; never blank/invented
Last update	10 s ago	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	View trip progress if tracking is enabled and consented.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can’t get a GPS signal. Move to an open area or check location settings.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_live_trip_location (read)
Inputs	booking/trip id
Server checks / RLS	sharing consent, trip active, retention rules (90 days normal / 1 year SOS-breakdown then review); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E22, E11
Retry / idempotency	Safe read
Offline	Last known with age
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says “delivered” without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-126, P-136 · Incoming: Entry point / system-launched


Open decisions: OD-08 (see Part 16).

P-136 CONFIRMED P1 v2.0

Location sharing controls

لوکیشن شیئرنگ

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.share_ctrl`

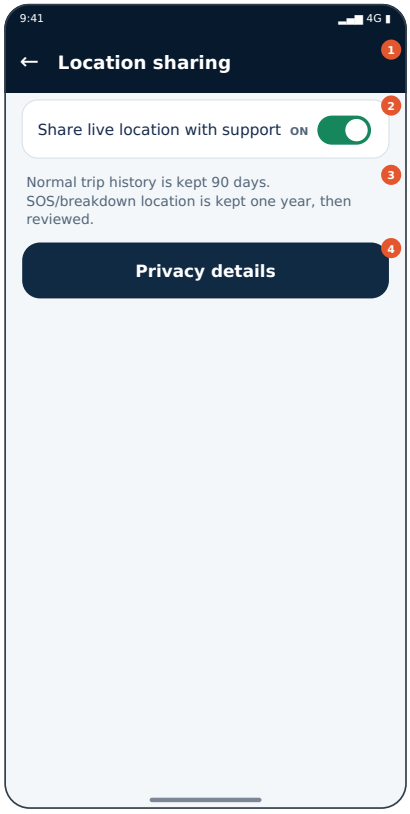

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Control who sees live location; explains retention.

Login: **Yes** · Incoming screens: P-129, P-135


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Privacy details (Button) → **P-138** Location & privacy explanation

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Switch row	80–142 dp	Full width, 16 dp margins	above fold
3	Body text	142–207 dp	Full width, 16 dp margins	above fold
4	Button	207–269 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Location sharing	Deep navy #071A2D, white 16sp bold	Per state	Location sharing	Yes	Always in this state
2	C02 Switch row	80–142 dp	328×62 dp	Share live location with support	52dp row, switch with ON/OFF text	Per state	Share live location with support	Yes	Always in this state
3	C03 Body text	142–207 dp	328×65 dp	Normal trip history is kept 90 days. SOS/breakdown location is kept one year, then reviewed.	12–14sp secondary text	—	Normal trip history is kept 90 days. SOS	No	Always in this state
4	C04 Button	207–269 dp	328×62 dp	Privacy details تفصیل	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Privacy details, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Location sharing	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Share live location with support	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Normal trip history is kept 90 days. SOS/breakdown location is kept one year, then reviewed.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Privacy details	تفصیل	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Save disabled while pending.

4	Button: Privacy details	≥48 dp	Enabled	Navigate to **P-138** Location & privacy explanation	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Save disabled while pending.
2	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	Save disabled while pending.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Control who sees live location; explains retention.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	set_location_sharing (write)
Inputs	trip id, on/off
Server checks / RLS	consent record; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E08, E27
Retry / idempotency	Idempotent
Offline	Blocked
Cache	None

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-138 · Incoming: P-129, P-135


Open decisions: None specific (see Part 16).

P-137 CONFIRMED P1 v2.0

GPS unavailable / stale

جی پی ایس دستیاب نہیں

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.gps_stale`

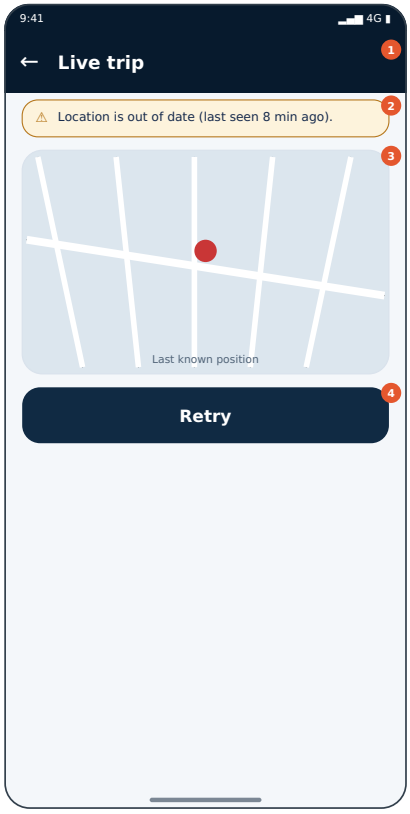

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No fix or old fix; show age; no fake position.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Retry (Button) → stays on screen (action)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Map placeholder	125–337 dp	Full width, 16 dp margins	above fold
4	Button	337–399 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Live trip	Deep navy #071A2D, white 16sp bold	Per state	Live trip	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Location is out of date (last seen 8 min ago).	Tinted background + border + icon + text (never colour alone)	—	Location is out of date (last seen 8 min	No	Always in this state
3	C03 Map placeholder	125–337 dp	328×212 dp	Last known position	Provider NEEDS CONFIRMATION	—	Last known position	No	Always in this state
4	C04 Button	337–399 dp	328×62 dp	Retry دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Retry, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Live trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Location is out of date (last seen 8 min ago).	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Last known position	Translation review required	—
4	Retry	دوبارہ کوشش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E22 copy; no false success	Retry debounced.
4	Button: Retry	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E22 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No fix or old fix; show age; no fake position.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can't get a GPS signal. Move to an open area or check location settings.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_live_trip_location (read)
Inputs	booking/trip id
Server checks / RLS	sharing consent, trip active, retention rules (90 days normal / 1 year SOS-breakdown then review); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E22
Retry / idempotency	Safe read
Offline	Last known with age
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-138 CONFIRMED P1 v2.0

Location & privacy explanation

لوکیشن اور رازداری

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.privacy_loc`

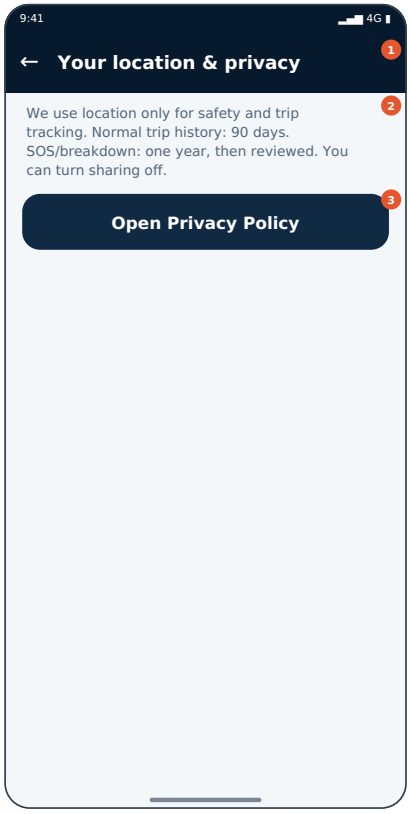

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Explain what location is collected and retention.

Login: **Per flow** · Incoming screens: P-136


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open Privacy Policy (Button) → **P-161** Privacy policy

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–164 dp	Full width, 16 dp margins	above fold
3	Button	164–226 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Your location & privacy	Deep navy #071A2D, white 16sp bold	Per state	Your location & privacy	Yes	Always in this state
2	C02 Body text	80–164 dp	328×84 dp	We use location only for safety and trip tracking. Normal trip history: 90 days. SOS/breakdown: one year, then reviewed. You can turn sharing off.	12–14sp secondary text	—	We use location only for safety and trip	No	Always in this state
3	C03 Button	164–226 dp	328×62 dp	Open Privacy Policy پرائیویسی پالیسی	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open Privacy Policy, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Your location & privacy	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We use location only for safety and trip tracking. Normal trip history: 90 days. SOS/breakdown: one year, then reviewed. You can turn sharing off.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open Privacy Policy	پرائیویسی پالیسی	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
3	Button: Open Privacy Policy	≥48 dp	Enabled	Navigate to **P-161** Privacy policy	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Explain what location is collected and retention.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-161 · Incoming: P-136


Open decisions: None specific (see Part 16).

P-139 CONFIRMED P0 v2.0

Help hub

مدد

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.help`

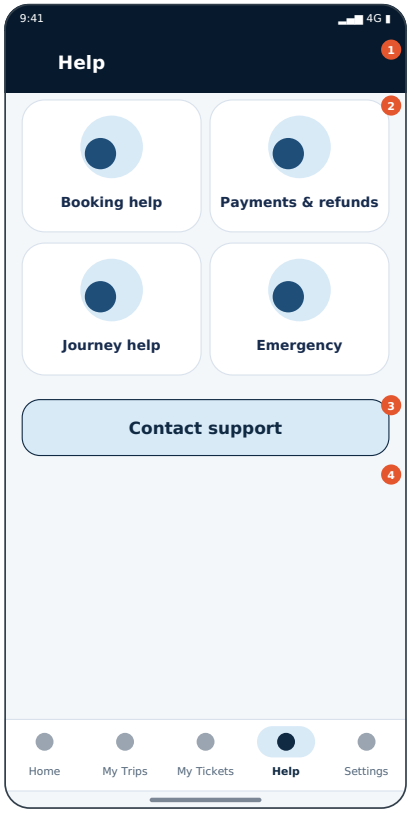

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Tab: help categories, FAQ, support, emergency access.

Login: **Per flow** · Incoming screens: AU-002, AU-009, P-001, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-065, P-081, P-082, P-083, P-093, P-094, P-095, P-096, P-097, P-098, P-099, P-147, P-150, P-159


3. Exit & navigation map

- Booking help (Tile) → **P-140** FAQ list
- Payments & refunds (Tile) → **P-140** FAQ list
- Journey help (Tile) → **P-140** FAQ list
- Emergency (Tile) → **P-125** SOS — how it works
- Contact support (Button) → **P-143** Contact support
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Illustrated tile grid	80–348 dp	Full width, 16 dp margins	above fold
3	Button	348–410 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	410–410 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Help	Deep navy #071A2D, white 16sp bold	Per state	Help	Yes	Always in this state
2	C02 Illustrated tile grid	80–348 dp	328×268 dp	Booking help; Payments & refunds; Journey help; Emergency بکنگ / ادائیگی / سفر / ہنگامی	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Booking help	Yes	Always in this state
3	C03 Button	348–410 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state
4	C04 Bottom navigation	410–410 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Help	مدد	Needs native review
2	Booking help	بکنگ	Needs native review
2	Payments & refunds	ادائیگی	Needs native review
2	Journey help	سفر	Needs native review
2	Emergency	ہنگامی	Needs native review
3	Contact support	سپورٹ	Needs native review

4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	My Tickets	میرے ٹکٹ	Needs native review
4	Help	مدد	Needs native review
4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Tile: Booking help	≥48 dp	Enabled	Navigate to **P-140** FAQ list	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Tile: Payments & refunds	≥48 dp	Enabled	Navigate to **P-140** FAQ list	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Tile: Journey help	≥48 dp	Enabled	Navigate to **P-140** FAQ list	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Tile: Emergency	≥48 dp	Enabled	Navigate to **P-125** SOS — how it works	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Button: Contact support	≥48 dp	Enabled	Navigate to **P-143** Contact support	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Tab: help categories, FAQ, support, emergency access.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_help_content (read)
Inputs	category, locale
Server checks / RLS	published content; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Bundled offline copy of core help
Cache	Versioned bundle

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions

logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-125, P-139, P-140, P-143, P-150 · Incoming: AU-002, AU-009, P-001, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-065, P-081, P-082, P-083, P-093, P-094, P-095, P-096, P-097, P-098, P-099, P-147, P-150, P-159


Open decisions: None specific (see Part 16).

P-140 CONFIRMED P1 v2.0

FAQ list

عمومی سوالات

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.faq`

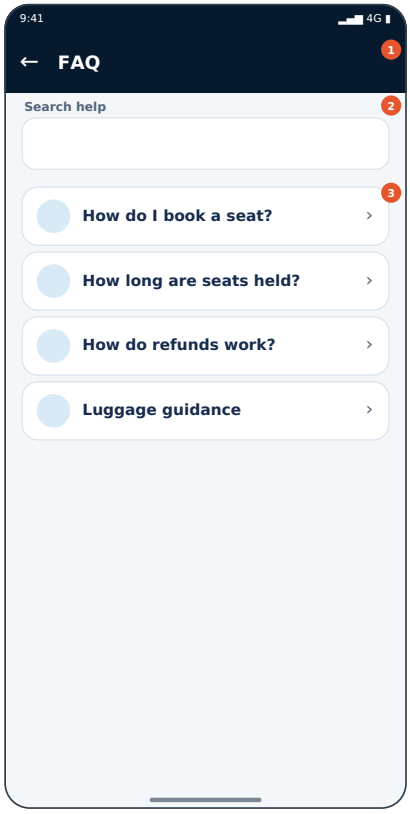

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

FAQ by category.

Login: **Per flow** · Incoming screens: P-139


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- How do I book a seat? (Row) → **P-141** FAQ detail
- How long are seats held? (Row) → **P-141** FAQ detail
- How do refunds work? (Row) → **P-141** FAQ detail
- Luggage guidance (Row) → **P-142** Luggage guidance (Help)

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	List rows	158–400 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	FAQ	Deep navy #071A2D, white 16sp bold	Per state	FAQ	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Search help: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Search help: “”	Yes	Always in this state
3	C03 List rows	158–400 dp	328×242 dp	How do I book a seat?; How long are seats held?; How do refunds work?; Luggage guidance	White rows radius 14dp, 52dp high, chevron/check	Per state	How do I book a seat?	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	FAQ	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Search help	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	How do I book a seat?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	How long are seats held?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	How do refunds work?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Luggage guidance	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Row: How do I book a	≥48 dp	Enabled	Navigate to **P-141** FAQ detail	Instant	—	E01, E03 copy; no false	Row tap navigates once; navigation

	seat?						success	debounced.
3	Row: How long are seats held?	≥48 dp	Enabled	Navigate to **P-141** FAQ detail	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Row: How do refunds work?	≥48 dp	Enabled	Navigate to **P-141** FAQ detail	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Row: Luggage guidance	≥48 dp	Enabled	Navigate to **P-142** Luggage guidance (Help)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Search help	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	FAQ by category.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_help_content (read)
Inputs	category, locale
Server checks / RLS	published content; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Bundled offline copy of core help
Cache	Versioned bundle

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-141, P-142 · Incoming: P-139


Open decisions: None specific (see Part 16).

P-141 CONFIRMED P2 v2.0

FAQ detail

سوال کی تفصیل

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.faq_d`

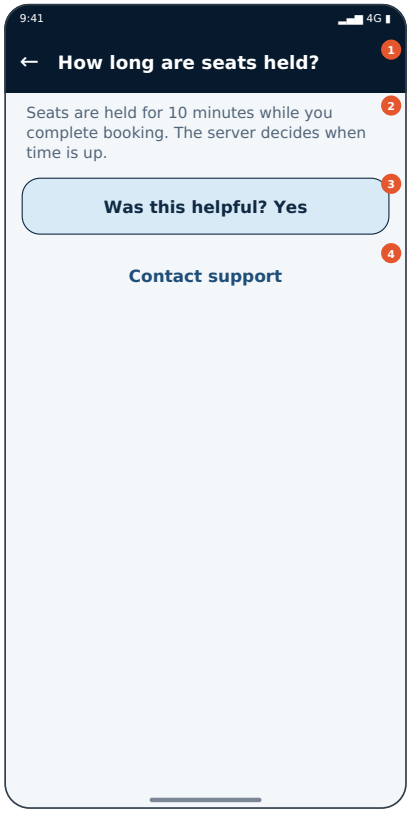

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Single FAQ answer with helpful Yes/No and support link.

Login: **Per flow** · Incoming screens: P-140


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Was this helpful? Yes (Button) → previous screen (system Back)
- Contact support (Button) → **P-143** Contact support

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–150 dp	Full width, 16 dp margins	above fold
3	Button	150–212 dp	Full width, 16 dp margins	above fold
4	Button	212–274 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	How long are seats held?	Deep navy #071A2D, white 16sp bold	Per state	How long are seats held?	Yes	Always in this state
2	C02 Body text	80–150 dp	328×70 dp	Seats are held for 10 minutes while you complete booking. The server decides when time is up.	12–14sp secondary text	—	Seats are held for 10 minutes while you	No	Always in this state
3	C03 Button	150–212 dp	328×62 dp	Was this helpful? Yes ہاں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Was this helpful? Yes, button	Yes	Always in this state
4	C04 Button	212–274 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	How long are seats held?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Seats are held for 10 minutes while you complete booking. The server decides when time is up.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Was this helpful? Yes	ہاں	Needs native review
4	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

3	Button: Was this helpful? Yes	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
4	Button: Contact support	≥48 dp	Enabled	Navigate to **P-143** Contact support	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Single FAQ answer with helpful Yes/No and support link.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_help_content (read)
Inputs	category, locale
Server checks / RLS	published content; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Bundled offline copy of core help
Cache	Versioned bundle

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-143 · Incoming: P-140


Open decisions: None specific (see Part 16).

P-142 CONFIRMED P1 v2.0

Luggage guidance (Help)

سامان کی رہنمائی

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.luggage`

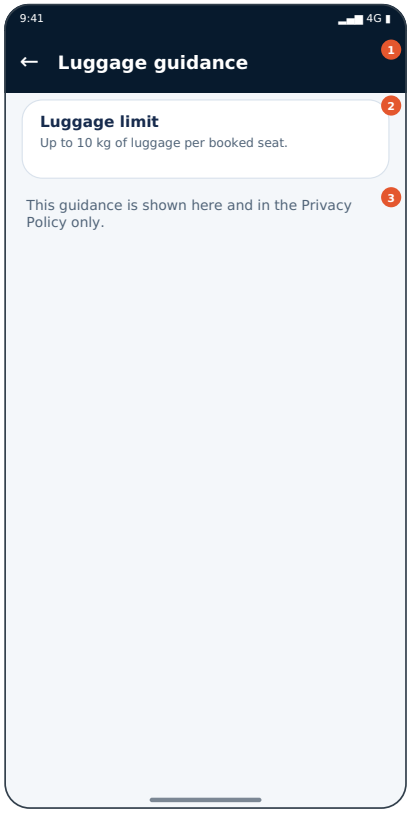

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Help-only page: 10 kg per booked seat. Not shown in checkout.

Login: **Per flow** · Incoming screens: P-140


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–162 dp	Full width, 16 dp margins	above fold
3	Body text	162–210 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Luggage guidance	Deep navy #071A2D, white 16sp bold	Per state	Luggage guidance	Yes	Always in this state
2	C02 Info card	80–162 dp	328×82 dp	Luggage limit; Up to 10 kg of luggage per booked seat.	White card, border #D9E2EC, radius 18dp	—	Luggage limit	No	Always in this state
3	C03 Body text	162–210 dp	328×48 dp	This guidance is shown here and in the Privacy Policy only.	12–14sp secondary text	—	This guidance is shown here and in the P	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Luggage guidance	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Luggage limit	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Up to 10 kg of luggage per booked seat.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	This guidance is shown here and in the Privacy Policy only.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Help-only page: 10 kg per booked seat. Not shown in checkout.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Appears only in Help and Privacy Policy; not in checkout/review/fare/payment
2. Text readable at 200%
3. Offline copy available
4. Urdu text RTL and complete
5. Policy content respects confirmed rules
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-140


Open decisions: None specific (see Part 16).

P-143 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Contact support

سپورٹ سے رابطہ

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.contact`

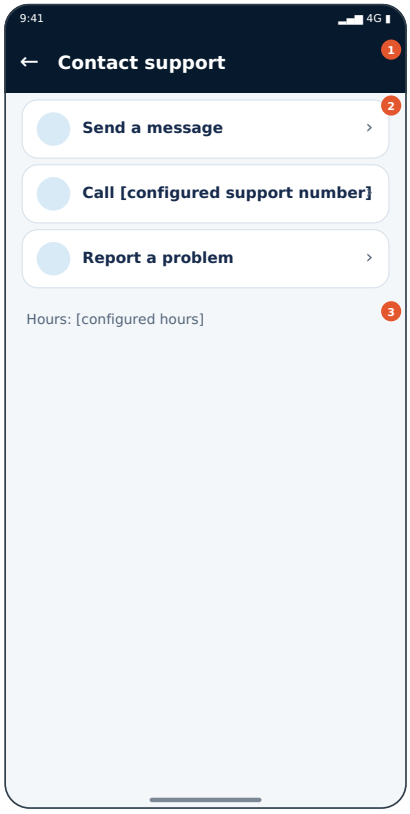

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Show configured support channels only.

Login: **Per flow** · Incoming screens: AU-014, AU-015, P-069, P-133, P-139, P-141, SH-026


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send a message (Row) → **P-145** Report form
- Call [configured support number] (Row) → external app: EXT:dial
- Report a problem (Row) → **P-144** Report a problem — category

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold
3	Body text	264–296 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Contact support	Deep navy #071A2D, white 16sp bold	Per state	Contact support	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	Send a message; Call [configured support number]; Report a problem	White rows radius 14dp, 52dp high, chevron/check	Per state	Send a message	Yes	Always in this state
3	C03 Body text	264–296 dp	328×32 dp	Hours: [configured hours]	12–14sp secondary text	—	Hours: [configured hours]	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Contact support	سپورٹ سے رابطہ	Needs native review
2	Send a message	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Call [configured support number]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Report a problem	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Hours: [configured hours]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Row: Send a message	≥48 dp	Enabled	Navigate to **P-145** Report form	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Row: Call [configured support number]	≥48 dp	Enabled	Hands off to external app (EXT:dial); returning restores this screen	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

2	Row: Report a problem	≥48 dp	Enabled	Navigate to **P-144** Report a problem — category	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Show configured support channels only.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-144, P-145 · Incoming: AU-014, AU-015, P-069, P-133, P-139, P-141, SH-026


Open decisions: OD-09 (see Part 16).

P-144 CONFIRMED P1 v2.0

Report a problem — category

مسئلہ رپورٹ کریں

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.report`

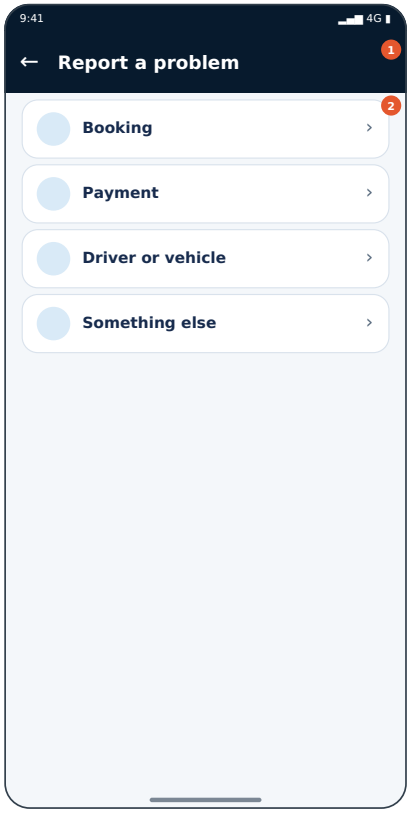

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Choose category.

Login: **Per flow** · Incoming screens: P-143


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Booking (Row) → **P-145** Report form
- Payment (Row) → **P-145** Report form
- Driver or vehicle (Row) → **P-149** Safety incident report
- Something else (Row) → **P-145** Report form

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–322 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Report a problem	Deep navy #071A2D, white 16sp bold	Per state	Report a problem	Yes	Always in this state
2	C02 List rows	80–322 dp	328×242 dp	Booking; Payment; Driver or vehicle; Something else	White rows radius 14dp, 52dp high, chevron/check	Per state	Booking	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Report a problem	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Booking	بکنگ	Needs native review
2	Payment	ادائیگی	Needs native review
2	Driver or vehicle	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Something else	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
2	Row: Booking	≥48 dp	Enabled	Navigate to **P-145** Report form	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
2	Row: Payment	≥48 dp	Enabled	Navigate to **P-145** Report form	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
2	Row: Driver or vehicle	≥48 dp	Enabled	Navigate to **P-149** Safety incident report	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
2	Row: Something else	≥48 dp	Enabled	Navigate to **P-145** Report form	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Choose category.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-145, P-149 · Incoming: P-143


Open decisions: None specific (see Part 16).

P-145 CONFIRMED PROPOSED P1 v2.0

Report form

شکایت فارم

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.issue`

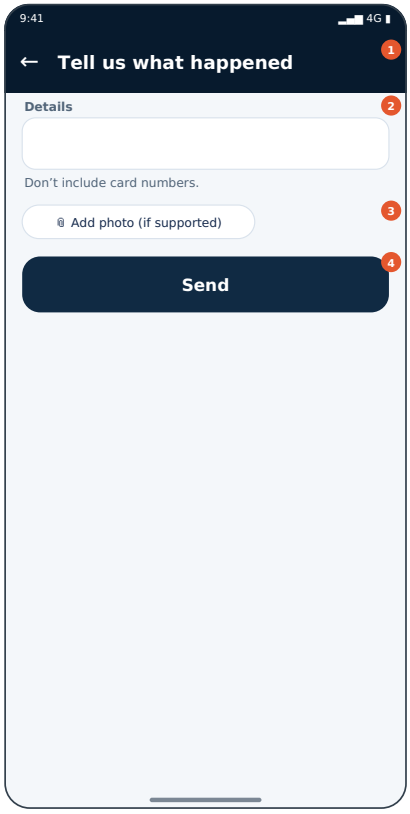

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Describe issue; optional attachment if supported; link a ticket.

Login: **As per flow** · Incoming screens: P-143, P-144, P-148


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send (Button) → **P-146** Submitting report

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–174 dp	Full width, 16 dp margins	above fold
3	Chips	174–220 dp	Full width, 16 dp margins	above fold
4	Button	220–282 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Tell us what happened	Deep navy #071A2D, white 16sp bold	Per state	Tell us what happened	Yes	Always in this state
2	C02 Text field	80–174 dp	328×94 dp	Details: “” Don’t include card numbers.	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Details: “” Don’t include card numbers.	Yes	Always in this state
3	C03 Chips	174–220 dp	328×46 dp	Add photo (if supported)	Pill 30dp high; selected navy fill	Per state	Add photo (if supported)	Yes	Always in this state
4	C04 Button	220–282 dp	328×62 dp	Send بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Tell us what happened	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Details	تفصیلات	Needs native review
2	Don’t include card numbers.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Add photo (if supported)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Send	بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back	≥48 dp	Enabled	Pop to previous screen (same	Instant	—	E01, E04 copy: no	Submit disabled while request in flight: one

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant		false success	idempotency key per attempt.
4	Button: Send	≥48 dp	Enabled	Navigate to **P-146** Submitting report	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Details	text	Required	Max length NEEDS CONFIRMATION	Blur+submit	Text

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Describe issue; optional attachment if supported; link a ticket.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-146 · Incoming: P-143, P-144, P-148


Open decisions: None specific (see Part 16).

P-146 CONFIRMED P1 v2.0

Submitting report

رپورٹ جمع ہو رہی ہے

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sub_pend`

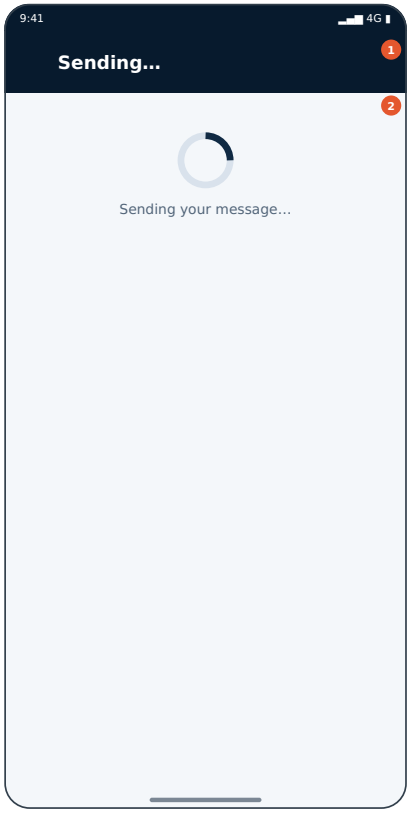

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Request in flight.

Login: **Per flow** · Incoming screens: P-105, P-124, P-145, P-148, P-149


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Sending...	Deep navy #071A2D, white 16sp bold	Per state	Sending...	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Sending your message...	Navy arc on grey ring	—	Sending your message...	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Sending...	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Sending your message...	Translation review required	—

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Request in flight

This screen	As mocked above	Request in flight.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E05
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-105, P-124, P-145, P-148, P-149


Open decisions: None specific (see Part 16).

P-147 CONFIRMED P1 v2.0

Report submitted

رپورٹ جمع ہو گئی

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sub_ok`

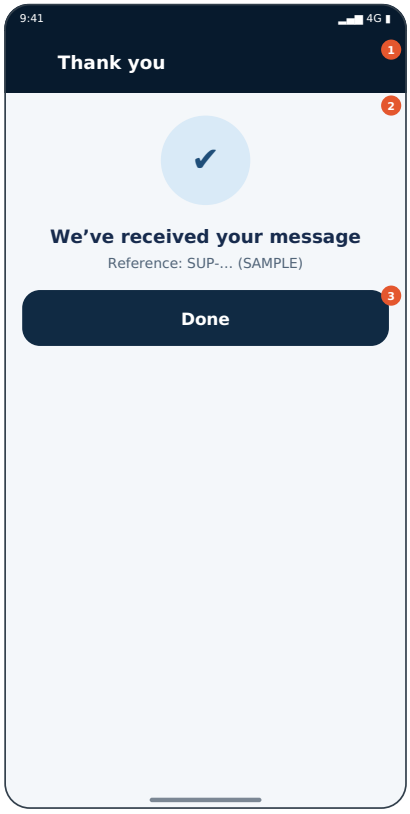

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server accepted the report; reference shown.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Done (Button) → **P-139** Help hub

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Thank you	Deep navy #071A2D, white 16sp bold	Per state	Thank you	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	We've received your message; Reference: SUP-... (SAMPLE)	Light-blue circle icon + 16sp title + 12sp body	—	We've received your message	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Done مکمل	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Done, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Thank you	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We've received your message	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Reference: SUP-... (SAMPLE)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Done	مکمل	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Done	≥48 dp	Enabled	Navigate to **P-139** Help hub	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server accepted the report; reference shown.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-139 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-148 CONFIRMED P1 v2.0

Report failed

ریپورٹ ناکام

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.sub_fail`

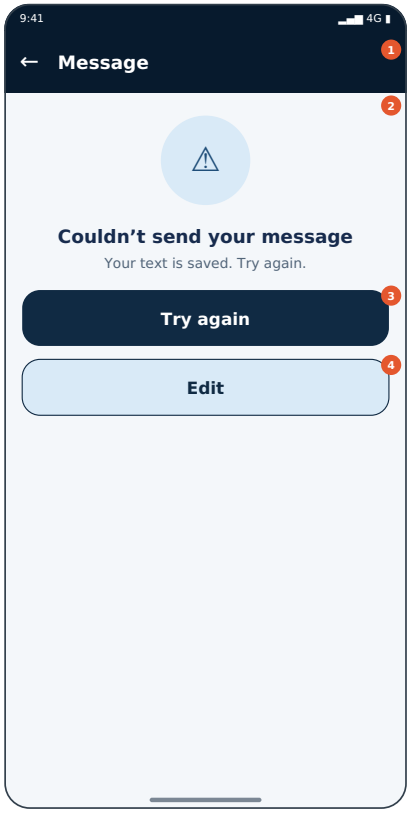

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Submit failed; draft kept.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **P-146** Submitting report
- Edit (Button) → **P-145** Report form

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Message	Deep navy #071A2D, white 16sp bold	Per state	Message	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Couldn’t send your message; Your text is saved. Try again.	Light-blue circle icon + 16sp title + 12sp body	—	Couldn’t send your message	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Try again دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Edit ترمیم	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Edit, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Message	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Couldn’t send your message	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your text is saved. Try again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش	Needs native review
4	Edit	ترمیم	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Retry debounced.
3	Button: Try again	≥48 dp	Enabled	Navigate to **P-146** Submitting report	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Retry debounced.
4	Button: Edit	≥48 dp	Enabled	Navigate to **P-145** Report form	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Submit failed; draft kept.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-145, P-146 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-149 CONFIRMED PROPOSED P0 v2.0

Safety incident report

حفاظتی واقعہ کی رپورٹ

Role: **Passenger** · Family: F7 Passenger safety, SOS, location & support · Key: `p.safety_inc`

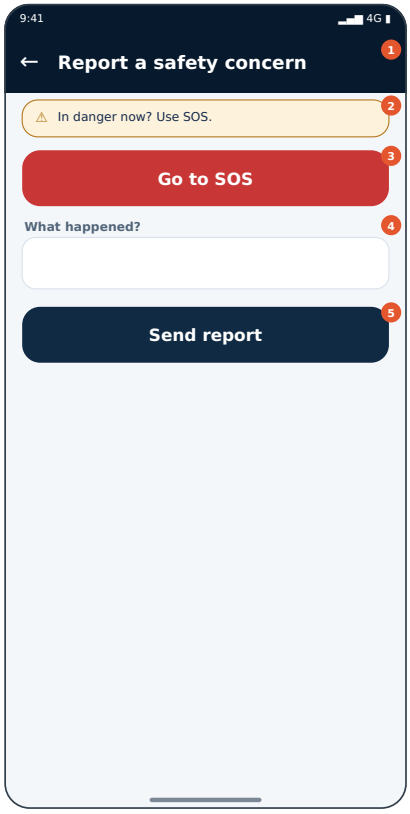

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Report driver/vehicle safety concern (not an SOS).

Login: **As per flow** · Incoming screens: P-144


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Go to SOS (Button) → **P-125** SOS — how it works
- Send report (Button) → **P-146** Submitting report

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Text field	187–265 dp	Full width, 16 dp margins	above fold
5	Button	265–327 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Report a safety concern	Deep navy #071A2D, white 16sp bold	Per state	Report a safety concern	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	In danger now? Use SOS.	Tinted background + border + icon + text (never colour alone)	—	In danger now? Use SOS.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Go to SOS SOS	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Go to SOS, button	Yes	Always in this state
4	C04 Text field	187–265 dp	328×78 dp	What happened?: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	What happened?: “”	Yes	Always in this state
5	C05 Button	265–327 dp	328×62 dp	Send report رپورٹ بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send report, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Report a safety concern	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	In danger now? Use SOS.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Go to SOS	SOS	Needs native review
4	What happened?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Send report	رپورٹ بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Button: Go to SOS	≥48 dp	Enabled	Navigate to **P-125** SOS — how it works	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
5	Button: Send report	≥48 dp	Enabled	Navigate to **P-146** Submitting report	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
What happened?	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Report driver/vehicle safety concern (not an SOS).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-125, P-146 · Incoming: P-144


Open decisions: None specific (see Part 16).

P-150 CONFIRMED P0 v2.0

Settings

ترتیبات

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.settings`

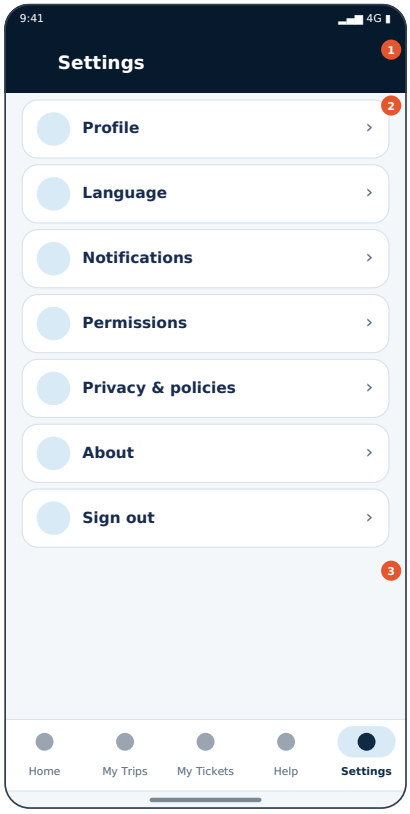

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Tab: profile, language, notifications, permissions, policies, about, sign out.

Login: **Yes** · Incoming screens: P-001, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-081, P-082, P-083, P-093, P-094, P-095, P-096, P-097, P-098, P-099, P-139, P-158, P-159


3. Exit & navigation map

- Profile (Row) → **P-151** Profile
- Language (Row) → **P-157** Language settings
- Notifications (Row) → **P-159** Notification settings
- Permissions (Row) → **P-160** Permissions status
- Privacy & policies (Row) → **P-161** Privacy policy
- About (Row) → **P-164** About / app version
- Sign out (Row) → **SH-035** Sign-out confirmation
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–496 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	496–496 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Settings	Deep navy #071A2D, white 16sp bold	Per state	Settings	Yes	Always in this state
2	C02 List rows	80–496 dp	328×416 dp	Profile; Language; Notifications; Permissions; Privacy & policies; About; Sign out	White rows radius 14dp, 52dp high, chevron/check	Per state	Profile	Yes	Always in this state
3	C03 Bottom navigation	496–496 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Settings	ترتیبات	Needs native review
2	Profile	پروفائل	Needs native review
2	Language	زبان	Needs native review
2	Notifications	اطلاعات	Needs native review
2	Permissions	اجازتیں	Needs native review
2	Privacy & policies	رازداری اور پالیسیاں	Needs native review
2	About	ایپ کے بارے میں	Needs native review
2	Sign out	سائن آؤٹ	Needs native review
3	Home	ہوم	Needs native review

3	My Trips	میرے سفر	Needs native review
3	My Tickets	میرے ٹکٹ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Row: Profile	≥48 dp	Enabled	Navigate to **P-151** Profile	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Language	≥48 dp	Enabled	Navigate to **P-157** Language settings	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Notifications	≥48 dp	Enabled	Navigate to **P-159** Notification settings	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Permissions	≥48 dp	Enabled	Navigate to **P-160** Permissions status	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Privacy & policies	≥48 dp	Enabled	Navigate to **P-161** Privacy policy	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: About	≥48 dp	Enabled	Navigate to **P-164** About / app version	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Sign out	≥48 dp	Enabled	Navigate to **SH-035** Sign-out confirmation	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E04 copy; no false success	Save disabled while pending.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Tab: profile, language, notifications, permissions, policies, about, sign out.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_profile (read)
Inputs	auth user
Server checks / RLS	owner only; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E08, E27
Retry / idempotency	Safe read
Offline	Cached
Cache	Cached

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-139, P-150, P-151, P-157, P-159, P-160, P-161, P-164, SH-035 · Incoming: P-001, P-002, P-003, P-004, P-005, P-006, P-007, P-008, P-081, P-082, P-083, P-093, P-094, P-095, P-096, P-097, P-098, P-099, P-139, P-158, P-159


Open decisions: None specific (see Part 16).

P-151 CONFIRMED P1 v2.0

Profile

پروفائل

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.profile`

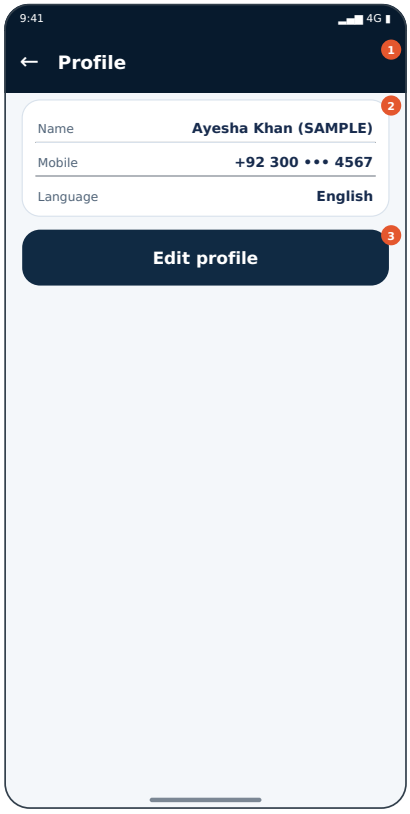

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

View profile.

Login: **Per flow** · Incoming screens: P-150


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Edit profile (Button) → **P-152** Edit profile

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–196 dp	Full width, 16 dp margins	above fold
3	Button	196–258 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Profile	Deep navy #071A2D, white 16sp bold	Per state	Profile	Yes	Always in this state
2	C02 Key-value card	80–196 dp	328×116 dp	Name: Ayesha Khan (SAMPLE); Mobile: +92 300 ••• 4567; Language: English	White card, 30dp rows, label grey / value bold	—	Name: Ayesha Khan (SAMPLE)	No	Always in this state
3	C03 Button	196–258 dp	328×62 dp	Edit profile پروفائل میں ترمیم	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Edit profile, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Profile	پروفائل	Needs native review
2	Name: Ayesha Khan (SAMPLE)	نام	Needs native review
2	Mobile: +92 300 ••• 4567	موبائل	Needs native review
2	Language: English	زبان	Needs native review
3	Edit profile	پروفائل میں ترمیم	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Button: Edit profile	≥48 dp	Enabled	Navigate to **P-152** Edit profile	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Name	Ayesha Khan (SAMPLE)	User-entered	Required	Show “Not available” if missing; never blank/invented
Mobile	+92 300 ••• 4567	Server-derived	Required	Show “Not available” if missing; never blank/invented
Language	English	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	View profile.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_profile (read)
Inputs	auth user
Server checks / RLS	owner only; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached
Cache	Cached

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-152 · Incoming: P-150


Open decisions: None specific (see Part 16).

P-152 CONFIRMED P1 v2.0

Edit profile

پروفائل میں ترمیم

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.prof_edit`

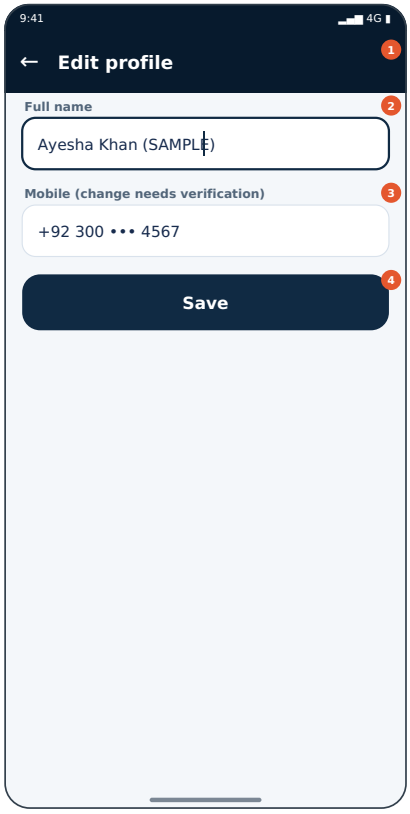

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Edit name/language; phone change needs re-auth.

Login: **As per flow** · Incoming screens: P-151


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Save (Button) → **P-154** Profile — saving

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Text field	158–236 dp	Full width, 16 dp margins	above fold
4	Button	236–298 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Edit profile	Deep navy #071A2D, white 16sp bold	Per state	Edit profile	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Full name: “Ayesha Khan (SAMPLE)”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “Ayesha Khan (SAMPLE)”	Yes	Always in this state
3	C03 Text field	158–236 dp	328×78 dp	Mobile (change needs verification): “+92 300 ••• 4567”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Mobile (change needs verification): “+92	Yes	Always in this state
4	C04 Button	236–298 dp	328×62 dp	Save محفوظ کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Save, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Edit profile	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Full name	پورا نام	Needs native review
3	Mobile (change needs verification)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Save	محفوظ کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.

	Back							
4	Button: Save	≥48 dp	Enabled	Navigate to **P-154** Profile — saving	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text	Required	NEEDS CONFIRMATION	Blur+submit	Text

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Edit name/language; phone change needs re-auth.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upsert_profile (write)
Inputs	name, language, contact fields confirmed by rules
Server checks / RLS	auth user match, field validation, role immutability (role never client-set); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Idempotent upsert
Offline	Draft kept locally; submit blocked
Cache	Profile cached after success

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-154 · Incoming: P-151


Open decisions: None specific (see Part 16).

P-153 CONFIRMED P1 v2.0

Edit profile — field errors

پروفائل — غلطیاں

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.prof_err`

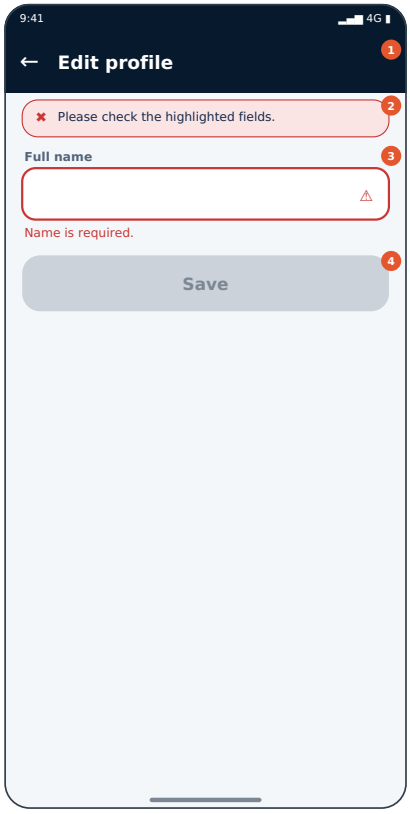

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Field validation errors.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Text field	125–219 dp	Full width, 16 dp margins	above fold
4	Button	219–281 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Edit profile	Deep navy #071A2D, white 16sp bold	Per state	Edit profile	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Please check the highlighted fields.	Tinted background + border + icon + text (never colour alone)	—	Please check the highlighted fields.	No	Always in this state
3	C03 Text field	125–219 dp	328×94 dp	Full name: “” Name is required.	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “” Name is required.	Yes	Always in this state
4	C04 Button	219–281 dp	328×62 dp	Save محفوظ کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Save, button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Edit profile	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please check the highlighted fields.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Full name	پورا نام	Needs native review
3	Name is required.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Save	محفوظ کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E27 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local	Inline error + icon +	Submit disabled while request in flight; one idempotency

3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit		Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Field validation errors.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E27
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-154 CONFIRMED P2 v2.0

Profile — saving

پروفائل — محفوظ ہو رہا ہے

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.prof_save`

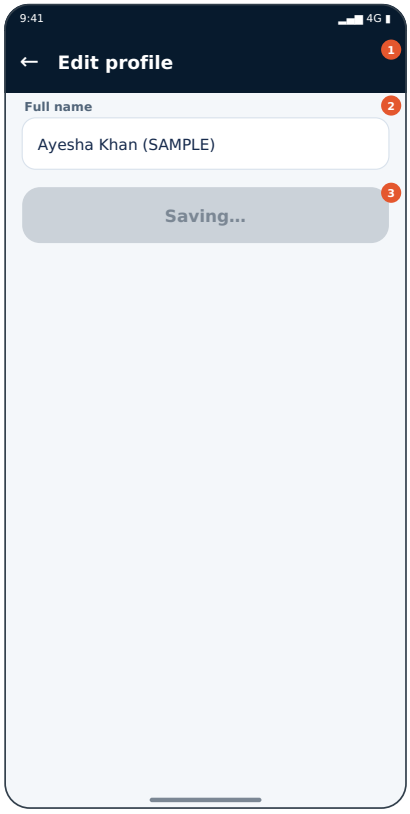

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Save in flight.

Login: **Per flow** · Incoming screens: P-152, P-156


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Button	158–220 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Edit profile	Deep navy #071A2D, white 16sp bold	Per state	Edit profile	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Full name: “Ayesha Khan (SAMPLE)”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “Ayesha Khan (SAMPLE)”	Yes	Always in this state
3	C03 Button	158–220 dp	328×62 dp	Saving... محفوظ ہو رہا ہے…	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Saving..., button	Yes	Visible, disabled until conditions met

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Edit profile	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Full name	پورا نام	Needs native review
3	Saving...	محفوظ ہو رہا ہے…	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Save in flight.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upsert_profile (write)
Inputs	name, language, contact fields confirmed by rules
Server checks / RLS	auth user match, field validation, role immutability (role never client-set); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Idempotent upsert
Offline	Draft kept locally; submit blocked
Cache	Profile cached after success

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-152, P-156


Open decisions: None specific (see Part 16).

P-155 CONFIRMED P2 v2.0

Profile — saved

پروفائل — محفوظ

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.prof_ok`

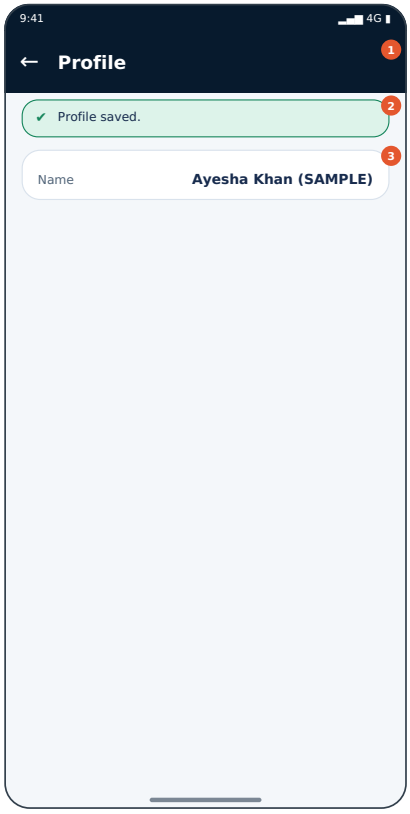

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Save succeeded.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Key-value card	125–181 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Profile	Deep navy #071A2D, white 16sp bold	Per state	Profile	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Profile saved.	Tinted background + border + icon + text (never colour alone)	—	Profile saved.	No	Always in this state
3	C03 Key-value card	125–181 dp	328×56 dp	Name: Ayesha Khan (SAMPLE)	White card, 30dp rows, label grey / value bold	—	Name: Ayesha Khan (SAMPLE)	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Profile	پروفائل	Needs native review
2	Profile saved.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Name: Ayesha Khan (SAMPLE)	نام	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Name	Ayesha Khan (SAMPLE)	User-entered	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Save succeeded.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upsert_profile (write)
Inputs	name, language, contact fields confirmed by rules
Server checks / RLS	auth user match, field validation, role immutability (role never client-set); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Idempotent upsert
Offline	Draft kept locally; submit blocked
Cache	Profile cached after success

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-156 CONFIRMED P2 v2.0

Profile — save failed

پروفائل — محفوظ نہیں ہوا

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.prof_fail`

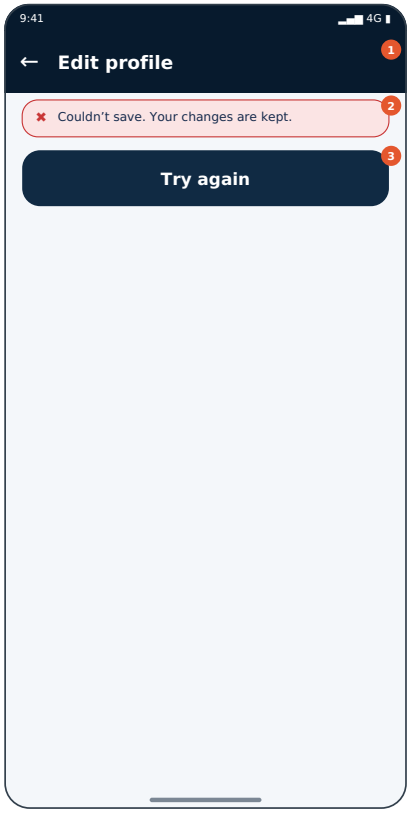

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Save failed; edits kept.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **P-154** Profile — saving

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Edit profile	Deep navy #071A2D, white 16sp bold	Per state	Edit profile	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Couldn't save. Your changes are kept.	Tinted background + border + icon + text (never colour alone)	—	Couldn't save. Your changes are kept.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Try again دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Edit profile	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Couldn't save. Your changes are kept.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Retry debounced.
3	Button: Try again	≥48 dp	Enabled	Navigate to **P-154** Profile — saving	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Save failed; edits kept.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upsert_profile (write)
Inputs	name, language, contact fields confirmed by rules
Server checks / RLS	auth user match, field validation, role immutability (role never client-set); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04
Retry / idempotency	Idempotent upsert
Offline	Draft kept locally; submit blocked
Cache	Profile cached after success

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-154 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

P-157 CONFIRMED P0 v2.0

Language settings

زبان کی ترتیبات

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.lang`

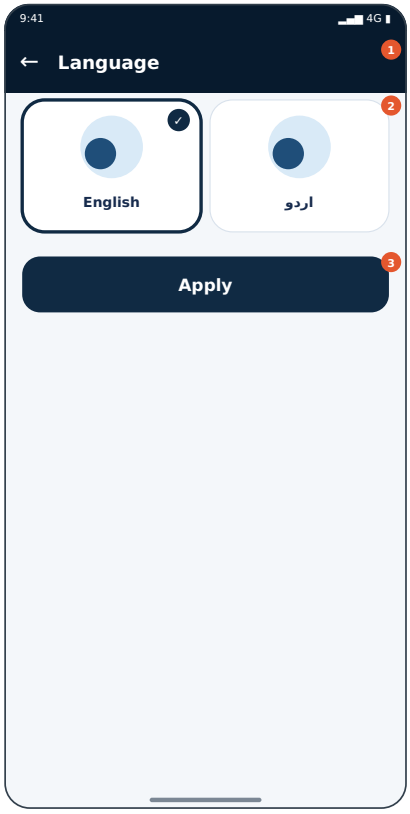

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Switch English/Urdu; preview RTL before applying.

Login: **Yes** · Incoming screens: P-150


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- English (Tile) → **P-158** Urdu RTL preview
- اردو (Tile) → **P-158** Urdu RTL preview
- Apply (Button) → previous screen (system Back)

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Illustrated tile grid	80–220 dp	Full width, 16 dp margins	above fold
3	Button	220–282 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Language	Deep navy #071A2D, white 16sp bold	Per state	Language	Yes	Always in this state
2	C02 Illustrated tile grid	80–220 dp	328×140 dp	English; اردو اردوEnglish	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	English	Yes	Always in this state
3	C03 Button	220–282 dp	328×62 dp	Apply لاگو کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Apply, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Language	زبان	Needs native review
2	English	English	Needs native review
2	اردو	اردو	Needs native review
3	Apply	لاگو کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Tile: English	≥48 dp	Enabled	Navigate to **P-158** Urdu RTL preview	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Tile: اردو	≥48 dp	Enabled	Navigate to **P-158** Urdu RTL preview	Instant	—	E01, E04 copy; no false success	Save disabled while pending.

3	Button: Apply	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Save disabled while pending.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Switch English/Urdu; preview RTL before applying.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	update_preferences (write)
Inputs	language, notification toggles
Server checks / RLS	auth; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E08, E27
Retry / idempotency	Idempotent
Offline	Saved locally then synced when online (PROPOSED)
Cache	Local + server

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-158 · Incoming: P-150


Open decisions: None specific (see Part 16).

P-158 CONFIRMED P1 v2.0

Urdu RTL preview

اردو RTL ایپش

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.lang_rtl`

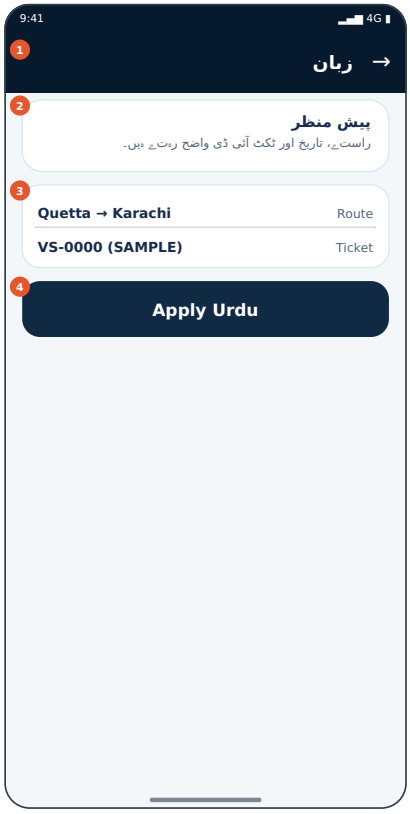

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Preview Urdu layout with mixed-direction content.

Login: **Yes** · Incoming screens: P-157


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Apply Urdu (Button) → **P-150** Settings

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–156 dp	Full width, 16 dp margins	above fold
3	Key-value card	156–242 dp	Full width, 16 dp margins	above fold
4	Button	242–304 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	زبان	Deep navy #071A2D, white 16sp bold	Per state	زبان	Yes	Always in this state
2	C02 Info card	80–156 dp	328×76 dp	پیش منظر راستے، تاریخ اور ٹکٹ آئی ڈی واضح رہتے ہیں۔	White card, border #D9E2EC, radius 18dp	—	پیش منظر	No	Always in this state
3	C03 Key-value card	156–242 dp	328×86 dp	Route: Quetta → Karachi; Ticket: VS-0000 (SAMPLE)	White card, 30dp rows, label grey / value bold	—	Route: Quetta → Karachi	No	Always in this state
4	C04 Button	242–304 dp	328×62 dp	Apply Urdu اردو لاگو کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Apply Urdu, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	زبان	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	پیش منظر	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	راستے، تاریخ اور ٹکٹ آئی ڈی واضح رہتے ہیں۔	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Route: Quetta → Karachi	روٹ	Needs native review
3	Ticket: VS-0000 (SAMPLE)	ٹکٹ	Needs native review
4	Apply Urdu	اردو لاگو کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
4	Button: Apply Urdu	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E04 copy; no false success	Save disabled while pending.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Route	Quetta → Karachi	Server-derived	Required	Show “Not available” if missing; never blank/invented
Ticket	VS-0000 (SAMPLE)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Preview Urdu layout with mixed-direction content.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E08, E27
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-150 · Incoming: P-157


Open decisions: None specific (see Part 16).

P-159 CONFIRMED PROPOSED P1 v2.0

Notification settings

اطلاعات کی ترتیبات

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.notif_set`

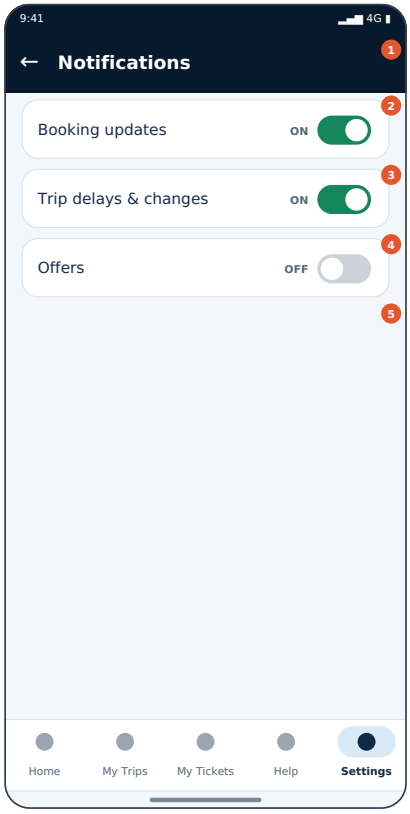

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Toggle booking, trip and safety notifications.

Login: **Yes** · Incoming screens: P-150


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Home (Nav tab) → **P-001** Passenger Home — default
- My Trips (Nav tab) → **P-094** My Trips — Upcoming
- My Tickets (Nav tab) → **P-081** My Tickets
- Help (Nav tab) → **P-139** Help hub
- Settings (Nav tab) → **P-150** Settings

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Switch row	80–142 dp	Full width, 16 dp margins	above fold
3	Switch row	142–204 dp	Full width, 16 dp margins	above fold
4	Switch row	204–266 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	266–266 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Notifications	Deep navy #071A2D, white 16sp bold	Per state	Notifications	Yes	Always in this state
2	C02 Switch row	80–142 dp	328×62 dp	Booking updates	52dp row, switch with ON/OFF text	Per state	Booking updates	Yes	Always in this state
3	C03 Switch row	142–204 dp	328×62 dp	Trip delays & changes	52dp row, switch with ON/OFF text	Per state	Trip delays & changes	Yes	Always in this state
4	C04 Switch row	204–266 dp	328×62 dp	Offers	52dp row, switch with ON/OFF text	Per state	Offers	Yes	Always in this state
5	C05 Bottom navigation	266–266 dp	360×0 dp	Home; My Trips; My Tickets; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Notifications	اطلاعات	Needs native review
2	Booking updates	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Trip delays & changes	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Offers	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
5	Home	ہوم	Needs native review
5	My Trips	میرے سفر	Needs native review
5	My Tickets	میرے ٹکٹ	Needs native review
5	Help	مدد	Needs native review
5	Settings		Needs native review

3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **P-001** Passenger Home — default	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **P-094** My Trips — Upcoming	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
5	Nav tab: My Tickets	≥48 dp	Enabled	Navigate to **P-081** My Tickets	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **P-139** Help hub	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **P-150** Settings	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	Save disabled while pending.
3	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	Save disabled while pending.
4	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	Save disabled while pending.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Toggle booking, trip and safety notifications.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	update_preferences (write)
Inputs	language, notification toggles
Server checks / RLS	auth; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E08, E27
Retry / idempotency	Idempotent
Offline	Saved locally then synced when online (PROPOSED)
Cache	Local + server

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-001, P-081, P-094, P-139, P-150 · Incoming: P-150


Open decisions: OD-15 (see Part 16).

P-160 CONFIRMED P1 v2.0

Permissions status

اجازتوں کی حالت

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.perm_stat`

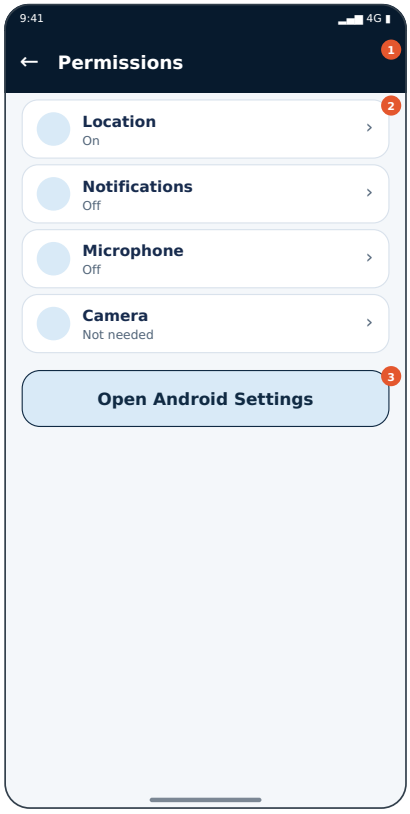

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Show permission states with link to Settings.

Login: **Yes** · Incoming screens: P-150


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open Android Settings (Button) → Android system settings

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–322 dp	Full width, 16 dp margins	above fold
3	Button	322–384 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Permissions	Deep navy #071A2D, white 16sp bold	Per state	Permissions	Yes	Always in this state
2	C02 List rows	80–322 dp	328×242 dp	Location|On; Notifications|Off; Microphone|Off; Camera|Not needed	White rows radius 14dp, 52dp high, chevron/check	Per state	Location|On	Yes	Always in this state
3	C03 Button	322–384 dp	328×62 dp	Open Android Settings سیٹنگز	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open Android Settings, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Permissions	اجازتیں	Needs native review
2	Location|On	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Notifications|Off	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Microphone|Off	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Camera|Not needed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open Android Settings	سیٹنگز	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Save disabled while pending.
3	Button: Open Android Settings	≥48 dp	Enabled	Open Android Settings for this app; on return re-check state	Instant	—	E09, E10 copy; no false success	Save disabled while pending.

	Settings			check state			success	pending

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Show permission states with link to Settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: P-150


Open decisions: None specific (see Part 16).

P-161 CONFIRMED NEEDS CONFIRMATION P1 v2.0

Privacy policy

رازداری کی پالیسی

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.privacy`

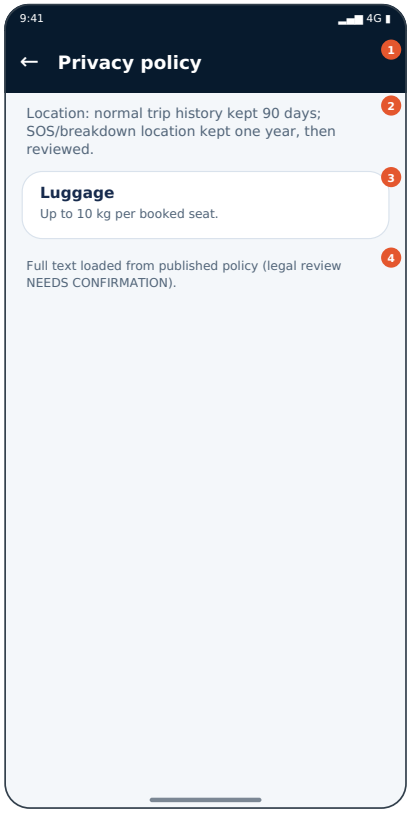

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Published privacy policy; includes 10 kg luggage notice; GPS retention.

Login: **Per flow** · Incoming screens: D-073, P-138, P-150, P-164, SH-005


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–144 dp	Full width, 16 dp margins	above fold
3	Info card	144–216 dp	Full width, 16 dp margins	above fold
4	Body text	216–262 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Privacy policy	Deep navy #071A2D, white 16sp bold	Per state	Privacy policy	Yes	Always in this state
2	C02 Body text	80–144 dp	328×64 dp	Location: normal trip history kept 90 days; SOS/breakdown location kept one year, then reviewed.	12–14sp secondary text	—	Location: normal trip history kept 90 da	No	Always in this state
3	C03 Info card	144–216 dp	328×72 dp	Luggage; Up to 10 kg per booked seat.	White card, border #D9E2EC, radius 18dp	—	Luggage	No	Always in this state
4	C04 Body text	216–262 dp	328×46 dp	Full text loaded from published policy (legal review NEEDS CONFIRMATION).	12–14sp secondary text	—	Full text loaded from published policy (	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Privacy policy	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Location: normal trip history kept 90 days; SOS/breakdown location kept one year, then reviewed.	لوکیشن	Needs native review
3	Luggage	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Up to 10 kg per booked seat.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Full text loaded from published policy (legal review NEEDS CONFIRMATION).	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Published privacy policy; includes 10 kg luggage notice; GPS retention.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_policy_text (read)
Inputs	policy id, locale
Server checks / RLS	published version; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	Safe read
Offline	Bundled copy
Cache	Versioned

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Contains the 10 kg per booked seat notice
2. Retention figures match policy
3. Text readable at 200%
4. Offline copy available
5. Urdu text RTL and complete
6. Policy content respects confirmed rules
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-073, P-138, P-150, P-164, SH-005


Open decisions: OD-11, OD-17 (see Part 16).

P-162 CONFIRMED NEEDS CONFIRMATION P1 v2.0

Terms of use

شرائط

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.terms`

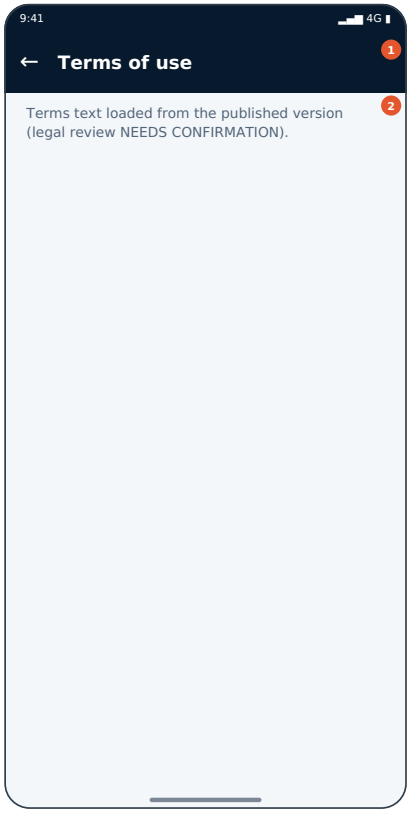

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Published terms.

Login: **Per flow** · Incoming screens: D-073, P-164, SH-005


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–130 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Terms of use	Deep navy #071A2D, white 16sp bold	Per state	Terms of use	Yes	Always in this state
2	C02 Body text	80–130 dp	328×50 dp	Terms text loaded from the published version (legal review NEEDS CONFIRMATION).	12–14sp secondary text	—	Terms text loaded from the published ver	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Terms of use	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Terms text loaded from the published version (legal review NEEDS CONFIRMATION).	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Published terms.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_policy_text (read)
Inputs	policy id, locale
Server checks / RLS	published version; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	Safe read
Offline	Bundled copy
Cache	Versioned

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-073, P-164, SH-005


Open decisions: OD-17 (see Part 16).

P-163 CONFIRMED P1 v2.0

Cancellation & refund policy

منسوخی اور رقم واپسی پالیسی

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.refund_policy`

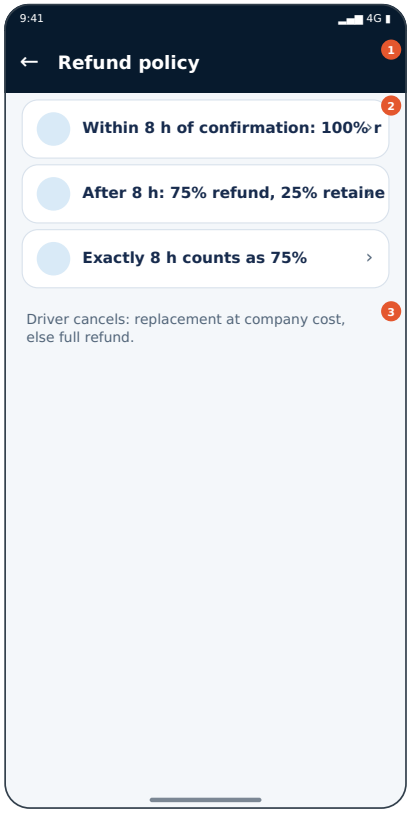

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Plain-language policy: 8 h rule, driver cancellation, no-show.

Login: **Per flow** · Incoming screens: D-073, P-107, P-108, P-123


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold
3	Body text	264–313 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Refund policy	Deep navy #071A2D, white 16sp bold	Per state	Refund policy	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	Within 8 h of confirmation: 100% refund; After 8 h: 75% refund, 25% retained; Exactly 8 h counts as 75%	White rows radius 14dp, 52dp high, chevron/check	Per state	Within 8 h of confirmation: 100% refund	Yes	Always in this state
3	C03 Body text	264–313 dp	328×49 dp	Driver cancels: replacement at company cost, else full refund.	12–14sp secondary text	—	Driver cancels: replacement at company c	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Refund policy	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Within 8 h of confirmation: 100% refund	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	After 8 h: 75% refund, 25% retained	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Exactly 8 h counts as 75%	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Driver cancels: replacement at company cost, else full refund.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Plain-language policy: 8 h rule, driver cancellation, no-show.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_policy_text (read)
Inputs	policy id, locale
Server checks / RLS	published version; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	Safe read
Offline	Bundled copy
Cache	Versioned

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Timer starts at confirmation, not departure
2. Text readable at 200%
3. Offline copy available
4. Urdu text RTL and complete
5. Policy content respects confirmed rules
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-073, P-107, P-108, P-123


Open decisions: None specific (see Part 16).

P-164 CONFIRMED P2 v2.0

About / app version

ایپ کے بارے میں

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.about`

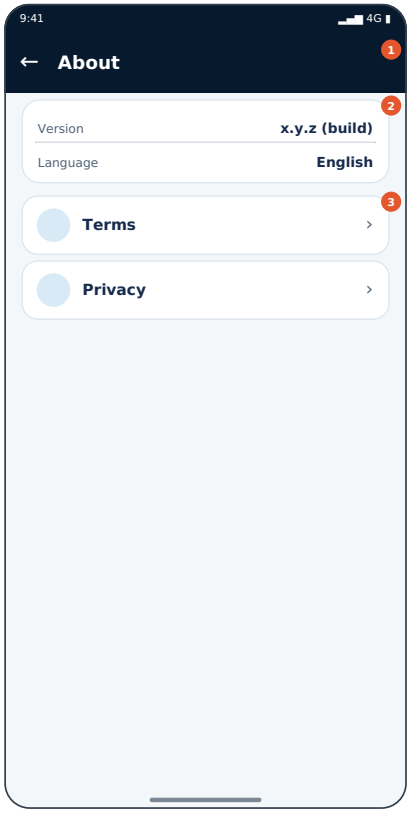

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Version, licences.

Login: **Per flow** · Incoming screens: P-150


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Terms (Row) → **P-162** Terms of use
- Privacy (Row) → **P-161** Privacy policy

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–166 dp	Full width, 16 dp margins	above fold
3	List rows	166–292 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	About	Deep navy #071A2D, white 16sp bold	Per state	About	Yes	Always in this state
2	C02 Key-value card	80–166 dp	328×86 dp	Version: x.y.z (build); Language: English	White card, 30dp rows, label grey / value bold	—	Version: x.y.z (build)	No	Always in this state
3	C03 List rows	166–292 dp	328×126 dp	Terms; Privacy	White rows radius 14dp, 52dp high, chevron/check	Per state	Terms	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	About	ایپ کے بارے میں	Needs native review
2	Version: x.y.z (build)	ورژن	Needs native review
2	Language: English	زبان	Needs native review
3	Terms	شرائط	Needs native review
3	Privacy	رازداری	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
3	Row: Terms	≥48 dp	Enabled	Navigate to **P-162** Terms of use	Instant	—	E01, E03 copy; no false success	n/a
3	Row: Privacy	≥48 dp	Enabled	Navigate to **P-161** Privacy policy	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Version	x.y.z (build)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Language	English	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Version, licences.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_app_config (read)
Inputs	app version, locale
Server checks / RLS	min version, maintenance flag, configured payment methods, feature flags; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	Safe read
Offline	Use last config; never assume payment methods
Cache	Short TTL (PROPOSED)

14. Security, privacy & safety

Static/published policy text; version shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-161, P-162 · Incoming: P-150


Open decisions: None specific (see Part 16).

P-165 PROPOSED NEEDS CONFIRMATION P2 v2.0

Accessibility & voice settings

رسائی اور آواز

Role: **Passenger** · Family: F8 Passenger settings, profile & help · Key: `p.access`

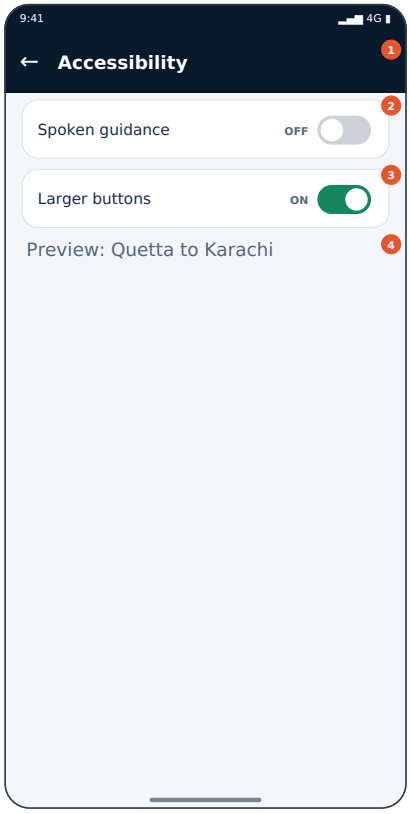

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Text size, voice guidance toggles (if available).

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Switch row	80–142 dp	Full width, 16 dp margins	above fold
3	Switch row	142–204 dp	Full width, 16 dp margins	above fold
4	Body text	204–240 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Accessibility	Deep navy #071A2D, white 16sp bold	Per state	Accessibility	Yes	Always in this state
2	C02 Switch row	80–142 dp	328×62 dp	Spoken guidance	52dp row, switch with ON/OFF text	Per state	Spoken guidance	Yes	Always in this state
3	C03 Switch row	142–204 dp	328×62 dp	Larger buttons	52dp row, switch with ON/OFF text	Per state	Larger buttons	Yes	Always in this state
4	C04 Body text	204–240 dp	328×36 dp	Preview: Quetta to Karachi	12–14sp secondary text	—	Preview: Quetta to Karachi	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Accessibility	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Spoken guidance	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Larger buttons	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Preview: Quetta to Karachi	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	Save disabled while pending.
3	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	Save disabled while pending.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Req.	Missing / freshness

Source of truth
Data is static UI copy or derived from the action in §13.

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Text size, voice guidance toggles (if available).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	update_preferences (write)
Inputs	language, notification toggles
Server checks / RLS	auth; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E08, E27
Retry / idempotency	Idempotent
Offline	Saved locally then synced when online (PROPOSED)
Cache	Local + server

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-001 CONFIRMED P0 v2.0

Driver home — before approval

ڈرائیور ہوم — منظوری سے پہلے

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.pre`

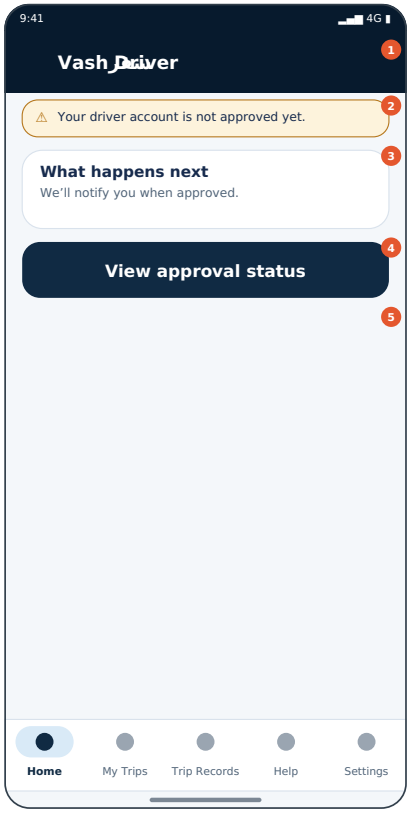

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Driver signed in but not approved; trip actions disabled with reason.

Login: **Yes (or guest if confirmed)** · Incoming screens: D-009


3. Exit & navigation map

- View approval status (Button) → **D-002** Approval pending
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Info card	125–207 dp	Full width, 16 dp margins	above fold
4	Button	207–269 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	269–269 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر Driver	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر Driver	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Your driver account is not approved yet.	Tinted background + border + icon + text (never colour alone)	—	Your driver account is not approved yet.	No	Always in this state
3	C03 Info card	125–207 dp	328×82 dp	What happens next; We'll notify you when approved.	White card, border #D9E2EC, radius 18dp	—	What happens next	No	Always in this state
4	C04 Button	207–269 dp	328×62 dp	View approval status منظوری کی حالت	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View approval status, button	Yes	Always in this state
5	C05 Bottom navigation	269–269 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر Driver	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Your driver account is not approved yet.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	What happens next	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	We'll notify you when approved.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	View approval status	منظوری کی حالت	Needs native review
5	Home	ہوم	Needs native review

5	My Trips	میرے سفر	Needs native review
5	Trip Records	سفر کے ریکارڈ	Needs native review
5	Help	مدد	Needs native review
5	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
4	Button: View approval status	≥48 dp	Enabled	Navigate to **D-002** Approval pending	Instant	—	E19 copy; no false success	Cards debounced.
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E19 copy; no false success	Cards debounced.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E19 copy; no false success	Cards debounced.
5	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E19 copy; no false success	Cards debounced.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E19 copy; no false success	Cards debounced.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E19 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Driver signed in but not approved; trip actions disabled with reason.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E19 Driver account not approved	Banner or full screen **D-002** Approval pending	Your driver account is not approved yet — You can start trips after approval.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E19
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Bottom nav exact labels
2. Primary action visible above fold on 360×640
3. Offline shows saved data labelled
4. Urdu RTL mirrored
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-002, D-013, D-016, D-046, D-063, D-067 · Incoming: D-009


Open decisions: None specific (see Part 16).

D-002 CONFIRMED P0 v2.0

Approval pending

منظوری زیر التوا

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.pending`

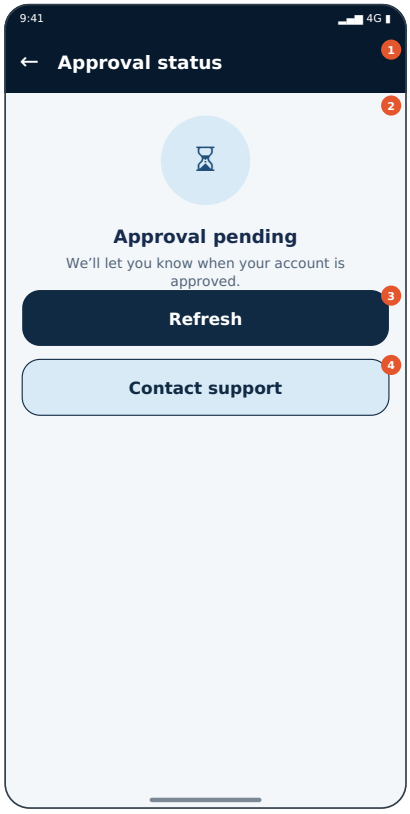

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server shows pending approval.

Login: **Per flow** · Incoming screens: D-001, ERR-021


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Refresh (Button) → stays on screen (action)
- Contact support (Button) → **D-063** Driver Help hub

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Approval status	Deep navy #071A2D, white 16sp bold	Per state	Approval status	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Approval pending; We'll let you know when your account is approved.	Light-blue circle icon + 16sp title + 12sp body	—	Approval pending	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Refresh ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Approval status	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Approval pending	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We'll let you know when your account is approved.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refresh	ریفریش	Needs native review
4	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow; Back	≥48 dp	Enabled	Pop to previous screen (same as system	Instant	—	E19 copy; no false	Status check button debounced; no write

	[illegible]	[illegible]	[illegible]	Back)	[illegible]		success	retries.
3	Button: Refresh	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E19 copy; no false success	Status check button debounced; no write retries.
4	Button: Contact support	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E19 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server shows pending approval.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E19 Driver account not approved	Banner or full screen **D-002** Approval pending	Your driver account is not approved yet — You can start trips after approval.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E19
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-063 · Incoming: D-001, ERR-021


Open decisions: None specific (see Part 16).

D-003 PROPOSED NEEDS CONFIRMATION P1 v2.0

Needs correction / rejected

اصلاح درکار / مسترد

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.rejected`

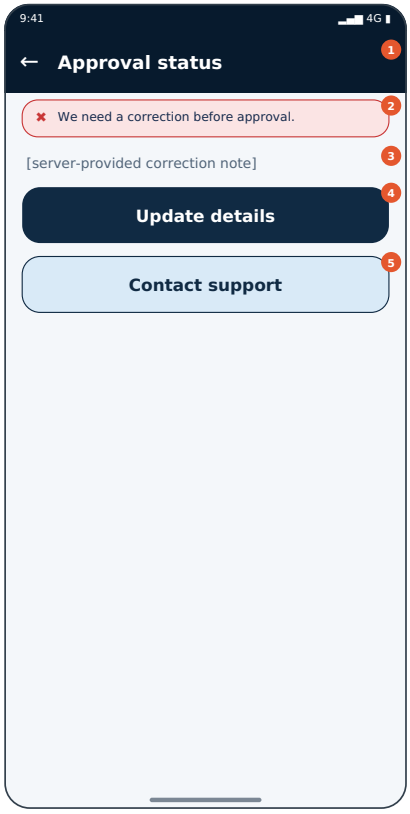

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server returned a correction request (reasons are server text).

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Update details (Button) → **D-004** Driver profile setup
- Contact support (Button) → **D-063** Driver Help hub

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Body text	125–158 dp	Full width, 16 dp margins	above fold
4	Button	158–220 dp	Full width, 16 dp margins	above fold
5	Button	220–282 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Approval status	Deep navy #071A2D, white 16sp bold	Per state	Approval status	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	We need a correction before approval.	Tinted background + border + icon + text (never colour alone)	—	We need a correction before approval.	No	Always in this state
3	C03 Body text	125–158 dp	328×33 dp	[server-provided correction note]	12–14sp secondary text	—	[server-provided correction note]	No	Always in this state
4	C04 Button	158–220 dp	328×62 dp	Update details تفصیلات اپڈیٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Update details, button	Yes	Always in this state
5	C05 Button	220–282 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Approval status	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We need a correction before approval.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	[server-provided correction note]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Update details	تفصیلات اپڈیٹ	Needs native review
5	Contact support	سپورٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
4	Button: Update details	≥48 dp	Enabled	Navigate to **D-004** Driver profile setup	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
5	Button: Contact support	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server returned a correction request (reasons are server text).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-004, D-063 · Incoming: Entry point / system-launched


Open decisions: OD-13 (see Part 16).

D-004 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Driver profile setup

ڈرائیور پروفائل سیٹ اپ

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.setup`

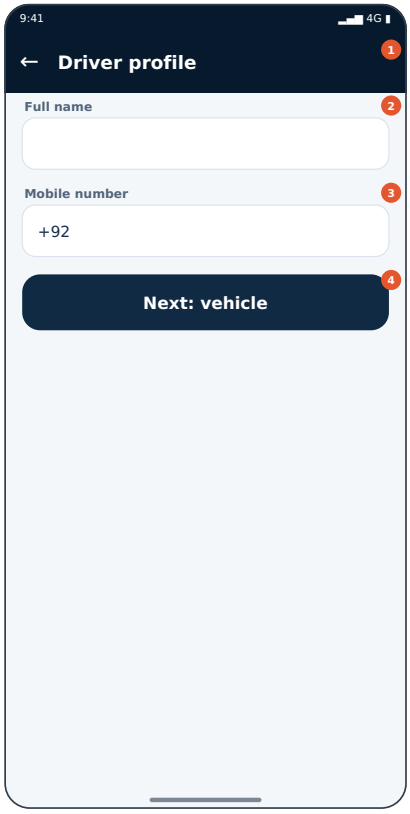

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Collect driver profile details required by the business (fields NEEDS CONFIRMATION).

Login: **As per flow** · Incoming screens: D-003


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Next: vehicle (Button) → **D-005** Vehicle details

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Text field	158–236 dp	Full width, 16 dp margins	above fold
4	Button	236–298 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Driver profile	Deep navy #071A2D, white 16sp bold	Per state	Driver profile	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Full name: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Full name: “”	Yes	Always in this state
3	C03 Text field	158–236 dp	328×78 dp	Mobile number: “+92 ”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Mobile number: “+92 ”	Yes	Always in this state
4	C04 Button	236–298 dp	328×62 dp	Next: vehicle اگلا: گاڑی	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Next: vehicle, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Driver profile	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Full name	پورا نام	Needs native review
3	Mobile number	موبائل نمبر	Needs native review
4	Next: vehicle	اگلا: گاڑی	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button: Next:	≥48 dp	Enabled	Navigate to **D-005** Vehicle	Inline spinner; other	Server-confirmed	E01, E04 copy; no	Submit disabled while request in flight; one

	vehicle			details	controls locked	result only	false success	idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Full name	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default
Mobile number	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Collect driver profile details required by the business (fields NEEDS CONFIRMATION).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	update_driver_profile_request (write)
Inputs	profile/vehicle fields
Server checks / RLS	auth, change-request rules (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-005 · Incoming: D-003


Open decisions: OD-13 (see Part 16).

D-005 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Vehicle details

گاڑی کی تفصیلات

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.vehicle`

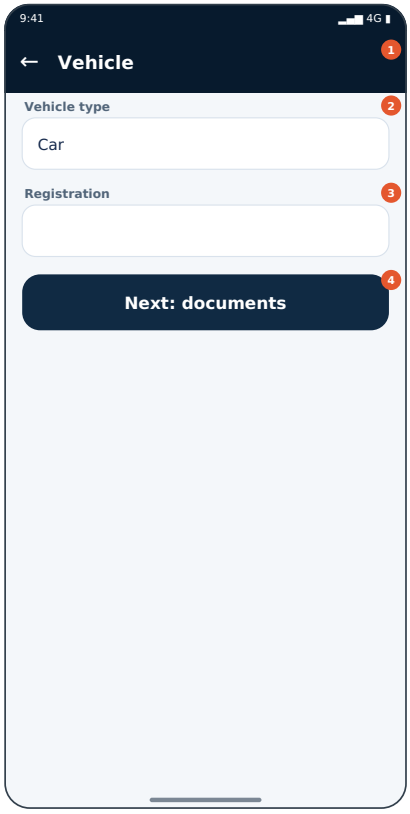

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Vehicle type, registration, seats (data-driven).

Login: **As per flow** · Incoming screens: D-004


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Next: documents (Button) → **D-006** Document upload (if required)

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Text field	158–236 dp	Full width, 16 dp margins	above fold
4	Button	236–298 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vehicle	Deep navy #071A2D, white 16sp bold	Per state	Vehicle	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Vehicle type: “Car”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Vehicle type: “Car”	Yes	Always in this state
3	C03 Text field	158–236 dp	328×78 dp	Registration: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Registration: “”	Yes	Always in this state
4	C04 Button	236–298 dp	328×62 dp	Next: documents اگلا: دستاویزات	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Next: documents, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vehicle	گاڑی	Needs native review
2	Vehicle type	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Registration	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Next: documents	اگلا: دستاویزات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button: Next:	≥48 dp	Enabled	Navigate to **D-006** Document	Inline spinner; other	Server-	E01, E04 copy; no	Submit disabled while request in flight; one

	documents			upload (if required)	controls locked	confirmed result only	false success	idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Vehicle type	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default
Registration	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Vehicle type, registration, seats (data-driven).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	update_driver_profile_request (write)
Inputs	profile/vehicle fields
Server checks / RLS	auth, change-request rules (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-006 · Incoming: D-004


Open decisions: OD-13 (see Part 16).

D-006 PROPOSED NEEDS CONFIRMATION P1 v2.0

Document upload (if required)

دستاویزات اپلوڈ

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.docs`

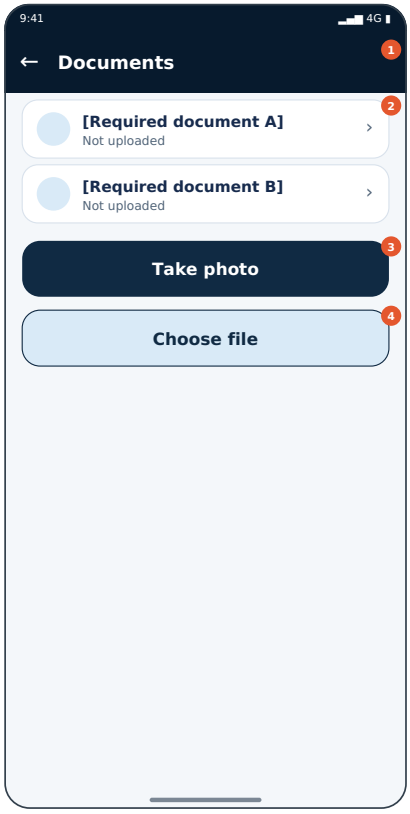

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Upload documents only if the product requires them (list NEEDS CONFIRMATION).

Login: **As per flow** · Incoming screens: D-005, D-007, D-008


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Take photo (Button) → **SH-013** Camera / QR scan education
- Choose file (Button) → **D-007** Upload progress

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–206 dp	Full width, 16 dp margins	above fold
3	Button	206–268 dp	Full width, 16 dp margins	above fold
4	Button	268–330 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Documents	Deep navy #071A2D, white 16sp bold	Per state	Documents	Yes	Always in this state
2	C02 List rows	80–206 dp	328×126 dp	[Required document A]|Not uploaded; [Required document B]|Not uploaded	White rows radius 14dp, 52dp high, chevron/check	Per state	[Required document A]|Not uploaded	Yes	Always in this state
3	C03 Button	206–268 dp	328×62 dp	Take photo تصویر لیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Take photo, button	Yes	Always in this state
4	C04 Button	268–330 dp	328×62 dp	Choose file فائل منتخب	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Choose file, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Documents	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	[Required document A]|Not uploaded	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	[Required document B]|Not uploaded	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Take photo	تصویر لیں	Needs native review
4	Choose file	فائل منتخب	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow;	≥48 dp	Enabled	Pop to previous screen (same	Instant	—	E01, E04 copy; no	Submit disabled while request in flight; one

	Back			as system Back)			false success	idempotency key per attempt.
3	Button: Take photo	≥48 dp	Enabled	Navigate to **SH-013** Camera / QR scan education	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button: Choose file	≥48 dp	Enabled	Navigate to **D-007** Upload progress	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Upload documents only if the product requires them (list NEEDS CONFIRMATION).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upload_driver_document (write)
Inputs	file (type/size limits NEEDS CONFIRMATION)
Server checks / RLS	auth, malware/type checks, private storage; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Resumable upload with key (PROPOSED)
Offline	Paused until online
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-007, SH-013 · Incoming: D-005, D-007, D-008


Open decisions: OD-13 (see Part 16).

D-007 CONFIRMED P1 v2.0

Upload progress

اپلوڈ جاری

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.upl`

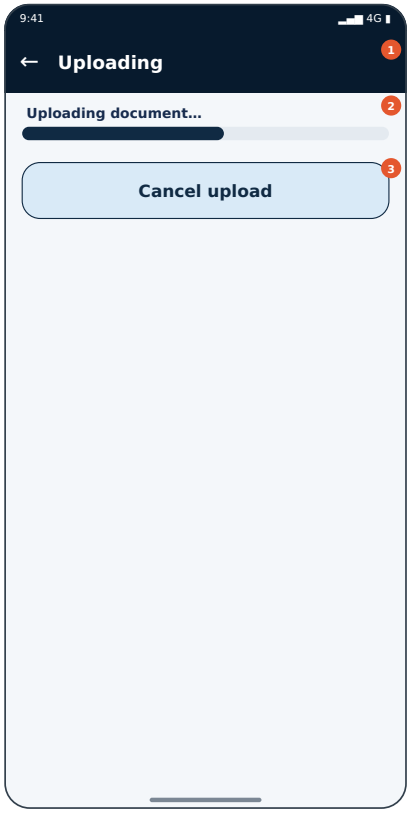

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Upload with progress and cancel.

Login: **Per flow** · Incoming screens: D-006


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Cancel upload (Button) → **D-006** Document upload (if required)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Progress bar	80–136 dp	Full width, 16 dp margins	above fold
3	Button	136–198 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Uploading	Deep navy #071A2D, white 16sp bold	Per state	Uploading	Yes	Always in this state
2	C02 Progress bar	80–136 dp	328×56 dp	Uploading document…	12dp track	—	Uploading document…	No	Always in this state
3	C03 Button	136–198 dp	328×62 dp	Cancel upload اپلوڈ منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel upload, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Uploading	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Uploading document…	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Cancel upload	اپلوڈ منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E02 copy; no false success	Status check button debounced; no write retries.
3	Button: Cancel upload	≥48 dp	Enabled	Navigate to **D-006** Document upload (if required)	Inline spinner; other controls locked	Server-confirmed result only	E01, E02 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Upload with progress and cancel.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E02 Request slower than 8 s (threshold PROPOSED)	Banner or full screen **ERR-001** Slow network — with cancel	Slow connection — This is taking longer than usual. You can keep waiting or cancel.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upload_driver_document (write)
Inputs	file (type/size limits NEEDS CONFIRMATION)
Server checks / RLS	auth, malware/type checks, private storage; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E02
Retry / idempotency	Resumable upload with key (PROPOSED)
Offline	Paused until online
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-006 · Incoming: D-006


Open decisions: None specific (see Part 16).

D-008 CONFIRMED P1 v2.0

Document failed / invalid

دستاویز ناکام / غلط

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.doc_bad`

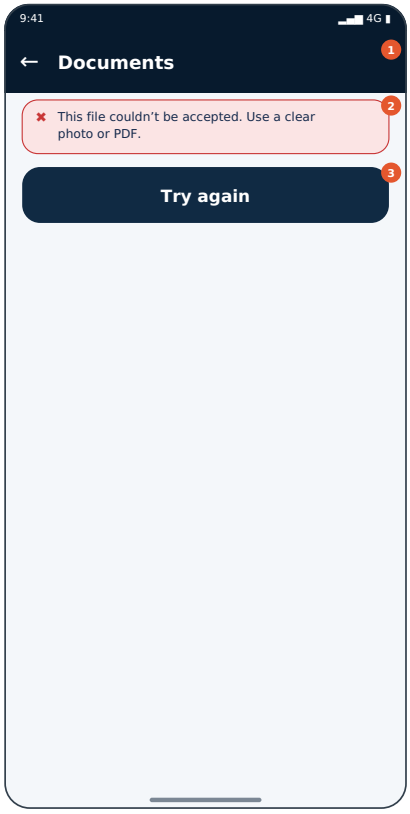

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Upload failed or file invalid.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Try again (Button) → **D-006** Document upload (if required)

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Documents	Deep navy #071A2D, white 16sp bold	Per state	Documents	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	This file couldn't be accepted. Use a clear photo or PDF.	Tinted background + border + icon + text (never colour alone)	—	This file couldn't be accepted. Use a cl	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Try again دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Documents	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This file couldn't be accepted. Use a clear photo or PDF.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ کوشش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E27, E01 copy; no false success	Retry debounced.
3	Button: Try again	≥48 dp	Enabled	Navigate to **D-006** Document upload (if required)	Inline spinner; other controls locked	Server-confirmed result only	E27, E01 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Upload failed or file invalid.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upload_driver_document (write)
Inputs	file (type/size limits NEEDS CONFIRMATION)
Server checks / RLS	auth, malware/type checks, private storage; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E27, E01
Retry / idempotency	Resumable upload with key (PROPOSED)
Offline	Paused until online
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-006 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-009 CONFIRMED P1 v2.0

Submission confirmation

جمع کرانے کی تصدیق

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.submitted`

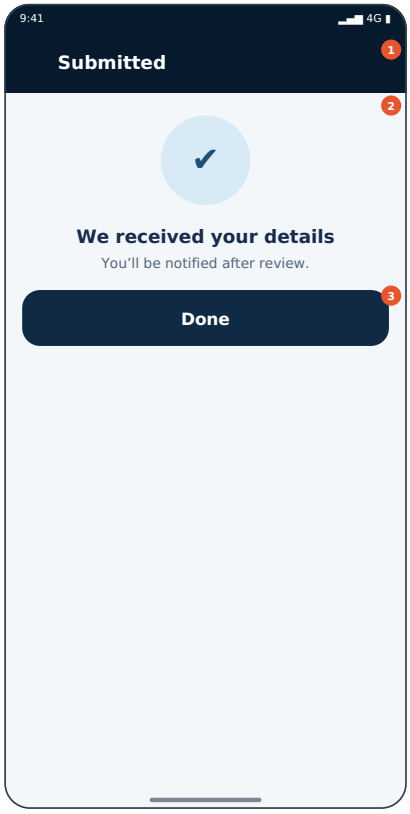

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Driver submission received; awaiting review.

Login: **Per flow** · Incoming screens: D-011


3. Exit & navigation map

- Done (Button) → **D-001** Driver home — before approval

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Submitted	Deep navy #071A2D, white 16sp bold	Per state	Submitted	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	We received your details; You'll be notified after review.	Light-blue circle icon + 16sp title + 12sp body	—	We received your details	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Done مکمل	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Done, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Submitted	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We received your details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You'll be notified after review.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Done	مکمل	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Done	≥48 dp	Enabled	Navigate to **D-001** Driver home — before approval	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Driver submission received; awaiting review.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-001 · Incoming: D-011


Open decisions: None specific (see Part 16).

D-010 CONFIRMED P1 v2.0

Driver profile details

ڈرائیور پروفائل

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.profile`

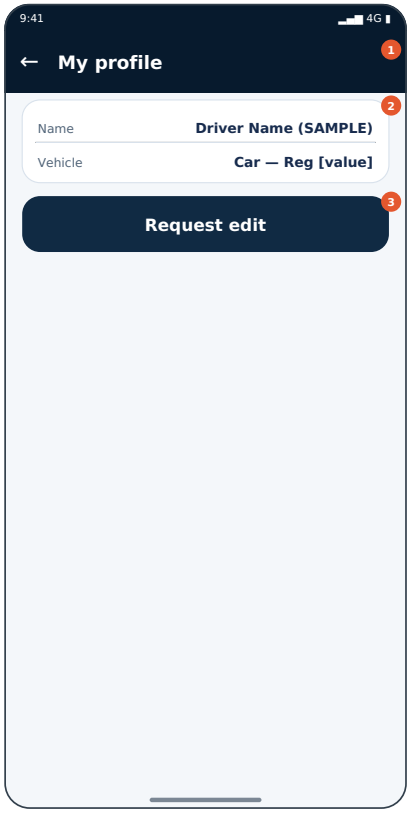

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

View profile and vehicle.

Login: **Per flow** · Incoming screens: D-067, D-068


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Request edit (Button) → **D-011** Edit request

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–166 dp	Full width, 16 dp margins	above fold
3	Button	166–228 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My profile	Deep navy #071A2D, white 16sp bold	Per state	My profile	Yes	Always in this state
2	C02 Key-value card	80–166 dp	328×86 dp	Name: Driver Name (SAMPLE); Vehicle: Car — Reg [value]	White card, 30dp rows, label grey / value bold	—	Name: Driver Name (SAMPLE)	No	Always in this state
3	C03 Button	166–228 dp	328×62 dp	Request edit ترمیم کی درخواست	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Request edit, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My profile	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Name: Driver Name (SAMPLE)	نام	Needs native review
2	Vehicle: Car — Reg [value]	گاڑی	Needs native review
3	Request edit	ترمیم کی درخواست	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Button: Request edit	≥48 dp	Enabled	Navigate to **D-011** Edit request	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Name	Driver Name (SAMPLE)	User-entered	Required	Show “Not available” if missing; never blank/invented
Vehicle	Car — Reg [value]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	View profile and vehicle.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-011 · Incoming: D-067, D-068


Open decisions: None specific (see Part 16).

D-011 PROPOSED NEEDS CONFIRMATION P1 v2.0

Edit request

ترمیم کی درخواست

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.edit_req`

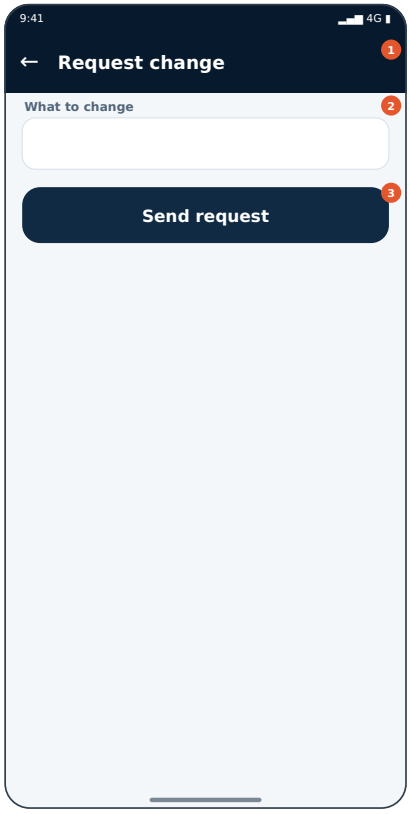

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Request profile changes (may need review).

Login: **As per flow** · Incoming screens: D-010


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send request (Button) → **D-009** Submission confirmation

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Button	158–220 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Request change	Deep navy #071A2D, white 16sp bold	Per state	Request change	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	What to change: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	What to change: “”	Yes	Always in this state
3	C03 Button	158–220 dp	328×62 dp	Send request درخواست بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send request, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Request change	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	What to change	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Send request	درخواست بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Button: Send request	≥48 dp	Enabled	Navigate to **D-009** Submission confirmation	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
What to change	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Request profile changes (may need review).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	update_driver_profile_request (write)
Inputs	profile/vehicle fields
Server checks / RLS	auth, change-request rules (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-009 · Incoming: D-010


Open decisions: OD-13 (see Part 16).

D-012 CONFIRMED P0 v2.0

Account disabled / suspended

اکاؤنٹ معطل

Role: **Driver** · Family: F9 Driver onboarding, approval & profile · Key: `d.suspended`

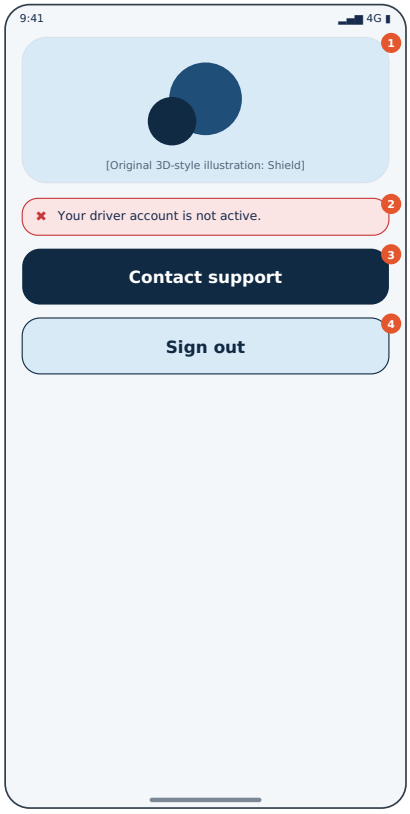

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server marks driver suspended; no trip actions.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Contact support (Button) → **D-063** Driver Help hub
- Sign out (Button) → **SH-035** Sign-out confirmation

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–168 dp	Full width, 16 dp margins	above fold
2	Banner	168–213 dp	Full width, 16 dp margins	above fold
3	Button	213–275 dp	Full width, 16 dp margins	above fold
4	Button	275–337 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–168 dp	328×144 dp	[Shield]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Shield]	No	Always in this state
2	C02 Banner	168–213 dp	328×45 dp	Your driver account is not active.	Tinted background + border + icon + text (never colour alone)	—	Your driver account is not active.	No	Always in this state
3	C03 Button	213–275 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state
4	C04 Button	275–337 dp	328×62 dp	Sign out سائن آؤٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Sign out, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	Your driver account is not active.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Contact support	سپورٹ	Needs native review
4	Sign out	سائن آؤٹ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Contact support	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E19 copy; no false success	Retry debounced.
4	Button: Sign out	≥48 dp	Enabled	Navigate to **SH-035** Sign-out confirmation	Instant	—	E19 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server marks driver suspended; no trip actions.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E19 Driver account not approved	Banner or full screen **D-002** Approval pending	Your driver account is not approved yet — You can start trips after approval.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E19
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-063, SH-035 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-013 CONFIRMED P0 v2.0

Driver Home — default

ڈرائیور ہوم

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.home`

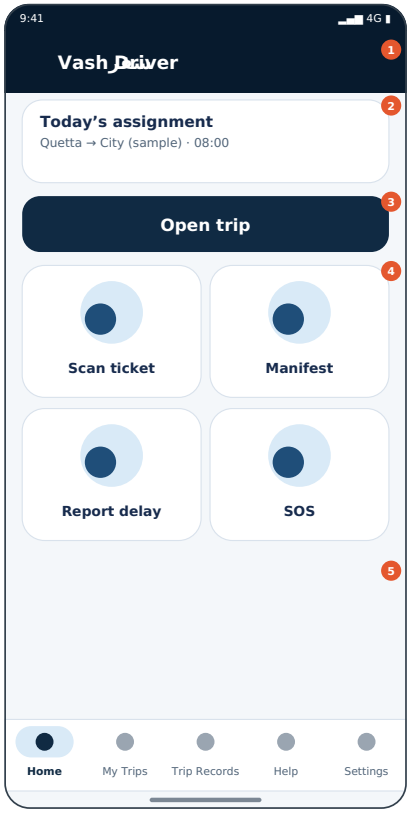

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Driver’s start: approval state, assigned trip, quick actions. Distinct from passenger home.

Login: **Yes (or guest if confirmed)** · Incoming screens: D-001, D-014, D-015, D-016, D-017, D-045, D-046, D-048, D-049, D-063, D-067, D-070, ERR-020


3. Exit & navigation map

- Open trip (Button) → **D-018** Trip details
- Scan ticket (Tile) → **D-022** Scanner ready
- Manifest (Tile) → **D-020** Passenger manifest
- Report delay (Tile) → **D-039** Report delay
- SOS (Tile) → **D-050** Driver SOS
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–166 dp	Full width, 16 dp margins	above fold
3	Button	166–228 dp	Full width, 16 dp margins	above fold
4	Illustrated tile grid	228–496 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	496–496 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر Driver	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر Driver	Yes	Always in this state
2	C02 Info card	80–166 dp	328×86 dp	Today’s assignment; Quetta → City (sample) · 08:00	White card, border #D9E2EC, radius 18dp	—	Today’s assignment	No	Always in this state
3	C03 Button	166–228 dp	328×62 dp	Open trip سفر کھولیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open trip, button	Yes	Always in this state
4	C04 Illustrated tile grid	228–496 dp	328×268 dp	Scan ticket; Manifest; Report delay; SOS ٹکٹ سکین / مسافر فہرست / تاخیر / SOS	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	Scan ticket	Yes	Always in this state
5	C05 Bottom navigation	496–496 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر Driver	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Today’s assignment	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta → City (sample) · 08:00	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open trip	سفر کھولیں	Needs native review
4	Scan ticket		Needs native review

4	Scan ticket	ٹکٹ سکین	Needs native review
4	Manifest	مسافر فہرست	Needs native review
4	Report delay	تاخیر	Needs native review
4	SOS	SOS	Needs native review
5	Home	ہوم	Needs native review
5	My Trips	میرے سفر	Needs native review
5	Trip Records	سفر کے ریکارڈ	Needs native review
5	Help	مدد	Needs native review
5	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Open trip	≥48 dp	Enabled	Navigate to **D-018** Trip details	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Tile: Scan ticket	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Tile: Manifest	≥48 dp	Enabled	Navigate to **D-020** Passenger manifest	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Tile: Report delay	≥48 dp	Enabled	Navigate to **D-039** Report delay	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Tile: SOS	≥48 dp	Enabled	Navigate to **D-050** Driver SOS	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E01, E03 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Driver's start: approval state, assigned trip, quick actions. Distinct from passenger home.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Bottom nav exact: Home, My Trips, Trip Records, Help, Settings
2. Never shows passenger nav
3. Bottom nav exact labels
4. Primary action visible above fold on 360×640
5. Offline shows saved data labelled
6. Urdu RTL mirrored
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-018, D-020, D-022, D-039, D-046, D-050, D-063, D-067 · Incoming: D-001, D-014, D-015, D-016, D-017, D-045, D-046, D-048, D-049, D-063, D-067, D-070, ERR-020


Open decisions: None specific (see Part 16).

D-014 CONFIRMED P0 v2.0

Driver Home — no assigned trip

ہوم — کوئی سفر نہیں

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.home_none`

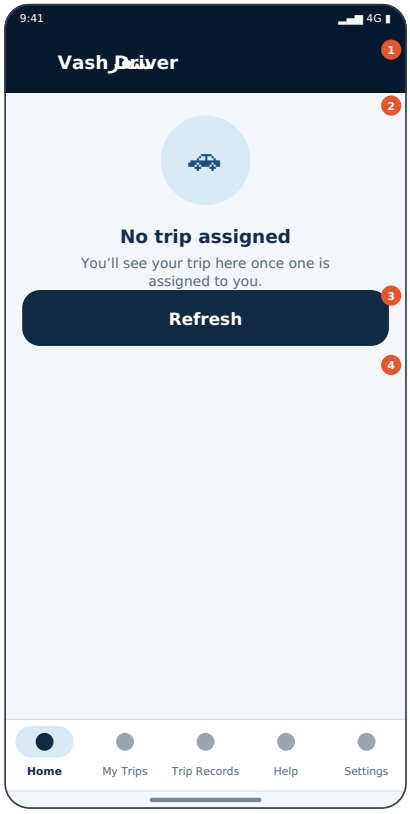

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Approved driver with no assignment.

Login: **Yes (or guest if confirmed)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Refresh (Button) → stays on screen (action)
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	312–312 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر Driver	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر Driver	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	No trip assigned; You'll see your trip here once one is assigned to you.	Light-blue circle icon + 16sp title + 12sp body	—	No trip assigned	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Refresh ریفریش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Refresh, button	Yes	Always in this state
4	C04 Bottom navigation	312–312 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر Driver	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	No trip assigned	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You'll see your trip here once one is assigned to you.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Refresh	ریفریش	Needs native review
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	Trip Records	سفر کے ریکارڈ	Needs native review
4	Help	مدد	Needs native review

4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Refresh	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E20 copy; no false success	Cards debounced.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E20 copy; no false success	Cards debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E20 copy; no false success	Cards debounced.
4	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E20 copy; no false success	Cards debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E20 copy; no false success	Cards debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E20 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Approved driver with no assignment.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E20 No trip assigned to driver	Banner or full screen **D-013** Driver Home — default	No trip assigned — You’ll see your trip here once one is assigned to you.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E20
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Bottom nav exact labels
2. Primary action visible above fold on 360×640
3. Offline shows saved data labelled
4. Urdu RTL mirrored
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-046, D-063, D-067 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-015 CONFIRMED P0 v2.0

Driver Home — assigned upcoming trip

ہوم — آنے والا سفر

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.home_trip`

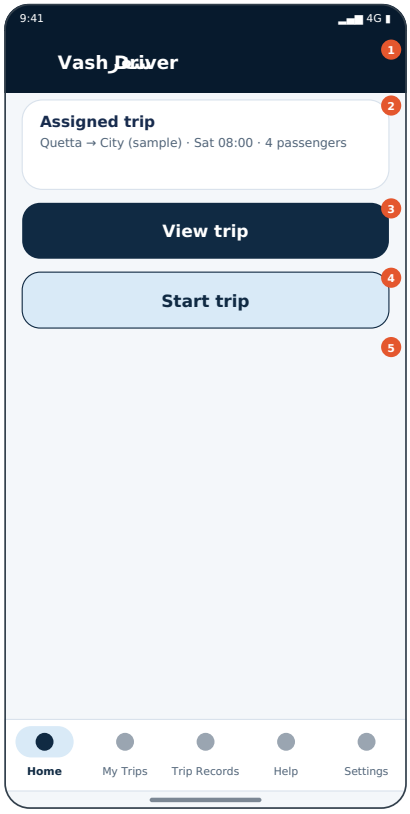

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Assigned trip summary with start eligibility.

Login: **Yes (or guest if confirmed)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- View trip (Button) → **D-018** Trip details
- Start trip (Button) → **D-031** Start-trip eligibility
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back from root exits app (double-back pattern PROPOSED). **Bottom nav:** Visible, Home active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–172 dp	Full width, 16 dp margins	above fold
3	Button	172–234 dp	Full width, 16 dp margins	above fold
4	Button	234–296 dp	Full width, 16 dp margins	above fold
5	Bottom navigation	296–296 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Vashسفر Driver	Deep navy #071A2D, white 16sp bold	Per state	Vashسفر Driver	Yes	Always in this state
2	C02 Info card	80–172 dp	328×92 dp	Assigned trip; Quetta → City (sample) · Sat 08:00 · 4 passengers	White card, border #D9E2EC, radius 18dp	—	Assigned trip	No	Always in this state
3	C03 Button	172–234 dp	328×62 dp	View trip سفر دیکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View trip, button	Yes	Always in this state
4	C04 Button	234–296 dp	328×62 dp	Start trip سفر شروع کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Start trip, button	Yes	Always in this state
5	C05 Bottom navigation	296–296 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Vashسفر Driver	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Assigned trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta → City (sample) · Sat 08:00 · 4 passengers	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View trip	سفر دیکھیں	Needs native review
4	Start trip	سفر شروع کریں	Needs native review
5	Home		Needs native review

5	Home	ہوم	Needs native review
5	My Trips	میرے سفر	Needs native review
5	Trip Records	سفر کے ریکارڈ	Needs native review
5	Help	مدد	Needs native review
5	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: View trip	≥48 dp	Enabled	Navigate to **D-018** Trip details	Instant	—	E01, E03 copy; no false success	Cards debounced.
4	Button: Start trip	≥48 dp	Enabled	Navigate to **D-031** Start-trip eligibility	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E03 copy; no false success	Cards debounced.
5	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E01, E03 copy; no false success	Cards debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Assigned trip summary with start eligibility.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Show only data for signed-in user; announcements are non-sensitive. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Primary action first; illustrated quick actions with labels; voice assist optional. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Bottom nav exact labels
2. Primary action visible above fold on 360×640
3. Offline shows saved data labelled

4. Urdu RTL mirrored
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-018, D-031, D-046, D-063, D-067 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-016 CONFIRMED P0 v2.0

Driver My Trips

میرے سفر

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.trips`

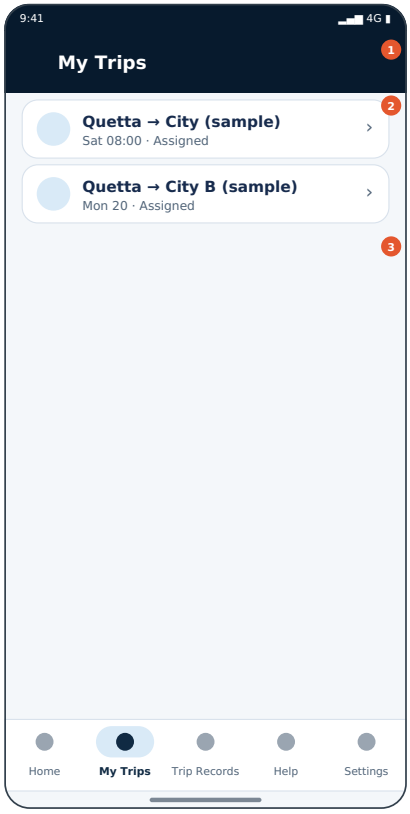

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Tab: assigned and upcoming trips.

Login: **Per flow** · Incoming screens: D-001, D-013, D-014, D-015, D-017, D-046, D-048, D-049, D-063, D-067, D-070


3. Exit & navigation map

- Quetta → City (sample)|Sat 08:00 · Assigned (Row) → **D-018** Trip details
- Quetta → City B (sample)|Mon 20 · Assigned (Row) → **D-018** Trip details
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–206 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	206–206 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Trips	Deep navy #071A2D, white 16sp bold	Per state	My Trips	Yes	Always in this state
2	C02 List rows	80–206 dp	328×126 dp	Quetta → City (sample)|Sat 08:00 · Assigned; Quetta → City B (sample)|Mon 20 · Assigned	White rows radius 14dp, 52dp high, chevron/check	Per state	Quetta → City (sample)|Sat 08:00 · Assig	Yes	Always in this state
3	C03 Bottom navigation	206–206 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Trips	میرے سفر	Needs native review
2	Quetta → City (sample)|Sat 08:00 · Assigned	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta → City B (sample)|Mon 20 · Assigned	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Home	ہوم	Needs native review
3	My Trips	میرے سفر	Needs native review
3	Trip Records	سفر کے ریکارڈ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Row: Quetta → City (sample)|Sat 08:00 · Assigned	≥48 dp	Enabled	Navigate to **D-018** Trip details	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Row: Quetta → City B (sample)|Mon 20 · Assigned	≥48 dp	Enabled	Navigate to **D-018** Trip details	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Tab: assigned and upcoming trips.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible

7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-018, D-046, D-063, D-067 · Incoming: D-001, D-013, D-014, D-015, D-017, D-046, D-048, D-049, D-063, D-067, D-070


Open decisions: None specific (see Part 16).

D-017 CONFIRMED P1 v2.0

My Trips — empty

میرے سفر — خالی

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.trips_empty`

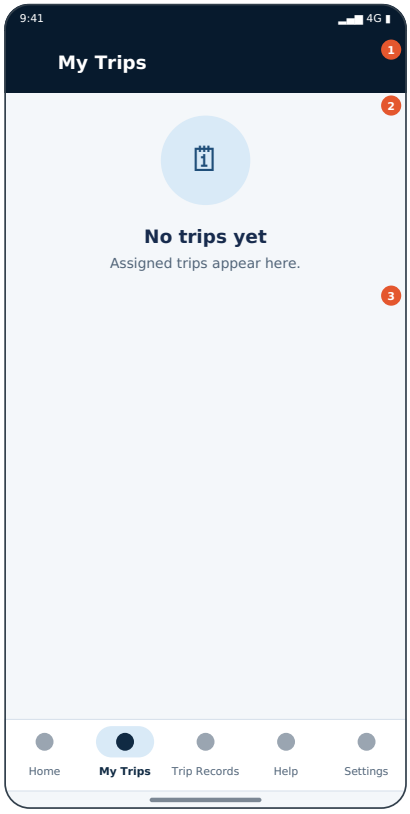

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No assigned trips.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	250–250 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	My Trips	Deep navy #071A2D, white 16sp bold	Per state	My Trips	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	No trips yet; Assigned trips appear here.	Light-blue circle icon + 16sp title + 12sp body	—	No trips yet	No	Always in this state
3	C03 Bottom navigation	250–250 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	My Trips	میرے سفر	Needs native review
2	No trips yet	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Assigned trips appear here.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Home	ہوم	Needs native review
3	My Trips	میرے سفر	Needs native review
3	Trip Records	سفر کے ریکارڈ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

3	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E20 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E20 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E20 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E20 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E20 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No assigned trips.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E20 No trip assigned to driver	Banner or full screen **D-013** Driver Home — default	No trip assigned — You’ll see your trip here once one is assigned to you.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E20
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-046, D-063, D-067 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-018 CONFIRMED P0 v2.0

Trip details

سفر کی تفصیل

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.trip`

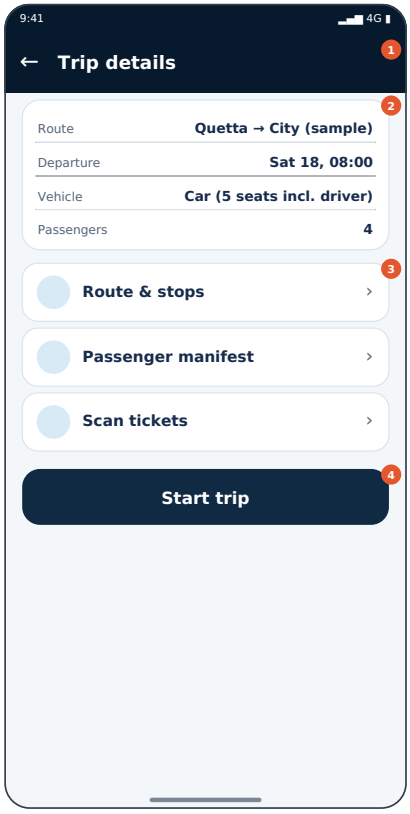

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Route, vehicle, departure, manifest and actions.

Login: **Per flow** · Incoming screens: D-013, D-015, D-016, D-032, D-035, D-036


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Route & stops (Row) → **D-019** Route / stop list
- Passenger manifest (Row) → **D-020** Passenger manifest
- Scan tickets (Row) → **D-022** Scanner ready
- Start trip (Button) → **D-031** Start-trip eligibility

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–226 dp	Full width, 16 dp margins	above fold
3	List rows	226–410 dp	Full width, 16 dp margins	above fold
4	Button	410–472 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip details	Deep navy #071A2D, white 16sp bold	Per state	Trip details	Yes	Always in this state
2	C02 Key-value card	80–226 dp	328×146 dp	Route: Quetta → City (sample); Departure: Sat 18, 08:00; Vehicle: Car (5 seats incl. driver); Passengers: 4	White card, 30dp rows, label grey / value bold	—	Route: Quetta → City (sample)	No	Always in this state
3	C03 List rows	226–410 dp	328×184 dp	Route & stops; Passenger manifest; Scan tickets	White rows radius 14dp, 52dp high, chevron/check	Per state	Route & stops	Yes	Always in this state
4	C04 Button	410–472 dp	328×62 dp	Start trip سفر شروع	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Start trip, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip details	سفر کی تفصیل	Needs native review
2	Route: Quetta → City (sample)	روٹ	Needs native review
2	Departure: Sat 18, 08:00	روانگی	Needs native review
2	Vehicle: Car (5 seats incl. driver)	گاڑی	Needs native review
2	Passengers: 4	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Route & stops	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Passenger manifest	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Scan tickets	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

4	Start trip	سفر شروع	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Row: Route & stops	≥48 dp	Enabled	Navigate to **D-019** Route / stop list	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Row: Passenger manifest	≥48 dp	Enabled	Navigate to **D-020** Passenger manifest	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Row: Scan tickets	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
4	Button: Start trip	≥48 dp	Enabled	Navigate to **D-031** Start-trip eligibility	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Route	Quetta → City (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Departure	Sat 18, 08:00	Server-derived	Required	Show “Not available” if missing; never blank/invented
Vehicle	Car (5 seats incl. driver)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Passengers	4	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Route, vehicle, departure, manifest and actions.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-019, D-020, D-022, D-031 · Incoming: D-013, D-015, D-016, D-032, D-035, D-036


Open decisions: None specific (see Part 16).

D-019 CONFIRMED P1 v2.0

Route / stop list

راستہ / اسٹاپ

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.stops`

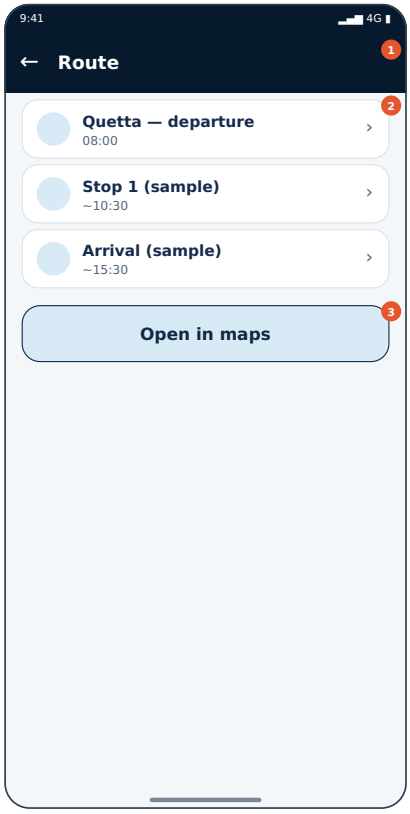

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Stops and arrival points for the trip.

Login: **Per flow** · Incoming screens: D-018, D-037


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open in maps (Button) → **D-038** Navigation handoff

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold
3	Button	264–326 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Route	Deep navy #071A2D, white 16sp bold	Per state	Route	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	Quetta — departure|08:00; Stop 1 (sample)|~10:30; Arrival (sample)|~15:30	White rows radius 14dp, 52dp high, chevron/check	Per state	Quetta — departure|08:00	Yes	Always in this state
3	C03 Button	264–326 dp	328×62 dp	Open in maps نقشہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open in maps, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Route	روٹ	Needs native review
2	Quetta — departure|08:00	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Stop 1 (sample)|~10:30	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Arrival (sample)|~15:30	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open in maps	نقشہ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Button: Open in maps	≥48 dp	Enabled	Navigate to **D-038** Navigation handoff	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Stops and arrival points for the trip.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-038 · Incoming: D-018, D-037


Open decisions: None specific (see Part 16).

D-020 CONFIRMED PROPOSED P0 v2.0

Passenger manifest

مسافر فہرست

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.manifest`

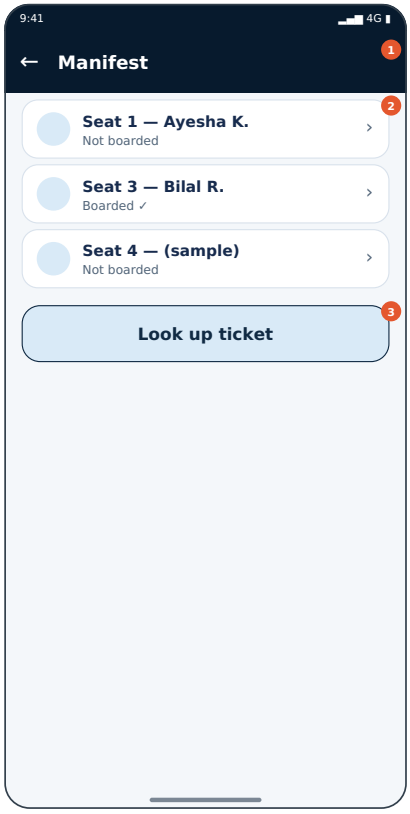

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Minimised passenger list: seat, first name, boarding status.

Login: **Per flow** · Incoming screens: D-013, D-018, D-028, D-030


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Look up ticket (Button) → **D-021** Passenger / ticket lookup

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold
3	Button	264–326 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Manifest	Deep navy #071A2D, white 16sp bold	Per state	Manifest	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	Seat 1 — Ayesha K.|Not boarded; Seat 3 — Bilal R.|Boarded ✓; Seat 4 — (sample)|Not boarded	White rows radius 14dp, 52dp high, chevron/check	Per state	Seat 1 — Ayesha K.|Not boarded	Yes	Always in this state
3	C03 Button	264–326 dp	328×62 dp	Look up ticket ٹکٹ تلاش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Look up ticket, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Manifest	مسافر فہرست	Needs native review
2	Seat 1 — Ayesha K.|Not boarded	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Seat 3 — Bilal R.|Boarded ✓	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Seat 4 — (sample)|Not boarded	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Look up ticket	ٹکٹ تلاش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Button: Look up ticket	≥48 dp	Enabled	Navigate to **D-021** Passenger / ticket lookup	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Minimised passenger list: seat, first name, boarding status.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_trip_manifest (read)
Inputs	trip id
Server checks / RLS	assignment check; passenger data minimised; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached manifest (privacy-minimal) with age
Cache	Secure cache (PROPOSED)

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Only data needed to board; no payment details
2. Pull-to-refresh works and shows timestamp
3. Empty and error states are distinct
4. Scroll position retained on Back
5. Urdu RTL row mirroring correct, numbers legible
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-021 · Incoming: D-013, D-018, D-028, D-030


Open decisions: None specific (see Part 16).

D-021 CONFIRMED P1 v2.0

Passenger / ticket lookup

ٹکٹ تلاش

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.lookup`

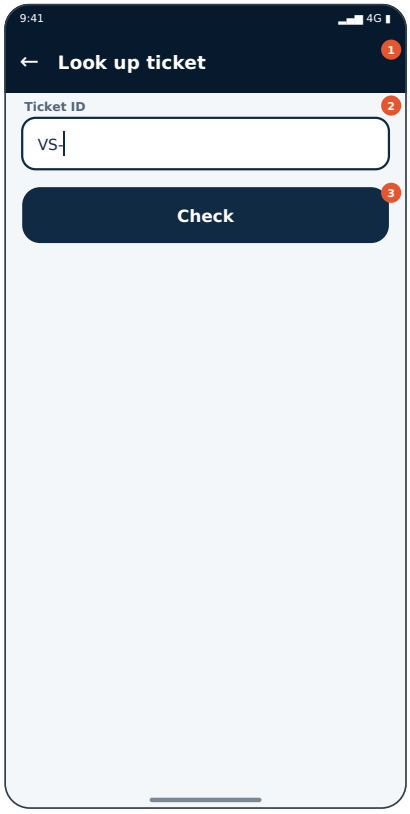

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Manual lookup by ticket ID when scan not possible.

Login: **As per flow** · Incoming screens: D-020, D-022, D-024, SH-013, SH-014


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Check (Button) → **D-023** Scan — valid ticket

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Button	158–220 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Look up ticket	Deep navy #071A2D, white 16sp bold	Per state	Look up ticket	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Ticket ID: “VS-”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Ticket ID: “VS-”	Yes	Always in this state
3	C03 Button	158–220 dp	328×62 dp	Check چیک کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Check, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Look up ticket	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Ticket ID	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Check	چیک کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Button: Check	≥48 dp	Enabled	Navigate to **D-023** Scan — valid ticket	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Ticket ID	text	Required	Format per server	Submit	Text

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Manual lookup by ticket ID when scan not possible.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_ticket_qr (write)
Inputs	trip id, QR payload, idempotency key
Server checks / RLS	ticket confirmed, right trip, not already boarded; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key; duplicate scan returns "already boarded"
Offline	Offline scan cannot be authoritative; shows actual status only
Cache	No cache of verdict

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-023 · Incoming: D-020, D-022, D-024, SH-013, SH-014


Open decisions: None specific (see Part 16).

D-022 CONFIRMED P0 v2.0

Scanner ready

سکینر تیار

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.scan_ready`

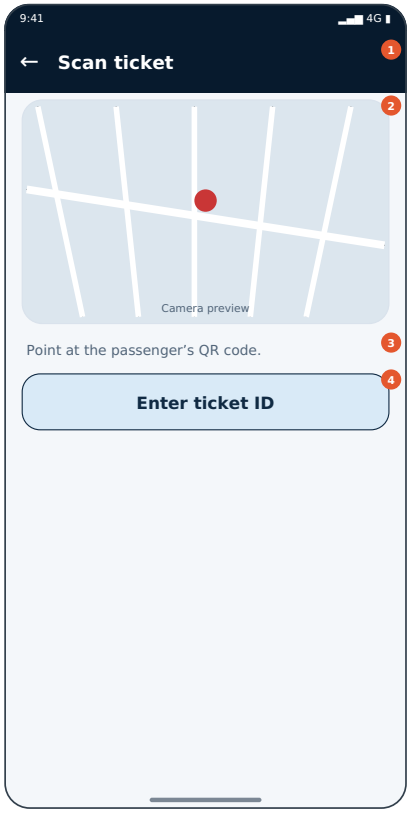

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Camera preview with frame; manual lookup always available.

Login: **Yes (driver)** · Incoming screens: D-013, D-018, D-023, D-024, D-025, D-026, D-027, D-028, D-029, SH-013


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Enter ticket ID (Button) → **D-021** Passenger / ticket lookup

Android system Back: Back closes scanner. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Map placeholder	80–292 dp	Full width, 16 dp margins	above fold
3	Body text	292–325 dp	Full width, 16 dp margins	above fold
4	Button	325–387 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Scan ticket	Deep navy #071A2D, white 16sp bold	Per state	Scan ticket	Yes	Always in this state
2	C02 Map placeholder	80–292 dp	328×212 dp	Camera preview	Provider NEEDS CONFIRMATION	—	Camera preview	No	Always in this state
3	C03 Body text	292–325 dp	328×33 dp	Point at the passenger's QR code.	12–14sp secondary text	—	Point at the passenger's QR code.	No	Always in this state
4	C04 Button	325–387 dp	328×62 dp	Enter ticket ID ٹکٹ آئی ڈی	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Enter ticket ID, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Scan ticket	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Camera preview	Translation review required	—
3	Point at the passenger's QR code.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Enter ticket ID	ٹکٹ آئی ڈی	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Same QR debounced for 2 s (PROPOSED).
4	Button: Enter ticket ID	≥48 dp	Enabled	Navigate to **D-021** Passenger / ticket lookup	Inline spinner; other controls locked	Server-confirmed result only	E09, E10 copy; no false success	Same QR debounced for 2 s (PROPOSED).

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Camera preview with frame; manual lookup always available.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_ticket_qr (write)
Inputs	trip id, QR payload, idempotency key
Server checks / RLS	ticket confirmed, right trip, not already boarded; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	Required key; duplicate scan returns "already boarded"
Offline	Offline scan cannot be authoritative; shows actual status only
Cache	No cache of verdict

14. Security, privacy & safety

Verdict is server-authoritative; offline cannot be authoritative; passenger data minimised. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large verdict text + icon + haptic/sound option; not colour only. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Valid/invalid/duplicate/pending distinct
2. Offline never shows "boarded"
3. Camera denied path works
4. Wrong trip rejected
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-021 · Incoming: D-013, D-018, D-023, D-024, D-025, D-026, D-027, D-028, D-029, SH-013


Open decisions: None specific (see Part 16).

D-023 CONFIRMED P0 v2.0

Scan — valid ticket

سکین — درست ٹکٹ

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.scan_valid`

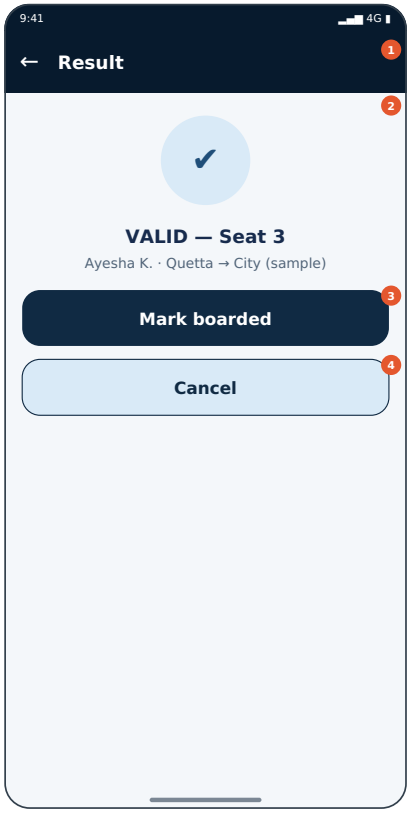

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server verified: confirmed ticket for this trip and not yet boarded.

Login: **Yes (driver)** · Incoming screens: D-021


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Mark boarded (Button) → **D-029** Boarding recorded
- Cancel (Button) → **D-022** Scanner ready

Android system Back: Back closes scanner. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Result	Deep navy #071A2D, white 16sp bold	Per state	Result	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	VALID — Seat 3; Ayesha K. · Quetta → City (sample)	Light-blue circle icon + 16sp title + 12sp body	—	VALID — Seat 3	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Mark boarded سوار ہوا	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Mark boarded, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Cancel منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Result	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	VALID — Seat 3	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Ayesha K. · Quetta → City (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Mark boarded	سوار ہوا	Needs native review
4	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same as	Instant	—	E01, E18 copy: no	Same QR debounced for 2 s

	Back			system Back)			false success	(PROPOSED).
3	Button: Mark boarded	≥48 dp	Enabled	Navigate to **D-029** Boarding recorded	Inline spinner; other controls locked	Server-confirmed result only	E01, E18 copy; no false success	Same QR debounced for 2 s (PROPOSED).
4	Button: Cancel	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Inline spinner; other controls locked	Server-confirmed result only	E01, E18 copy; no false success	Same QR debounced for 2 s (PROPOSED).

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server verified: confirmed ticket for this trip and not yet boarded.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E18 QR invalid, expired, or wrong trip	Banner or full screen **D-024** Scan — invalid ticket	Ticket not valid — This ticket could not be verified for this trip.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_ticket_qr (write)
Inputs	trip id, QR payload, idempotency key
Server checks / RLS	ticket confirmed, right trip, not already boarded; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E18, E09, E10, E04
Retry / idempotency	Required key; duplicate scan returns “already boarded”
Offline	Offline scan cannot be authoritative; shows actual status only
Cache	No cache of verdict

14. Security, privacy & safety

Verdict is server-authoritative; offline cannot be authoritative; passenger data minimised. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large verdict text + icon + haptic/sound option; not colour only. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Valid/invalid/duplicate/pending distinct
2. Offline never shows “boarded”
3. Camera denied path works
4. Wrong trip rejected
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-022, D-029 · Incoming: D-021


Open decisions: None specific (see Part 16).

D-024 CONFIRMED P0 v2.0

Scan — invalid ticket

سکین — غلط ٹکٹ

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.scan_invalid`

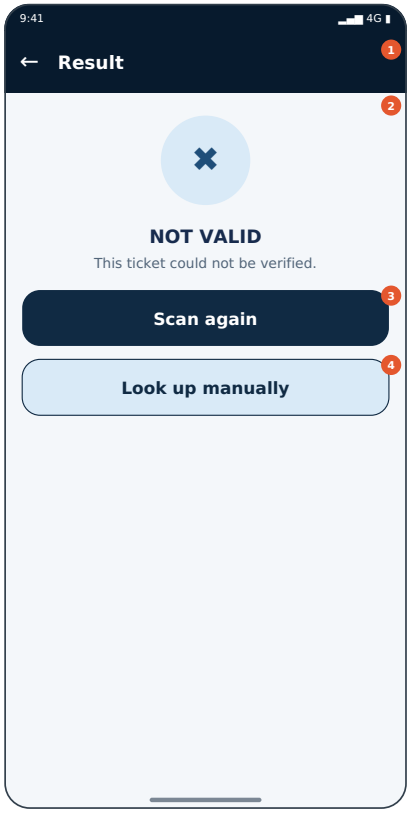

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server could not verify the ticket.

Login: **Yes (driver)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Scan again (Button) → **D-022** Scanner ready
- Look up manually (Button) → **D-021** Passenger / ticket lookup

Android system Back: Back closes scanner. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Result	Deep navy #071A2D, white 16sp bold	Per state	Result	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	NOT VALID; This ticket could not be verified.	Light-blue circle icon + 16sp title + 12sp body	—	NOT VALID	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Scan again دوبارہ سکین	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Scan again, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Look up manually دستی تلاش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Look up manually, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Result	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	NOT VALID	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This ticket could not be verified.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Scan again	دوبارہ سکین	Needs native review
4	Look up manually	دستی تلاش	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow; Back	≥48 dp	Enabled	Pop to previous screen (same as	Instant	—	E18 copy; no false	Same QR debounced for 2 s

	[illegible]	[illegible]	[illegible]	system Back)	[illegible]		success	(PROPOSED).
3	Button: Scan again	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Inline spinner; other controls locked	Server-confirmed result only	E18 copy; no false success	Same QR debounced for 2 s (PROPOSED).
4	Button: Look up manually	≥48 dp	Enabled	Navigate to **D-021** Passenger / ticket lookup	Inline spinner; other controls locked	Server-confirmed result only	E18 copy; no false success	Same QR debounced for 2 s (PROPOSED).

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server could not verify the ticket.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E18 QR invalid, expired, or wrong trip	Banner or full screen **D-024** Scan — invalid ticket	Ticket not valid — This ticket could not be verified for this trip.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_ticket_qr (write)
Inputs	trip id, QR payload, idempotency key
Server checks / RLS	ticket confirmed, right trip, not already boarded; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E18
Retry / idempotency	Required key; duplicate scan returns “already boarded”
Offline	Offline scan cannot be authoritative; shows actual status only
Cache	No cache of verdict

14. Security, privacy & safety

Verdict is server-authoritative; offline cannot be authoritative; passenger data minimised. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large verdict text + icon + haptic/sound option; not colour only. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Valid/invalid/duplicate/pending distinct
2. Offline never shows “boarded”
3. Camera denied path works
4. Wrong trip rejected
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-021, D-022 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-025 CONFIRMED P0 v2.0

Scan — wrong trip

سکین — غلط سفر

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.scan_wrong`

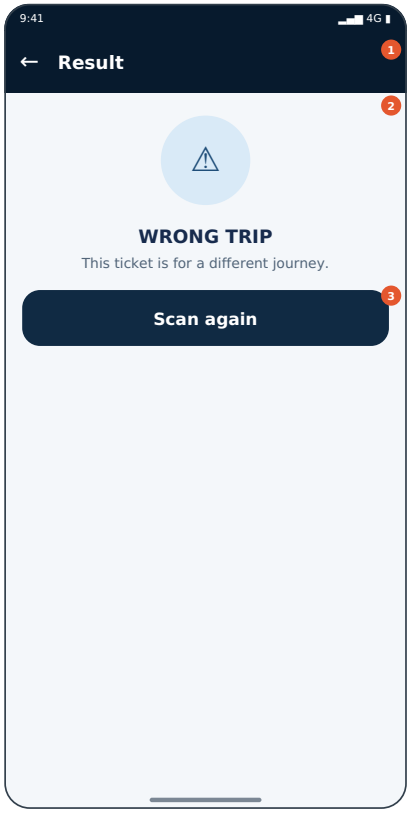

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Ticket belongs to a different trip.

Login: **Yes (driver)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Scan again (Button) → **D-022** Scanner ready

Android system Back: Back closes scanner. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Result	Deep navy #071A2D, white 16sp bold	Per state	Result	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	WRONG TRIP; This ticket is for a different journey.	Light-blue circle icon + 16sp title + 12sp body	—	WRONG TRIP	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Scan again دوبارہ سکین	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Scan again, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Result	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	WRONG TRIP	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This ticket is for a different journey.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Scan again	دوبارہ سکین	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E18 copy; no false success	Same QR debounced for 2 s (PROPOSED).
3	Button: Scan again	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Inline spinner; other controls locked	Server-confirmed result only	E18 copy; no false success	Same QR debounced for 2 s (PROPOSED).

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Ticket belongs to a different trip.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E18 QR invalid, expired, or wrong trip	Banner or full screen **D-024** Scan — invalid ticket	Ticket not valid — This ticket could not be verified for this trip.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_ticket_qr (write)
Inputs	trip id, QR payload, idempotency key
Server checks / RLS	ticket confirmed, right trip, not already boarded; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E18
Retry / idempotency	Required key; duplicate scan returns "already boarded"
Offline	Offline scan cannot be authoritative; shows actual status only
Cache	No cache of verdict

14. Security, privacy & safety

Verdict is server-authoritative; offline cannot be authoritative; passenger data minimised. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large verdict text + icon + haptic/sound option; not colour only. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Valid/invalid/duplicate/pending distinct
2. Offline never shows "boarded"
3. Camera denied path works
4. Wrong trip rejected
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-022 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-026 CONFIRMED P0 v2.0

Scan — already boarded

سکین — پہلے سے سوار

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.scan_dup`

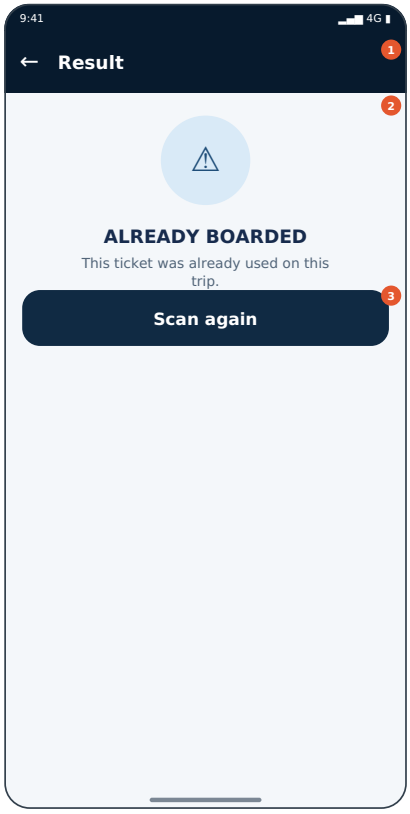

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Duplicate boarding attempt.

Login: **Yes (driver)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Scan again (Button) → **D-022** Scanner ready

Android system Back: Back closes scanner. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Result	Deep navy #071A2D, white 16sp bold	Per state	Result	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	ALREADY BOARDED; This ticket was already used on this trip.	Light-blue circle icon + 16sp title + 12sp body	—	ALREADY BOARDED	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Scan again دوبارہ سکین	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Scan again, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Result	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	ALREADY BOARDED	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	This ticket was already used on this trip.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Scan again	دوبارہ سکین	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E18 copy; no false success	Same QR debounced for 2 s (PROPOSED).
3	Button: Scan again	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Inline spinner; other controls locked	Server-confirmed result only	E18 copy; no false success	Same QR debounced for 2 s (PROPOSED).

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Duplicate boarding attempt.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E18 QR invalid, expired, or wrong trip	Banner or full screen **D-024** Scan — invalid ticket	Ticket not valid — This ticket could not be verified for this trip.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_ticket_qr (write)
Inputs	trip id, QR payload, idempotency key
Server checks / RLS	ticket confirmed, right trip, not already boarded; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E18
Retry / idempotency	Required key; duplicate scan returns "already boarded"
Offline	Offline scan cannot be authoritative; shows actual status only
Cache	No cache of verdict

14. Security, privacy & safety

Verdict is server-authoritative; offline cannot be authoritative; passenger data minimised. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large verdict text + icon + haptic/sound option; not colour only. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Valid/invalid/duplicate/pending distinct
2. Offline never shows "boarded"
3. Camera denied path works
4. Wrong trip rejected
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-022 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-027 CONFIRMED P0 v2.0

Scan — pending / unverified

سکین — زیر التوا

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.scan_pend`

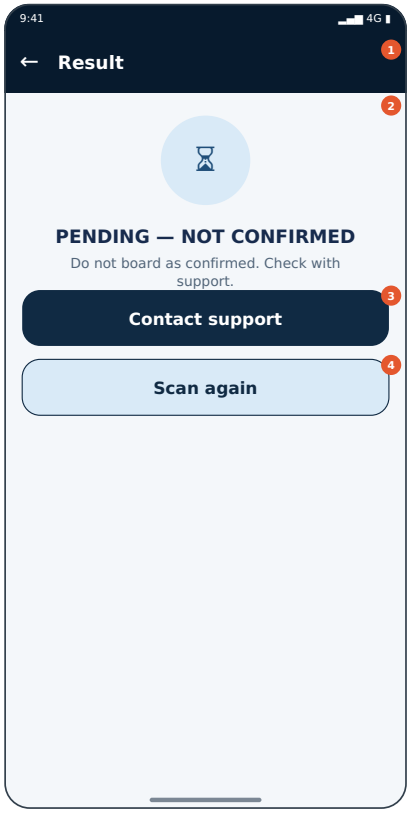

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Ticket pending or unverified: not accepted as confirmed.

Login: **Yes (driver)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Contact support (Button) → **D-063** Driver Help hub
- Scan again (Button) → **D-022** Scanner ready

Android system Back: Back closes scanner. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Result	Deep navy #071A2D, white 16sp bold	Per state	Result	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	PENDING — NOT CONFIRMED; Do not board as confirmed. Check with support.	Light-blue circle icon + 16sp title + 12sp body	—	PENDING — NOT CONFIRMED	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Contact support سپورٹ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Contact support, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Scan again دوبارہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Scan again, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Result	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	PENDING — NOT CONFIRMED	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Do not board as confirmed. Check with support.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Contact support	سپورٹ	Needs native review
4	Scan again	دوبارہ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as	Instant	—	E30 copy: no false	Same OR debounced for 2 s

	[illegible]	[illegible]	[illegible]	system Back)	[illegible]		success	(PROPOSED).
3	Button: Contact support	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Inline spinner; other controls locked	Server-confirmed result only	E30 copy; no false success	Same QR debounced for 2 s (PROPOSED).
4	Button: Scan again	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Inline spinner; other controls locked	Server-confirmed result only	E30 copy; no false success	Same QR debounced for 2 s (PROPOSED).

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Ticket pending or unverified: not accepted as confirmed.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_ticket_qr (write)
Inputs	trip id, QR payload, idempotency key
Server checks / RLS	ticket confirmed, right trip, not already boarded; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E30
Retry / idempotency	Required key; duplicate scan returns “already boarded”
Offline	Offline scan cannot be authoritative; shows actual status only
Cache	No cache of verdict

14. Security, privacy & safety

Verdict is server-authoritative; offline cannot be authoritative; passenger data minimised. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large verdict text + icon + haptic/sound option; not colour only. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Valid/invalid/duplicate/pending distinct
2. Offline never shows “boarded”
3. Camera denied path works
4. Wrong trip rejected
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-022, D-063 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-028 CONFIRMED P0 v2.0

Scan — offline warning

سکین — آف لائن

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.scan_off`

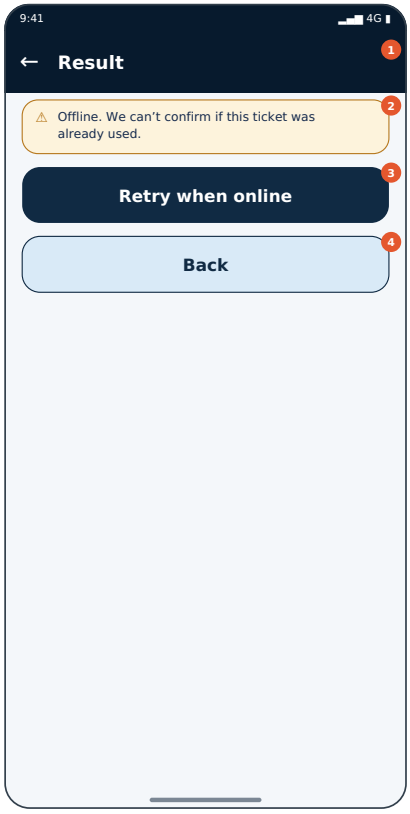

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Offline: cannot guarantee uniqueness; shows actual validation status only.

Login: **Yes (driver)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Retry when online (Button) → **D-022** Scanner ready
- Back (Button) → **D-020** Passenger manifest

Android system Back: Back closes scanner. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Result	Deep navy #071A2D, white 16sp bold	Per state	Result	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Offline. We can't confirm if this ticket was already used.	Tinted background + border + icon + text (never colour alone)	—	Offline. We can't confirm if this ticket	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Retry when online دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Retry when online, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Result	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Offline. We can't confirm if this ticket was already used.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Retry when online	دوبارہ کوشش	Needs native review
4	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01 copy; no false success	Same QR debounced for 2 s (PROPOSED).

3	Button: Retry when online	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Inline spinner; other controls locked	Server-confirmed result only	E01 copy; no false success	Same QR debounced for 2 s (PROPOSED).
4	Button: Back	≥48 dp	Enabled	Navigate to **D-020** Passenger manifest	Inline spinner; other controls locked	Server-confirmed result only	E01 copy; no false success	Same QR debounced for 2 s (PROPOSED).

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Offline: cannot guarantee uniqueness; shows actual validation status only.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_ticket_qr (write)
Inputs	trip id, QR payload, idempotency key
Server checks / RLS	ticket confirmed, right trip, not already boarded; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01
Retry / idempotency	Required key; duplicate scan returns “already boarded”
Offline	Offline scan cannot be authoritative; shows actual status only
Cache	No cache of verdict

14. Security, privacy & safety

Verdict is server-authoritative; offline cannot be authoritative; passenger data minimised. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Large verdict text + icon + haptic/sound option; not colour only. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never labels a boarding as server-verified while offline
2. Valid/invalid/duplicate/pending distinct
3. Offline never shows “boarded”
4. Camera denied path works
5. Wrong trip rejected
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-020, D-022 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-029 CONFIRMED P1 v2.0

Boarding recorded

سواری درج

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.scan_succ`

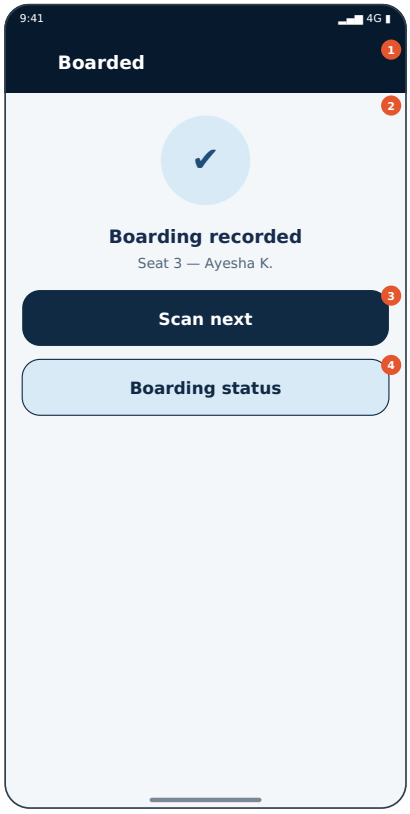

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server recorded boarding.

Login: **Per flow** · Incoming screens: D-023


3. Exit & navigation map

- Scan next (Button) → **D-022** Scanner ready
- Boarding status (Button) → **D-030** Boarding status

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Boarded	Deep navy #071A2D, white 16sp bold	Per state	Boarded	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Boarding recorded; Seat 3 — Ayesha K.	Light-blue circle icon + 16sp title + 12sp body	—	Boarding recorded	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Scan next اگلا سکین	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Scan next, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Boarding status سواری کی حالت	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Boarding status, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Boarded	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Boarding recorded	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Seat 3 — Ayesha K.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Scan next	اگلا سکین	Needs native review
4	Boarding status	سواری کی حالت	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Scan next	≥48 dp	Enabled	Navigate to **D-022** Scanner ready	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Status check button debounced; no write retries.

4	Button: Boarding status	≥48 dp	Enabled	Navigate to **D-030** Boarding status	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server recorded boarding.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	verify_ticket_qr (write)
Inputs	trip id, QR payload, idempotency key
Server checks / RLS	ticket confirmed, right trip, not already boarded; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Required key; duplicate scan returns "already boarded"
Offline	Offline scan cannot be authoritative; shows actual status only
Cache	No cache of verdict

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-022, D-030 · Incoming: D-023


Open decisions: None specific (see Part 16).

D-030 CONFIRMED P1 v2.0

Boarding status

سوار ہونے کی حالت

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.board`

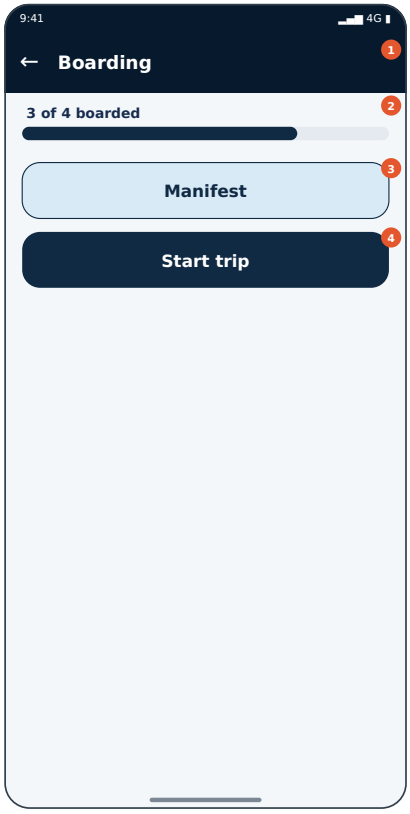

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Boarded vs expected summary.

Login: **Per flow** · Incoming screens: D-029


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Manifest (Button) → **D-020** Passenger manifest
- Start trip (Button) → **D-031** Start-trip eligibility

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Progress bar	80–136 dp	Full width, 16 dp margins	above fold
3	Button	136–198 dp	Full width, 16 dp margins	above fold
4	Button	198–260 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Boarding	Deep navy #071A2D, white 16sp bold	Per state	Boarding	Yes	Always in this state
2	C02 Progress bar	80–136 dp	328×56 dp	3 of 4 boarded	12dp track	—	3 of 4 boarded	No	Always in this state
3	C03 Button	136–198 dp	328×62 dp	Manifest فہرست	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Manifest, button	Yes	Always in this state
4	C04 Button	198–260 dp	328×62 dp	Start trip سفر شروع	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Start trip, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Boarding	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	3 of 4 boarded	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Manifest	فہرست	Needs native review
4	Start trip	سفر شروع	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Button: Manifest	≥48 dp	Enabled	Navigate to **D-020** Passenger manifest	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
4	Button: Start trip	≥48 dp	Enabled	Navigate to **D-031** Start-trip eligibility	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Boarded vs expected summary.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_trip_manifest (read)
Inputs	trip id
Server checks / RLS	assignment check; passenger data minimised; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached manifest (privacy-minimal) with age
Cache	Secure cache (PROPOSED)

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-020, D-031 · Incoming: D-029


Open decisions: None specific (see Part 16).

D-031 CONFIRMED P0 v2.0

Start-trip eligibility

سفر شروع کرنے کی اہلیت

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.start_elig`

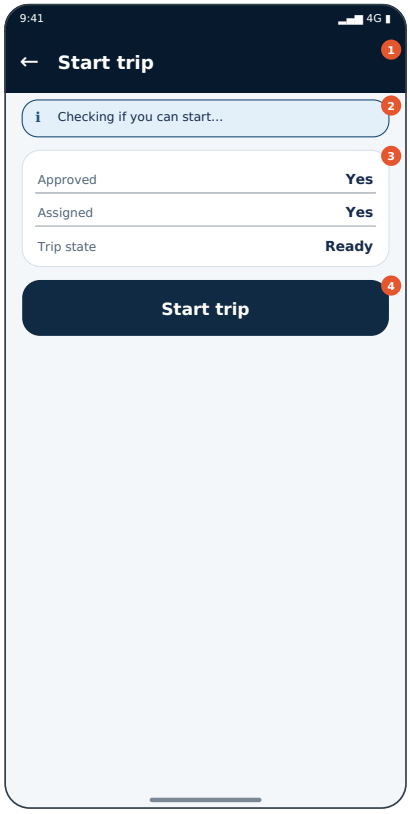

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server checks approval, assignment, state before enabling Start.

Login: **Per flow** · Incoming screens: D-015, D-018, D-030


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Start trip (Button) → **D-032** Start-trip confirmation

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Key-value card	125–241 dp	Full width, 16 dp margins	above fold
4	Button	241–303 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Start trip	Deep navy #071A2D, white 16sp bold	Per state	Start trip	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Checking if you can start...	Tinted background + border + icon + text (never colour alone)	—	Checking if you can start...	No	Always in this state
3	C03 Key-value card	125–241 dp	328×116 dp	Approved: Yes; Assigned: Yes; Trip state: Ready	White card, 30dp rows, label grey / value bold	—	Approved: Yes	No	Always in this state
4	C04 Button	241–303 dp	328×62 dp	Start trip سفر شروع کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Start trip, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Start trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Checking if you can start...	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Approved: Yes	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Assigned: Yes	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Trip state: Ready	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Start trip	سفر شروع کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure

								Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E19, E20 copy; no false success	Status check button debounced; no write retries.
4	Button: Start trip	≥48 dp	Enabled	Navigate to **D-032** Start-trip confirmation	Instant	—	E19, E20 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Approved	Yes	Server-derived	Required	Show “Not available” if missing; never blank/invented
Assigned	Yes	Server-derived	Required	Show “Not available” if missing; never blank/invented
Trip state	Ready	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server checks approval, assignment, state before enabling Start.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E19 Driver account not approved	Banner or full screen **D-002** Approval pending	Your driver account is not approved yet — You can start trips after approval.
E20 No trip assigned to driver	Banner or full screen **D-013** Driver Home — default	No trip assigned — You’ll see your trip here once one is assigned to you.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E19, E20
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-032 · Incoming: D-015, D-018, D-030


Open decisions: None specific (see Part 16).

D-032 CONFIRMED P0 v2.0

Start-trip confirmation

سفر شروع کرنے کی تصدیق

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.start_conf`

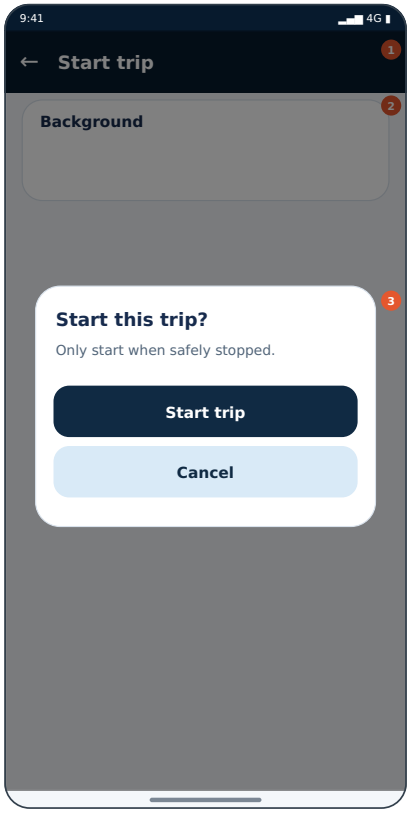

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Confirm safely stopped and ready.

Login: **n/a (shared pattern)** · Incoming screens: D-031


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Start trip (Dialog button) → **D-033** Starting trip…
- Cancel (Dialog button) → **D-018** Trip details

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–182 dp	Full width, 16 dp margins	above fold
3	Dialog	252–467 dp	Full width, 16 dp margins	above fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Start trip	Deep navy #071A2D, white 16sp bold	Per state	Start trip	Yes	Always in this state
2	C02 Info card	80–182 dp	328×102 dp	Background	White card, border #D9E2EC, radius 18dp	—	Background	No	Always in this state
3	C03 Dialog	252–467 dp	328×215 dp	Start this trip?; Only start when safely stopped.; Start trip; Cancel سفر شروع کریں / منسوخ	Radius 22dp, scrim 50%	Per state	Start this trip?	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Start trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Background	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Start this trip?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Only start when safely stopped.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Start trip	سفر شروع کریں	Needs native review
3	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.
3	Dialog button: Start trip	≥48 dp	Enabled	Navigate to **D-033** Starting trip…	Instant	—	E17, E28 copy; no false success	Buttons debounced.
3	Dialog button: Cancel	≥48 dp	Enabled	Navigate to **D-018** Trip details	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Confirm safely stopped and ready.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	start_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	approved, assigned, state allows start, time window; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	Required key
Offline	Blocked — never shows started
Cache	None

14. Security, privacy & safety

Copy must not leak technical detail. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-018, D-033 · Incoming: D-031


Open decisions: None specific (see Part 16).

D-033 CONFIRMED P0 v2.0

Starting trip…

سفر شروع ہو رہا ہے…

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.start_load`

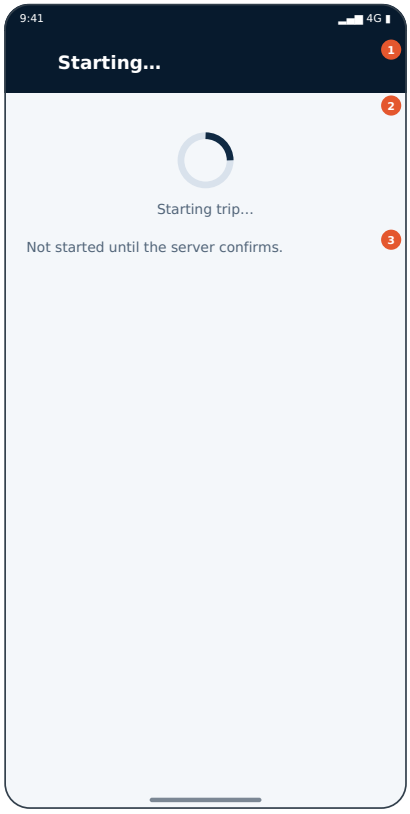

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Waiting for server confirmation.

Login: **Per flow** · Incoming screens: D-032, D-036


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Body text	200–232 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Starting…	Deep navy #071A2D, white 16sp bold	Per state	Starting…	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Starting trip…	Navy arc on grey ring	—	Starting trip…	No	Always in this state
3	C03 Body text	200–232 dp	328×32 dp	Not started until the server confirms.	12–14sp secondary text	—	Not started until the server confirms.	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Starting…	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Starting trip…	Translation review required	—
3	Not started until the server confirms.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Waiting for server confirmation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	start_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	approved, assigned, state allows start, time window; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E05, E17
Retry / idempotency	Required key
Offline	Blocked — never shows started
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-032, D-036


Open decisions: None specific (see Part 16).

D-034 CONFIRMED P0 v2.0

Trip started (server confirmed)

سفر شروع (سرور سے تصدیق)

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.started`

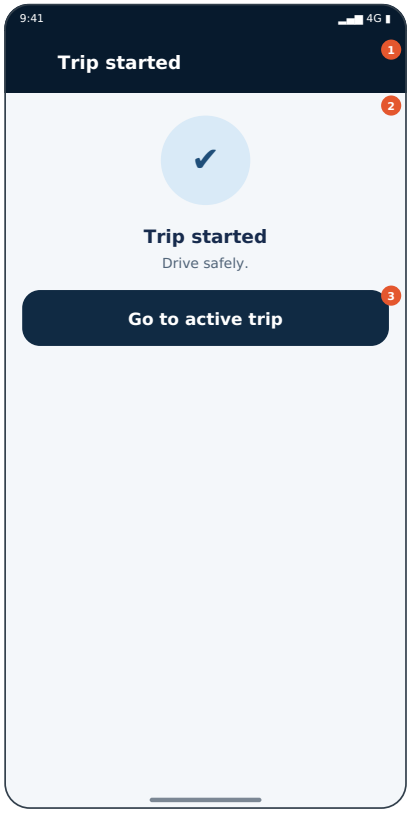

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Shown only after server confirmation.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Go to active trip (Button) → **D-037** Active trip

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip started	Deep navy #071A2D, white 16sp bold	Per state	Trip started	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Trip started; Drive safely.	Light-blue circle icon + 16sp title + 12sp body	—	Trip started	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Go to active trip فعال سفر	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Go to active trip, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip started	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Trip started	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Drive safely.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Go to active trip	فعال سفر	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Go to active trip	≥48 dp	Enabled	Navigate to **D-037** Active trip	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Shown only after server confirmation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	start_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	approved, assigned, state allows start, time window; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Required key
Offline	Blocked — never shows started
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-037 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-035 CONFIRMED P0 v2.0

Start rejected

شروع مسترد

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.start_rej`

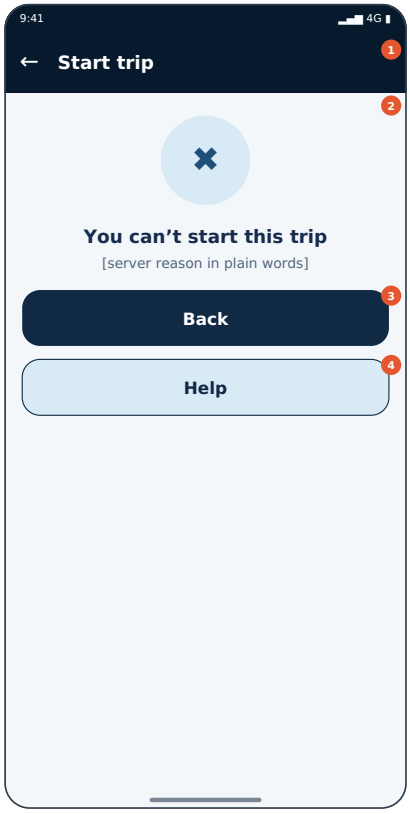

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server rejected start (not approved/assigned/wrong state).

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Back (Button) → **D-018** Trip details
- Help (Button) → **D-063** Driver Help hub

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Button	312–374 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Start trip	Deep navy #071A2D, white 16sp bold	Per state	Start trip	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	You can’t start this trip; [server reason in plain words]	Light-blue circle icon + 16sp title + 12sp body	—	You can’t start this trip	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state
4	C04 Button	312–374 dp	328×62 dp	Help مدد	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Help, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Start trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You can’t start this trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	[server reason in plain words]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Back	واپس	Needs native review
4	Help	مدد	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E19, E20 copy; no false success	Retry debounced.
3	Button: Back	≥48 dp	Enabled	Navigate to **D-018** Trip details	Inline spinner; other controls locked	Server-confirmed result only	E19, E20 copy; no false success	Retry debounced.
4	Button: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Inline spinner; other controls locked	Server-confirmed result only	E19, E20 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server rejected start (not approved/assigned/wrong state).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E19 Driver account not approved	Banner or full screen **D-002** Approval pending	Your driver account is not approved yet — You can start trips after approval.
E20 No trip assigned to driver	Banner or full screen **D-013** Driver Home — default	No trip assigned — You'll see your trip here once one is assigned to you.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	start_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	approved, assigned, state allows start, time window; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E19, E20
Retry / idempotency	Required key
Offline	Blocked — never shows started
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-018, D-063 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-036 CONFIRMED P0 v2.0

Start — offline not accepted

شروع — آف لائن

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.start_off`

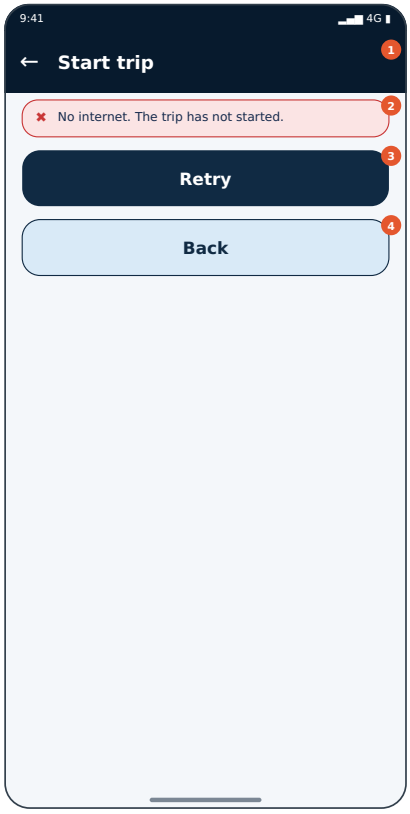

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Offline: Start not accepted; never pretend.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Retry (Button) → **D-033** Starting trip...
- Back (Button) → **D-018** Trip details

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Start trip	Deep navy #071A2D, white 16sp bold	Per state	Start trip	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	No internet. The trip has not started.	Tinted background + border + icon + text (never colour alone)	—	No internet. The trip has not started.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Retry دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Retry, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Start trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	No internet. The trip has not started.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Retry	دوبارہ کوشش	Needs native review
4	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01 copy; no false success	Retry debounced.
3	Button: Retry	≥48 dp	Enabled	Navigate to **D-033** Starting trip…	Inline spinner; other controls locked	Server-confirmed result only	E01 copy; no false success	Retry debounced.
4	Button: Back	≥48 dp	Enabled	Navigate to **D-018** Trip details	Inline spinner; other controls locked	Server-confirmed result only	E01 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Offline: Start not accepted; never pretend.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	start_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	approved, assigned, state allows start, time window; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01
Retry / idempotency	Required key
Offline	Blocked — never shows started
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-018, D-033 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-037 CONFIRMED P0 v2.0

Active trip

فعال سفر

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.active`

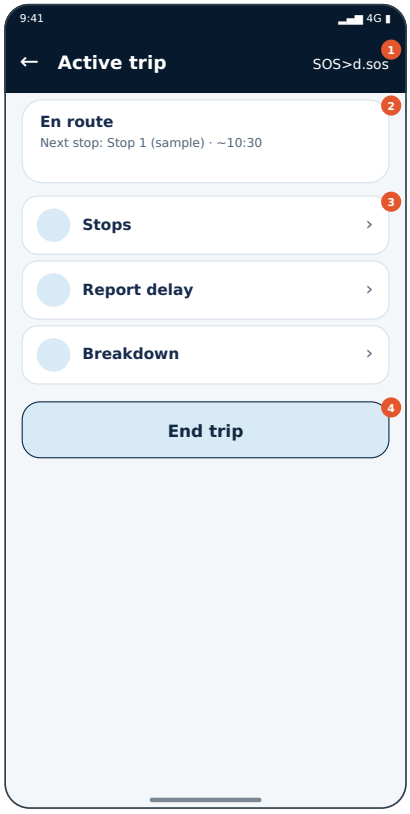

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Active trip hub: progress, stops, delay, breakdown, SOS, end trip.

Login: **Per flow** · Incoming screens: D-034, D-041, D-044, D-053, D-066


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- SOS (App-bar action) → **D-050** Driver SOS
- Stops (Row) → **D-019** Route / stop list
- Report delay (Row) → **D-039** Report delay
- Breakdown (Row) → **D-056** Breakdown report
- End trip (Button) → **D-040** End-trip eligibility

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–166 dp	Full width, 16 dp margins	above fold
3	List rows	166–350 dp	Full width, 16 dp margins	above fold
4	Button	350–412 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Active trip; SOS	Deep navy #071A2D, white 16sp bold	Per state	Active trip	Yes	Always in this state
2	C02 Info card	80–166 dp	328×86 dp	En route; Next stop: Stop 1 (sample) · ~10:30	White card, border #D9E2EC, radius 18dp	—	En route	No	Always in this state
3	C03 List rows	166–350 dp	328×184 dp	Stops; Report delay; Breakdown	White rows radius 14dp, 52dp high, chevron/check	Per state	Stops	Yes	Always in this state
4	C04 Button	350–412 dp	328×62 dp	End trip سفر ختم	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	End trip, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Active trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	En route	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Next stop: Stop 1 (sample) · ~10:30	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Stops	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Report delay	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Breakdown	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	End trip	سفر ختم	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
1	App-bar action: SOS	≥48 dp	Enabled	Navigate to **D-050** Driver SOS	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Row: Stops	≥48 dp	Enabled	Navigate to **D-019** Route / stop list	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Row: Report delay	≥48 dp	Enabled	Navigate to **D-039** Report delay	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Row: Breakdown	≥48 dp	Enabled	Navigate to **D-056** Breakdown report	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
4	Button: End trip	≥48 dp	Enabled	Navigate to **D-040** End-trip eligibility	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Active trip hub: progress, stops, delay, breakdown, SOS, end trip.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_assigned_trip (read)
Inputs	auth user
Server checks / RLS	approved + assigned; trip state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached with label; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-019, D-039, D-040, D-050, D-056 · Incoming: D-034, D-041, D-044, D-053, D-066


Open decisions: None specific (see Part 16).

D-038 PROPOSED NEEDS CONFIRMATION P2 v2.0

Navigation handoff

نیویگیشن

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.nav_hand`

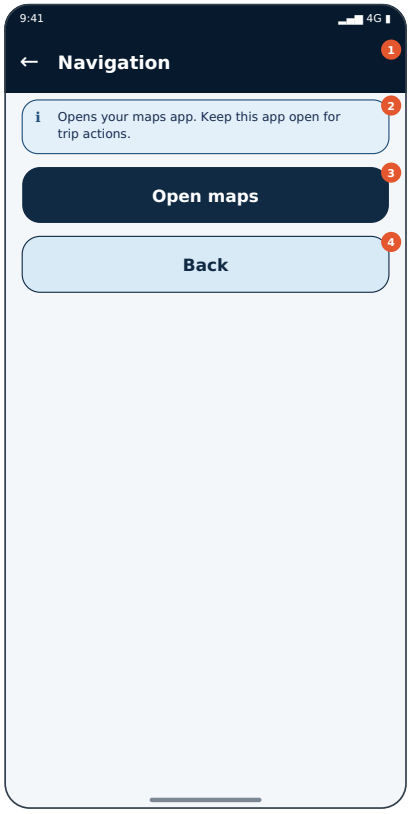

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Open external maps if configured.

Login: **Per flow** · Incoming screens: D-019


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open maps (Button) → external app: EXT:maps
- Back (Button) → previous screen (system Back)

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–140 dp	Full width, 16 dp margins	above fold
3	Button	140–202 dp	Full width, 16 dp margins	above fold
4	Button	202–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Navigation	Deep navy #071A2D, white 16sp bold	Per state	Navigation	Yes	Always in this state
2	C02 Banner	80–140 dp	328×60 dp	Opens your maps app. Keep this app open for trip actions.	Tinted background + border + icon + text (never colour alone)	—	Opens your maps app. Keep this app open	No	Always in this state
3	C03 Button	140–202 dp	328×62 dp	Open maps نقشہ کھولیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open maps, button	Yes	Always in this state
4	C04 Button	202–264 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Navigation	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Opens your maps app. Keep this app open for trip actions.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Open maps	نقشہ کھولیں	Needs native review
4	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

3	Button: Open maps	≥48 dp	Enabled	Hands off to external app (EXT:maps); returning restores this screen	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
4	Button: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Open external maps if configured.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-019


Open decisions: OD-08 (see Part 16).

D-039 CONFIRMED P1 v2.0

Report delay

تاخیر رپورٹ کریں

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.delay`

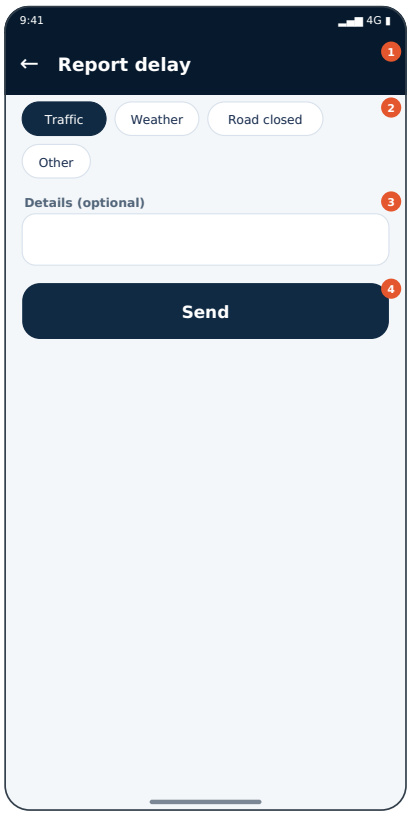

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Report delay with reason.

Login: **As per flow** · Incoming screens: D-013, D-037


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send (Button) → **D-066** Trip disruption status

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Chips	80–164 dp	Full width, 16 dp margins	above fold
3	Text field	164–242 dp	Full width, 16 dp margins	above fold
4	Button	242–304 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Report delay	Deep navy #071A2D, white 16sp bold	Per state	Report delay	Yes	Always in this state
2	C02 Chips	80–164 dp	328×84 dp	Traffic; Weather; Road closed; Other	Pill 30dp high; selected navy fill	Per state	Traffic	Yes	Always in this state
3	C03 Text field	164–242 dp	328×78 dp	Details (optional): “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Details (optional): “”	Yes	Always in this state
4	C04 Button	242–304 dp	328×62 dp	Send بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Report delay	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Traffic	ٹریفک	Needs native review
2	Weather	موسم	Needs native review
2	Road closed	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Other	دیگر	Needs native review
3	Details (optional)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Send	بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button: Send	≥48 dp	Enabled	Navigate to **D-066** Trip disruption status	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Details (optional)	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Report delay with reason.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	report_delay (write)
Inputs	trip id, reason, idempotency key
Server checks / RLS	assignment, trip active; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Draft kept; send blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-066 · Incoming: D-013, D-037


Open decisions: None specific (see Part 16).

D-040 CONFIRMED P0 v2.0

End-trip eligibility

سفر ختم کرنے کی اہلیت

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.end_elig`

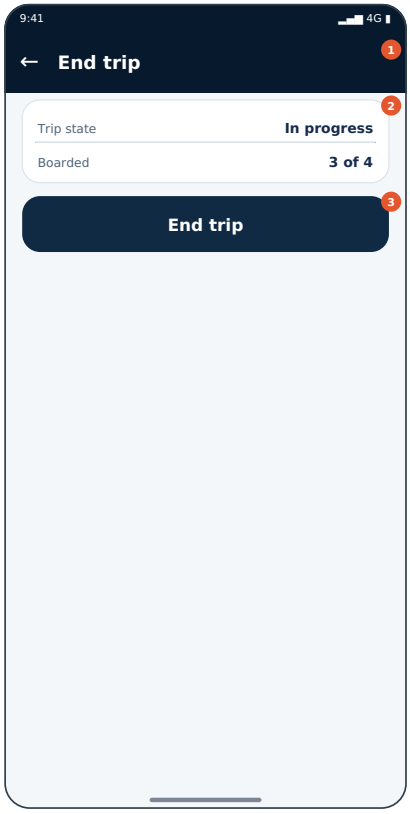

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server confirms state allows ending.

Login: **Per flow** · Incoming screens: D-037


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- End trip (Button) → **D-041** End-trip confirmation

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–166 dp	Full width, 16 dp margins	above fold
3	Button	166–228 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	End trip	Deep navy #071A2D, white 16sp bold	Per state	End trip	Yes	Always in this state
2	C02 Key-value card	80–166 dp	328×86 dp	Trip state: In progress; Boarded: 3 of 4	White card, 30dp rows, label grey / value bold	—	Trip state: In progress	No	Always in this state
3	C03 Button	166–228 dp	328×62 dp	End trip سفر ختم کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	End trip, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	End trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Trip state: In progress	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Boarded: 3 of 4	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	End trip	سفر ختم کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Status check button debounced; no write retries.
3	Button: End trip	≥48 dp	Enabled	Navigate to **D-041** End-trip confirmation	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Trip state	In progress	Server-derived	Required	Show “Not available” if missing; never blank/invented
Boarded	3 of 4	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server confirms state allows ending.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn’t confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven’t received confirmation yet. Do not pay again. We’ll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We’ll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	end_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	state allows end; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Required key
Offline	Blocked — never shows ended
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-041 · Incoming: D-037


Open decisions: None specific (see Part 16).

D-041 CONFIRMED P0 v2.0

End-trip confirmation

سفر ختم کرنے کی تصدیق

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.end_conf`

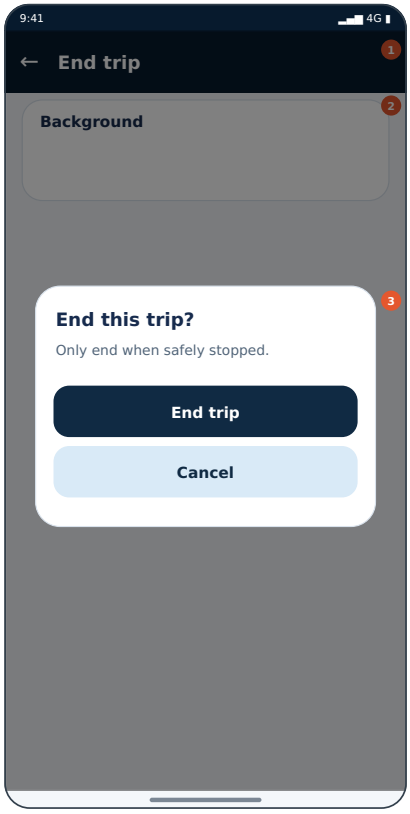

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Confirm safely stopped at destination.

Login: **n/a (shared pattern)** · Incoming screens: D-040


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- End trip (Dialog button) → **D-042** Ending trip…
- Cancel (Dialog button) → **D-037** Active trip

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–182 dp	Full width, 16 dp margins	above fold
3	Dialog	252–467 dp	Full width, 16 dp margins	above fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	End trip	Deep navy #071A2D, white 16sp bold	Per state	End trip	Yes	Always in this state
2	C02 Info card	80–182 dp	328×102 dp	Background	White card, border #D9E2EC, radius 18dp	—	Background	No	Always in this state
3	C03 Dialog	252–467 dp	328×215 dp	End this trip?; Only end when safely stopped.; End trip; Cancel سفر ختم کریں / منسوخ	Radius 22dp, scrim 50%	Per state	End this trip?	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	End trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Background	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	End this trip?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Only end when safely stopped.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	End trip	سفر ختم کریں	Needs native review
3	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.
3	Dialog button: End trip	≥48 dp	Enabled	Navigate to **D-042** Ending trip…	Instant	—	E17, E28 copy; no false success	Buttons debounced.
3	Dialog button: Cancel	≥48 dp	Enabled	Navigate to **D-037** Active trip	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Confirm safely stopped at destination.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	end_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	state allows end; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	Required key
Offline	Blocked — never shows ended
Cache	None

14. Security, privacy & safety

Copy must not leak technical detail. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-037, D-042 · Incoming: D-040


Open decisions: None specific (see Part 16).

D-042 CONFIRMED P0 v2.0

Ending trip...

سفر ختم ہو رہا ہے...

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.end_load`

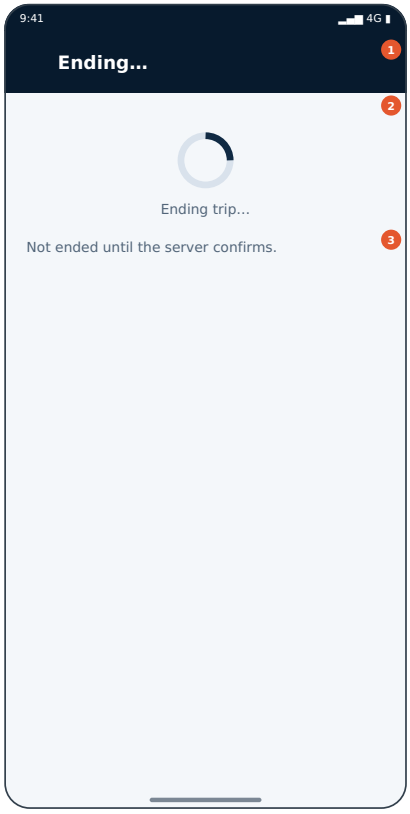

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Waiting for server confirmation.

Login: **Per flow** · Incoming screens: D-041


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Body text	200–232 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ending...	Deep navy #071A2D, white 16sp bold	Per state	Ending...	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Ending trip...	Navy arc on grey ring	—	Ending trip...	No	Always in this state
3	C03 Body text	200–232 dp	328×32 dp	Not ended until the server confirms.	12–14sp secondary text	—	Not ended until the server confirms.	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ending...	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Ending trip...	Translation review required	—
3	Not ended until the server confirms.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Waiting for server confirmation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	end_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	state allows end; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E05, E17
Retry / idempotency	Required key
Offline	Blocked — never shows ended
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-041


Open decisions: None specific (see Part 16).

D-043 CONFIRMED P0 v2.0

Trip ended (server confirmed)

سفر ختم (سرور سے تصدیق)

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.ended`

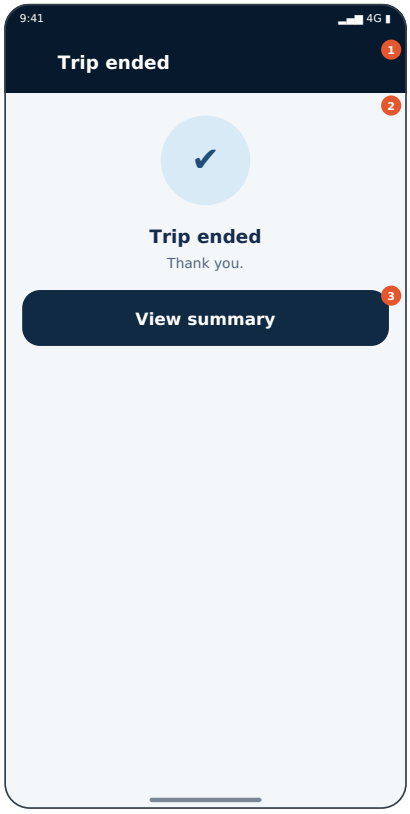

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Shown only after server confirmation.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- View summary (Button) → **D-045** Post-trip summary

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip ended	Deep navy #071A2D, white 16sp bold	Per state	Trip ended	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Trip ended; Thank you.	Light-blue circle icon + 16sp title + 12sp body	—	Trip ended	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	View summary خلاصہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	View summary, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip ended	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Trip ended	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Thank you.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	View summary	خلاصہ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: View summary	≥48 dp	Enabled	Navigate to **D-045** Post-trip summary	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Shown only after server confirmation.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E16 Payment status not yet known	Banner or full screen **P-072** Payment pending	Payment is being checked — We haven't received confirmation yet. Do not pay again. We'll update you here.
E30 Booking/ticket not yet confirmed	Banner or full screen **P-079** Pending confirmation	Booking not confirmed yet — We'll show your ticket as soon as the server confirms it.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	end_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	state allows end; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E06, E16, E30
Retry / idempotency	Required key
Offline	Blocked — never shows ended
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-045 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-044 CONFIRMED P0 v2.0

End rejected

ختم مسترد

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.end_rej`

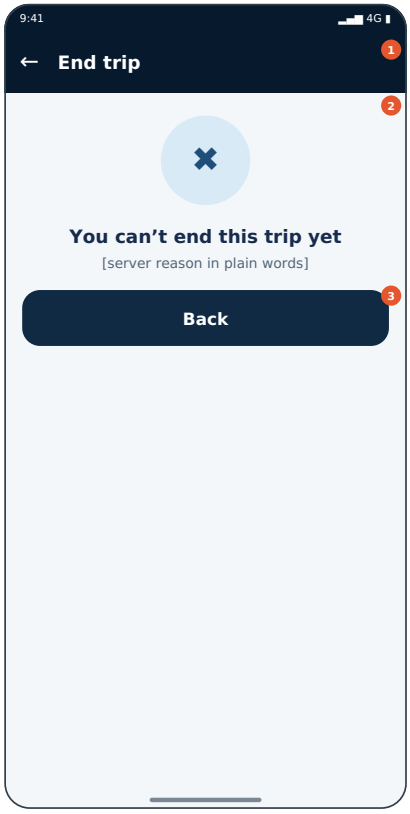

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Server rejected end.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Back (Button) → **D-037** Active trip

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	End trip	Deep navy #071A2D, white 16sp bold	Per state	End trip	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	You can’t end this trip yet; [server reason in plain words]	Light-blue circle icon + 16sp title + 12sp body	—	You can’t end this trip yet	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	End trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	You can’t end this trip yet	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	[server reason in plain words]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E06 copy; no false success	Retry debounced.
3	Button: Back	≥48 dp	Enabled	Navigate to **D-037** Active trip	Inline spinner; other controls locked	Server-confirmed result only	E06 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Server rejected end.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	end_trip (write)
Inputs	trip id, idempotency key
Server checks / RLS	state allows end; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E06
Retry / idempotency	Required key
Offline	Blocked — never shows ended
Cache	None

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-037 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-045 CONFIRMED P1 v2.0

Post-trip summary

سفر کے بعد خلاصہ

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.summary`

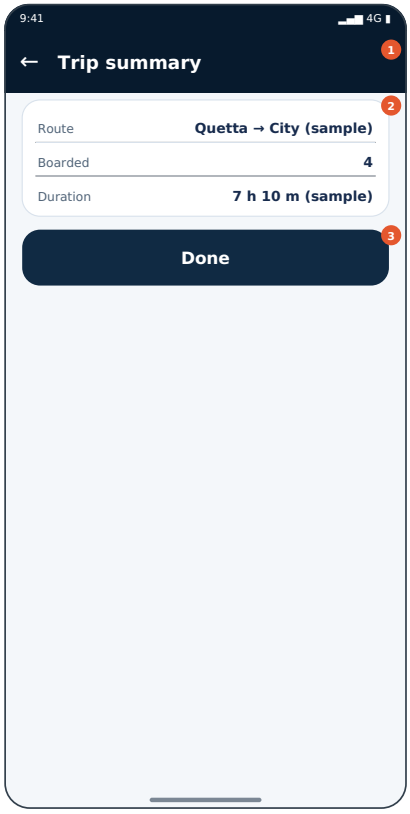

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Summary of completed trip.

Login: **Per flow** · Incoming screens: D-043


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Done (Button) → **D-013** Driver Home — default

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–196 dp	Full width, 16 dp margins	above fold
3	Button	196–258 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip summary	Deep navy #071A2D, white 16sp bold	Per state	Trip summary	Yes	Always in this state
2	C02 Key-value card	80–196 dp	328×116 dp	Route: Quetta → City (sample); Boarded: 4; Duration: 7 h 10 m (sample)	White card, 30dp rows, label grey / value bold	—	Route: Quetta → City (sample)	No	Always in this state
3	C03 Button	196–258 dp	328×62 dp	Done مکمل	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Done, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip summary	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Route: Quetta → City (sample)	روٹ	Needs native review
2	Boarded: 4	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Duration: 7 h 10 m (sample)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Done	مکمل	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.
3	Button: Done	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Route	Quetta → City (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Boarded	4	Server-derived	Required	Show “Not available” if missing; never blank/invented
Duration	7 h 10 m (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Summary of completed trip.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trip_records (read)
Inputs	driver, page
Server checks / RLS	owner/assignment rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached labelled
Cache	Cached

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013 · Incoming: D-043


Open decisions: None specific (see Part 16).

D-046 CONFIRMED P0 v2.0

Trip Records

سفر کے ریکارڈ

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.records`

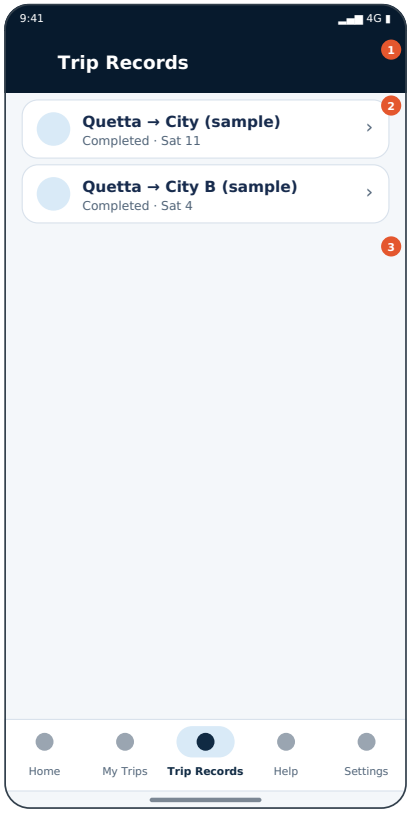

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Tab: past trip records.

Login: **Per flow** · Incoming screens: D-001, D-013, D-014, D-015, D-016, D-017, D-048, D-049, D-063, D-067, D-070


3. Exit & navigation map

- Quetta → City (sample)|Completed · Sat 11 (Row) → **D-047** Trip record detail
- Quetta → City B (sample)|Completed · Sat 4 (Row) → **D-047** Trip record detail
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–206 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	206–206 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip Records	Deep navy #071A2D, white 16sp bold	Per state	Trip Records	Yes	Always in this state
2	C02 List rows	80–206 dp	328×126 dp	Quetta → City (sample)|Completed · Sat 11; Quetta → City B (sample)|Completed · Sat 4	White rows radius 14dp, 52dp high, chevron/check	Per state	Quetta → City (sample)|Completed · Sat 1	Yes	Always in this state
3	C03 Bottom navigation	206–206 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip Records	سفر کے ریکارڈ	Needs native review
2	Quetta → City (sample)|Completed · Sat 11	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Quetta → City B (sample)|Completed · Sat 4	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Home	ہوم	Needs native review
3	My Trips	میرے سفر	Needs native review
3	Trip Records	سفر کے ریکارڈ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Row: Quetta → City (sample)|Completed · Sat 11	≥48 dp	Enabled	Navigate to **D-047** Trip record detail	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Row: Quetta → City B (sample)|Completed · Sat 4	≥48 dp	Enabled	Navigate to **D-047** Trip record detail	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Tab: past trip records.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trip_records (read)
Inputs	driver, page
Server checks / RLS	owner/assignment rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached labelled
Cache	Cached

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible

7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-046, D-047, D-063, D-067 · Incoming: D-001, D-013, D-014, D-015, D-016, D-017, D-048, D-049, D-063, D-067, D-070


Open decisions: None specific (see Part 16).

D-047 CONFIRMED P1 v2.0

Trip record detail

ریکارڈ کی تفصیل

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.record`

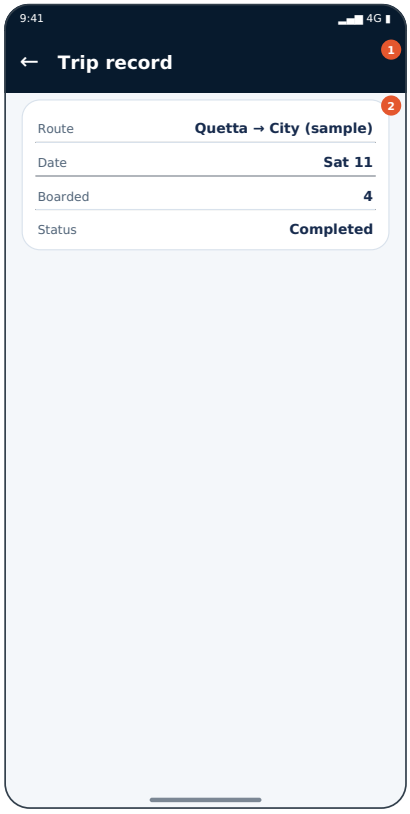

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Single completed trip record.

Login: **Per flow** · Incoming screens: D-046


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–226 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip record	Deep navy #071A2D, white 16sp bold	Per state	Trip record	Yes	Always in this state
2	C02 Key-value card	80–226 dp	328×146 dp	Route: Quetta → City (sample); Date: Sat 11; Boarded: 4; Status: Completed	White card, 30dp rows, label grey / value bold	—	Route: Quetta → City (sample)	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip record	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Route: Quetta → City (sample)	روٹ	Needs native review
2	Date: Sat 11	تاریخ	Needs native review
2	Boarded: 4	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Status: Completed	حالت	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Route	Quetta → City (sample)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Date	Sat 11	Server-derived	Required	Show “Not available” if missing; never blank/invented
Boarded	4	Server-derived	Required	Show “Not available” if missing; never blank/invented

Boarded	4	Server-derived	Required	Show “Not available” if missing; never blank/invented
Status	Completed	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Single completed trip record.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trip_records (read)
Inputs	driver, page
Server checks / RLS	owner/assignment rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Cached labelled
Cache	Cached

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit “not available”
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-046


Open decisions: None specific (see Part 16).

D-048 CONFIRMED P2 v2.0

Trip Records — empty

ریکارڈ — خالی

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.records_empty`

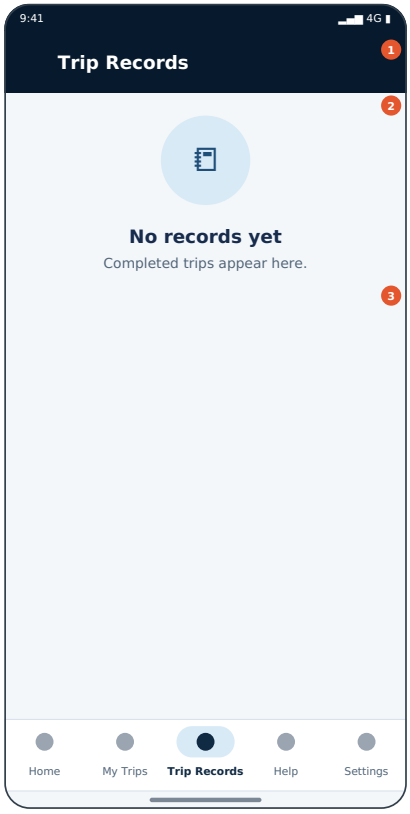

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No records yet.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	250–250 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip Records	Deep navy #071A2D, white 16sp bold	Per state	Trip Records	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	No records yet; Completed trips appear here.	Light-blue circle icon + 16sp title + 12sp body	—	No records yet	No	Always in this state
3	C03 Bottom navigation	250–250 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip Records	سفر کے ریکارڈ	Needs native review
2	No records yet	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Completed trips appear here.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Home	ہوم	Needs native review
3	My Trips	میرے سفر	Needs native review
3	Trip Records	سفر کے ریکارڈ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry

3	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No records yet.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trip_records (read)
Inputs	driver, page
Server checks / RLS	owner/assignment rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Cached labelled
Cache	Cached

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-046, D-063, D-067 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-049 CONFIRMED P2 v2.0

Trip Records — error/refresh

ریکارڈ — خرابی

Role: **Driver** · Family: F10 Driver home, trips & trip operations · Key: `d.records_err`

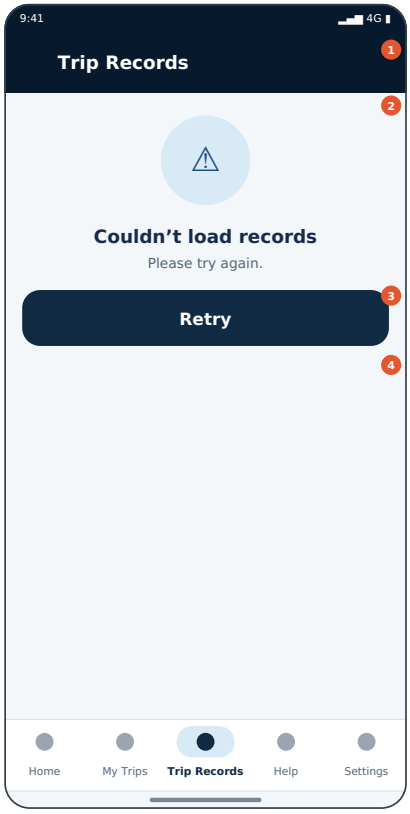

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Load failed.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Retry (Button) → stays on screen (action)
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	312–312 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Trip Records	Deep navy #071A2D, white 16sp bold	Per state	Trip Records	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	Couldn’t load records; Please try again.	Light-blue circle icon + 16sp title + 12sp body	—	Couldn’t load records	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Retry دوبارہ کوشش	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Retry, button	Yes	Always in this state
4	C04 Bottom navigation	312–312 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Trip Records	سفر کے ریکارڈ	Needs native review
2	Couldn’t load records	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Please try again.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Retry	دوبارہ کوشش	Needs native review
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	Trip Records	سفر کے ریکارڈ	Needs native review
4	Help	مدد	Needs native review

4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Retry	≥48 dp	Enabled	Runs the on-screen action (see §13); stays here	Instant	—	E01, E06 copy; no false success	Retry debounced.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E06 copy; no false success	Retry debounced.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E01, E06 copy; no false success	Retry debounced.
4	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E01, E06 copy; no false success	Retry debounced.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E06 copy; no false success	Retry debounced.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E01, E06 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Load failed.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	list_trip_records (read)
Inputs	driver, page
Server checks / RLS	owner/assignment rows; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E06
Retry / idempotency	Safe read
Offline	Cached labelled
Cache	Cached

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-046, D-063, D-067 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-050 CONFIRMED P0 v2.0

Driver SOS

SOS ڈرائیور

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.sos`

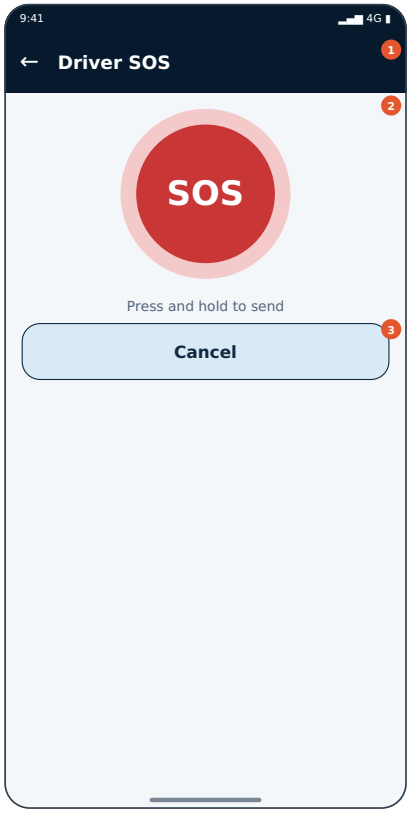

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Driver press-and-hold SOS.

Login: **Yes** · Incoming screens: D-013, D-037, D-051, D-056, D-063


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Cancel (Button) → previous screen (system Back)

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	SOS hold button	80–280 dp	Full width, 16 dp margins	above fold
3	Button	280–342 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Driver SOS	Deep navy #071A2D, white 16sp bold	Per state	Driver SOS	Yes	Always in this state
2	C02 SOS hold button	80–280 dp	328×200 dp	SOS	Red circle 124dp, white label	Per state	SOS	Yes	Always in this state
3	C03 Button	280–342 dp	328×62 dp	Cancel منسوخ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Cancel, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Driver SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
3	Button: Cancel	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
2	SOS hold button	≥48 dp	Enabled	Updates local selection; server validates on submit	—	Local state	Inline error + icon + text	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Driver press-and-hold SOS.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can’t get a GPS signal. Move to an open area or check location settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	send_sos (write)
Inputs	trip id, location (if permitted), idempotency key
Server checks / RLS	auth, trip context, rate protection; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E21, E22, E09, E10
Retry / idempotency	Required key; retry reuses key
Offline	Local pending state only; never “delivered”
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Same truthfulness rules as passenger SOS
2. Never says “delivered” without server ack
3. Accidental activation prevented
4. Location denied path works
5. Offline state honest
6. Retry reuses key
7. Android Back follows §3 on every state
8. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
9. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-013, D-037, D-051, D-056, D-063


Open decisions: None specific (see Part 16).

D-051 CONFIRMED P0 v2.0

Driver SOS — confirm

~~SOS~~ديق

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.sos_conf`

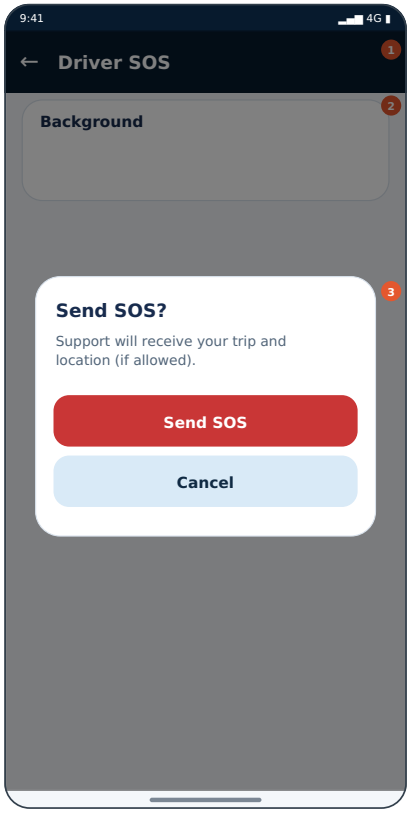

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Confirm SOS with clear text.

Login: **n/a (shared pattern)** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send SOS (Dialog button) → **D-052** Driver SOS — sending
- Cancel (Dialog button) → **D-050** Driver SOS

Android system Back: Dismiss pattern = Back. **Bottom nav:** Inherited from host. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Info card	80–182 dp	Full width, 16 dp margins	above fold
3	Dialog	244–476 dp	Full width, 16 dp margins	above fold · overlay

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Driver SOS	Deep navy #071A2D, white 16sp bold	Per state	Driver SOS	Yes	Always in this state
2	C02 Info card	80–182 dp	328×102 dp	Background	White card, border #D9E2EC, radius 18dp	—	Background	No	Always in this state
3	C03 Dialog	244–476 dp	328×232 dp	Send SOS?; Support will receive your trip and location (if allowed).; Send SOS; Cancel ~~SOS~~ / بھیجیں	Radius 22dp, scrim 50%	Per state	Send SOS?	Yes	Only while overlay open

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Driver SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Background	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Send SOS?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Support will receive your trip and location (if allowed).	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Send SOS	~~SOS~~بھیجیں	Needs native review
3	Cancel	منسوخ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E17, E28 copy; no false success	Buttons debounced.
3	Dialog button: Send SOS	≥48 dp	Enabled	Navigate to **D-052** Driver SOS — sending	Instant	—	E17, E28 copy; no false success	Buttons debounced.
3	Dialog button: Cancel	≥48 dp	Enabled	Navigate to **D-050** Driver SOS	Instant	—	E17, E28 copy; no false success	Buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Confirm SOS with clear text.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E17 Second tap while request in flight	Banner or full screen **ERR-008** Duplicate taps blocked	Already in progress — Please wait — we're still processing your request.
E28 Generic recoverable failure	Banner or full screen **SH-025** Generic recoverable failure	Something went wrong — Please try again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	send_sos (write)
Inputs	trip id, location (if permitted), idempotency key
Server checks / RLS	auth, trip context, rate protection; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E17, E28
Retry / idempotency	Required key; retry reuses key
Offline	Local pending state only; never "delivered"
Cache	None

14. Security, privacy & safety

Copy must not leak technical detail. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Focus trapped in dialogs/sheets; scrim tap behaviour defined; announced on open. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Back dismisses (unless blocking)
2. Focus returns to trigger
3. Urdu RTL mirrored
4. Text scale 200% no clipping
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-050, D-052 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-052 CONFIRMED P0 v2.0

Driver SOS — sending

SOS بھیجا ہے —

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.sos_send`

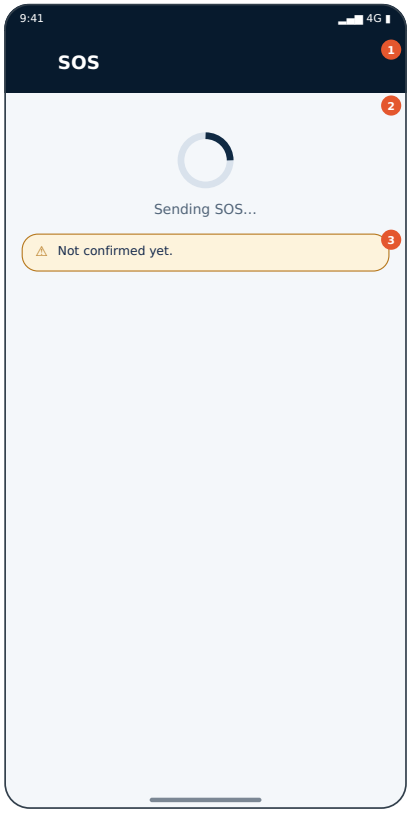

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Sending; not confirmed yet.

Login: **Yes** · Incoming screens: D-051, D-054, D-055


3. Exit & navigation map

- No on-screen controls beyond system Back.

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Loading indicator	80–200 dp	Full width, 16 dp margins	above fold
3	Banner	200–245 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Loading indicator	80–200 dp	328×120 dp	Sending SOS...	Navy arc on grey ring	—	Sending SOS...	No	Always in this state
3	C03 Banner	200–245 dp	328×45 dp	Not confirmed yet.	Tinted background + border + icon + text (never colour alone)	—	Not confirmed yet.	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Sending SOS...	Translation review required	—
3	Not confirmed yet.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
No interactive controls (informational). System Back only.								

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Sending; not confirmed yet.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	send_sos (write)
Inputs	trip id, location (if permitted), idempotency key
Server checks / RLS	auth, trip context, rate protection; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E21
Retry / idempotency	Required key; retry reuses key
Offline	Local pending state only; never "delivered"
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says "delivered" without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-051, D-054, D-055


Open decisions: None specific (see Part 16).

D-053 CONFIRMED P0 v2.0

Driver SOS — delivered

~~SOS~~ وصول

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.sos_ok`

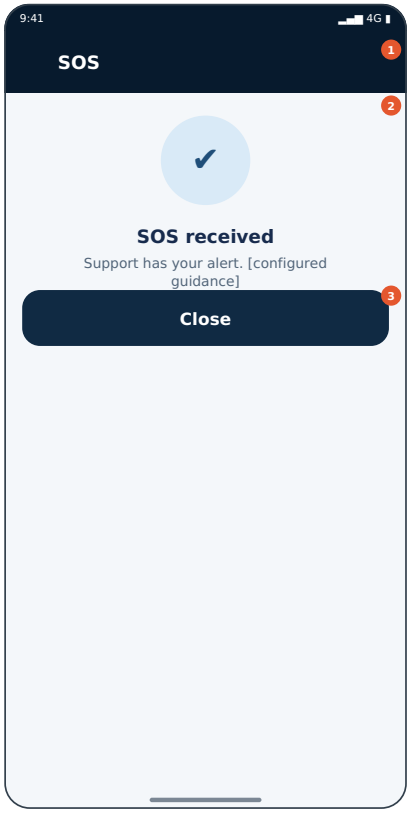

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Only after server acknowledgement.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Close (Button) → **D-037** Active trip

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Empty/status block	80–250 dp	Full width, 16 dp margins	above fold
3	Button	250–312 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Empty/status block	80–250 dp	328×170 dp	SOS received; Support has your alert. [configured guidance]	Light-blue circle icon + 16sp title + 12sp body	—	SOS received	No	Always in this state
3	C03 Button	250–312 dp	328×62 dp	Close بند	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Close, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	SOS received	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Support has your alert. [configured guidance]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Close	بند	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Close	≥48 dp	Enabled	Navigate to **D-037** Active trip	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Only after server acknowledgement.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can’t get a GPS signal. Move to an open area or check location settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_sos_status (read)
Inputs	sos id
Server checks / RLS	server acknowledgement state; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E21, E22, E09, E10
Retry / idempotency	Safe read
Offline	Shows “not confirmed”
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says “delivered” without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-037 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-054 CONFIRMED P0 v2.0

Driver SOS — unconfirmed

SOS تصدیق نہیں —

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.sos_unconf`

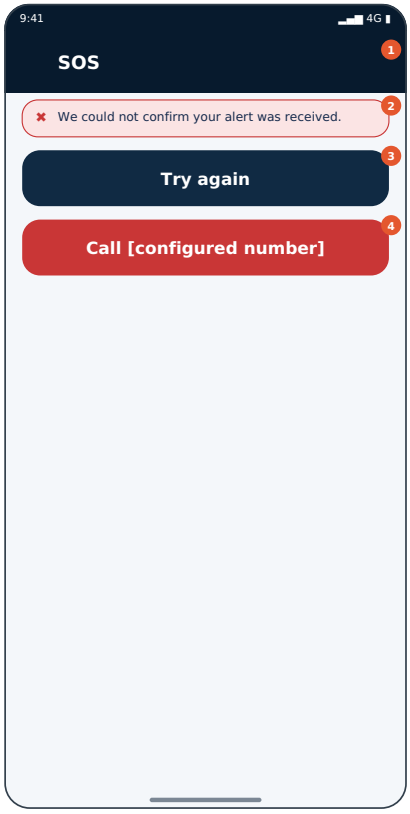

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

No server ack; honest.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Try again (Button) → **D-052** Driver SOS — sending
- Call [configured number] (Button) → external app: EXT:dial

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	We could not confirm your alert was received.	Tinted background + border + icon + text (never colour alone)	—	We could not confirm your alert was rece	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Try again دوبارہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Try again, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Call [configured number] کال	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Call [configured number], button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	We could not confirm your alert was received.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Try again	دوبارہ	Needs native review
4	Call [configured number]	کال	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Try again	≥48 dp	Enabled	Navigate to **D-052** Driver SOS —	Inline spinner; other	Server-	E21 copy; no	One SOS per idempotency key; duplicate

				sending	controls locked	confirmed result only	false success	tap does not create duplicates.
4	Button: Call [configured number]	≥48 dp	Enabled	Hands off to external app (EXT:dial); returning restores this screen	Inline spinner; other controls locked	Server-confirmed result only	E21 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	No server ack; honest.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	send_sos (write)
Inputs	trip id, location (if permitted), idempotency key
Server checks / RLS	auth, trip context, rate protection; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E21
Retry / idempotency	Required key; retry reuses key
Offline	Local pending state only; never “delivered”
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says “delivered” without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-052 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-055 CONFIRMED P0 v2.0

Driver SOS — offline

لائن SOS—

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.sos_off`

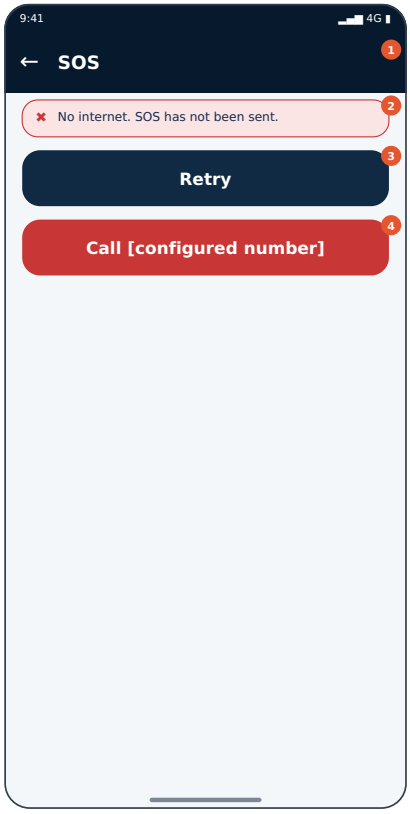

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Offline: not sent.

Login: **Yes** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Retry (Button) → **D-052** Driver SOS — sending
- Call [configured number] (Button) → external app: EXT:dial

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	SOS	Deep navy #071A2D, white 16sp bold	Per state	SOS	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	No internet. SOS has not been sent.	Tinted background + border + icon + text (never colour alone)	—	No internet. SOS has not been sent.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Retry دوبارہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Retry, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Call [configured number] کال	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Call [configured number], button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	No internet. SOS has not been sent.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Retry	دوبارہ	Needs native review
4	Call [configured number]	کال	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E21 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
3	Button: Retry	≥48 dp	Enabled	Navigate to **D-052** Driver SOS —	Inline spinner;	Server-	E01, E21 copy;	One SOS per idempotency key;

				sending	other controls locked	confirmed result only	no false success	duplicate tap does not create duplicates.
4	Button: Call [configured number]	≥48 dp	Enabled	Hands off to external app (EXT:dial); returning restores this screen	Inline spinner; other controls locked	Server-confirmed result only	E01, E21 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Offline: not sent.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	send_sos (write)
Inputs	trip id, location (if permitted), idempotency key
Server checks / RLS	auth, trip context, rate protection; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E21
Retry / idempotency	Required key; retry reuses key
Offline	Local pending state only; never "delivered"
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says "delivered" without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-052 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-056 CONFIRMED P0 v2.0

Breakdown report

خرابی کی رپورٹ

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.bd`

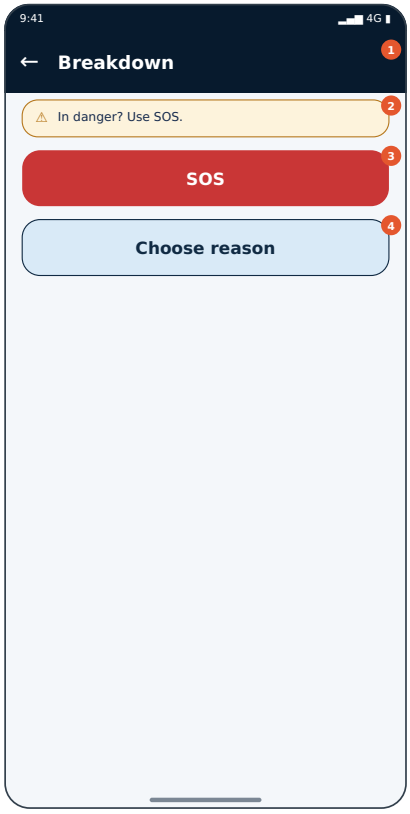

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Report breakdown; choose reason.

Login: **Yes** · Incoming screens: D-037, D-063


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- SOS (Button) → **D-050** Driver SOS
- Choose reason (Button) → **D-057** Breakdown — reason

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Breakdown	Deep navy #071A2D, white 16sp bold	Per state	Breakdown	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	In danger? Use SOS.	Tinted background + border + icon + text (never colour alone)	—	In danger? Use SOS.	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	SOS SOS	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	SOS, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Choose reason وجہ منتخب کریں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Choose reason, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Breakdown	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	In danger? Use SOS.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	SOS	SOS	Needs native review
4	Choose reason	وجہ منتخب کریں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.
3	Button: SOS	≥48 dp	Enabled	Navigate to **D-050** Driver	Inline spinner; other	Server-confirmed	E01, E04 copy; no	One SOS per idempotency key; duplicate tap

				SOS	controls locked	result only	false success	does not create duplicates.
4	Button: Choose reason	≥48 dp	Enabled	Navigate to **D-057** Breakdown — reason	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Report breakdown; choose reason.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E21 SOS delivery not confirmed by server	Banner or full screen **P-130** SOS — delivery unconfirmed	SOS not confirmed yet — We could not confirm that your alert was received. [configured emergency guidance]
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can't get a GPS signal. Move to an open area or check location settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	report_breakdown (write)
Inputs	trip id, reason, location (if permitted), idempotency key
Server checks / RLS	assignment, trip active; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E21, E22, E09, E10
Retry / idempotency	Required key
Offline	Local pending only; never "delivered"
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says "delivered" without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-050, D-057 · Incoming: D-037, D-063


Open decisions: None specific (see Part 16).

D-057 CONFIRMED P0 v2.0

Breakdown — reason

خرابی کی وجہ

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.bd_reason`

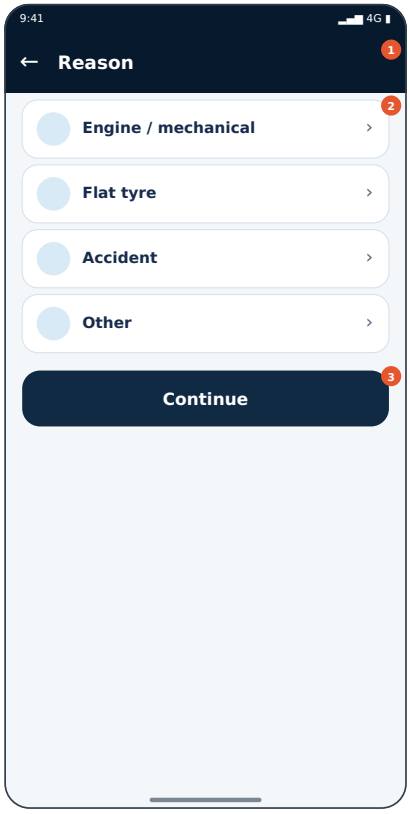

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Select reason.

Login: **Per flow** · Incoming screens: D-056


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Continue (Button) → **D-058** Breakdown — location status

Android system Back: Back returns to previous step keeping the search draft. **Bottom nav:** Hidden in booking flow; Home tab remains the app root. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–322 dp	Full width, 16 dp margins	above fold
3	Button	322–384 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Reason	Deep navy #071A2D, white 16sp bold	Per state	Reason	Yes	Always in this state
2	C02 List rows	80–322 dp	328×242 dp	Engine / mechanical; Flat tyre; Accident; Other	White rows radius 14dp, 52dp high, chevron/check	Per state	Engine / mechanical	Yes	Always in this state
3	C03 Button	322–384 dp	328×62 dp	Continue جاری رکھیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Continue, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Reason	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Engine / mechanical	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Flat tyre	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Accident	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Other	دیگر	Needs native review
3	Continue	جاری رکھیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.
3	Button: Continue	≥48 dp	Enabled	Navigate to **D-058** Breakdown — location status	Instant	—	E01, E03 copy; no false success	Selection is local until Continue; double tap selects once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume.

Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Select reason.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn’t finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E12, E11
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

No personal data. Only configured services listed. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Cards ≥ 48 dp (large cards ≥ 96 dp); icon + label; selected state = border + check + text, not colour alone. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Selected state visible and announced by TalkBack
2. Back keeps previous selections
3. Only configured items appear; none invented
4. Urdu RTL grid order mirrors correctly
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-058 · Incoming: D-056


Open decisions: None specific (see Part 16).

D-058 CONFIRMED P0 v2.0

Breakdown — location status

خرابی — لوکیشن

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.bd_loc`

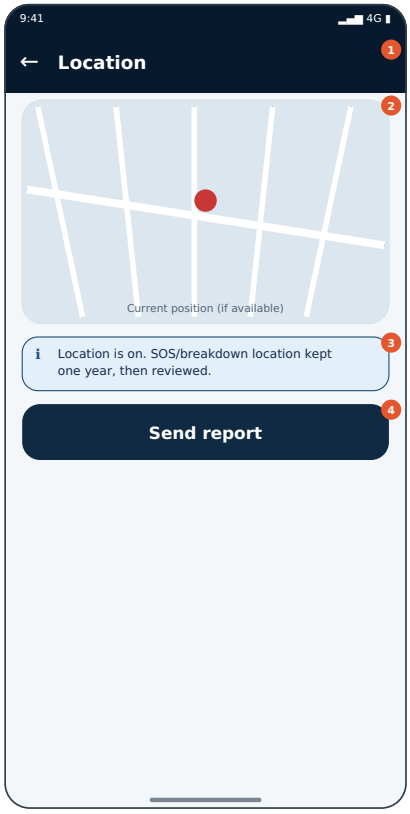

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Show location status; send with or without location.

Login: **Yes** · Incoming screens: D-057


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send report (Button) → **D-066** Trip disruption status

Android system Back: Back cancels before submission; after submission shows status. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Map placeholder	80–292 dp	Full width, 16 dp margins	above fold
3	Banner	292–352 dp	Full width, 16 dp margins	above fold
4	Button	352–414 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Location	Deep navy #071A2D, white 16sp bold	Per state	Location	Yes	Always in this state
2	C02 Map placeholder	80–292 dp	328×212 dp	Current position (if available)	Provider NEEDS CONFIRMATION	—	Current position (if available)	No	Always in this state
3	C03 Banner	292–352 dp	328×60 dp	Location is on. SOS/breakdown location kept one year, then reviewed.	Tinted background + border + icon + text (never colour alone)	—	Location is on. SOS/breakdown location k	No	Always in this state
4	C04 Button	352–414 dp	328×62 dp	Send report رپورٹ بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send report, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Location	لوکیشن	Needs native review
2	Current position (if available)	Translation review required	—
3	Location is on. SOS/breakdown location kept one year, then reviewed.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Send report	رپورٹ بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow:	≥48 dp	Enabled	Pop to previous screen (same	Instant	—	E22, E09 copy; no	One SOS per idempotency key; duplicate tap

	Back			as system Back)			false success	does not create duplicates.
4	Button: Send report	≥48 dp	Enabled	Navigate to **D-066** Trip disruption status	Inline spinner; other controls locked	Server-confirmed result only	E22, E09 copy; no false success	One SOS per idempotency key; duplicate tap does not create duplicates.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Show location status; send with or without location.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E22 GPS unavailable or stale	Banner or full screen **P-137** GPS unavailable / stale	Location unavailable — We can’t get a GPS signal. Move to an open area or check location settings.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	report_breakdown (write)
Inputs	trip id, reason, location (if permitted), idempotency key
Server checks / RLS	assignment, trip active; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E22, E09, E10
Retry / idempotency	Required key
Offline	Local pending only; never “delivered”
Cache	None

14. Security, privacy & safety

Location only with permission; no delivery claim without server ack; SOS/breakdown location retained 1 year then review; normal trip GPS 90 days. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Very large targets; high contrast; hold-to-confirm alternative for accessibility. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never says “delivered” without server ack
2. Accidental activation prevented
3. Location denied path works
4. Offline state honest
5. Retry reuses key
6. Android Back follows §3 on every state
7. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
8. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-066 · Incoming: D-057

Open decisions: None specific (see Part 16).

D-059 CONFIRMED NEEDS CONFIRMATION P1 v2.0

Call support

سپورٹ کو کال

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.bd_call`



5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Call configured support only if available.

Login: **Per flow** · Incoming screens: Entry point / system-launched

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Call [configured support number] (Button) → external app: EXT:dial
- Back (Button) → previous screen (system Back)

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Button	80–142 dp	Full width, 16 dp margins	above fold
3	Button	142–204 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Call support	Deep navy #071A2D, white 16sp bold	Per state	Call support	Yes	Always in this state
2	C02 Button	80–142 dp	328×62 dp	Call [configured support number] کال	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Call [configured support number], button	Yes	Always in this state
3	C03 Button	142–204 dp	328×62 dp	Back واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Call support	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Call [configured support number]	کال	Needs native review
3	Back	واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
2	Button: Call [configured support number]	≥48 dp	Enabled	Hands off to external app (EXT:dial); returning restores this screen	Instant	—	E01, E03 copy; no false success	n/a
3	Button: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Call configured support only if available.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: OD-09 (see Part 16).

D-060 CONFIRMED P1 v2.0

Support form

سپورٹ فارم

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.support`

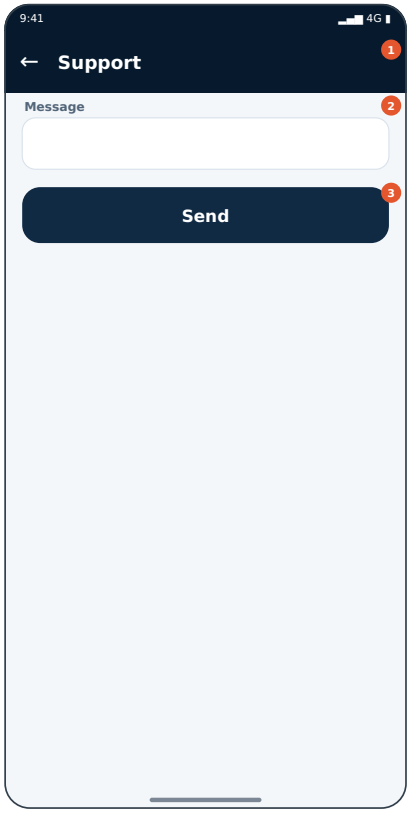

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Contact support.

Login: **As per flow** · Incoming screens: D-063


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send (Button) → **D-066** Trip disruption status

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Button	158–220 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Support	Deep navy #071A2D, white 16sp bold	Per state	Support	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Message: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Message: “”	Yes	Always in this state
3	C03 Button	158–220 dp	328×62 dp	Send بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Support	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Message	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Send	بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Button: Send	≥48 dp	Enabled	Navigate to **D-066** Trip disruption status	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Message	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Contact support.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-066 · Incoming: D-063


Open decisions: None specific (see Part 16).

D-061 CONFIRMED P1 v2.0

Report incident

واقعہ رپورٹ

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.incident`

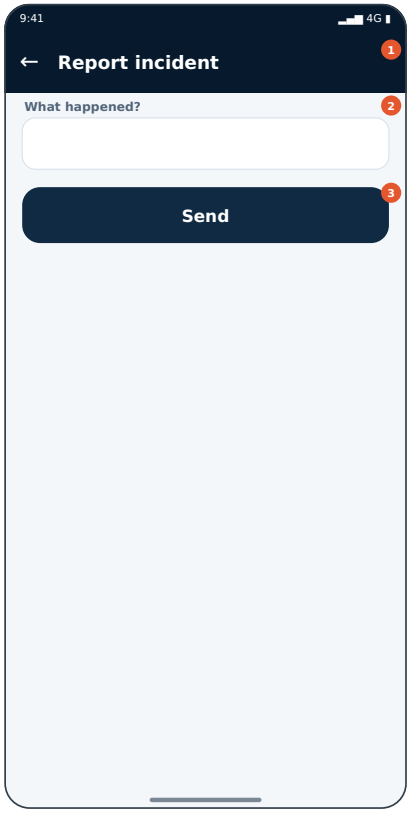

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Report incident on trip.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send (Button) → **D-066** Trip disruption status

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Button	158–220 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Report incident	Deep navy #071A2D, white 16sp bold	Per state	Report incident	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	What happened?: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	What happened?: “”	Yes	Always in this state
3	C03 Button	158–220 dp	328×62 dp	Send بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Report incident	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	What happened?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Send	بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Button: Send	≥48 dp	Enabled	Navigate to **D-066** Trip disruption status	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
What happened?	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Report incident on trip.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-066 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-062 CONFIRMED NEEDS CONFIRMATION P0 v2.0

Emergency guidance

ہنگامی رہنمائی

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.guide`

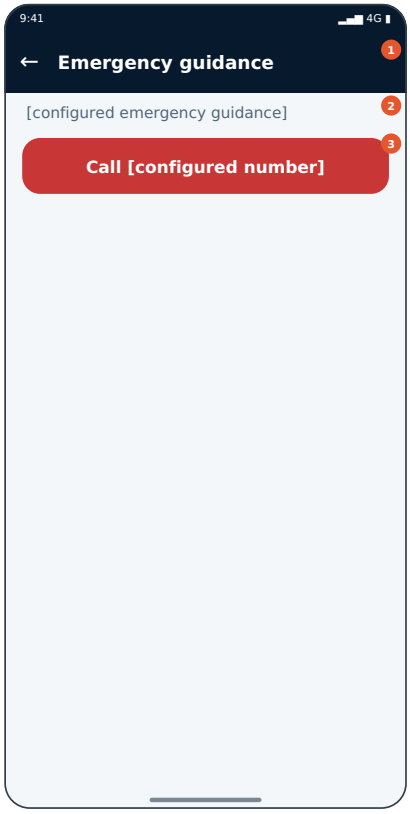

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Configured guidance only; no response promise.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Call [configured number] (Button) → external app: EXT:dial

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–114 dp	Full width, 16 dp margins	above fold
3	Button	114–176 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Emergency guidance	Deep navy #071A2D, white 16sp bold	Per state	Emergency guidance	Yes	Always in this state
2	C02 Body text	80–114 dp	328×34 dp	[configured emergency guidance]	12–14sp secondary text	—	[configured emergency guidance]	No	Always in this state
3	C03 Button	114–176 dp	328×62 dp	Call [configured number] کال	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Call [configured number], button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Emergency guidance	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	[configured emergency guidance]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Call [configured number]	کال	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
3	Button: Call [configured number]	≥48 dp	Enabled	Hands off to external app (EXT:dial); returning restores this screen	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Configured guidance only; no response promise.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: OD-10 (see Part 16).

D-063 CONFIRMED P1 v2.0

Driver Help hub

ڈرائیور مدد

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.help`

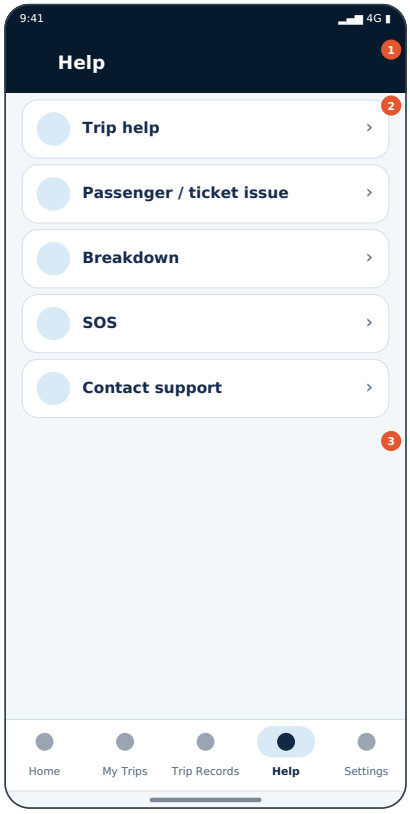

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Tab: help topics for drivers.

Login: **Per flow** · Incoming screens: D-001, D-002, D-003, D-012, D-013, D-014, D-015, D-016, D-017, D-027, D-035, D-046, D-048, D-049, D-067, D-070


3. Exit & navigation map

- Trip help (Row) → **D-064** Driver FAQ
- Passenger / ticket issue (Row) → **D-065** Ticket / passenger issue
- Breakdown (Row) → **D-056** Breakdown report
- SOS (Row) → **D-050** Driver SOS
- Contact support (Row) → **D-060** Support form
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–380 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	380–380 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Help	Deep navy #071A2D, white 16sp bold	Per state	Help	Yes	Always in this state
2	C02 List rows	80–380 dp	328×300 dp	Trip help; Passenger / ticket issue; Breakdown; SOS; Contact support	White rows radius 14dp, 52dp high, chevron/check	Per state	Trip help	Yes	Always in this state
3	C03 Bottom navigation	380–380 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Help	مدد	Needs native review
2	Trip help	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Passenger / ticket issue	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Breakdown	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	SOS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Contact support	سپورٹ سے رابطہ	Needs native review
3	Home	ہوم	Needs native review
3	My Trips	میرے سفر	Needs native review
3	Trip Records	سفر کے ریکارڈ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Row: Trip help	≥48 dp	Enabled	Navigate to **D-064** Driver FAQ	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Row: Passenger / ticket issue	≥48 dp	Enabled	Navigate to **D-065** Ticket / passenger issue	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Row: Breakdown	≥48 dp	Enabled	Navigate to **D-056** Breakdown report	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Row: SOS	≥48 dp	Enabled	Navigate to **D-050** Driver SOS	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
2	Row: Contact support	≥48 dp	Enabled	Navigate to **D-060** Support form	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Tab: help topics for drivers.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_help_content (read)
Inputs	category, locale
Server checks / RLS	published content; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Bundled offline copy of core help
Cache	Versioned bundle

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-046, D-050, D-056, D-060, D-063, D-064, D-065, D-067 · Incoming: D-001, D-002, D-003, D-012, D-013, D-014, D-015, D-016, D-017, D-027, D-035, D-046, D-048, D-049, D-067, D-070


Open decisions: None specific (see Part 16).

D-064 CONFIRMED P2 v2.0

Driver FAQ

ڈرائیور سوالات

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.faq`

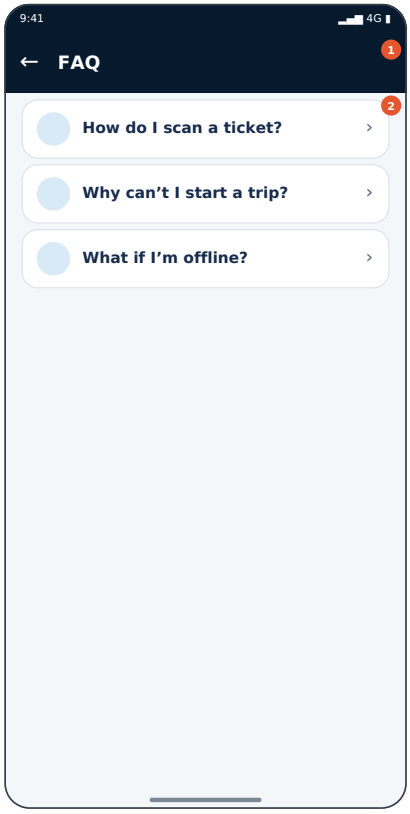

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Driver FAQ.

Login: **Per flow** · Incoming screens: D-063


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns to previous step. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	FAQ	Deep navy #071A2D, white 16sp bold	Per state	FAQ	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	How do I scan a ticket?; Why can’t I start a trip?; What if I’m offline?	White rows radius 14dp, 52dp high, chevron/check	Per state	How do I scan a ticket?	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	FAQ	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	How do I scan a ticket?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Why can’t I start a trip?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	What if I’m offline?	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Row tap navigates once; navigation debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Driver FAQ.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.
E12 No configured service for selection	Banner or full screen **P-032** No services for route	No service found — There is no available service for this choice. Try another date or city.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_help_content (read)
Inputs	category, locale
Server checks / RLS	published content; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11, E12
Retry / idempotency	Safe read
Offline	Bundled offline copy of core help
Cache	Versioned bundle

14. Security, privacy & safety

Owner-only data via RLS; minimal personal data on lists. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Row ≥ 48 dp; each row reads as one TalkBack item with price/time/status in order. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Pull-to-refresh works and shows timestamp
2. Empty and error states are distinct
3. Scroll position retained on Back
4. Urdu RTL row mirroring correct, numbers legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-063


Open decisions: None specific (see Part 16).

D-065 CONFIRMED P1 v2.0

Ticket / passenger issue

ٹکٹ / مسافر مسئلہ

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.pax_issue`

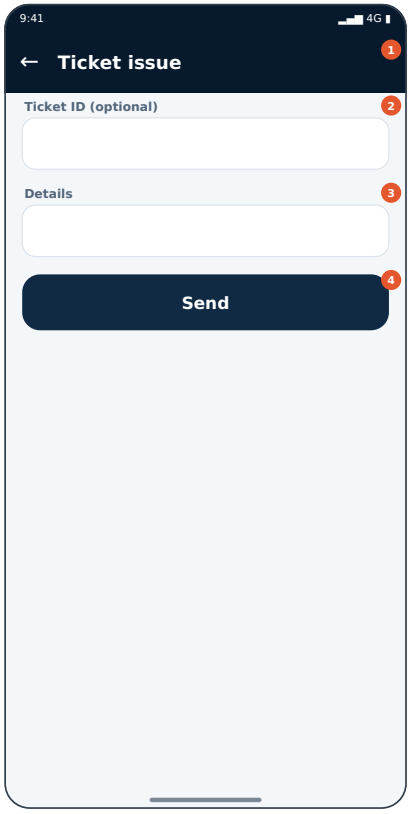

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Report ticket issue.

Login: **As per flow** · Incoming screens: D-063


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Send (Button) → **D-066** Trip disruption status

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Text field	158–236 dp	Full width, 16 dp margins	above fold
4	Button	236–298 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Ticket issue	Deep navy #071A2D, white 16sp bold	Per state	Ticket issue	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Ticket ID (optional): “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Ticket ID (optional): “”	Yes	Always in this state
3	C03 Text field	158–236 dp	328×78 dp	Details: “”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Details: “”	Yes	Always in this state
4	C04 Button	236–298 dp	328×62 dp	Send بھیجیں	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Send, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Ticket issue	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Ticket ID (optional)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Details	تفصیلات	Needs native review
4	Send	بھیجیں	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
4	Button:	≥48 dp	Enabled	Navigate to **D-066** Trip	Inline spinner; other	Server-confirmed	E01, E04 copy; no	Submit disabled while request in flight; one

	Send			disruption status	controls locked	result only	false success	idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.
3	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Ticket ID (optional)	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default
Details	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Report ticket issue.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	submit_support_request (write)
Inputs	category, text, optional booking id, attachments (if supported)
Server checks / RLS	auth, size/type limits, abuse limits; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Draft kept locally; send blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-066 · Incoming: D-063


Open decisions: None specific (see Part 16).

D-066 CONFIRMED P1 v2.0

Trip disruption status

سفر میں خلل کی حالت

Role: **Driver** · Family: F11 Driver safety, breakdown & help · Key: `d.disrupt`

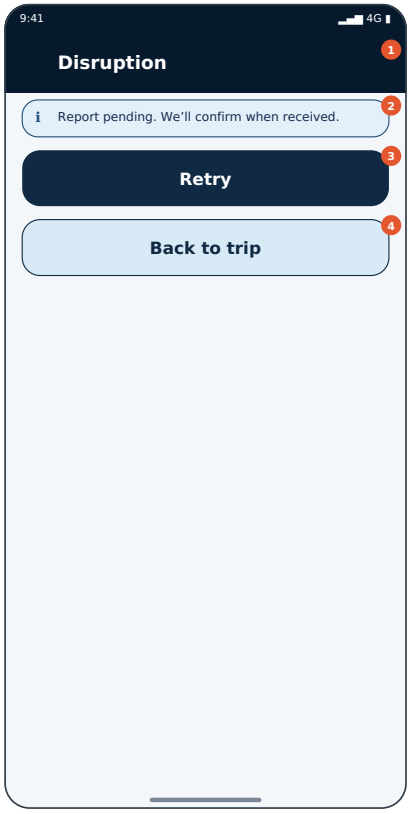

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Report sent/pending status (never "delivered" without server).

Login: **Per flow** · Incoming screens: D-039, D-058, D-060, D-061, D-065


3. Exit & navigation map

- Retry (Button) → stays on screen (action)
- Back to trip (Button) → **D-037** Active trip

Android system Back: Back goes to safe screen (never re-submits). **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Banner	80–125 dp	Full width, 16 dp margins	above fold
3	Button	125–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Disruption	Deep navy #071A2D, white 16sp bold	Per state	Disruption	Yes	Always in this state
2	C02 Banner	80–125 dp	328×45 dp	Report pending. We'll confirm when received.	Tinted background + border + icon + text (never colour alone)	—	Report pending. We'll confirm when recei	No	Always in this state
3	C03 Button	125–187 dp	328×62 dp	Retry دوبارہ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Retry, button	Yes	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Back to trip سفر پر واپس	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Back to trip, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Disruption	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Report pending. We'll confirm when received.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Retry	دوبارہ	Needs native review
4	Back to trip	سفر پر واپس	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Retry	≥48 dp	Enabled	Runs the on-screen action (see	Inline spinner; other	Server-confirmed	E04, E01 copy; no	Status check button debounced;

				§13); stays here	controls locked	result only	false success	no write retries.
4	Button: Back to trip	≥48 dp	Enabled	Navigate to **D-037** Active trip	Inline spinner; other controls locked	Server-confirmed result only	E04, E01 copy; no false success	Status check button debounced; no write retries.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Report sent/pending status (never “delivered” without server).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn’t confirm the status — Your connection dropped. We don’t know yet whether this went through. Check status before trying again.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	report_delay (write)
Inputs	trip id, reason, idempotency key
Server checks / RLS	assignment, trip active; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E04, E01
Retry / idempotency	Required key
Offline	Draft kept; send blocked
Cache	None

14. Security, privacy & safety

Statuses are server-authoritative; no optimistic success. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Status conveyed by icon + heading + text; announced politely on appearance. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Never shows success without server confirmation
2. Back never resubmits a write
3. App kill/relaunch restores correct status
4. Urdu RTL copy matches catalogue
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-037 · Incoming: D-039, D-058, D-060, D-061, D-065


Open decisions: None specific (see Part 16).

D-067 CONFIRMED P0 v2.0

Driver Settings

ڈرائیور ترتیبات

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.settings`

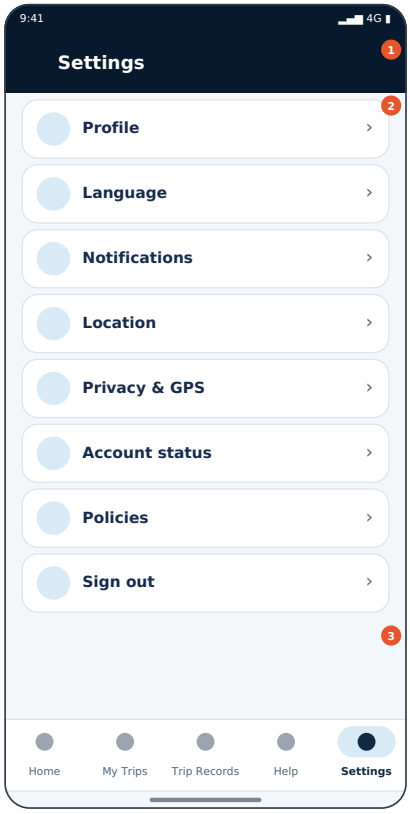

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Tab: profile, language, notifications, location, privacy, policies, sign out.

Login: **Yes** · Incoming screens: D-001, D-013, D-014, D-015, D-016, D-017, D-046, D-048, D-049, D-063, D-070


3. Exit & navigation map

- Profile (Row) → **D-010** Driver profile details
- Language (Row) → **D-069** Driver language
- Notifications (Row) → **D-070** Driver notifications
- Location (Row) → **D-071** Location permission
- Privacy & GPS (Row) → **D-072** Privacy & GPS explanation
- Account status (Row) → **D-075** Account status
- Policies (Row) → **D-073** Policies
- Sign out (Row) → **SH-035** Sign-out confirmation
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–554 dp	Full width, 16 dp margins	above fold
3	Bottom navigation	554–554 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Settings	Deep navy #071A2D, white 16sp bold	Per state	Settings	Yes	Always in this state
2	C02 List rows	80–554 dp	328×474 dp	Profile; Language; Notifications; Location; Privacy & GPS; Account status; Policies; Sign out	White rows radius 14dp, 52dp high, chevron/check	Per state	Profile	Yes	Always in this state
3	C03 Bottom navigation	554–554 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Settings	ترتیبات	Needs native review
2	Profile	پروفائل	Needs native review
2	Language	زبان	Needs native review
2	Notifications	اطلاعات	Needs native review
2	Location	لوکیشن	Needs native review
2	Privacy & GPS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Account status	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Policies	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Sign out		Needs native review

2	Sign out	سائن آؤٹ	Needs native review
3	Home	ہوم	Needs native review
3	My Trips	میرے سفر	Needs native review
3	Trip Records	سفر کے ریکارڈ	Needs native review
3	Help	مدد	Needs native review
3	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
2	Row: Profile	≥48 dp	Enabled	Navigate to **D-010** Driver profile details	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Language	≥48 dp	Enabled	Navigate to **D-069** Driver language	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Notifications	≥48 dp	Enabled	Navigate to **D-070** Driver notifications	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Location	≥48 dp	Enabled	Navigate to **D-071** Location permission	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Privacy & GPS	≥48 dp	Enabled	Navigate to **D-072** Privacy & GPS explanation	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Account status	≥48 dp	Enabled	Navigate to **D-075** Account status	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Policies	≥48 dp	Enabled	Navigate to **D-073** Policies	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Row: Sign out	≥48 dp	Enabled	Navigate to **SH-035** Sign-out confirmation	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
3	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E01, E04 copy; no false success	Save disabled while pending.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Tab: profile, language, notifications, location, privacy, policies, sign out.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E08, E27
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-010, D-013, D-016, D-046, D-063, D-067, D-069, D-070, D-071, D-072, D-073, D-075, SH-035 · Incoming: D-001, D-013, D-014, D-015, D-016, D-017, D-046, D-048, D-049, D-063, D-070


Open decisions: None specific (see Part 16).

D-068 CONFIRMED P1 v2.0

Edit details

تفصیلات میں ترمیم

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.edit`

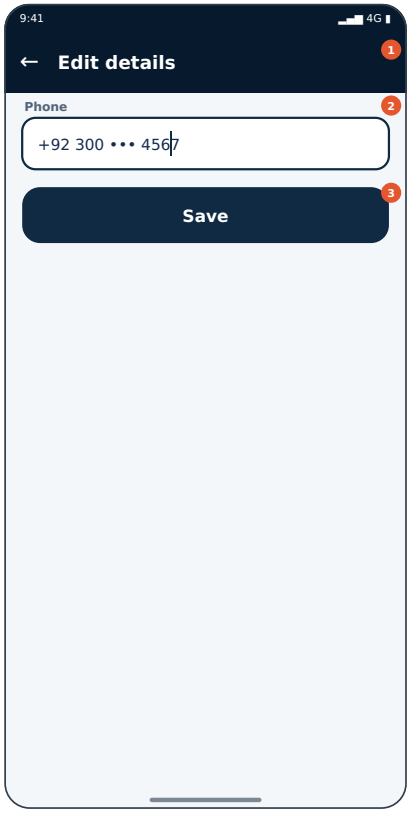

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Edit permitted driver details.

Login: **As per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Save (Button) → **D-010** Driver profile details

Android system Back: Back asks to discard if edited; otherwise returns. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Text field	80–158 dp	Full width, 16 dp margins	above fold
3	Button	158–220 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Edit details	Deep navy #071A2D, white 16sp bold	Per state	Edit details	Yes	Always in this state
2	C02 Text field	80–158 dp	328×78 dp	Phone: “+92 300 ••• 4567”	White field radius 12dp, 1dp border; focus 2dp navy; error 2dp red + icon + text	Per state	Phone: “+92 300 ••• 4567”	Yes	Always in this state
3	C03 Button	158–220 dp	328×62 dp	Save محفوظ	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Save, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Edit details	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Phone	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Save	محفوظ	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
3	Button: Save	≥48 dp	Enabled	Navigate to **D-010** Driver profile details	Inline spinner; other controls locked	Server-confirmed result only	E01, E04 copy; no false success	Submit disabled while request in flight; one idempotency key per attempt.
2	Text field	≥48 dp	Enabled	Edits value; validates on blur/submit	—	Local state	Inline error + icon + text	Submit disabled while request in flight; one idempotency key per attempt.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Field	Type	Required	Rule	Timing	Keyboard
Phone	text/tel	Required unless noted	Rules NEEDS CONFIRMATION where not stated	On blur + submit	Default

Inline error under field (icon + text) and summary banner; focus moves to first error; submit blocked while invalid; server validation errors map to fields (E27).

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Edit permitted driver details.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E05 Write timeout with unknown outcome	Banner or full screen **ERR-004** Connection lost during booking write	Still waiting for a response — We couldn't confirm the status yet. Check status before trying again.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E24 Rate limit (HTTP 429)	Banner or full screen **ERR-005** Rate limited	Too many attempts — Please wait a moment before trying again.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	update_driver_profile_request (write)
Inputs	profile/vehicle fields
Server checks / RLS	auth, change-request rules (NEEDS CONFIRMATION); owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E05, E27, E08, E24
Retry / idempotency	Required key
Offline	Blocked
Cache	None

14. Security, privacy & safety

Validate client-side for UX and server-side for authority; never log field values; mask sensitive values. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Each field has visible label (not placeholder-only); error text + icon; focus moves to first error; numeric keyboard where applicable. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Empty submit shows field errors and focuses first error
2. Keyboard never hides focused field or primary button
3. Rotate/background keeps entered values
4. Urdu RTL: input alignment and caret correct, digits/phone legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-010 · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-069 CONFIRMED P1 v2.0

Driver language

زبان

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.lang`

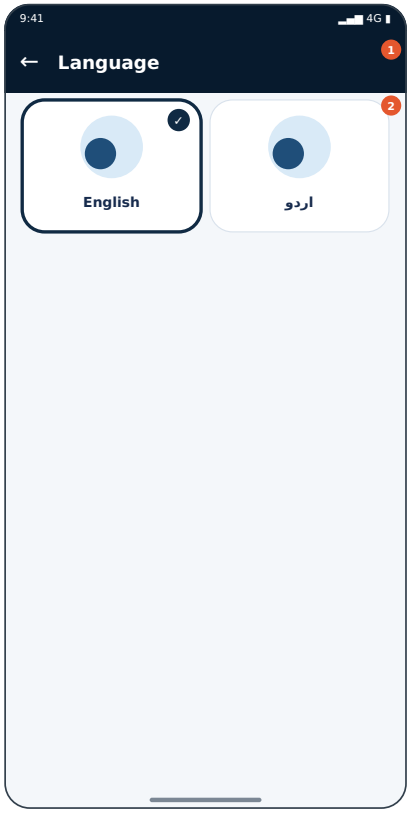

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

English/Urdu.

Login: **Yes** · Incoming screens: D-067

3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Illustrated tile grid	80–220 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Language	Deep navy #071A2D, white 16sp bold	Per state	Language	Yes	Always in this state
2	C02 Illustrated tile grid	80–220 dp	328×140 dp	English; اردو	White tiles radius 20dp, 3D illustration + label 13sp bold; selected = 3dp navy border + check	Per state	English	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Language	زبان	Needs native review
2	English	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	اردو	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Save disabled while pending.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	English/Urdu.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	update_preferences (write)
Inputs	language, notification toggles
Server checks / RLS	auth; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E08, E27
Retry / idempotency	Idempotent
Offline	Saved locally then synced when online (PROPOSED)
Cache	Local + server

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-067


Open decisions: None specific (see Part 16).

D-070 CONFIRMED P1 v2.0

Driver notifications

اطلاعات

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.notif`

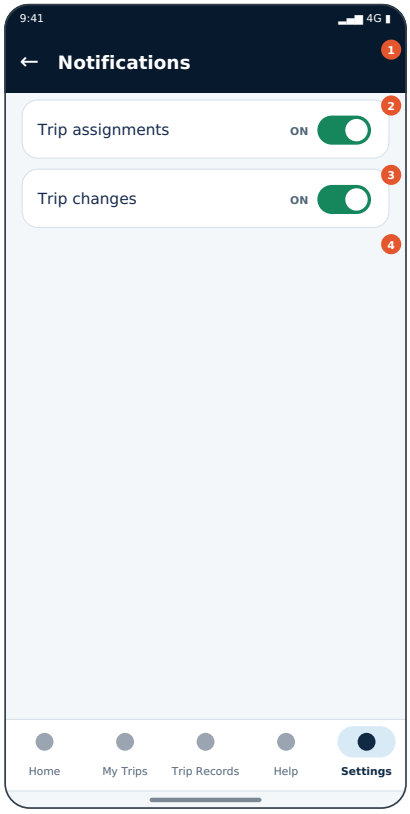

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Trip assignment and update notifications.

Login: **Yes** · Incoming screens: D-067


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Home (Nav tab) → **D-013** Driver Home — default
- My Trips (Nav tab) → **D-016** Driver My Trips
- Trip Records (Nav tab) → **D-046** Trip Records
- Help (Nav tab) → **D-063** Driver Help hub
- Settings (Nav tab) → **D-067** Driver Settings

Android system Back: Back to Settings / previous. **Bottom nav:** Settings tab active. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Switch row	80–142 dp	Full width, 16 dp margins	above fold
3	Switch row	142–204 dp	Full width, 16 dp margins	above fold
4	Bottom navigation	204–204 dp	Edge to edge	above fold · sticky

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Notifications	Deep navy #071A2D, white 16sp bold	Per state	Notifications	Yes	Always in this state
2	C02 Switch row	80–142 dp	328×62 dp	Trip assignments	52dp row, switch with ON/OFF text	Per state	Trip assignments	Yes	Always in this state
3	C03 Switch row	142–204 dp	328×62 dp	Trip changes	52dp row, switch with ON/OFF text	Per state	Trip changes	Yes	Always in this state
4	C04 Bottom navigation	204–204 dp	360×0 dp	Home; My Trips; Trip Records; Help; Settings	64dp white bar, 5 tabs, active = light-blue pill + bold label	Per state	Home	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Notifications	اطلاعات	Needs native review
2	Trip assignments	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Trip changes	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Home	ہوم	Needs native review
4	My Trips	میرے سفر	Needs native review
4	Trip Records	سفر کے ریکارڈ	Needs native review
4	Help	مدد	Needs native review
4	Settings	ترتیبات	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
4	Nav tab: Home	≥48 dp	Enabled	Navigate to **D-013** Driver Home — default	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
4	Nav tab: My Trips	≥48 dp	Enabled	Navigate to **D-016** Driver My Trips	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
4	Nav tab: Trip Records	≥48 dp	Enabled	Navigate to **D-046** Trip Records	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
4	Nav tab: Help	≥48 dp	Enabled	Navigate to **D-063** Driver Help hub	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
4	Nav tab: Settings	≥48 dp	Enabled	Navigate to **D-067** Driver Settings	Instant	—	E01, E04 copy; no false success	Save disabled while pending.
2	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	Save disabled while pending.
3	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	Save disabled while pending.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Trip assignment and update notifications.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E04 Connection lost during a booking/payment/SOS write	Banner or full screen **ERR-004** Connection lost during booking write	We couldn't confirm the status — Your connection dropped. We don't know yet whether this went through. Check status before trying again.
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.
E27 Server/field validation failure	Banner or full screen **ERR-013** Backend validation summary	Please check the highlighted fields — Fix the items marked below to continue.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	update_preferences (write)
Inputs	language, notification toggles
Server checks / RLS	auth; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E04, E08, E27
Retry / idempotency	Idempotent
Offline	Saved locally then synced when online (PROPOSED)
Cache	Local + server

14. Security, privacy & safety

Sensitive changes may require re-authentication; no secrets shown. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Switches with labels and states in text; rows ≥ 56 dp. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Change persists after relaunch
2. Failure rolls back switch and explains
3. Language change applies immediately with RTL
4. TalkBack announces switch state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: D-013, D-016, D-046, D-063, D-067 · Incoming: D-067


Open decisions: None specific (see Part 16).

D-071 CONFIRMED P0 v2.0

Location permission

لوکیشن کی اجازت

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.perm_loc`

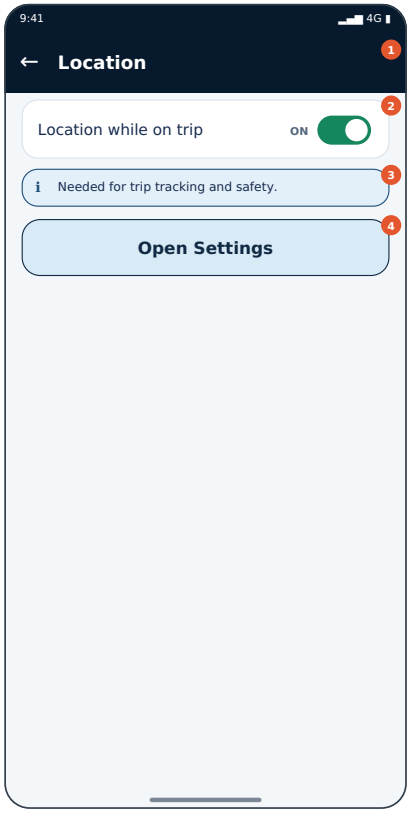

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Location needed for trip tracking; states and Settings path.

Login: **Per flow** · Incoming screens: D-067


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Open Settings (Button) → Android system settings

Android system Back: Back skips (feature stays off) unless blocking. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Switch row	80–142 dp	Full width, 16 dp margins	above fold
3	Banner	142–187 dp	Full width, 16 dp margins	above fold
4	Button	187–249 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Location	Deep navy #071A2D, white 16sp bold	Per state	Location	Yes	Always in this state
2	C02 Switch row	80–142 dp	328×62 dp	Location while on trip	52dp row, switch with ON/OFF text	Per state	Location while on trip	Yes	Always in this state
3	C03 Banner	142–187 dp	328×45 dp	Needed for trip tracking and safety.	Tinted background + border + icon + text (never colour alone)	—	Needed for trip tracking and safety.	No	Always in this state
4	C04 Button	187–249 dp	328×62 dp	Open Settings سیٹنگز	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Open Settings, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Location	لوکیشن	Needs native review
2	Location while on trip	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Needed for trip tracking and safety.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
4	Open Settings	سیٹنگز	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.
4	Button: Open Settings	≥48 dp	Enabled	Open Android Settings for this app; on return re-check state	Instant	—	E09, E10 copy; no false success	Allow button opens OS prompt once.

2	Switch row	≥48 dp	Enabled	Toggles setting; persists via §13	—	Local state	Inline error + icon + text	Allow button opens OS prompt once.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Location needed for trip tracking; states and Settings path.
E09 OS permission denied (can ask again)	Banner or full screen **SH-010** Location blocked — open Settings	Permission needed — Allow access to use this feature, or continue another way.
E10 OS permission permanently denied	Banner or full screen **ERR-007** Return from OS Settings	Permission is turned off — Open Android Settings to turn it on.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E09, E10
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Explain why permission is needed; request only when needed; no hidden collection. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Plain explanation + icon; clear Allow / Not now. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. OS prompt shown only after user taps Allow
2. Deny → manual alternative shown
3. Permanent deny → Settings path
4. Return from Settings re-checks state
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-067


Open decisions: None specific (see Part 16).

D-072 CONFIRMED P0 v2.0

Privacy & GPS explanation

رازداری اور جی پی ایس

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.privacy_gps`

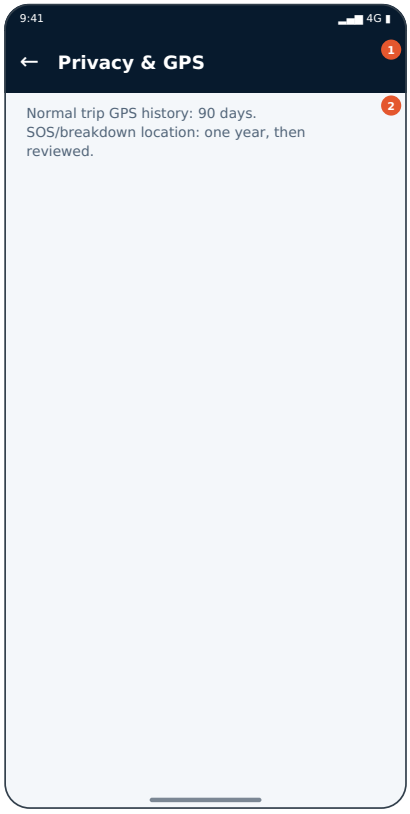

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Explain GPS use and retention.

Login: **Per flow** · Incoming screens: D-067


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Body text	80–147 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Privacy & GPS	Deep navy #071A2D, white 16sp bold	Per state	Privacy & GPS	Yes	Always in this state
2	C02 Body text	80–147 dp	328×67 dp	Normal trip GPS history: 90 days. SOS/breakdown location: one year, then reviewed.	12–14sp secondary text	—	Normal trip GPS history: 90 days. SOS/br	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Privacy & GPS	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Normal trip GPS history: 90 days. SOS/breakdown location: one year, then reviewed.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Explain GPS use and retention.
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	No backend call (local UI state)
Inputs	—
Server checks / RLS	—; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	n/a
Offline	Fully functional
Cache	n/a

14. Security, privacy & safety

Static/published policy text; version shown. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-067


Open decisions: None specific (see Part 16).

D-073 CONFIRMED P2 v2.0

Policies

پالیسیاں

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.policies`

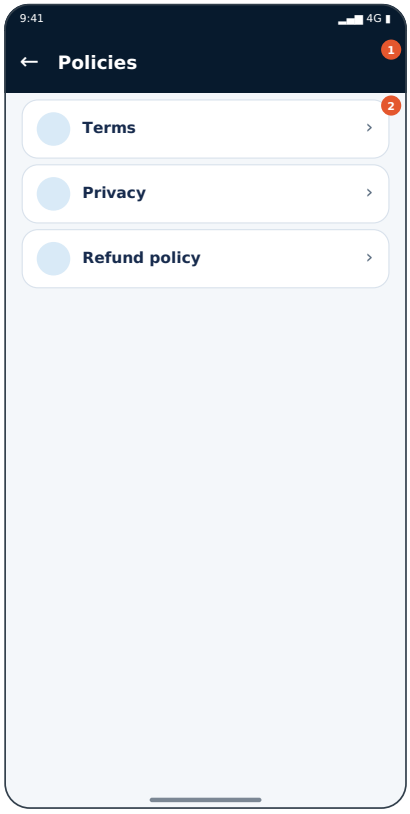

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Terms, privacy, refund policy for drivers.

Login: **Per flow** · Incoming screens: D-067


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)
- Terms (Row) → **P-162** Terms of use
- Privacy (Row) → **P-161** Privacy policy
- Refund policy (Row) → **P-163** Cancellation & refund policy

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–264 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Policies	Deep navy #071A2D, white 16sp bold	Per state	Policies	Yes	Always in this state
2	C02 List rows	80–264 dp	328×184 dp	Terms; Privacy; Refund policy	White rows radius 14dp, 52dp high, chevron/check	Per state	Terms	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Policies	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Terms	شرائط	Needs native review
2	Privacy	رازداری	Needs native review
2	Refund policy	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a
2	Row: Terms	≥48 dp	Enabled	Navigate to **P-162** Terms of use	Instant	—	E01, E03 copy; no false success	n/a
2	Row: Privacy	≥48 dp	Enabled	Navigate to **P-161** Privacy policy	Instant	—	E01, E03 copy; no false success	n/a
2	Row: Refund policy	≥48 dp	Enabled	Navigate to **P-163** Cancellation & refund policy	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Terms, privacy, refund policy for drivers.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_policy_text (read)
Inputs	policy id, locale
Server checks / RLS	published version; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	Safe read
Offline	Bundled copy
Cache	Versioned

14. Security, privacy & safety

Static/published policy text; version shown. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: P-161, P-162, P-163 · Incoming: D-067


Open decisions: None specific (see Part 16).

D-074 CONFIRMED P2 v2.0

App version

ایپ ورژن

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.about`

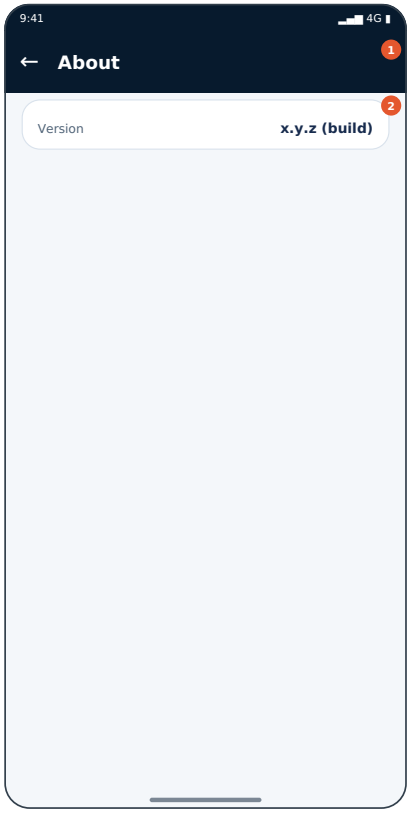

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Version info.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–136 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	About	Deep navy #071A2D, white 16sp bold	Per state	About	Yes	Always in this state
2	C02 Key-value card	80–136 dp	328×56 dp	Version: x.y.z (build)	White card, 30dp rows, label grey / value bold	—	Version: x.y.z (build)	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	About	ایپ کے بارے میں	Needs native review
2	Version: x.y.z (build)	ورژن	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	n/a

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Version	x.y.z (build)	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)

This screen	As mocked above	Version info.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_app_config (read)
Inputs	app version, locale
Server checks / RLS	min version, maintenance flag, configured payment methods, feature flags; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06
Retry / idempotency	Safe read
Offline	Use last config; never assume payment methods
Cache	Short TTL (PROPOSED)

14. Security, privacy & safety

Static/published policy text; version shown. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Readable line length; headings; scalable text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Text readable at 200%
2. Offline copy available
3. Urdu text RTL and complete
4. Policy content respects confirmed rules
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-075 CONFIRMED P1 v2.0

Account status

اکاؤنٹ کی حالت

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.acct`

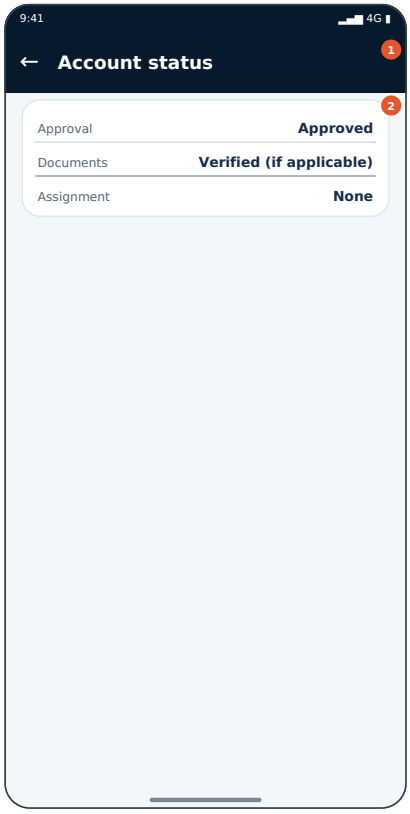

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Account/approval/document status.

Login: **Per flow** · Incoming screens: D-067


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–196 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Account status	Deep navy #071A2D, white 16sp bold	Per state	Account status	Yes	Always in this state
2	C02 Key-value card	80–196 dp	328×116 dp	Approval: Approved; Documents: Verified (if applicable); Assignment: None	White card, 30dp rows, label grey / value bold	—	Approval: Approved	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Account status	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Approval: Approved	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Documents: Verified (if applicable)	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Assignment: None	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Approval	Approved	Server-derived	Required	Show “Not available” if missing; never blank/invented
Documents	Verified (if applicable)	Server-derived	Required	Show “Not available” if missing; never blank/invented
Assignment	None	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Account/approval/document status.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit "not available"
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: D-067


Open decisions: None specific (see Part 16).

D-076 CONFIRMED P2 v2.0

Approval status detail

منظوری کی تفصیل

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.appr`

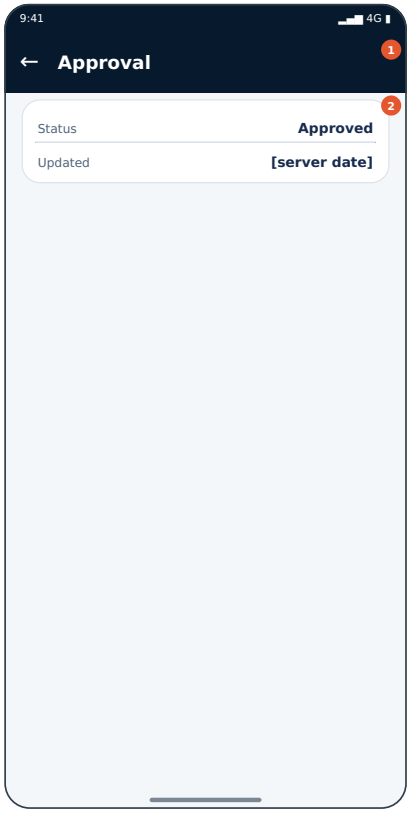

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Detailed approval history (server).

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	Key-value card	80–166 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Approval	Deep navy #071A2D, white 16sp bold	Per state	Approval	Yes	Always in this state
2	C02 Key-value card	80–166 dp	328×86 dp	Status: Approved; Updated: [server date]	White card, 30dp rows, label grey / value bold	—	Status: Approved	No	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Approval	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	Status: Approved	حالت	Needs native review
2	Updated: [server date]	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Status	Approved	Server-derived	Required	Show “Not available” if missing; never blank/invented
Updated	[server date]	Server-derived	Required	Show “Not available” if missing; never blank/invented

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are “[server fare]” placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Detailed approval history (server).
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_driver_status (read)
Inputs	auth user
Server checks / RLS	approval state, suspension, assignment — server authoritative; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Safe read
Offline	Last known with age; actions disabled
Cache	Short TTL

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit "not available"
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: None specific (see Part 16).

D-077 PROPOSED NEEDS CONFIRMATION P2 v2.0

Document status

دستاویزات کی حالت

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.docstat`

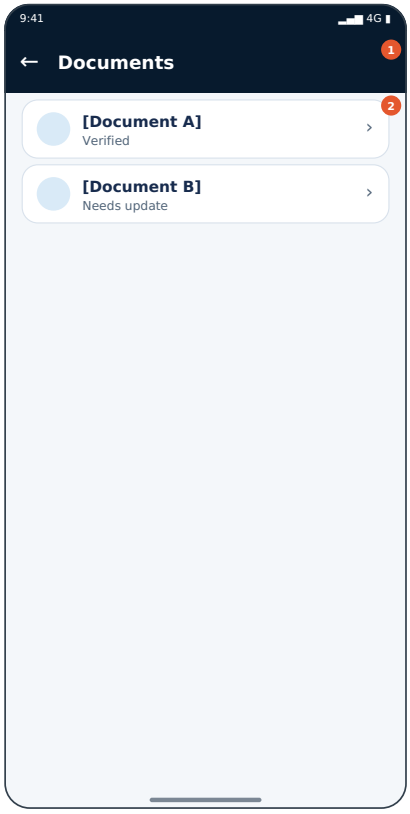

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Document verification status if applicable.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Back (Back arrow) → previous screen (system Back)

Android system Back: Back returns to list/previous. **Bottom nav:** Per flow. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Top app bar	24–80 dp	Edge to edge	above fold · sticky
2	List rows	80–206 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Top app bar	24–80 dp	360×56 dp	Documents	Deep navy #071A2D, white 16sp bold	Per state	Documents	Yes	Always in this state
2	C02 List rows	80–206 dp	328×126 dp	[Document A]|Verified; [Document B]|Needs update	White rows radius 14dp, 52dp high, chevron/check	Per state	[Document A]|Verified	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
1	Documents	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	[Document A]|Verified	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
2	[Document B]|Needs update	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
1	Back arrow: Back	≥48 dp	Enabled	Pop to previous screen (same as system Back)	Instant	—	E01, E03 copy; no false success	Action buttons debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Document verification status if applicable.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E01 No internet before an action	Banner or full screen **ERR-002** No internet before action	No internet connection — Check your Wi-Fi or mobile data. Nothing was sent.
E03 Connection drops during a read	Banner or full screen **ERR-003** Connection lost during read	Connection lost — We couldn't finish loading. Showing saved information, which may be out of date.
E06 HTTP 5xx / function failure	Banner or full screen **SH-023** Server unavailable (5xx)	Something went wrong on our side — This is not your fault. Please try again in a moment.
E11 Cached data older than freshness limit	Banner or full screen **SH-024** Stale data warning	Showing saved information — Last updated [time]. Refresh to see the latest.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	upload_driver_document (write)
Inputs	file (type/size limits NEEDS CONFIRMATION)
Server checks / RLS	auth, malware/type checks, private storage; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E01, E03, E06, E11
Retry / idempotency	Resumable upload with key (PROPOSED)
Offline	Paused until online
Cache	None

14. Security, privacy & safety

Show only data the user may see; hide internal IDs not meant for users. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Headings in logical order; key facts first; status uses icon + text. Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. All fields show server values or explicit "not available"
2. Back returns to origin list
3. TalkBack order matches visual order
4. Urdu RTL: mixed route/ID/date direction legible
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: — · Incoming: Entry point / system-launched


Open decisions: OD-13 (see Part 16).

D-078 CONFIRMED P1 v2.0

Driver session expired

سیشن ختم

Role: **Driver** · Family: F12 Driver settings, profile & account · Key: `d.expired`

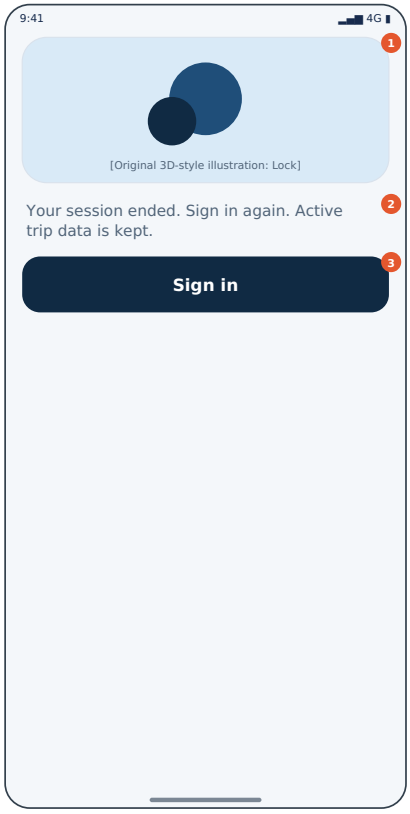

5. MOCKUP — SAMPLE DATA, illustrative only (360×720 dp). Orange numbers = component key (§7). Not real services or fares.

2. Purpose & entry conditions

Driver token expired mid-use; trip data preserved.

Login: **Per flow** · Incoming screens: Entry point / system-launched


3. Exit & navigation map

- Sign in (Button) → **AU-002** Sign in

Android system Back: Back goes to safe previous screen. **Bottom nav:** Hidden. Leaving mid-task: draft kept locally where safe; server holds/bookings are never silently lost (see §14).

4. Device canvas & layout

Android phone, portrait, reference 360×800 dp (test 320–393 dp). Status bar + gesture bar insets respected; top app bar 56 dp; scrollable content in 16 dp margins; sticky footer/bottom nav only where shown; keyboard resizes viewport and scrolls focused field into view; 320 dp: tiles drop to single column, text scale 200% wraps without clipping.



RTL (Urdu) mirroring preview — layout mirrors; QR, seat map, map and numerals/IDs are not mirrored. Urdu text per §8.

6. Vertical hierarchy & placement (top → bottom)

#	Element	Y range	Alignment / margins	Visibility
1	Illustration card	24–168 dp	Full width, 16 dp margins	above fold
2	Body text	168–220 dp	Full width, 16 dp margins	above fold
3	Button	220–282 dp	Full width, 16 dp margins	above fold

Spacing: 12 dp between cards, 16 dp horizontal margin; primary action reachable within thumb zone; scroll boundary below the last element; no essential action hidden below the fold.

7. Component inventory

#	Component	Location	Size	Content (EN / UR)	Style	Default	A11y label	Int.	Shown
1	C01 Illustration card	24–168 dp	328×144 dp	[Lock]	Light-blue #D9EAF7 card, radius 22dp, original 3D-style art	—	[Lock]	No	Always in this state
2	C02 Body text	168–220 dp	328×52 dp	Your session ended. Sign in again. Active trip data is kept.	12–14sp secondary text	—	Your session ended. Sign in again. Activ	No	Always in this state
3	C03 Button	220–282 dp	328×62 dp	Sign in سائن اِن	Radius 16dp; primary navy fill/white text 15sp bold; secondary light-blue; danger red; disabled grey	Per state	Sign in, button	Yes	Always in this state

8. Exact text & localisation

#	English (exact)	Urdu	Review
2	Your session ended. Sign in again. Active trip data is kept.	Urdu: translation required (see unresolved register)	Missing — unresolved OD-18
3	Sign in	سائن اِن	Needs native review

Accessibility labels follow the visible text (EN/UR). Error/status copy not listed here is taken verbatim from the Global Error Catalogue (Part 11).

9. Interaction contract

#	Control	Target	Enabled	Tap result	Loading	Success	Failure	Dup-tap / retry
3	Button: Sign in	≥48 dp	Enabled	Navigate to **AU-002** Sign in	Instant	—	E08 copy; no false success	Retry debounced.

Rapid double tap: second tap ignored. Long wait: slow-network state (E02) with cancel for reads; writes use status check (E04/E05). Back: per §3. App background: state re-read from server on resume. Process death: restore draft, revalidate (SH-recover). Network loss: reads show saved data; writes never retried blindly.

10. Data contract

Data	Sample value	Source of truth	Req.	Missing / freshness
Data is static UI copy or derived from the action in §13.				

Source of truth: server (Supabase/PostgreSQL provisional). Cached data is always labelled with its age; fares/availability from cache are never used to book. All fares are "[server fare]" placeholders.

11. Validation

Not applicable — this screen has no user-entered fields.

12. State matrix

State	Visual	Exact user-facing copy (EN; UR in Part 11)
This screen	As mocked above	Driver token expired mid-use; trip data preserved.
Loading	Skeleton / spinner (see SH-030)	Reads: skeleton; writes: inline spinner
E08 Auth token expired / revoked	Banner or full screen **SH-019** Session expired	Please sign in again — For your safety your session has ended. Your progress is saved where possible.

13. Network & Supabase behaviour

PROPOSED logical operation — not a deployed endpoint, table, RPC or Edge Function. No keys or secrets in the app.

Operation	get_session / refresh_session (read)
Inputs	refresh token (secure storage)
Server checks / RLS	token validity, account status; owner/role authorization enforced server-side (deny by default)
Loading → success → failure	Spinner/skeleton → proceed only on server-confirmed result → map to E08
Retry / idempotency	Safe read
Offline	Shows signed-in shell with stale warning only if allowed
Cache	Token in secure storage only

14. Security, privacy & safety

Safe, non-technical copy; do not reveal server internals. Driver actions require server-verified approval and assignment. Server-authoritative status; safe error messages; accidental-action protection per §9; audit-sensitive actions logged server-side (PROPOSED). GPS: normal trip history 90 days; SOS/breakdown location one year then review.

15. Accessibility & low-literacy design

Heading + body + clear actions; icon + text (not colour alone). Touch targets ≥ 48 dp; contrast ≥ 4.5:1 (navy on white/light); text scales to 200%; TalkBack reads components in numeric order of §7; every icon paired with a label; status never by colour alone; optional spoken guidance where available; Urdu RTL: layout mirrors, numerals/IDs/QR/routes stay legible and unmirrored.

16. Analytics / logging (PROPOSED — needs approval)

Optional event `screen_view` with screen ID only. Never log OTPs, secrets, payment details, personal fields, or precise location.

17. QA acceptance checks

1. Copy matches catalogue EN/UR
2. Retry safety matches rule
3. No stuck spinner
4. Back lands on defined screen
5. Android Back follows §3 on every state
6. Urdu RTL: mirrored layout, no clipped text, IDs/dates legible
7. Airplane mode mid-action: honest state per §12, no false success

18. Related screens & open questions

Outgoing: AU-002 · Incoming: Entry point / system-launched

Open decisions: None specific (see Part 16).

Part 11 — Shared overlays & global state catalogue

Pattern	Screen	Placement / rule
Confirmation dialog	**SH-027** Confirmation dialog pattern	Centered, scrim 50%, safe action focused
Destructive confirmation	**SH-028** Destructive-action confirmation	Red confirm; keep option equal prominence
Bottom sheet	**SH-029** Bottom-sheet pattern	Handle, scrim 45%, Back dismisses
Skeleton/loading	**SH-030** Loading / skeleton pattern	Skeleton for lists, spinner for short blocking actions
Empty state	**SH-031** Empty-state pattern	Illustration + title + reason + one action
No results	**SH-032** No-results pattern	Offer reset/change
Inline error	**SH-033** Inline-error pattern	Under field + summary banner
Snackbar/toast/banner	**SH-034** Snackbar / toast / banner catalogue	Bottom above nav, 4 s, never for critical outcomes

Global exact-copy error catalogue (EN / UR)

Network state must never imply a server-side action succeeded. For unknown outcomes the copy is: “We couldn’t confirm the status yet. Check status before trying again.” Never tell users to pay or book twice.

ID	Trigger	Screens	English (title / body / actions)	Urdu (title / body / actions)	Primary / secondary	Retry safe?	Recovery screen	Backend/network cause	QA test
E01	No internet before an action	SH-001, SH-002, SH-003, SH-004, SH-005, SH-021, AU-001, AU-002, AU-003, AU-005, AU-008, AU-010 … (+179)	**No internet connection** Check your Wi-Fi or mobile data. Nothing was sent. *Try again* | *Go back*	**انٹرنیٹ دستیاب نہیں** اپنا وائی فائی یا موبائل ڈیٹا چیک کریں۔ کچھ بھی بھیجا نہیں گیا۔ دوبارہ کوشش کریں | واپس جائیں	Try again / Go back	Yes (nothing was sent)	**ERR-002** No internet before action	Device has no connectivity (OS network callback / failed request before send)	Enable airplane mode, tap primary action: message shows, no request queued, no success shown
E02	Request slower than 8 s (threshold PROPOSED)	SH-022, P-018, P-030, P-046, D-007, ERR-001	**Slow connection** This is taking longer than usual. You can keep waiting or cancel. *Keep waiting* | *Cancel*	**سست کنکشن** معمول سے زیادہ وقت لگ رہا ہے۔ انتظار کر سکتے ہیں یا منسوخ کر سکتے ہیں۔ انتظار کریں | منسوخ کریں	Keep waiting / Cancel	Reads: yes. Writes: only via status check	**ERR-001** Slow network with cancel	High latency / packet loss	Throttle network to 2G: loader persists, Cancel visible, Back cancels read only
E03	Connection drops during a read	SH-003, SH-004, SH-005, SH-018, AU-017, P-001, P-002, P-003, P-004, P-005, P-007, P-008 … (+90)	**Connection lost** We couldn’t finish loading. Showing saved information, which may be out of date. *Retry* | *Use saved info*	**کنکشن ٹوٹ گیا** لوڈنگ مکمل نہیں ہو سکی۔ محفوظ شدہ معلومات دکھائی جا رہی ہیں جو پرانی ہو سکتی ہیں۔ دوبارہ کوشش | محفوظ معلومات	Retry / Use saved info	Yes (idempotent read)	**ERR-003** Connection lost during read	Socket reset / DNS failure mid-read	Kill connection mid-load: stale banner with timestamp, no spinner stuck
E04	Connection lost during a booking/payment/SOS write	AU-003, AU-005, AU-008, AU-010, AU-011, AU-012, AU-014, AU-016, P-029, P-057, P-059, P-060 … (+72)	**We couldn’t confirm the status** Your connection dropped. We don’t know yet whether this went through. Check status before trying again. *Check status* | *Later*	**ہم حالت کی تصدیق نہیں کر سکے** آپ کا کنکشن ٹوٹ گیا۔ ہمیں ابھی معلوم نہیں کہ بکنگ مکمل ہوا یا نہیں۔ دوبارہ کوشش سے پہلے حالت چیک کریں۔ بعد میں حالت چیک کریں | بعد میں	Check status / Later	NO blind retry; status check or same idempotency key only	**ERR-004** Connection lost during booking write	Response lost after request left device	Drop network after tap: UI shows neutral copy, never success or “try again to pay”
E05	Write timeout with unknown outcome	AU-003, AU-008, AU-011, AU-012, AU-014, AU-016, P-029, P-057, P-059, P-060, P-061, P-063 … (+47)	**Still waiting for a response** We couldn’t confirm the status yet. Check status before trying again. *Check status* | *Close*	**جواب کا انتظار ہے** ہم ابھی حالت کی تصدیق نہیں کر سکے۔ دوبارہ کوشش سے پہلے حالت چیک کریں | بند کریں	Check status / Close	NO blind retry	**ERR-004** Connection lost during booking write	Server slow or response lost	Delay server response past timeout: neutral status copy, status check works
E06	HTTP 5xx / function failure	SH-002, SH-003, SH-004, SH-005, SH-018, SH-023, AU-001, AU-002, AU-011, AU-016, AU-017, P-001 … (+117)	**Something went wrong on our side** This is not your fault. Please try again in a moment. *Try again* | *Go back*	**ہماری طرف سے کوئی مسئلہ پیش آیا** یہ آپ کی غلطی نہیں۔ براہ کرم کچھ دیر بعد دوبارہ کوشش کریں۔ دوبارہ کوشش کریں | واپس جائیں	Try again / Go back	Reads yes; writes only if idempotent	**SH-023** Server unavailable (5xx)	Backend error	Mock 500: friendly copy, no stack trace, no raw error code shown as the only text
E07	Maintenance flag from server config	SH-001, SH-002, SH-017, AU-001	**Service is being updated** Vashسفر is under maintenance. Please try again later. *Check again* | *Close*	**سروس اپڈیٹ ہو رہی ہے** وشسفر عارضی طور پر بحالی میں ہے۔ براہ کرم تھوڑی دیر میں دوبارہ کوشش کریں۔ دوبارہ چیک کریں | بند کریں	Check again / Close	Yes (config read)	**SH-017** Maintenance notice	Server-side maintenance flag	Enable flag: blocking screen, no booking/payment actions reachable
E08	Auth token expired / revoked	SH-019, AU-003, AU-008, AU-012, AU-014, P-057, P-059, P-105, P-124, P-136, P-145, P-149 … (+21)	**Please sign in again** For your safety your session has ended. Your progress is saved where possible. *Sign in* | *Not now*	**دوبارہ سائن اِن کریں** آپ کی حفاظت کے لیے سیشن ختم ہو گیا ہے۔ جہاں ممکن ہو آپ کی پیش رفت محفوظ ہے۔ سائن اِن | ابھی نہیں	Sign in / Not now	Yes after sign-in	**SH-019** Session expired	401 / refresh failure	Expire token mid-form: draft retained, action not replayed without re-check
E09	OS permission denied (can ask again)	SH-006, SH-007, SH-008, SH-009, SH-010, SH-011, SH-012, SH-013, SH-014, P-011, P-012, P-125 … (+13)	**Permission needed** Allow access to use this feature, or continue another way. *Allow* | *Not now*	**اجازت درکار ہے** اس فیچر کے لیے اجازت دیں، یا کسی اور طریقے سے جاری رکھیں۔ اجازت دیں | ابھی نہیں	Allow / Not now	Yes	**SH-010** Location blocked — open Settings	User denied OS prompt	Deny once: manual alternative shown, no crash
E10	OS permission permanently denied	SH-006, SH-007, SH-008, SH-009, SH-010, SH-011, SH-012, SH-013, SH-014, P-011, P-012, P-125 … (+14)	**Permission is turned off** Open Android Settings to turn it on. *Open Settings* | *Not now*	**اجازت بند ہے** اسے آن کرنے کے لیے اینڈرائیڈ سیٹنگز کھولیں۔ سیٹنگز کھولیں | ابھی نہیں	Open Settings / Not now	Yes after change	**ERR-007** Return from OS Settings	“Don’t ask again” / policy block	Deny twice: Settings deep link opens; return re-checks state
E11	Cached data older than	SH-003, SH-004, SH-	**Showing saved**	محفوظ شدہ معلومات دکھائی جا رہی ہیں	Refresh /	Yes	**SH-024**	Offline or failed	Go offline: banner

	freshness limit	024, P-001, P-002, P-003, P-004, P-006, P-007, P-008, P-009, P-014 ... (+64)	**information** Last updated [time]. Refresh to see the latest. *Refresh | Dismiss*	...ی ریفریش کریں۔ آخری اپڈیٹ [وقت]۔ ریفریش | بند کریں	Dismiss	Stale data warning	refresh	with timestamp, availability/fare marked unconfirmed
E12	No configured service for selection	SH-003, SH-004, P-007, P-008, P-009, P-014, P-015, P-016, P-017, P-019, P-020, P-021 ... (+39)	**No service found** There is no available service for this choice. Try another date or city. *Change date | Change city*	**کوئی سروس نہیں ملی** اس انتخاب کے لیے کوئی سروس دستیاب نہیں۔ کوئی اور تاریخ یا شہر آزمائیں۔ تاریخ بدلیں | شہر بدلیں	Change date / Change city	Yes	**P-032** No services for route	No configured journey for selection	Empty result set: no invented routes, actions lead to valid screens
E13	Seat taken by another user	P-043, P-047, P-048, P-049, P-050, P-051, P-054, P-055, P-056, P-064, ERR-010	**Seat no longer available** Someone else took this seat. Please choose another. *Choose another seat | Back*	**سیٹ اب دستیاب نہیں** یہ سیٹ کسی اور نے ابھی بک کر لی۔ دوسری سیٹ منتخب کریں۔ دوسری سیٹ منتخب کریں | واپس	Choose another seat / Back	Yes (new hold request)	**ERR-010** Conflicting seat reservation	Hold request rejected: seat conflict	Two sessions pick same seat: loser sees this, map refreshes, no charge
E14	10-minute hold expired (server time)	P-047, P-048, P-049, P-050, P-052, P-053, P-054, P-055, P-056, P-060, P-061, P-068 ... (+3)	**Your seat hold has ended** Seats are held for 10 minutes. Please select seats again. *Select seats again | Cancel*	**آپ کی سیٹ کا وقت ختم ہو گیا** سیٹیں 10 منٹ کے لیے روکی جاتی ہیں۔ براہ کرم دوبارہ سیٹ منتخب کریں۔ دوبارہ سیٹ منتخب کریں | منسوخ	Select seats again / Cancel	Yes (new hold)	**P-053** Hold expired	Server hold expiry	Let timer end / background app: on return server state shown, not local clock
E15	Fare differs from earlier display	P-060, P-061, P-062, P-068, P-107, P-108	**The fare has changed** The ticket rate is now PKR [server fare]. Review before continuing. *Continue | Go back*	**کرایہ تبدیل ہو گیا ہے** ٹکٹ کا کرایہ اب PKR [server fare] ہے۔ آگے بڑھنے سے پہلے دیکھ لیں۔ جاری رکھیں | واپس جائیں	Continue / Go back	Yes after acknowledge	**P-062** Fare changed — acknowledge	Server quote differs	Change fare server-side: explicit acknowledge required, no silent charge
E16	Payment status not yet known	AU-011, AU-016, P-029, P-060, P-061, P-067, P-068, P-071, P-072, P-075, P076, P-080 ... (+24)	**Payment is being checked** We haven't received confirmation yet. Do not pay again. We'll update you here. *Check status | Close*	**ادائیگی کی جانچ ہو رہی ہے** ابھی تصدیق نہیں ملی۔ دوبارہ ادائیگی نہ کریں۔ ہم آپ کو یہیں اطلاع دیں گے۔ حالت چیک کریں | بند کریں	Check status / Close	Status check only — never second payment	**P-072** Payment pending	Provider/webhook not reconciled in time	Unknown payment: no Pay Again button, no confirmed ticket
E17	Second tap while request in flight	SH-027, SH-028, SH-029, SH-030, SH-031, SH-032, SH-034, SH-035, AU-018, P-060, P-061, P-063 ... (+13)	**Already in progress** Please wait — we're still processing your request. *(none)*	**کارروائی جاری ہے** آپ کی درخواست پر کام جاری ہے — براہ کرم انتظار کریں۔ (کوئی نہیں)	(none) / —	n/a (blocked)	**ERR-008** Duplicate taps blocked	Double tap / repeated submit	Tap 5× fast: one request, one idempotency key
E18	QR invalid, expired, or wrong trip	D-023, D-024, D-025, D-026, ERR-012	**Ticket not valid** This ticket could not be verified for this trip. *Check details | Close*	**ٹکٹ درست نہیں** ٹکٹ تصدیق نہیں ہو سکا۔ اس سفر کے لیے ٹکٹ نہیں۔ تفصیلات دیکھیں | بند کریں	Check details / Close	Yes (rescan)	**D-024** Scan — invalid ticket	Server QR verification failed	Scan tampered/other-trip QR: clear invalid state, no boarding recorded
E19	Driver account not approved	D-001, D-002, D-012, D-031, D-035, ERR-021	**Your driver account is not approved yet** You can start trips after approval. *View status | Contact support*	**ڈرائیور اکاؤنٹ ابھی منظور نہیں ہوا** منظوری کے بعد ہی سفر شروع کر سکیں گے۔ حالت دیکھیں | سپورٹ سے رابطہ	View status / Contact support	Yes after approval	**D-002** Approval pending	Server approval state	Unapproved driver: Start Trip absent/disabled with reason
E20	No trip assigned to driver	D-014, D-017, D-031, D-035, ERR-020	**No trip assigned** You'll see your trip here once one is assigned to you. *Refresh | Help*	**کوئی سفر تفویض نہیں** سفر تفویض ہوتے ہی وہ یہاں نظر آئے گا۔ ریفریش | مدد	Refresh / Help	Yes	**D-013** Driver Home — default	No assignment on server	Unassigned driver: no trip actions enabled
E21	SOS delivery not confirmed by server	P-125, P-126, P-128, P-129, P-130, P-131, P-134, D-050, D-052, D-053, D-054, D-055 ... (+1)	**SOS not confirmed yet** We could not confirm that your alert was received. [configured emergency guidance] *Try again | Call [configured number]*	**SOS کی تصدیق نہیں ہوئی** آپ کا الرٹ موصول ہوا۔ [configured emergency guidance] | دوبارہ کوشش | [configured number] پر کال	Try again / Call [configured number]	Same idempotency key only	**P-130** SOS — delivery unconfirmed	No server acknowledgement	Offline SOS: never shows "delivered"
E22	GPS unavailable or stale	P-125, P-126, P-128, P-129, P-132, P-134, P-135, P-137, D-050, D-053, D-056, D-058	**Location unavailable** We can't get a GPS signal. Move to an open area or check location settings. *Retry | Settings*	**لوکیشن دستیاب نہیں** جی پی ایس سگنل نہیں مل رہا۔ کھلی جگہ پر جائیں یا لوکیشن سیٹنگز چیک کریں۔ دوبارہ کوشش | سیٹنگز	Retry / Settings	Yes	**P-137** GPS unavailable / stale	No fix / permission / provider off	Disable GPS: clear status, last-known time shown, no fake position
E23	Relaunch after interruption	SH-020, P-066, ERR-009	**Welcome back** We restored where you left off. Checking the latest status… *OK*	**خوش آمدید** ہم نے وہیں بحال کر دیا جہاں آپ رکے تھے۔ تازہ ترین حالت چیک ہو رہی ہے… ٹھیک ہے	OK / —	n/a	**SH-020** Session recovery after process death	Process death / app swiped away	Kill app on review screen: relaunch revalidates with server first
E24	Rate limit (HTTP 429)	AU-003, AU-005, AU-006, AU-008, AU-009, AU-012, AU-014, AU-019, P-057, P-059, P-105, P-124 ... (+14)	**Too many attempts** Please wait a moment before trying again. *OK*	**بہت زیادہ کوششیں** براہ کرم تھوڑا انتظار کریں۔ ٹھیک ہے	OK / —	Yes after wait	**ERR-005** Rate limited	Server throttling	429: countdown shown, button disabled until wait ends
E25	Unexpected/malformed response	ERR-015	**We couldn't read the response**	جواب پڑھا نہیں جا سکا	Try again / Go back	Reads yes; writes status	**ERR-015** Malformed	Schema mismatch / corrupt payload	Mock invalid JSON: no crash, no

			Something unexpected came back. Please try again. *Try again* | *Go back*	[illegible] براہ کرم دوبارہ کوشش کریں۔ دوبارہ کوشش کریں | واپس جائیں	[illegible] جواب آیا۔	first کوئی غیر متوقع response			partial success UI
E26	App version below minimum	SH-001, SH-002, SH-016, AU-001	**Please update the app** This version is no longer supported. *Update* | *Close*	**براہ کرم ایپ اپڈیٹ کریں** یہ ورژن اب سپورٹ نہیں کیا جاتا۔ اپڈیٹ | بند کریں	Update / Close	n/a	**SH-016** Required app update	Server minimum-version rule	Set min version above current: blocking screen
E27	Server/field validation failure	SH-033, AU-003, AU-004, AU-005, AU-007, AU-008, AU-012, AU-013, AU-014, AU-019, P-057, P-058 … (+29)	**Please check the highlighted fields** Fix the items marked below to continue. *OK*	**نمایاں فیلڈز چیک کریں** نیچے نشان زد حصے درست کریں۔ ٹھیک ہے	OK / —	Yes after fixing جاری رکھنے کے لیے	**ERR-013** Backend validation summary	Client or server validation	Submit invalid data: field errors at fields + summary, focus to first error
E28	Generic recoverable failure	SH-015, SH-025, SH-026, SH-027, SH-028, SH-029, SH-030, SH-031, SH-032, SH-034, SH-035, AU-015 … (+11)	**Something went wrong** Please try again. *Try again* | *Go back*	**کچھ غلط ہو گیا** براہ کرم دوبارہ کوشش کریں۔ دوبارہ کوشش کریں | واپس جائیں	Try again / Go back	Reads yes; writes status first	**SH-025** Generic recoverable failure	Unclassified error	Unknown exception: friendly screen + retry/back
E29	Cancellation rejected (state changed)	P-109, P-112, P-113	**Cancellation not possible** This booking's status changed. Please review the latest details. *View booking* | *Contact support*	**منسوخی ممکن نہیں** بکنگ کی حالت بدل گئی۔ تازہ ترین تفصیلات دیکھیں۔ بکنگ دیکھیں | سپورٹ سے رابطہ	View booking / Contact support	Yes after refresh	**P-112** Cancellation rejected (state changed)	Server rejects state transition	Boarded/cancelled booking: rejection, no refund claim shown
E30	Booking/ticket not yet confirmed	AU-011, AU-016, P-029, P-067, P-071, P-077, P-078, P-079, P-084, P-085, P-087, P-092 … (+23)	**Booking not confirmed yet** We'll show your ticket as soon as the server confirms it. *Check status* | *Close*	**ابھی تصدیق نہیں ہوئی** ٹکٹ دکھایا جائے گا۔ حالت چیک کریں | بند کریں	Check status / Close	Status check سرور سے تصدیق ہونے پر	**P-079** Pending confirmation	Booking pending server confirmation	Pending booking: no QR, status chip "Pending", never "Confirmed"

Part 12 — English / Urdu string catalogue

Unique visible strings across all screens: **754**; with Urdu supplied: **223**; missing Urdu (unresolved OD-18): **531**. All Urdu requires native review before release. Error/status copy: Part 11.

English	Urdu	Screens
08:00 → arrival time not available · PKR [server fare]	— missing (OD-18)	P-041
08:00 → ~15:30 · PKR [server fare] · 3 seats	— missing (OD-18)	P-031, P-034, P-035, P-036, P-045
08:00 → ~15:30 · Sold out	— missing (OD-18)	P-042
20:00 → ~06:00 · PKR [server fare] · 12 seats	— missing (OD-18)	P-031
A new version is available with improvements.	— missing (OD-18)	SH-015
A replacement driver is confirmed	— missing (OD-18)	P-119
ALREADY BOARDED	— missing (OD-18)	D-026
About	ایپ کے بارے میں	D-074, P-150, P-164
About fare & timing	— missing (OD-18)	P-040
Accept & continue	قبول کریں	P-062
Accessibility	— missing (OD-18)	P-165
Accident	— missing (OD-18)	D-057
Account status	— missing (OD-18)	D-067, D-075
Active trip	— missing (OD-18)	D-037
After 8 h: 75% refund, 25% retained	— missing (OD-18)	P-163
Allow camera	اجازت دیں	SH-013
Allow location	لوکیشن کی اجازت دیں	SH-008
Allow microphone	اجازت دیں	SH-011
Allow notifications	اجازت دیں	SH-006
Allow notifications to get ticket and trip updates.	— missing (OD-18)	SH-006
Alphabetical list…	— missing (OD-18)	P-020
Alternative: tap “Confirm SOS” for TalkBack/switch users.	— missing (OD-18)	P-126
Announcements	— missing (OD-18)	P-007
Apply	لاگو کریں	P-157
Apply Urdu	اردو لاگو کریں	P-158
Approval	— missing (OD-18)	D-076
Approval pending	— missing (OD-18)	D-002
Approval status	— missing (OD-18)	D-002, D-003
Are you sure?	— missing (OD-18)	SH-027
Arrival (sample)|~15:30	— missing (OD-18)	D-019
Assigned trip	— missing (OD-18)	D-015
Assigned trips appear here.	— missing (OD-18)	D-017
Ayesha K. · Quetta → City (sample)	— missing (OD-18)	D-023
Back	واپس	AU-009, AU-010, AU-014, D-028, D-035, D-036 …
Back to Home	ہوم پر واپس	P-019, P-080
Back to results	نتائج پر واپس	P-053
Back to review	جائزہ پر واپس	P-061
Back to trip	سفر پر واپس	D-066
Background	— missing (OD-18)	D-032, D-041, D-051, P-090
Background content	— missing (OD-18)	AU-018, SH-027, SH-028, SH-029, SH-035
Balochistan	بلوچستان	P-017
Battery settings may stop trip tracking.	— missing (OD-18)	ERR-019
Boarded	— missing (OD-18)	D-029
Boarding	— missing (OD-18)	D-030
Boarding point	— missing (OD-18)	P-039
Boarding point details	— missing (OD-18)	P-038
Boarding recorded	— missing (OD-18)	D-029
Boarding status	سواری کی حالت	D-029
Book a Journey	سفر بُک کریں	P-001, P-002, P-003, P-004, P-005, P-006 …
Book a journey to get your QR ticket.	— missing (OD-18)	P-082
Book a journey to see it here.	— missing (OD-18)	P-097
Book seats, get your QR ticket, travel with confidence.	— missing (OD-18)	SH-002
Book your first journey in a few taps	— missing (OD-18)	P-002
Booked ✖ · Held by another passenger ⏱ (temporary) · Available · Selected ✓	— missing (OD-18)	P-049
Booking	بکنگ	ERR-002, ERR-004, ERR-008, P-063, P-064, P-065 …

Booking cancelled	— missing (OD-18)	P-111
Booking confirmed	— missing (OD-18)	P-078
Booking confirmed|Tap to view ticket	— missing (OD-18)	P-008
Booking help	بکنگ	P-139
Booking pending	— missing (OD-18)	P-067
Booking, payment and SOS need a connection.	— missing (OD-18)	SH-021
Breakdown	— missing (OD-18)	D-037, D-056, D-063
Buses	بسیں	P-024, P-025
Call [configured number]	کال	D-054, D-055, D-062, P-130, P-131, P-133 …
Call [configured support number]	کال	D-059, P-143
Call support	— missing (OD-18)	D-059
Camera is off	— missing (OD-18)	SH-014
Camera is used only to scan ticket QR codes. Photos are not saved.	— missing (OD-18)	SH-013
Camera|Not needed	— missing (OD-18)	P-160
Cancel	منسوخ کریں	AU-018, D-023, D-032, D-041, D-050, D-051 …
Cancel booking	بکنگ منسوخ	P-100, P-106, P-107, P-108, P-109, P-112 …
Cancel this booking?	— missing (OD-18)	P-109, SH-028
Cancel upload	اپلوڈ منسوخ	D-007
Cancellation not possible	— missing (OD-18)	P-112
Cancelled	منسوخ	P-094, P-095, P-096, P-097, P-098, P-099 …
Cancelled trip	— missing (OD-18)	P-102
Cancelled within 8 hours of confirmation: full refund.	— missing (OD-18)	P-107
Cancelling…	— missing (OD-18)	P-110
Can’t sign in?	— missing (OD-18)	AU-014
Cars	کاریں	P-024, P-025
Catalogue	— missing (OD-18)	SH-034
Change	تبدیل کریں	P-014
Change city	شہر بدلیں	P-032
Change date	تاریخ بدلیں	P-033
Change search	تلاش بدلیں	SH-032
Change vehicle	گاڑی بدلیں	P-032
Check	چیک کریں	D-021
Check again	دوبارہ چیک کریں	SH-017
Check details	— missing (OD-18)	ERR-013
Check spelling or clear search.	— missing (OD-18)	P-022
Check status	حالت چیک	ERR-004, ERR-011, P-067, P-072, P-074, P-075 …
Check your connection. If you already received a code, you can enter it.	— missing (OD-18)	AU-010
Check your time	— missing (OD-18)	ERR-017
Checking if you can start…	— missing (OD-18)	D-031
Checking your booking	— missing (OD-18)	P-066
Choose an app to share with. Only share with people you trust.	— missing (OD-18)	P-091
Choose another city	دوسرا شہر	P-023
Choose another seat	دوسری سیٹ منتخب کریں	P-051, P-064
Choose another seat. You were not charged.	— missing (OD-18)	ERR-010
Choose city	— missing (OD-18)	P-020, P-021, P-022, P-023
Choose file	فائل منتخب	D-006
Choose manually	— missing (OD-18)	P-016
Choose method	طریقہ منتخب کریں	P-074
Choose reason	وجہ منتخب کریں	D-056
Choose region	علاقہ منتخب کریں	P-016, P-017, P-018, P-019
Choose seat	سیٹ منتخب	ERR-010
Choose vehicle	— missing (OD-18)	P-024, P-025
City A (sample)	— missing (OD-18)	P-015
City B (sample)	— missing (OD-18)	P-015, P-020
Clear filters	فلٹر صاف کریں	SH-032
Clear search	تلاش صاف کریں	P-022

Close	بند کریں	D-053, ERR-004, P-067, P-072, P-075, P-079 ...
Close app	ایپ بند کریں	SH-017
Code expired	— missing (OD-18)	AU-008
Comfort bus (sample)	— missing (OD-18)	P-031
Complete booking soon or your seats will be released.	— missing (OD-18)	P-052
Completed	مکمل	P-094, P-095, P-096, P-097, P-098, P-099
Completed trips appear here.	— missing (OD-18)	D-048
Completed trips will appear here.	— missing (OD-18)	P-098
Confirm	تصدیق	AU-019, SH-027
Confirm it’s you	— missing (OD-18)	AU-019
Connect to the internet to load your ticket.	— missing (OD-18)	P-089
Connection lost. Showing saved information.	— missing (OD-18)	ERR-003
Connection problem	— missing (OD-18)	AU-010
Contact support	سپورٹ سے رابطہ	AU-014, AU-015, D-002, D-003, D-012, D-027 ...
Continue	جاری رکھیں	AU-011, AU-012, AU-013, AU-017, D-057, P-047 ...
Continue to details	تفصیلات پر جائیں	P-050
Continue with phone	فون سے جاری رکھیں	AU-002
Continue without location	بغیر لوکیشن جاری رکھیں	SH-009
Copy details	کاپی	P-091
Couldn’t load journeys	— missing (OD-18)	P-044
Couldn’t load records	— missing (OD-18)	D-049
Couldn’t reach us	— missing (OD-18)	AU-010
Couldn’t save. Try again.	— missing (OD-18)	SH-034
Couldn’t save. Your changes are kept.	— missing (OD-18)	P-156
Couldn’t send your message	— missing (OD-18)	P-148
Delete account	اکاؤنٹ حذف کریں	AU-017, AU-018
Delete your account?	— missing (OD-18)	AU-018
Deleting removes your profile. Some records may be kept as required by law and policy.	— missing (OD-18)	AU-017
Describe the problem	— missing (OD-18)	P-105
Details	تفصیلات	D-065, P-145
Details (optional)	— missing (OD-18)	D-039
Dimmed	— missing (OD-18)	AU-018
Dimmed by scrim	— missing (OD-18)	SH-027, SH-028, SH-029, SH-035
Discard draft	ڈرافٹ ختم	ERR-006
Disruption	— missing (OD-18)	D-066
Do not board as confirmed. Check with support.	— missing (OD-18)	D-027
Documents	— missing (OD-18)	D-006, D-008, D-077
Done	مکمل	D-009, D-045, P-077, P-111, P-115, P-147
Drive safely.	— missing (OD-18)	D-034
Driver	ڈرائیور	AU-001
Driver SOS	— missing (OD-18)	D-050, D-051
Driver cancels: replacement at company cost, else full refund.	— missing (OD-18)	P-163
Driver or vehicle	— missing (OD-18)	P-144
Driver profile	— missing (OD-18)	D-004
Driver seat is not sold.	— missing (OD-18)	P-055
Drivers need an approved account.	— missing (OD-18)	AU-001
Earliest departure	— missing (OD-18)	P-034, SH-029
Edit	ترمیم	P-148
Edit details	ترمیم	D-068, P-059, P-060
Edit profile	پروفائل میں ترمیم	P-151, P-152, P-153, P-154, P-156
Emergency	ہنگامی	P-139
Emergency SOS	— missing (OD-18)	P-125, P-126
Emergency call	— missing (OD-18)	P-134
Emergency guidance	— missing (OD-18)	D-062
En route	— missing (OD-18)	D-037
End this trip?	— missing (OD-18)	D-041
End trip	سفر ختم	D-037, D-040, D-041, D-044
Ending…	— missing (OD-18)	D-042

Engine / mechanical	— missing (OD-18)	D-057
English	English	D-069, P-157, SH-003
Enlarge QR	بڑا کریں	P-084
Enter code	— missing (OD-18)	AU-005, AU-006, AU-007
Enter ticket ID	ٹکٹ آئی ڈی	D-022
Enter ticket ID instead	ٹکٹ آئی ڈی درج کریں	SH-013
Enter your mobile number. We will send a code.	— missing (OD-18)	AU-002
Exactly 8 h counts as 75%	— missing (OD-18)	P-163
Example form	— missing (OD-18)	SH-033
Example list	— missing (OD-18)	SH-031
Example screen	— missing (OD-18)	SH-027, SH-028, SH-029
Explain consequence in one plain sentence.	— missing (OD-18)	SH-027
Extend once	ایک بار بڑھائیں	P-054
FAQ	— missing (OD-18)	D-064, P-140
Fare	— missing (OD-18)	P-061
Fare & timing explained	— missing (OD-18)	P-038
Fare and seats are not confirmed	— missing (OD-18)	SH-024
Fix & continue	درست کریں	ERR-013
Flat tyre	— missing (OD-18)	D-057
For your safety your session has ended.	— missing (OD-18)	SH-019
For your safety, enter the code we send to your phone.	— missing (OD-18)	AU-019
Full name	پورا نام	AU-012, AU-013, D-004, P-052, P-057, P-058 …
Full text loaded from published policy (legal review NEEDS CONFIRMATION).	— missing (OD-18)	P-161
Get directions	راستہ دیکھیں	P-039, P-104
Get started	شروع کریں	SH-002
Gilgit-Baltistan / AJK	گلگت بلتستان / آزاد کشمیر	P-017
Go back	واپس جائیں	P-044, SH-018, SH-023, SH-025
Go to My Trips	میرے سفر	P-078
Go to SOS	SOS پر جائیں	P-125, P-149
Go to active trip	فعال سفر	D-034
Got it	سمجھ گیا	P-040
Help	مدد	D-035, D-063, P-001, P-009, P-065, P-139
Hold ending	— missing (OD-18)	P-054
Holiday timing|5 days ago	— missing (OD-18)	P-007
Hours: [configured hours]	— missing (OD-18)	P-143
How do I book a seat?	— missing (OD-18)	P-140
How do I scan a ticket?	— missing (OD-18)	D-064
How do refunds work?	— missing (OD-18)	P-140
How long are seats held?	— missing (OD-18)	P-140, P-141
How to use voice	— missing (OD-18)	P-010
I already have an account	میرا اکاؤنٹ ہے	SH-002
If SOS isn’t confirmed	— missing (OD-18)	P-133
If we can’t find one, you’ll get a full refund.	— missing (OD-18)	P-118
If you can’t receive codes, contact support to verify your identity.	— missing (OD-18)	AU-014
If you don’t board for reasons within your control, no automatic refund applies. If the delay or wrong information was ours, contact support.	— missing (OD-18)	P-123
If you miss the trip	— missing (OD-18)	P-123
If you turned it on, we’ll continue automatically.	— missing (OD-18)	ERR-007
If you were charged, support will help.	— missing (OD-18)	P-080
In danger now? Use SOS.	— missing (OD-18)	P-149
In danger? Use SOS.	— missing (OD-18)	D-056
Is this right?	— missing (OD-18)	P-014
Islamabad Capital Territory	وفاقی دارالحکومت	P-017
It is already boarded, cancelled, or completed.	— missing (OD-18)	P-113
It may have changed or sold out.	— missing (OD-18)	P-043
Journey details	— missing (OD-18)	P-038
Journey help	سفر	P-139
Journeys	— missing (OD-18)	ERR-003, P-029, P-032, P-033, P-034, P-035 …
Karachi (sample)	کراچی	P-020, P-021

Karak (sample)	— missing (OD-18)	P-021
Keep English	انگریزی رکھیں	SH-004
Keep booking	بکنگ رکھیں	P-107, P-108, P-109, SH-028
Keep my account	اکاؤنٹ رکھیں	AU-017
Keep tracking on	— missing (OD-18)	ERR-019
Keep waiting	انتظار کریں	ERR-001
Khyber Pakhtunkhwa	خیبر پختونخوا	P-017
Language	زبان	D-067, D-069, P-150, P-157
Language / زبان	— missing (OD-18)	SH-003
Later	بعد میں	SH-015
Latest departure	— missing (OD-18)	SH-029
Let’s pick together.	— missing (OD-18)	P-016
List	فہرست	P-047, P-055
Listening…	— missing (OD-18)	P-011
Listening… say “Quetta to Karachi”.	— missing (OD-18)	P-011
Live trip	— missing (OD-18)	P-135, P-137
Loading	— missing (OD-18)	SH-030
Loading…	لوڈ ہو رہا ہے…	ERR-001, SH-022
Location	لوکیشن	D-058, D-067, D-071, SH-009, SH-010
Location is off	— missing (OD-18)	SH-009
Location is off or unavailable. SOS can still be sent without it.	— missing (OD-18)	P-132
Location is on. SOS/breakdown location kept one year, then reviewed.	— missing (OD-18)	D-058
Location is out of date (last seen 8 min ago).	— missing (OD-18)	P-137
Location permission is turned off for Vashسفر.	— missing (OD-18)	SH-010
Location sharing	— missing (OD-18)	P-136
Location: normal trip history kept 90 days; SOS/breakdown location kept one year, then reviewed.	— missing (OD-18)	P-161
Location|On	— missing (OD-18)	P-160
Look up manually	دستی تلاش	D-024
Look up ticket	ٹکٹ تلاش کریں	D-020, D-021, SH-014
Lowest rate	— missing (OD-18)	P-034, SH-029
Lowest rate ×	— missing (OD-18)	P-035
Luggage	— missing (OD-18)	P-161
Luggage guidance	— missing (OD-18)	P-140, P-142
Luggage limit	— missing (OD-18)	P-142
Manifest	مسافر فہرست	D-013, D-020, D-030
Map	نقشہ	P-047, P-055
Mark boarded	سوار ہوا	D-023
May be out of date	— missing (OD-18)	ERR-003
Message	— missing (OD-18)	D-060, P-148
Microphone is off	— missing (OD-18)	P-012, SH-012
Microphone|Off	— missing (OD-18)	P-160
Mobile (change needs verification)	— missing (OD-18)	P-152
Mobile number	موبائل نمبر	AU-003, AU-004, D-004, P-057, P-058, P-059
Mon 20	— missing (OD-18)	P-029, P-030, P-031
More than 8 hours since confirmation: 75% refund, 25% retained.	— missing (OD-18)	P-108
Morning only	— missing (OD-18)	P-034
Morning only ×	— missing (OD-18)	P-035
My Tickets	میرے ٹکٹ	P-001, P-081, P-082, P-083
My Trips	میرے سفر	D-016, D-017, ERR-016, P-003, P-004, P-094 …
My profile	— missing (OD-18)	D-010
NOT VALID	— missing (OD-18)	D-024
Name	نام	ERR-013
Navigation	— missing (OD-18)	D-038
Need help?	مدد چاہیے؟	AU-002, AU-009, P-114
Needed for trip tracking and safety.	— missing (OD-18)	D-071
Next stop: Stop 1 (sample) · ~10:30	— missing (OD-18)	D-037
Next: documents	اگلا: دستاویزات	D-005
Next: vehicle	اگلا: گاڑی	D-004

No bus service is configured for this route.	— missing (OD-18)	P-025
No cancelled trips	— missing (OD-18)	P-099
No completed trips yet	— missing (OD-18)	P-098
No emergency response promise is made by the app.	— missing (OD-18)	P-133
No internet connection	— missing (OD-18)	SH-021
No internet. Nothing was sent.	— missing (OD-18)	ERR-002
No internet. SOS has not been sent.	— missing (OD-18)	D-055, P-131
No internet. The trip has not started.	— missing (OD-18)	D-036
No invented amenities or times.	— missing (OD-18)	P-024
No journeys available yet	— missing (OD-18)	P-019
No journeys on this date	— missing (OD-18)	P-033
No journeys on this date. Try another date.	— missing (OD-18)	P-028
No matching city	— missing (OD-18)	P-022
No payment was made (checking with server).	— missing (OD-18)	P-074
No records yet	— missing (OD-18)	D-048
No results	— missing (OD-18)	SH-032
No services found	— missing (OD-18)	P-032
No tickets yet	— missing (OD-18)	P-082
No trip assigned	— missing (OD-18)	D-014, ERR-020
No trips yet	— missing (OD-18)	D-017, P-002
No upcoming journey	— missing (OD-18)	P-004
No upcoming journey. Book your next trip.	— missing (OD-18)	P-001
No upcoming trips	— missing (OD-18)	P-097
None of these	— missing (OD-18)	P-015
Normal trip GPS history: 90 days. SOS/breakdown location: one year, then reviewed.	— missing (OD-18)	D-072
Normal trip history is kept 90 days. SOS/breakdown location is kept one year, then reviewed.	— missing (OD-18)	P-136
Not confirmed yet.	— missing (OD-18)	D-052
Not confirmed yet. Don’t close the app.	— missing (OD-18)	P-128
Not ended until the server confirms.	— missing (OD-18)	D-042
Not now	ابھی نہیں	ERR-019, P-125, SH-006, SH-008, SH-010, SH-019
Not started until the server confirms.	— missing (OD-18)	D-033
Nothing here yet	— missing (OD-18)	SH-031
Nothing here.	— missing (OD-18)	P-099
Nothing was sent.	— missing (OD-18)	P-127
Notifications	اطلاعات	D-067, D-070, P-008, P-150, P-159, SH-007
Notifications are off	— missing (OD-18)	SH-007
Notifications|Off	— missing (OD-18)	P-160
OK	ٹھیک ہے	ERR-018, P-122
Offline. Saved 2 hours ago. Status may have changed.	— missing (OD-18)	P-088
Offline. Saved tickets may be out of date.	— missing (OD-18)	P-083
Offline. We can’t confirm if this ticket was already used.	— missing (OD-18)	D-028
Only end when safely stopped.	— missing (OD-18)	D-041
Only start when safely stopped.	— missing (OD-18)	D-032
Open Android Settings	سیٹنگز	P-160
Open Android Settings → Permissions → Location, then return here.	— missing (OD-18)	SH-010
Open Privacy Policy	پرائیویسی پالیسی	P-138
Open Settings	سیٹنگز کھولیں	D-071, P-012, SH-007, SH-010, SH-012, SH-014
Open date settings	سیٹنگز	ERR-017
Open in maps	نقشہ	D-019
Open maps	نقشہ کھولیں	D-038
Open settings	سیٹنگز	ERR-019
Open share sheet	شیئر شیٹ	P-091
Open trip	سفر کھولیں	D-013
Opens your maps app. Keep this app open for trip actions.	— missing (OD-18)	D-038
Other	دیگر	D-039, D-057
Other cities in region	— missing (OD-18)	P-023
Our team will help. Your refund is not lost.	— missing (OD-18)	P-116
PENDING — NOT CONFIRMED	— missing (OD-18)	D-027
PKR [server refund] returned.	— missing (OD-18)	P-115
Passenger	مسافر	AU-001

Passenger / ticket issue	— missing (OD-18)	D-063
Passenger details	— missing (OD-18)	P-052, P-057, P-058
Passenger manifest	— missing (OD-18)	D-018
Pay at counter	— missing (OD-18)	P-077
Pay now	ادائیگی کریں	P-060
Payment	ادائیگی	ERR-011, P-068, P-069, P-070, P-071, P-072 …
Payment cancelled	— missing (OD-18)	P-074
Payment didn’t go through	— missing (OD-18)	P-073
Payment is being checked. Do not pay again.	— missing (OD-18)	P-067
Payment is being checked. Do not pay again. We’ll update you here.	— missing (OD-18)	P-072
Payment isn’t available right now	— missing (OD-18)	P-069
Payment received	— missing (OD-18)	P-071
Payment status	— missing (OD-18)	P-076
Payments & refunds	ادائیگی	P-139
Pending	زیرِ التوا	P-079
Permission	— missing (OD-18)	ERR-007
Permissions	اجازتیں	P-150, P-160
Phone	— missing (OD-18)	D-068, SH-033
Phone number	— missing (OD-18)	AU-003, AU-004
Please check the highlighted fields.	— missing (OD-18)	AU-013, ERR-013, P-058, P-153, SH-033
Please check updated trip details.	— missing (OD-18)	P-119
Please don’t close the app.	— missing (OD-18)	P-063, P-110
Please enter a complete mobile number.	— missing (OD-18)	AU-004
Please read how we use your data, including location only with your permission.	— missing (OD-18)	SH-005
Please review your details or try a different trip.	— missing (OD-18)	P-065
Please search again.	— missing (OD-18)	P-037
Please try again later or contact support.	— missing (OD-18)	P-069
Please try again.	— missing (OD-18)	D-049, ERR-015, P-044, SH-025
Please wait	— missing (OD-18)	AU-009, ERR-005
Please wait.	— missing (OD-18)	ERR-008
Point at the passenger’s QR code.	— missing (OD-18)	D-022
Policies	— missing (OD-18)	D-067, D-073
Preferred language	— missing (OD-18)	AU-012
Premium car (sample)	— missing (OD-18)	P-031, P-034, P-035, P-036, P-041, P-042 …
Preparing your ticket…	— missing (OD-18)	P-071
Preview: Quetta to Karachi	— missing (OD-18)	P-165
Price shown is the ticket rate.	— missing (OD-18)	P-061
Primary action	بنیادی عمل	SH-031
Privacy	رازداری	D-073, P-164
Privacy & GPS	— missing (OD-18)	D-067, D-072
Privacy & policies	رازداری اور پالیسیاں	P-150
Privacy details	تفصیل	P-136
Privacy policy	— missing (OD-18)	P-161, SH-005
Profile	پروفائل	D-067, P-150, P-151, P-155
Profile saved.	— missing (OD-18)	P-155
Punjab	پنجاب	P-017
Quetta journeys, made simple	— missing (OD-18)	SH-001
Quetta to cities across Pakistan	— missing (OD-18)	P-001, P-005
Quetta — departure|08:00	— missing (OD-18)	D-019
Quetta → City (sample) · 08:00	— missing (OD-18)	D-013
Quetta → City (sample) · Sat 08:00 · 4 passengers	— missing (OD-18)	D-015
Quetta → City (sample)|Completed · Sat 11	— missing (OD-18)	D-046
Quetta → City (sample)|Sat 08:00 · Assigned	— missing (OD-18)	D-016
Quetta → City B (sample)|Completed · Sat 4	— missing (OD-18)	D-046
Quetta → City B (sample)|Mon 20 · Assigned	— missing (OD-18)	D-016
Quetta → City B (sample)|Mon 20 · Pending	— missing (OD-18)	P-094
Quetta → City B (sample)|Mon 20 · Seat 1 · Pending	— missing (OD-18)	P-081
Quetta → City C (sample)|Completed	— missing (OD-18)	P-093, P-095
Quetta → City D (sample)|Cancelled	— missing (OD-18)	P-093
Quetta → City D (sample)|Cancelled · Refund pending	— missing (OD-18)	P-096
Quetta → Karachi (sample)	— missing (OD-18)	P-030, P-031

Quetta → Karachi (sample) · Sat 18, 08:00 · Seat 3	— missing (OD-18)	P-078
Quetta → Karachi (sample)|Sat 18 · Confirmed	— missing (OD-18)	P-094
Quetta → Karachi (sample)|Sat 18 · Seat 3 · Confirmed	— missing (OD-18)	P-081
Quetta → Karachi (sample)|Saved 2 h ago · Confirmed	— missing (OD-18)	P-083
Quetta → Karachi · Sat 08:00 (saved)	— missing (OD-18)	P-006
Quetta → Karachi · Sat 08:00 · Seat 2 (SAMPLE)	— missing (OD-18)	P-003
Reason	— missing (OD-18)	D-057
Reference: SUP-… (SAMPLE)	— missing (OD-18)	P-147
Refresh	ریفریش	D-002, D-014, ERR-020, P-036, P-114, SH-024
Refresh QR	کیو آر ریفریش	ERR-012
Refresh journeys	سفر ریفریش	P-043
Refresh status	حالت ریفریش	AU-016, P-087
Refresh to see the latest.	— missing (OD-18)	SH-024
Refresh when online	آن لائن ہونے پر ریفریش	P-088
Refreshing…	— missing (OD-18)	SH-034
Refund	رقم واپسی	P-114, P-115, P-116
Refund PKR [server refund]	— missing (OD-18)	P-109
Refund PKR [server refund] is being processed.	— missing (OD-18)	P-111
Refund completed	— missing (OD-18)	P-115
Refund policy	پالیسی	D-073, P-107, P-108, P-123, P-163
Refund shown is calculated by the server.	— missing (OD-18)	SH-028
Refund status	رقم واپسی کی حالت	P-102, P-120
Refund update|Tap to view	— missing (OD-18)	P-008
Registration	— missing (OD-18)	D-005
Reminder	— missing (OD-18)	P-104
Report a problem	— missing (OD-18)	P-143, P-144
Report a safety concern	— missing (OD-18)	P-149
Report delay	تاخیر	D-013, D-037, D-039
Report incident	— missing (OD-18)	D-061
Report pending. We'll confirm when received.	— missing (OD-18)	D-066
Request change	— missing (OD-18)	D-011
Request edit	ترمیم کی درخواست	D-010
Reselect seats	دوبارہ منتخب کریں	P-054
Resend code	دوبارہ بھیجیں	AU-005, AU-007
Resend in 0:42	0:42 میں دوبارہ بھیجیں	AU-006
Reset filters	فلٹر ری سیٹ	P-035
Response depends on configured services. [configured emergency guidance]	— missing (OD-18)	P-125
Restart	دوبارہ شروع	ERR-014
Restart app	ایپ دوبارہ شروع کریں	SH-026
Result	— missing (OD-18)	D-023, D-024, D-025, D-026, D-027, D-028
Retry	دوبارہ کوشش	D-036, D-049, D-055, D-066, ERR-003, P-131 …
Retry when online	دوبارہ کوشش	D-028
Return journeys	— missing (OD-18)	P-045
Return journeys to Quetta appear only when available.	— missing (OD-18)	P-045
Review booking	بکنگ دیکھیں	P-057, P-058, P-060, P-062
Review details	تفصیلات دیکھیں	P-065
Road closed	— missing (OD-18)	D-039
Route	روٹ	D-019
Route & stops	— missing (OD-18)	D-018
SOS	SOS	D-013, D-052, D-053, D-054, D-055, D-056 …
SOS cancelled	— missing (OD-18)	P-127
SOS received	— missing (OD-18)	D-053, P-129
SOS sends your trip and location (if allowed) to our support team. In an emergency, also use your local emergency services.	— missing (OD-18)	P-125
Safety and tracking features need location. You can still book and view tickets.	— missing (OD-18)	SH-009
Sat 18	— missing (OD-18)	P-029, P-030, P-031
Save	محفوظ کریں	D-068, P-059, P-152, P-153

Save for offline	آف لائن محفوظ	P-092
Save ticket	— missing (OD-18)	P-092
Saved information	— missing (OD-18)	SH-024
Saved results	— missing (OD-18)	ERR-003
Saved ticket	— missing (OD-18)	P-006
Saved tickets show their saved time and may be out of date.	— missing (OD-18)	P-092
Saved.	— missing (OD-18)	SH-034
Saving…	محفوظ ہو رہا ہے…	P-154
Say a city name|“Karachi”	— missing (OD-18)	P-010
Say a date|“Tomorrow”	— missing (OD-18)	P-010
Say vehicle|“Car” or “Bus”	— missing (OD-18)	P-010
Say where you want to go.	— missing (OD-18)	P-009
Scan again	دوبارہ سکین	D-024, D-025, D-026, D-027
Scan next	اگلا سکین	D-029
Scan ticket	ٹکٹ سکین	D-013, D-022, SH-014
Scan tickets	— missing (OD-18)	D-018
Schedule update|Posted today	— missing (OD-18)	P-007
Search	— missing (OD-18)	SH-032
Search again	دوبارہ تلاش	P-037
Search city	— missing (OD-18)	P-020, P-021, P-022
Search help	— missing (OD-18)	P-140
Search journeys	سفر تلاش کریں	P-001, P-004
Search with taps	ٹیپ سے تلاش کریں	SH-012
Seat 1 — Ayesha K.|Not boarded	— missing (OD-18)	D-020
Seat 1 — Front passenger|Available	— missing (OD-18)	P-055
Seat 2 — Rear|Booked	— missing (OD-18)	P-055
Seat 3 is no longer available. Please choose another seat.	— missing (OD-18)	P-051
Seat 3 — Ayesha K.	— missing (OD-18)	D-029
Seat 3 — Bilal R.|Boarded ✓	— missing (OD-18)	D-020
Seat 3 — Rear|Selected	— missing (OD-18)	P-055
Seat 4 — (sample)|Not boarded	— missing (OD-18)	D-020
Seat 4 — Rear|Available	— missing (OD-18)	P-055
Seat hold	— missing (OD-18)	ERR-009
Seat hold ended	— missing (OD-18)	P-053
Seat just taken	— missing (OD-18)	ERR-010
Seats	سیٹیں	ERR-010
Seats are held for 10 minutes while you complete booking. The server decides when time is up.	— missing (OD-18)	P-141
Seats are held for 10 minutes. Please select seats again.	— missing (OD-18)	P-053
See other dates	دوسری تاریخیں	P-042
Select seats	سیٹیں منتخب کریں	P-031, P-035, P-036, P-038, P-041, P-045 …
Select seats again	دوبارہ سیٹ منتخب کریں	P-053
Send	بھیجیں	D-039, D-060, D-061, D-065, P-105, P-124 …
Send SOS	SOS بھیجیں	D-051
Send SOS anyway	پھر بھی SOS بھیجیں	P-132
Send SOS?	— missing (OD-18)	D-051
Send a message	— missing (OD-18)	P-143
Send code	کوڈ بھیجیں	AU-003, AU-004
Send new code	نیا کوڈ بھیجیں	AU-008
Send report	رپورٹ بھیجیں	D-058, P-149
Send request	درخواست بھیجیں	D-011
Sending…	— missing (OD-18)	P-146
Server time decides how long you have left.	— missing (OD-18)	ERR-009
Service notice|2 days ago	— missing (OD-18)	P-007
Settings	ترتیبات	D-067, P-150, SH-035
Share	— missing (OD-18)	P-091
Share as image (contains QR)	— missing (OD-18)	P-090
Share live location	لائیو لوکیشن	P-129
Share ticket	ٹکٹ شیئر	P-086, P-090

Share ticket details (no QR)	— missing (OD-18)	P-090
Sharing settings	شیئرنگ	P-135
Short, kind explanation and next step.	— missing (OD-18)	SH-031
Show QR	کیو آر دکھائیں	P-081
Show QR ticket	کیو آر ٹکٹ	P-078
Show journeys	سفر دکھائیں	P-026, P-027, P-028
Show ticket	ٹکٹ دکھائیں	P-003, P-100, P-104
Show to driver	— missing (OD-18)	P-085
Showing saved information. Last updated 20 minutes ago.	— missing (OD-18)	SH-024
Shown details come from the server	— missing (OD-18)	P-024
Sign in	سائن اِن	AU-002, D-078, ERR-006, SH-019
Sign in again	— missing (OD-18)	ERR-006
Sign out	سائن آؤٹ	AU-015, AU-016, D-012, D-067, P-150, SH-035
Sign out?	— missing (OD-18)	SH-035
Sindh	سندھ	P-017
Slow connection. This may take longer.	— missing (OD-18)	SH-022
Snackbar: bottom, 4 s, one action. Critical results (payment, SOS) use full screens, not toasts.	— missing (OD-18)	SH-034
Sold out	سیٹیں ختم	P-042
Something else	— missing (OD-18)	P-144
Something went wrong	— missing (OD-18)	SH-025
Something went wrong on our side	— missing (OD-18)	SH-023
Sort & filter	— missing (OD-18)	P-034
Sort by	— missing (OD-18)	SH-029
Speak your trip, like “Quetta to Karachi”. You can always tap instead.	— missing (OD-18)	SH-011
Standard SMS charges may apply (NEEDS CONFIRMATION).	— missing (OD-18)	AU-003
Start speaking	بولنا شروع کریں	P-009
Start this trip?	— missing (OD-18)	D-032
Start trip	سفر شروع کریں	D-015, D-018, D-030, D-031, D-032, D-035 …
Starting…	— missing (OD-18)	D-033
Stay signed in	سائن اِن رہیں	SH-035
Stop	روکیں	P-011
Stop 1 (sample)|~10:30	— missing (OD-18)	D-019
Stops	— missing (OD-18)	D-037
Storage	— missing (OD-18)	ERR-018
Submitted	— missing (OD-18)	D-009
Sun 19	— missing (OD-18)	P-029, P-030, P-031
Support	سپورٹ	D-060, P-100
Support has received your alert. [configured guidance]	— missing (OD-18)	P-129
Support has your alert. [configured guidance]	— missing (OD-18)	D-053
Support will receive your trip and location (if allowed).	— missing (OD-18)	D-051
Take photo	تصویر لیں	D-006
Tell us what happened	— missing (OD-18)	P-145
Terms	شرائط	D-073, P-164
Terms & privacy	— missing (OD-18)	SH-005
Terms of use	— missing (OD-18)	P-162, SH-005
Terms text loaded from the published version (legal review NEEDS CONFIRMATION).	— missing (OD-18)	P-162
Thank you	— missing (OD-18)	P-147
Thank you.	— missing (OD-18)	D-043
That code isn’t right. Check and try again.	— missing (OD-18)	AU-007
The app had a problem. Your bookings are safe on our server.	— missing (OD-18)	ERR-014
The app hit a problem and needs to restart. Your bookings are safe on our server.	— missing (OD-18)	SH-026
The ticket rate has changed to PKR [server fare].	— missing (OD-18)	P-062
The ticket rate is the price per seat. Arrival time is an estimate and can change.	— missing (OD-18)	P-040
There’s no available service for this choice.	— missing (OD-18)	P-032
These results may be out of date. Last updated 15 min ago.	— missing (OD-18)	P-036
This QR needs refreshing.	— missing (OD-18)	ERR-012
This booking can’t be cancelled	— missing (OD-18)	P-113
This booking is PENDING until verified. It is not confirmed yet.	— missing (OD-18)	P-077
This booking’s status changed. Please review the latest details.	— missing (OD-18)	P-112
This can’t be undone. Active bookings or refunds may block deletion.	— missing (OD-18)	AU-018

This code has expired. Request a new one.	— missing (OD-18)	AU-008
This file couldn’t be accepted. Use a clear photo or PDF.	— missing (OD-18)	D-008
This guidance is shown here and in the Privacy Policy only.	— missing (OD-18)	P-142
This is not your fault. Please try again in a moment.	— missing (OD-18)	SH-023
This route is no longer available	— missing (OD-18)	P-037
This seat was just taken	— missing (OD-18)	P-064
This ticket could not be verified.	— missing (OD-18)	D-024
This ticket is for a different journey.	— missing (OD-18)	D-025
This ticket was already used on this trip.	— missing (OD-18)	D-026
This trip is unavailable	— missing (OD-18)	P-043
This version is no longer supported. Please update to continue.	— missing (OD-18)	SH-016
This was not your fault. Tell us what happened.	— missing (OD-18)	P-124
This will open your phone dialler.	— missing (OD-18)	P-134
Ticket	ٹکٹ	ERR-012, P-084, P-087, P-088, P-089, P-090
Ticket ID	— missing (OD-18)	D-021
Ticket ID (optional)	— missing (OD-18)	D-065
Ticket details	— missing (OD-18)	P-086
Ticket history	— missing (OD-18)	P-093
Ticket issue	— missing (OD-18)	D-065
Ticket not available	— missing (OD-18)	P-089
Ticket support	— missing (OD-18)	P-105
Today’s assignment	— missing (OD-18)	D-013
Too many attempts	— missing (OD-18)	AU-009, ERR-005
Too many attempts. Try again in 15 minutes (server value).	— missing (OD-18)	AU-009
Traffic	ٹریفک	D-039
Travel date	— missing (OD-18)	P-026, P-027, P-028
Trip	— missing (OD-18)	ERR-020, ERR-021
Trip Records	سفر کے ریکارڈ	D-046, D-048, D-049
Trip delayed	— missing (OD-18)	P-121
Trip delayed|Tap for details	— missing (OD-18)	P-008
Trip details	سفر کی تفصیل	D-018, P-100, P-101
Trip ended	— missing (OD-18)	D-043
Trip help	— missing (OD-18)	D-063
Trip record	— missing (OD-18)	D-047
Trip started	— missing (OD-18)	D-034
Trip summary	— missing (OD-18)	D-045
Trip update	— missing (OD-18)	P-117, P-118, P-119, P-120
Trip updated	— missing (OD-18)	P-122
Try again	دوبارہ کوشش کریں	AU-010, D-008, D-054, ERR-002, ERR-005, ERR-015 …
Try again in 0:30.	— missing (OD-18)	ERR-005
Try again in a quieter place or use taps.	— missing (OD-18)	P-013
Try another date.	— missing (OD-18)	P-033
Try different words or clear filters.	— missing (OD-18)	SH-032
Try now	ابھی آزمائیں	P-010
Turn on location	لوکیشن آن کریں	P-132
Turn on the camera permission or look up the ticket manually.	— missing (OD-18)	SH-014
Up to 10 kg of luggage per booked seat.	— missing (OD-18)	P-142
Up to 10 kg per booked seat.	— missing (OD-18)	P-161
Upcoming	آنے والے	P-094, P-095, P-096, P-097, P-098, P-099
Upcoming journey	— missing (OD-18)	P-001, P-003
Update	— missing (OD-18)	P-103
Update details	تفصیلات اپڈیٹ	D-003
Update now	ابھی اپڈیٹ کریں	SH-015, SH-016
Uploading	— missing (OD-18)	D-007
Use Urdu	اردو استعمال کریں	SH-004
Use taps	ٹیپ استعمال کریں	P-009, P-012, P-013
Use taps instead	ٹیپ استعمال کریں	SH-011
Use taps or turn on the microphone.	— missing (OD-18)	P-012
VALID — Seat 3	— missing (OD-18)	D-023
Vashسفر	— missing (OD-18)	AU-001, ERR-015, P-001, P-002, P-003, P-004 …

Vashسفر Driver	— missing (OD-18)	D-001, D-013, D-014, D-015
Vashسفر is being updated. Please try again later.	— missing (OD-18)	SH-017
Vehicle	گاڑی	D-005
Vehicle type	— missing (OD-18)	D-005
Verified	— missing (OD-18)	AU-011
Verify	تصدیق کریں	AU-005, AU-006, AU-007
View approval status	منظوری کی حالت	D-001
View booking	بکنگ دیکھیں	P-112
View details	تفصیل	P-103
View full ticket	مکمل ٹکٹ	P-084
View refund status	رقم واپسی کی حالت	P-111
View saved tickets	محفوظ ٹکٹ دیکھیں	SH-021
View status	حالت دیکھیں	ERR-021, P-117
View summary	خلاصہ	D-043
View ticket	ٹکٹ دیکھیں	P-071
View trip	سفر دیکھیں	D-015, P-119, P-121
Voice	— missing (OD-18)	SH-012
Voice assist	آواز سے مدد	P-001, P-009, P-012, P-013
WRONG TRIP	— missing (OD-18)	D-025
Was this helpful? Yes	ہاں	P-141
We can’t reach the service right now. This is not your fault.	— missing (OD-18)	SH-018
We could not confirm your alert was received.	— missing (OD-18)	D-054, P-130
We couldn’t book this trip	— missing (OD-18)	P-065
We couldn’t confirm the status yet. Check status before trying again.	— missing (OD-18)	ERR-004, P-075
We couldn’t confirm your booking	— missing (OD-18)	P-080
We couldn’t find a replacement driver. You will receive a full refund.	— missing (OD-18)	P-120
We couldn’t read the response	— missing (OD-18)	ERR-015
We didn’t hear anything	— missing (OD-18)	P-013
We don’t serve this city yet from Quetta.	— missing (OD-18)	P-023
We haven’t received confirmation yet. Do not pay again.	— missing (OD-18)	ERR-011
We need a correction before approval.	— missing (OD-18)	D-003
We need to review your refund	— missing (OD-18)	P-116
We received your details	— missing (OD-18)	D-009
We restored where you left off. Seats and payments are checked with the server first.	— missing (OD-18)	SH-020
We sent a code to +92 300 ••• 4567.	— missing (OD-18)	AU-005
We use location only for safety and trip tracking. Normal trip history: 90 days. SOS/breakdown: one year, then reviewed. You can turn sharing off.	— missing (OD-18)	P-138
We use your location only for safety features and trip tracking. Normal trip history is kept 90 days; SOS/breakdown location one year, then reviewed.	— missing (OD-18)	SH-008
Weather	موسم	D-039
Welcome back	— missing (OD-18)	SH-020
Welcome to Vashسفر.	— missing (OD-18)	AU-011
Welcome!	— missing (OD-18)	P-002
We’ll let you know when your account is approved.	— missing (OD-18)	D-002
We’ll notify you when approved.	— missing (OD-18)	D-001
We’ll show destinations as soon as services are added.	— missing (OD-18)	P-019
We’ll update this page when the refund completes.	— missing (OD-18)	P-114
We’re here to help	— missing (OD-18)	P-124
We’re making sure nothing is lost or duplicated.	— missing (OD-18)	P-066
We’ve received your message	— missing (OD-18)	P-147
What happened?	— missing (OD-18)	D-061, P-124, P-149
What happens next	— missing (OD-18)	D-001
What if I’m offline?	— missing (OD-18)	D-064
What to change	— missing (OD-18)	D-011
Where to next?	— missing (OD-18)	P-004
Which did you mean?	— missing (OD-18)	P-015
Who are you today?	— missing (OD-18)	AU-001
Why can’t I start a trip?	— missing (OD-18)	D-064
Within 8 h of confirmation: 100% refund	— missing (OD-18)	P-163
Yes, cancel	ہاں، منسوخ کریں	P-109
Yes, cancel booking	ہاں، بکنگ منسوخ کریں	SH-028

Yes, continue	ہاں، جاری رکھیں	P-014
You can change this later in Settings.	— missing (OD-18)	SH-003
You can search with taps instead.	— missing (OD-18)	SH-012
You can start trips after approval.	— missing (OD-18)	ERR-021
You can turn them on later in Settings. Important updates will also appear in the app.	— missing (OD-18)	SH-007
You can’t choose a past date.	— missing (OD-18)	P-027
You can’t end this trip yet	— missing (OD-18)	D-044
You can’t start this trip	— missing (OD-18)	D-035
You were not charged (server-confirmed).	— missing (OD-18)	P-073
You will need your phone number and a code to sign in again.	— missing (OD-18)	SH-035
You will receive the refund shown. This cannot be undone.	— missing (OD-18)	P-109
Your account can’t be used right now.	— missing (OD-18)	AU-015
Your account is under review. We’ll notify you.	— missing (OD-18)	AU-016
Your booking	— missing (OD-18)	ERR-016
Your booking is confirmed	— missing (OD-18)	P-078
Your booking is saved. We couldn’t load the ticket yet.	— missing (OD-18)	ERR-016
Your details	— missing (OD-18)	AU-012, AU-013
Your driver account is not active.	— missing (OD-18)	D-012
Your driver account is not approved yet	— missing (OD-18)	ERR-021
Your driver account is not approved yet.	— missing (OD-18)	D-001
Your driver cancelled. We’re finding a replacement driver at no cost to you.	— missing (OD-18)	P-117
Your location & privacy	— missing (OD-18)	P-138
Your past trips are in My Trips.	— missing (OD-18)	P-004
Your payment was not requested. Please choose another seat.	— missing (OD-18)	P-064
Your phone is low on storage. Free some space to save tickets offline.	— missing (OD-18)	ERR-018
Your phone’s time looks wrong. Hold timers use server time.	— missing (OD-18)	ERR-017
Your seat hold has ended	— missing (OD-18)	P-053
Your session ended. Sign in again. Active trip data is kept.	— missing (OD-18)	D-078
Your session ended. Your draft is saved.	— missing (OD-18)	ERR-006
Your text is saved. Try again.	— missing (OD-18)	P-148
Your tickets will appear here.	— missing (OD-18)	P-002
Your trip details have changed.	— missing (OD-18)	P-103
Your trip is delayed. New departure: [server time].	— missing (OD-18)	P-121
You’ll be notified after review.	— missing (OD-18)	D-009
You’ll return here after paying. We confirm payment with our server.	— missing (OD-18)	P-070
You’ll see your trip here once one is assigned to you.	— missing (OD-18)	D-014, ERR-020
You’re offline.	— missing (OD-18)	SH-034
You’re offline. Showing saved information.	— missing (OD-18)	P-006, SH-021
You’re verified	— missing (OD-18)	AU-011
[Configured method A]	— missing (OD-18)	P-068
[Configured method B]	— missing (OD-18)	P-068
[Document A]|Verified	— missing (OD-18)	D-077
[Document B]|Needs update	— missing (OD-18)	D-077
[Required document A]|Not uploaded	— missing (OD-18)	D-006
[Required document B]|Not uploaded	— missing (OD-18)	D-006
[configured emergency guidance]	— missing (OD-18)	D-062, P-130
[server reason in plain words]	— missing (OD-18)	D-035, D-044
[server-provided correction note]	— missing (OD-18)	D-003
اردو	اردو	D-069, P-157, SH-003
راستے، تاریخ اور ٹکٹ آئی ڈی واضح رہتے ہیں۔	— missing (OD-18)	P-158
زبان	— missing (OD-18)	P-158, SH-004
عنوانات دائیں سے بائیں ہوں گے، اور نمبر واضح رہیں گے۔	— missing (OD-18)	SH-004
پیش منظر	— missing (OD-18)	P-158
یہ پیش منظر ہے	— missing (OD-18)	SH-004
@ Add photo (if supported)	— missing (OD-18)	P-145

Part 13 — Screen/action → backend (Supabase) matrix

All operations are PROPOSED logical operations. No table names, URLs, keys, deployed RPCs or Edge Functions are asserted. Secrets (service-role keys, provider secrets) stay server-side and never appear in the app or this PDF. Rules for every write: idempotency key; server time authoritative; owner/role authorization (RLS, deny by default); outcome unknown → status check, never blind retry.

13.1 Operation catalogue

Key	Logical operation (PROPOSED)	Inputs	Server checks / authorization	Idempotency	Offline	Cache
cfg	get_app_config (read)	app version, locale	min version, maintenance flag, configured payment methods, feature flags	Safe read	Use last config; never assume payment methods	Short TTL (PROPOSED)
otp_req	request_otp (write)	phone number (E.164)	rate limit per phone/device; provider availability (NEEDS CONFIRMATION)	Required: client request id; server dedupes resend window	Blocked — requires network	No cache; never log OTP
otp_ver	verify_otp (write)	phone, code, request id	code validity, expiry, attempt count, lockout	Safe to resubmit same code only until used	Blocked	No cache; code never persisted
profile_up	upsert_profile (write)	name, language, contact fields confirmed by rules	auth user match, field validation, role immutability (role never client-set)	Idempotent upsert	Draft kept locally; submit blocked	Profile cached after success
session	get_session / refresh_session (read)	refresh token (secure storage)	token validity, account status	Safe read	Shows signed-in shell with stale warning only if allowed	Token in secure storage only
acct_del	request_account_deletion (write)	reason (optional), re-auth proof	active bookings/refunds check, legal retention rules (NEEDS CONFIRMATION)	Required key; duplicate returns existing request	Blocked	No cache
home	get_home_summary (read)	auth user	next upcoming booking, announcements, configured origins	Safe read	Show cached summary labelled “saved”	Cache with timestamp
regions	list_regions (read)	origin=Quetta	only regions that have ≥1 configured Quetta service; correct classification (Islamabad = territory; Karachi in Sindh)	Safe read	Cached list labelled saved	Medium TTL (PROPOSED)
cities	list_cities (read)	region id, origin	configured destinations only; served flag	Safe read	Cached list labelled saved	Medium TTL
cats	list_vehicle_categories (read)	region/city ids	only categories with configured service; verified details only	Safe read	Cached	Short TTL
dates	get_service_dates (read)	route, category	booking horizon/cutoff (NEEDS CONFIRMATION), service days	Safe read	Cached; mark unconfirmed	Short TTL
search	search_journeys (read)	origin, destination, category, date	only configured active journeys; real fare/time/availability; return trips only if configured	Safe read	Cached results flagged stale; Select Seats disabled	Short TTL; never reused for booking
journey	get_journey_detail (read)	journey id, date	fare, times, boarding/arrival points, status	Safe read	Cached detail flagged stale	Short TTL
seatmap	get_seat_map (read)	journey id, segment	vehicle layout (data-driven), seat inventory per segment, holds	Safe read	Blocked for selection (cached view only)	No reuse for booking
hold	create_seat_hold (write)	journey id, seat ids, segment, idempotency key	seat free for segment, 10-minute hold, server clock, per-user limits	Required idempotency key; same key returns same hold	Blocked	Hold state server-only
hold_status	get_hold_status (read)	hold id	expiry (server time), ownership	Safe read	Shows last known; warns not authoritative	None
release	release_seat_hold (write)	hold id	ownership; hold active	Idempotent	Queued locally only as hint; server expiry still authoritative	None
quote	get_booking_quote (read)	hold id	ticket rate for seats (ticket rate only — no toll/highway/luggage fee)	Safe read	Blocked	Short TTL
book	create_booking (write)	hold id, passenger details, quote id, idempotency key	hold valid, fare unchanged, details valid	Required idempotency key	Blocked; never create pending-confirmed locally	None
paym	list_payment_methods (read)	—	configured, enabled methods only; provider names shown only if verified	Safe read	Blocked	Config TTL
pay_start	start_payment (write)	booking id, method id, idempotency key	booking pending, hold valid, method enabled	Required key; duplicate returns same attempt	Blocked	None
pay_stat	get_payment_status (read)	booking id / payment attempt id	authoritative payment + booking state (reconciliation)	Safe read	Blocked; show last known	None
bk_stat	get_booking_status (read)	booking id	server-confirmed status	Safe read	Show cached with freshness label	Status cache labelled
ticket	get_ticket (read)	booking id	booking confirmed; QR payload only if confirmed; owner check	Safe read	Cached confirmed ticket shown with freshness; pending never shows QR	Secure local cache (PROPOSED)
tickets	list_tickets (read)	auth user	owner-only rows (RLS)	Safe read	Cached list labelled	Cache with timestamp
trips	list_trips (read)	status filter, page	owner-only rows	Safe read	Cached list labelled	Cache with timestamp
trip	get_trip_detail (read)	booking id	owner check, live status	Safe read	Cached	Short TTL
cq	get_cancellation_quote (read)	booking id	eligibility; server-time since confirmation (≤8 h → 100%; >8 h → 75%, 25% retained; exactly 8 h → 75%)	Safe read	Blocked	None — always fresh
cancel	cancel_booking (write)	booking id, quote id, idempotency key	state allows cancel; policy recomputed server-side	Required key	Blocked	None
refund	get_refund_status (read)	booking id	refund state: pending/succeeded/failed/needs review	Safe read	Cached with label	Short TTL

disrupt	get_disruption_status (read)	booking/trip id	driver cancellation, replacement attempts, delay, changes	Safe read	Cached with label	Short TTL
sos	send_sos (write)	trip id, location (if permitted), idempotency key	auth, trip context, rate protection	Required key; retry reuses key	Local pending state only; never “delivered”	None
sos_stat	get_sos_status (read)	sos id	server acknowledgement state	Safe read	Shows “not confirmed”	None
track	get_live_trip_location (read)	booking/trip id	sharing consent, trip active, retention rules (90 days normal / 1 year SOS-breakdown then review)	Safe read	Last known with age	None
share_loc	set_location_sharing (write)	trip id, on/off	consent record	Idempotent	Blocked	None
support	submit_support_request (write)	category, text, optional booking id, attachments (if supported)	auth, size/type limits, abuse limits	Required key	Draft kept locally; send blocked	None
faq	get_help_content (read)	category, locale	published content	Safe read	Bundled offline copy of core help	Versioned bundle
policy	get_policy_text (read)	policy id, locale	published version	Safe read	Bundled copy	Versioned
prof	get_profile (read)	auth user	owner only	Safe read	Cached	Cached
prefs	update_preferences (write)	language, notification toggles	auth	Idempotent	Saved locally then synced when online (PROPOSED)	Local + server
drv_stat	get_driver_status (read)	auth user	approval state, suspension, assignment — server authoritative	Safe read	Last known with age; actions disabled	Short TTL
drv_prof	update_driver_profile_request (write)	profile/vehicle fields	auth, change-request rules (NEEDS CONFIRMATION)	Required key	Blocked	None
drv_doc	upload_driver_document (write)	file (type/size limits NEEDS CONFIRMATION)	auth, malware/type checks, private storage	Resumable upload with key (PROPOSED)	Paused until online	None
drv_trip	get_assigned_trip (read)	auth user	approved + assigned; trip state	Safe read	Cached with label; actions disabled	Short TTL
drv_man	get_trip_manifest (read)	trip id	assignment check; passenger data minimised	Safe read	Cached manifest (privacy-minimal) with age	Secure cache (PROPOSED)
drv_scan	verify_ticket_qr (write)	trip id, QR payload, idempotency key	ticket confirmed, right trip, not already boarded	Required key; duplicate scan returns “already boarded”	Offline scan cannot be authoritative; shows actual status only	No cache of verdict
drv_start	start_trip (write)	trip id, idempotency key	approved, assigned, state allows start, time window	Required key	Blocked — never shows started	None
drv_end	end_trip (write)	trip id, idempotency key	state allows end	Required key	Blocked — never shows ended	None
drv_rec	list_trip_records (read)	driver, page	owner/assignment rows	Safe read	Cached labelled	Cached
drv_delay	report_delay (write)	trip id, reason, idempotency key	assignment, trip active	Required key	Draft kept; send blocked	None
drv_bd	report_breakdown (write)	trip id, reason, location (if permitted), idempotency key	assignment, trip active	Required key	Local pending only; never “delivered”	None
loc_ping	post_trip_location (write)	trip id, coords, timestamp	trip active, consent, rate limit	Batched; last-write-wins per timestamp	Buffered briefly (PROPOSED), no fake live status	Retention per policy

13.2 Screen → operation map

Screen	Title	Op key	Operation
SH-001	Splash / app initialisation	cfg	get_app_config (read)
SH-015	Optional app update	cfg	get_app_config (read)
SH-016	Required app update	cfg	get_app_config (read)
SH-017	Maintenance notice	cfg	get_app_config (read)
SH-019	Session expired	session	get_session / refresh_session (read)
SH-020	Session recovery after process death	session	get_session / refresh_session (read)
SH-035	Sign-out confirmation	session	get_session / refresh_session (read)
AU-003	Phone number entry	otp_req	request_otp (write)
AU-004	Phone validation error	otp_req	request_otp (write)
AU-005	Code entry	otp_ver	verify_otp (write)
AU-006	Resend timer (waiting)	otp_req	request_otp (write)
AU-007	Invalid code	otp_ver	verify_otp (write)
AU-008	Expired code	otp_req	request_otp (write)
AU-009	Too many attempts	otp_ver	verify_otp (write)
AU-010	Network failure during OTP	otp_ver	verify_otp (write)
AU-011	Verification success	session	get_session / refresh_session (read)
AU-012	New-user details	profile_up	upsert_profile (write)
AU-013	New-user validation errors	profile_up	upsert_profile (write)
AU-015	Account blocked	session	get_session / refresh_session (read)
AU-016	Account under review	session	get_session / refresh_session (read)
AU-017	Account deletion request	acct_del	request_account_deletion (write)
AU-018	Account deletion confirmation	acct_del	request_account_deletion (write)

AU-019	Re-authentication for sensitive action	otp_ver	verify_otp (write)
P-001	Passenger Home — default	home	get_home_summary (read)
P-002	Home — first-time empty	home	get_home_summary (read)
P-003	Home — upcoming trip	home	get_home_summary (read)
P-004	Home — no upcoming trip	home	get_home_summary (read)
P-005	Home — loading	home	get_home_summary (read)
P-006	Home — offline / stale	home	get_home_summary (read)
P-007	Announcements	home	get_home_summary (read)
P-008	Notification centre	trips	list_trips (read)
P-017	Province / region selection	regions	list_regions (read)
P-018	Region — loading	regions	list_regions (read)
P-019	Region — no configured destinations	regions	list_regions (read)
P-020	City selection (suggested + search)	cities	list_cities (read)
P-021	City — search active	cities	list_cities (read)
P-024	Cars or Buses	cats	list_vehicle_categories (read)
P-025	Vehicle — category unavailable	cats	list_vehicle_categories (read)
P-026	Select travel date	dates	get_service_dates (read)
P-028	Date — no service	dates	get_service_dates (read)
P-029	Date changed — results refresh	search	search_journeys (read)
P-030	Results — loading	search	search_journeys (read)
P-031	Available journeys — premium cards	search	search_journeys (read)
P-032	No services for route	search	search_journeys (read)
P-033	No results for date	search	search_journeys (read)
P-034	Filter & sort sheet	search	search_journeys (read)
P-035	Filter active	search	search_journeys (read)
P-036	Results stale	search	search_journeys (read)
P-037	Route no longer available	search	search_journeys (read)
P-038	Journey detail	journey	get_journey_detail (read)
P-039	Boarding & arrival point	journey	get_journey_detail (read)
P-041	Estimated arrival unavailable	search	search_journeys (read)
P-042	Seats sold out	search	search_journeys (read)
P-043	Trip unavailable at selection	journey	get_journey_detail (read)
P-044	Results — error	search	search_journeys (read)
P-045	Return journeys (if configured)	search	search_journeys (read)
P-046	Seat map — loading	seatmap	get_seat_map (read)
P-047	Seat map — available	seatmap	get_seat_map (read)
P-048	Seats selected	hold	create_seat_hold (write)
P-049	Booked & held seats shown	seatmap	get_seat_map (read)
P-050	Seat hold active — 10-minute timer	hold_status	get_hold_status (read)
P-051	Seat no longer available	hold	create_seat_hold (write)
P-052	Hold expiring soon	hold_status	get_hold_status (read)
P-053	Hold expired	hold_status	get_hold_status (read)
P-054	Extend / reselect hold (if supported)	hold	create_seat_hold (write)
P-055	Seat list alternative	seatmap	get_seat_map (read)
P-056	Vehicle layout — data-driven (bus)	seatmap	get_seat_map (read)
P-057	Passenger details	hold_status	get_hold_status (read)
P-060	Booking review	quote	get_booking_quote (read)
P-061	Fare calculation	quote	get_booking_quote (read)
P-062	Fare changed — acknowledge	quote	get_booking_quote (read)
P-063	Submitting booking	book	create_booking (write)
P-064	Reservation conflict	book	create_booking (write)
P-065	Server rejected booking	book	create_booking (write)
P-066	App closed mid-booking — recovery	bk_stat	get_booking_status (read)
P-067	Booking created — payment pending	pay_stat	get_payment_status (read)
P-068	Payment method	paym	list_payment_methods (read)
P-069	No payment methods configured	paym	list_payment_methods (read)
P-070	Payment handoff	pay_start	start_payment (write)
P-071	Payment confirmed by server	pay_stat	get_payment_status (read)
P-072	Payment pending	pay_stat	get_payment_status (read)
P-073	Payment failed	pay_stat	get_payment_status (read)
P-074	Payment cancelled by user	pay_stat	get_payment_status (read)
P-075	Payment timeout — unknown status	pay_stat	get_payment_status (read)
P-076	Payment status re-check	pay_stat	get_payment_status (read)
P-077	Counter / cash flow (if configured)	bk_stat	get_booking_status (read)
P-078	Booking confirmed	ticket	get_ticket (read)
P-079	Pending confirmation	bk_stat	get_booking_status (read)

P-080	Confirmation failed	bk_stat	get_booking_status (read)
P-081	My Tickets	tickets	list_tickets (read)
P-082	My Tickets — empty	tickets	list_tickets (read)
P-083	My Tickets — offline	tickets	list_tickets (read)
P-084	QR ticket — confirmed	ticket	get_ticket (read)
P-085	QR enlarged — high contrast	ticket	get_ticket (read)
P-086	Full ticket details	ticket	get_ticket (read)
P-087	Ticket — pending (no QR)	ticket	get_ticket (read)
P-088	Cached ticket — offline	ticket	get_ticket (read)
P-089	Ticket unavailable	ticket	get_ticket (read)
P-093	Ticket history	tickets	list_tickets (read)
P-094	My Trips — Upcoming	trips	list_trips (read)
P-095	My Trips — Completed	trips	list_trips (read)
P-096	My Trips — Cancelled	trips	list_trips (read)
P-097	My Trips — no upcoming	trips	list_trips (read)
P-098	My Trips — no completed	trips	list_trips (read)
P-099	My Trips — no cancelled	trips	list_trips (read)
P-100	Trip details	trip	get_trip_detail (read)
P-101	Trip detail — refreshing	trip	get_trip_detail (read)
P-102	Cancelled trip details	refund	get_refund_status (read)
P-103	Booking status changed	disrupt	get_disruption_status (read)
P-104	Boarding point & departure reminder	trip	get_trip_detail (read)
P-105	Ticket support	support	submit_support_request (write)
P-106	Cancellation — checking eligibility	cq	get_cancellation_quote (read)
P-107	Refund estimate — 100% (within 8 h)	cq	get_cancellation_quote (read)
P-108	Refund estimate — 75% (after 8 h)	cq	get_cancellation_quote (read)
P-109	Cancellation confirmation	cancel	cancel_booking (write)
P-110	Cancel request pending	cancel	cancel_booking (write)
P-111	Cancellation successful	cancel	cancel_booking (write)
P-112	Cancellation rejected (state changed)	cancel	cancel_booking (write)
P-113	Cancellation not available	cq	get_cancellation_quote (read)
P-114	Refund pending	refund	get_refund_status (read)
P-115	Refund completed	refund	get_refund_status (read)
P-116	Refund failed — needs support	refund	get_refund_status (read)
P-117	Driver cancellation notice	disrupt	get_disruption_status (read)
P-118	Replacement being sought	disrupt	get_disruption_status (read)
P-119	Replacement found	disrupt	get_disruption_status (read)
P-120	No replacement — full refund	refund	get_refund_status (read)
P-121	Delay notice	disrupt	get_disruption_status (read)
P-122	Trip details changed	disrupt	get_disruption_status (read)
P-124	Company-caused disruption support	support	submit_support_request (write)
P-128	SOS — sending	sos	send_sos (write)
P-129	SOS — delivered (server confirmed)	sos_stat	get_sos_status (read)
P-130	SOS — delivery unconfirmed	sos	send_sos (write)
P-131	SOS — offline	sos	send_sos (write)
P-132	SOS — location unavailable/denied	sos	send_sos (write)
P-135	Live trip tracking	track	get_live_trip_location (read)
P-136	Location sharing controls	share_loc	set_location_sharing (write)
P-137	GPS unavailable / stale	track	get_live_trip_location (read)
P-139	Help hub	faq	get_help_content (read)
P-140	FAQ list	faq	get_help_content (read)
P-141	FAQ detail	faq	get_help_content (read)
P-143	Contact support	support	submit_support_request (write)
P-145	Report form	support	submit_support_request (write)
P-146	Submitting report	support	submit_support_request (write)
P-147	Report submitted	support	submit_support_request (write)
P-148	Report failed	support	submit_support_request (write)
P-149	Safety incident report	support	submit_support_request (write)
P-150	Settings	prof	get_profile (read)
P-151	Profile	prof	get_profile (read)
P-152	Edit profile	profile_up	upsert_profile (write)
P-154	Profile — saving	profile_up	upsert_profile (write)
P-155	Profile — saved	profile_up	upsert_profile (write)
P-156	Profile — save failed	profile_up	upsert_profile (write)
P-157	Language settings	prefs	update_preferences (write)

P-159	Notification settings	prefs	update_preferences (write)
P-161	Privacy policy	policy	get_policy_text (read)
P-162	Terms of use	policy	get_policy_text (read)
P-163	Cancellation & refund policy	policy	get_policy_text (read)
P-164	About / app version	cfg	get_app_config (read)
P-165	Accessibility & voice settings	prefs	update_preferences (write)
D-001	Driver home — before approval	drv_stat	get_driver_status (read)
D-002	Approval pending	drv_stat	get_driver_status (read)
D-003	Needs correction / rejected	drv_stat	get_driver_status (read)
D-004	Driver profile setup	drv_prof	update_driver_profile_request (write)
D-005	Vehicle details	drv_prof	update_driver_profile_request (write)
D-006	Document upload (if required)	drv_doc	upload_driver_document (write)
D-007	Upload progress	drv_doc	upload_driver_document (write)
D-008	Document failed / invalid	drv_doc	upload_driver_document (write)
D-009	Submission confirmation	drv_stat	get_driver_status (read)
D-010	Driver profile details	drv_stat	get_driver_status (read)
D-011	Edit request	drv_prof	update_driver_profile_request (write)
D-012	Account disabled / suspended	drv_stat	get_driver_status (read)
D-013	Driver Home — default	drv_trip	get_assigned_trip (read)
D-014	Driver Home — no assigned trip	drv_trip	get_assigned_trip (read)
D-015	Driver Home — assigned upcoming trip	drv_trip	get_assigned_trip (read)
D-016	Driver My Trips	drv_trip	get_assigned_trip (read)
D-017	My Trips — empty	drv_trip	get_assigned_trip (read)
D-018	Trip details	drv_trip	get_assigned_trip (read)
D-019	Route / stop list	drv_trip	get_assigned_trip (read)
D-020	Passenger manifest	drv_man	get_trip_manifest (read)
D-021	Passenger / ticket lookup	drv_scan	verify_ticket_qr (write)
D-022	Scanner ready	drv_scan	verify_ticket_qr (write)
D-023	Scan — valid ticket	drv_scan	verify_ticket_qr (write)
D-024	Scan — invalid ticket	drv_scan	verify_ticket_qr (write)
D-025	Scan — wrong trip	drv_scan	verify_ticket_qr (write)
D-026	Scan — already boarded	drv_scan	verify_ticket_qr (write)
D-027	Scan — pending / unverified	drv_scan	verify_ticket_qr (write)
D-028	Scan — offline warning	drv_scan	verify_ticket_qr (write)
D-029	Boarding recorded	drv_scan	verify_ticket_qr (write)
D-030	Boarding status	drv_man	get_trip_manifest (read)
D-031	Start-trip eligibility	drv_trip	get_assigned_trip (read)
D-032	Start-trip confirmation	drv_start	start_trip (write)
D-033	Starting trip…	drv_start	start_trip (write)
D-034	Trip started (server confirmed)	drv_start	start_trip (write)
D-035	Start rejected	drv_start	start_trip (write)
D-036	Start — offline not accepted	drv_start	start_trip (write)
D-037	Active trip	drv_trip	get_assigned_trip (read)
D-039	Report delay	drv_delay	report_delay (write)
D-040	End-trip eligibility	drv_end	end_trip (write)
D-041	End-trip confirmation	drv_end	end_trip (write)
D-042	Ending trip…	drv_end	end_trip (write)
D-043	Trip ended (server confirmed)	drv_end	end_trip (write)
D-044	End rejected	drv_end	end_trip (write)
D-045	Post-trip summary	drv_rec	list_trip_records (read)
D-046	Trip Records	drv_rec	list_trip_records (read)
D-047	Trip record detail	drv_rec	list_trip_records (read)
D-048	Trip Records — empty	drv_rec	list_trip_records (read)
D-049	Trip Records — error/refresh	drv_rec	list_trip_records (read)
D-050	Driver SOS	sos	send_sos (write)
D-051	Driver SOS — confirm	sos	send_sos (write)
D-052	Driver SOS — sending	sos	send_sos (write)
D-053	Driver SOS — delivered	sos_stat	get_sos_status (read)
D-054	Driver SOS — unconfirmed	sos	send_sos (write)
D-055	Driver SOS — offline	sos	send_sos (write)
D-056	Breakdown report	drv_bd	report_breakdown (write)
D-058	Breakdown — location status	drv_bd	report_breakdown (write)
D-060	Support form	support	submit_support_request (write)
D-061	Report incident	support	submit_support_request (write)
D-063	Driver Help hub	faq	get_help_content (read)

D-064	Driver FAQ	faq	get_help_content (read)
D-065	Ticket / passenger issue	support	submit_support_request (write)
D-066	Trip disruption status	drv_delay	report_delay (write)
D-067	Driver Settings	drv_stat	get_driver_status (read)
D-068	Edit details	drv_prof	update_driver_profile_request (write)
D-069	Driver language	prefs	update_preferences (write)
D-070	Driver notifications	prefs	update_preferences (write)
D-073	Policies	policy	get_policy_text (read)
D-074	App version	cfg	get_app_config (read)
D-075	Account status	drv_stat	get_driver_status (read)
D-076	Approval status detail	drv_stat	get_driver_status (read)
D-077	Document status	drv_doc	upload_driver_document (write)
D-078	Driver session expired	session	get_session / refresh_session (read)
ERR-004	Connection lost during booking write	bk_stat	get_booking_status (read)
ERR-006	Session expired during action	session	get_session / refresh_session (read)
ERR-009	Background / foreground during hold	hold_status	get_hold_status (read)
ERR-011	Payment pending reconciliation	pay_stat	get_payment_status (read)
ERR-012	Ticket QR needs refresh	ticket	get_ticket (read)
ERR-016	Booking saved, ticket not loaded	ticket	get_ticket (read)
ERR-020	No assigned trip (action blocked)	drv_trip	get_assigned_trip (read)
ERR-021	Driver not approved (action blocked)	drv_stat	get_driver_status (read)

Part 14 — Safety, privacy, GPS, QR, booking integrity, payment/cancellation & offline

Topic	Behaviour (CONFIRMED unless tagged)
Safety / SOS	Press-and-hold (≈2 s, PROPOSED) with accessible confirm alternative; SOS never says “delivered” without server acknowledgement; location denied → SOS still sendable; offline → honest not-sent state; retries reuse the idempotency key; configured emergency guidance only; no response-time promise (OD-10).
Privacy / GPS	Normal trip-history GPS 90 days; SOS/breakdown location one year, then review; location only with permission and consent; sharing controls explained in-app; explanations on location, privacy and driver GPS screens.
QR	QR only for server-confirmed bookings; high contrast, ≥70% width when enlarged, quiet zone kept, brightness raised and restored; pending shows no QR; offline cached ticket shows freshness; offline scanning cannot guarantee uniqueness and the driver UI says only the real validation status.
Booking integrity	10-minute server-authoritative hold; seat conflicts handled without charge; idempotency key per booking write; fare changes need acknowledgement; app kill/relaunch revalidates; no optimistic confirmation; ticket rate only at checkout (no toll/highway/luggage lines).
Payment	Methods from backend config; provider named only when verified; success only after server confirmation; unknown/timeout → status check and “do not pay again”; duplicate-payment protection by idempotency; no card data stored or logged.
Cancellation / refund	Server-calculated eligibility and estimate before final confirm; ≤8 h → 100%, >8 h → 75% (25% retained), exactly 8 h → 75%, from booking confirmation; driver cancel → replacement at company cost else full refund; passenger no-show no automatic refund; company-caused issues not passenger fault.
Offline behaviour	Reads: saved data labelled with age; writes: blocked or status-first; start/end trip and SOS never shown as accepted/delivered offline; counter tickets pending until verified.

Part 15 — QA acceptance checklist & end-to-end scenarios

Visual
- Navy tokens and component states match Part 5
- Illustrated cards have text + spoken labels
- Light theme contrast ≥ 4.5:1

Navigation
- Passenger nav labels exact: Home, My Trips, My Tickets, Help, Settings
- Driver nav labels exact: Home, My Trips, Trip Records, Help, Settings
- Every control destination in Part 17 resolves
- Android Back per screen §3

Localization
- Urdu RTL mirrored; QR/seat map/IDs unmirrored
- Route names, dates, phone numbers legible in RTL
- All strings reviewed (OD-18)

Accessibility
- Touch targets ≥ 48 dp
- TalkBack order and labels
- 200% text scale no clipping
- No state by colour alone

Network
- No-internet, weak, timeout, 5xx, maintenance states match Part 11
- Unknown outcome uses neutral copy, no blind retry
- Airplane mode mid-write

Booking concurrency
- Two users one seat → one hold
- Hold timer follows server time; background/foreground
- Driver seat never sold; exactly 5 seats for standard car

Payment
- Success only after server confirm
- Unknown payment → no pay-again
- Duplicate tap → one request/key

Cancellation/refund
- Boundary tests at 7:59:59, 8:00:00, 8:00:01 after confirmation
- Server amount displayed, not computed in UI
- Driver cancel flows

GPS/SOS
- Never “delivered” without ack
- Permission denied/permanent/offline paths
- Retention text matches policy

Security
- Cross-user access denied (server)
- No secrets in app/logs
- Role cannot be set from client

Content consistency
- No highway/toll fee or PKR 500 charge anywhere
- No luggage counter/add-on
- 10 kg notice only in Help and Privacy Policy
- No “confirmed” before server confirms
- No fake route, emergency number or support contact
- No admin/Silent Owner UI

End-to-end scenario matrix

Scenario	Screens	Expected
Happy-path booking	p.home → … → p.qr	Confirmed QR only after server confirm
Hold expires on payment screen	p.paym	E14 → p.seat
Seat conflict	e.conflict	No charge; choose another seat
Fare changes at review	p.fare_changed	Acknowledge required
Payment timeout	p.pay_unknown	Status check; no pay again
App killed mid-booking	p.mid_recover	Server-first revalidation
Cancel at 7:59	p.cest100	100%
Cancel at exactly 8:00	p.cest75	75%
Cancel after boarding	p.cancel_rejected	E29
Driver cancels	p.drv_cancel → p.repl_seek	Replacement or full refund
SOS online	p.sos_hold → p.sos_ok	Only after ack
SOS offline	p.sos_off	Not sent; honest
Location permanently denied	sh.loc_perm	Settings path
Offline ticket	p.ticket_cached	Freshness shown
Pending counter ticket	p.counter	No QR
Driver unapproved	e.notappr	No trip actions
Driver start offline	d.start_off	Not started
Scan duplicate	d.scan_dup	Already boarded
Scan offline	d.scan_off	Warning only
Urdu full journey	all	RTL correct

Part 16 — Open decisions register

Record chosen answer, owner, date, rationale and implementation impact when confirmed. None of these may be silently turned into fact.

ID	Decision needed	Affected screens	Owner	Status
OD-01	OTP/SMS provider availability, pricing, delivery, sender ID in Pakistan	au.phone, au.otp*	[owner]	OPEN
OD-02	Payment providers (legal/commercial availability, fees, settlement, webhooks, refunds); counter/cash flow	p.paym, p.counter, p.rf_pend	[owner]	OPEN
OD-03	Sign-in before browsing, or only before hold/booking; role handling	au.entry, au.new	[owner]	OPEN
OD-04	Whether one booking may include multiple passengers/seats; required passenger fields	p.pax	[owner]	OPEN
OD-05	Booking horizon, cutoff time, timetable update process	p.date	[owner]	OPEN
OD-06	Whether the server supports hold extension	p.hold_ext	[owner]	OPEN
OD-07	Actual vehicle seat layouts; segment-based seat reuse per service type; driver-side placement in drawing	p.seat, p.seat_bus	[owner]	OPEN
OD-08	Map provider, GPS cost/accuracy, offline navigation fallback	p.board_detail, p.live, d.nav_hand	[owner]	OPEN
OD-09	Support channels, hours, escalation, languages	p.contact, d.bd_call, au.recov	[owner]	OPEN
OD-10	Emergency contact integration; who receives/acknowledges SOS	p.sos_*, d.sos_*, p.emerg_call	[owner]	OPEN
OD-11	Legal basis, retention, deletion and data-subject request handling	au.del_*, p.privacy	[owner]	OPEN
OD-12	Configured region/city/route list (only real Quetta services)	p.region, p.city	[owner]	OPEN
OD-13	Driver licensing/document requirements and approval process	d.setup, d.vehicle, d.docs	[owner]	OPEN
OD-14	App distribution method and verified update destination	sh.update_*	[owner]	OPEN
OD-15	Notification provider (e.g. FCM) and privacy configuration	p.notif_set, sh.notif_edu	[owner]	OPEN
OD-16	Analytics/crash reporting use and excluded fields	all (§16)	[owner]	OPEN
OD-17	Legal review of terms, privacy, cancellation/refund, consumer disclosures; fare display (current rule: ticket rate only)	sh.terms, p.terms, p.privacy	[owner]	OPEN
OD-18	Urdu translation review; strings still lacking Urdu (counted in audit)	all text tables	[owner]	OPEN
OD-19	Dark mode (first release designed light with navy accents; dark mode NEEDS CONFIRMATION)	Design system	[owner]	OPEN
OD-20	Supabase plan/limits/region/edge-function capability; need for separate worker; hosting, backups, DR objectives	Part 13	[owner]	OPEN

Part 17 — Final completeness audit

Metric	Value
Total unique screen specifications	318
Passenger (P)	165
Driver (D)	78
Shared (SH) screens/overlays/patterns	35
Shared authentication (AU)	19
Cross-cutting recovery (ERR)	21
Distinct error/recovery full-screen variants (ERR + all error-kind screens)	66
Mockups: primary full-size / mirrored RTL previews / design-system gallery	318 / 318 / 7
Navigation controls indexed (control → destination)	854
Unique visible strings / with Urdu / missing Urdu	754 / 223 / 531
Unresolved decisions	OD-01, OD-02, OD-03, OD-04, OD-05, OD-06, OD-07, OD-08, OD-09, OD-10, OD-11, OD-12, OD-13, OD-14, OD-15, OD-16, OD-17, OD-18, OD-19, OD-20
Per family	F0: 35, F1: 19, F2: 29, F3: 16, F4: 32, F5: 28, F6: 19, F7: 25, F8: 16, F9: 12, F10: 37, F11: 17, F12: 12, F13: 21

Automated self-audit

✔ PASS	Unique IDs, all in register
✔ PASS	All screen-to-screen links resolve to real IDs
✔ PASS	Passenger nav labels exact
✔ PASS	Driver nav labels exact
✔ PASS	10 kg notice appears only in: P-142, P-161 (Help luggage page + Privacy Policy)
✔ PASS	No fee amounts / toll / highway fee in screen content
✔ PASS	Standard-car seat map drawn with exactly 5 seats (1 front passenger, 3 rear, driver not bookable)
✔ PASS	Admin / Silent Owner screens excluded

Design specification only — no claim that any integration is implemented. Admin and Silent Owner UIs are not designed here.

17.2 Button/action → destination index

From	Control	Destination	Dest. page
SH-002	Button: Get started	**SH-003** Choose language	19
SH-002	Button: I already have an account	**AU-001** Choose how to continue	86
SH-003	Tile: English	**SH-004** Language change preview (Urdu RTL)	21
SH-003	Tile: اردو	**SH-004** Language change preview (Urdu RTL)	21
SH-003	Button: Continue	**SH-005** Terms & privacy acknowledgement	24
SH-004	Back arrow: Back	Previous screen	—
SH-004	Button: Use Urdu	**SH-005** Terms & privacy acknowledgement	24
SH-004	Button: Keep English	**SH-003** Choose language	19
SH-005	Back arrow: Back	Previous screen	—
SH-005	Row: Terms of use	**P-162** Terms of use	533
SH-005	Row: Privacy policy	**P-161** Privacy policy	531
SH-005	Button: Continue	**AU-001** Choose how to continue	86
SH-006	Button: Allow notifications	**SH-007** Notification permission denied result	28
SH-006	Button: Not now	Previous screen	—
SH-007	Back arrow: Back	Previous screen	—
SH-007	Button: Open Settings	Android Settings	—
SH-007	Button: Continue	Previous screen	—
SH-008	Button: Allow location	**SH-009** Location permission denied	32
SH-008	Button: Not now	Previous screen	—
SH-009	Back arrow: Back	Previous screen	—
SH-009	Button: Try again	**SH-010** Location blocked — open Settings	34
SH-009	Button: Continue without location	Previous screen	—
SH-010	Back arrow: Back	Previous screen	—
SH-010	Button: Open Settings	Android Settings	—
SH-010	Button: Not now	Previous screen	—
SH-011	Button: Allow microphone	**P-011** Voice assistance — listening	194
SH-011	Button: Use taps instead	**P-017** Province / region selection	206
SH-012	Back arrow: Back	Previous screen	—
SH-012	Button: Search with taps	**P-017** Province / region selection	206
SH-012	Button: Open Settings	Android Settings	—
SH-013	Button: Allow camera	**D-022** Scanner ready	588
SH-013	Button: Enter ticket ID instead	**D-021** Passenger / ticket lookup	586
SH-014	Back arrow: Back	Previous screen	—
SH-014	Button: Open Settings	Android Settings	—
SH-014	Button: Look up ticket	**D-021** Passenger / ticket lookup	586
SH-015	Button: Update now	External: EXT:store	—

SH-015	Button: Later	Previous screen	—
SH-016	Button: Update now	External: EXT:store	—
SH-017	Button: Check again	**SH-001** Splash / app initialisation	15
SH-017	Button: Close app	External: EXT:exit	—
SH-018	Button: Try again	**SH-001** Splash / app initialisation	15
SH-018	Button: Go back	Previous screen	—
SH-019	Button: Sign in	**AU-002** Sign in	88
SH-019	Button: Not now	**SH-002** First-launch welcome	17
SH-021	Button: Try again	Stays (action)	—
SH-021	Button: View saved tickets	**P-081** My Tickets	351
SH-022	Back arrow: Back	Previous screen	—
SH-022	Button: Cancel	Previous screen	—
SH-023	Button: Try again	Stays (action)	—
SH-023	Button: Go back	Previous screen	—
SH-024	Back arrow: Back	Previous screen	—
SH-024	Button: Refresh	Stays (action)	—
SH-025	Back arrow: Back	Previous screen	—
SH-025	Button: Try again	Stays (action)	—
SH-025	Button: Go back	Previous screen	—
SH-026	Button: Restart app	**SH-001** Splash / app initialisation	15
SH-026	Button: Contact support	**P-143** Contact support	492
SH-027	Back arrow: Back	Previous screen	—
SH-028	Back arrow: Back	Previous screen	—
SH-029	Back arrow: Back	Previous screen	—
SH-030	Back arrow: Back	Previous screen	—
SH-031	Back arrow: Back	Previous screen	—
SH-031	Button: Primary action	Stays (action)	—
SH-032	Back arrow: Back	Previous screen	—
SH-032	Button: Clear filters	Stays (action)	—
SH-032	Button: Change search	Previous screen	—
SH-033	Back arrow: Back	Previous screen	—
SH-033	Button: Continue	Stays (action)	—
SH-034	Back arrow: Back	Previous screen	—
SH-035	Back arrow: Back	Previous screen	—
AU-001	Tile: Passenger	**AU-002** Sign in	88
AU-001	Tile: Driver	**AU-002** Sign in	88
AU-002	Back arrow: Back	Previous screen	—
AU-002	Button: Continue with phone	**AU-003** Phone number entry	90
AU-002	Button: Need help?	**P-139** Help hub	483
AU-003	Back arrow: Back	Previous screen	—
AU-003	Button: Send code	**AU-005** Code entry	94
AU-004	Back arrow: Back	Previous screen	—
AU-004	Button: Send code	**AU-003** Phone number entry	90
AU-005	Back arrow: Back	Previous screen	—
AU-005	Button: Verify	**AU-011** Verification success	107
AU-005	Button: Resend code	**AU-006** Resend timer (waiting)	97
AU-006	Back arrow: Back	Previous screen	—
AU-006	Button: Verify	**AU-011** Verification success	107
AU-007	Back arrow: Back	Previous screen	—
AU-007	Button: Verify	**AU-005** Code entry	94
AU-007	Button: Resend code	**AU-006** Resend timer (waiting)	97
AU-008	Back arrow: Back	Previous screen	—
AU-008	Button: Send new code	**AU-006** Resend timer (waiting)	97
AU-009	Back arrow: Back	Previous screen	—
AU-009	Button: Back	**AU-002** Sign in	88
AU-009	Button: Need help?	**P-139** Help hub	483
AU-010	Back arrow: Back	Previous screen	—
AU-010	Button: Try again	**AU-005** Code entry	94
AU-010	Button: Back	**AU-003** Phone number entry	90
AU-011	Button: Continue	**AU-012** New-user details	109
AU-012	Back arrow: Back	Previous screen	—
AU-012	Button: Continue	**P-001** Passenger Home — default	167
AU-013	Back arrow: Back	Previous screen	—
AU-013	Button: Continue	**AU-012** New-user details	109
AU-014	Back arrow: Back	Previous screen	—

AU-014	Button: Contact support	**P-143** Contact support	492
AU-014	Button: Back	**AU-002** Sign in	88
AU-015	Button: Contact support	**P-143** Contact support	492
AU-015	Button: Sign out	**SH-035** Sign-out confirmation	84
AU-016	Button: Refresh status	Stays (action)	—
AU-016	Button: Sign out	**SH-035** Sign-out confirmation	84
AU-017	Back arrow: Back	Previous screen	—
AU-017	Button: Continue	**AU-018** Account deletion confirmation	121
AU-017	Button: Keep my account	Previous screen	—
AU-018	Back arrow: Back	Previous screen	—
AU-019	Back arrow: Back	Previous screen	—
AU-019	Button: Confirm	Previous screen	—
P-001	App-bar action: 🔔	**P-008** Notification centre	186
P-001	Tile: Search journeys	**P-017** Province / region selection	206
P-001	Tile: My Tickets	**P-081** My Tickets	351
P-001	Tile: Help	**P-139** Help hub	483
P-001	Tile: Voice assist	**P-009** Voice assistance — start	189
P-001	Nav tab: Home	**P-001** Passenger Home — default	167
P-001	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-001	Nav tab: My Tickets	**P-081** My Tickets	351
P-001	Nav tab: Help	**P-139** Help hub	483
P-001	Nav tab: Settings	**P-150** Settings	507
P-002	Button: Book a Journey	**P-017** Province / region selection	206
P-002	Nav tab: Home	**P-001** Passenger Home — default	167
P-002	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-002	Nav tab: My Tickets	**P-081** My Tickets	351
P-002	Nav tab: Help	**P-139** Help hub	483
P-002	Nav tab: Settings	**P-150** Settings	507
P-003	Button: Show ticket	**P-084** QR ticket — confirmed	359
P-003	Tile: Book a Journey	**P-017** Province / region selection	206
P-003	Tile: My Trips	**P-094** My Trips — Upcoming	382
P-003	Nav tab: Home	**P-001** Passenger Home — default	167
P-003	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-003	Nav tab: My Tickets	**P-081** My Tickets	351
P-003	Nav tab: Help	**P-139** Help hub	483
P-003	Nav tab: Settings	**P-150** Settings	507
P-004	Tile: Search journeys	**P-017** Province / region selection	206
P-004	Tile: My Trips	**P-094** My Trips — Upcoming	382
P-004	Nav tab: Home	**P-001** Passenger Home — default	167
P-004	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-004	Nav tab: My Tickets	**P-081** My Tickets	351
P-004	Nav tab: Help	**P-139** Help hub	483
P-004	Nav tab: Settings	**P-150** Settings	507
P-005	Nav tab: Home	**P-001** Passenger Home — default	167
P-005	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-005	Nav tab: My Tickets	**P-081** My Tickets	351
P-005	Nav tab: Help	**P-139** Help hub	483
P-005	Nav tab: Settings	**P-150** Settings	507
P-006	Nav tab: Home	**P-001** Passenger Home — default	167
P-006	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-006	Nav tab: My Tickets	**P-081** My Tickets	351
P-006	Nav tab: Help	**P-139** Help hub	483
P-006	Nav tab: Settings	**P-150** Settings	507
P-007	Back arrow: Back	Previous screen	—
P-007	Nav tab: Home	**P-001** Passenger Home — default	167
P-007	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-007	Nav tab: My Tickets	**P-081** My Tickets	351
P-007	Nav tab: Help	**P-139** Help hub	483
P-007	Nav tab: Settings	**P-150** Settings	507
P-008	Back arrow: Back	Previous screen	—
P-008	Nav tab: Home	**P-001** Passenger Home — default	167
P-008	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-008	Nav tab: My Tickets	**P-081** My Tickets	351
P-008	Nav tab: Help	**P-139** Help hub	483
P-008	Nav tab: Settings	**P-150** Settings	507
P-009	Back arrow: Back	Previous screen	—

P-009	Button: Start speaking	**P-011** Voice assistance — listening	194
P-009	Button: Help	**P-010** Voice assistance — help	192
P-009	Button: Use taps	**P-017** Province / region selection	206
P-010	Back arrow: Back	Previous screen	—
P-010	Button: Try now	**P-011** Voice assistance — listening	194
P-011	Back arrow: Back	Previous screen	—
P-011	Button: Stop	**P-014** Voice — understood	200
P-011	Button: Cancel	Previous screen	—
P-012	Back arrow: Back	Previous screen	—
P-012	Button: Use taps	**P-017** Province / region selection	206
P-012	Button: Open Settings	Android Settings	—
P-013	Back arrow: Back	Previous screen	—
P-013	Button: Try again	**P-011** Voice assistance — listening	194
P-013	Button: Use taps	**P-017** Province / region selection	206
P-014	Back arrow: Back	Previous screen	—
P-014	Button: Yes, continue	**P-026** Select travel date	227
P-014	Button: Change	**P-016** Voice — manual fallback	204
P-015	Back arrow: Back	Previous screen	—
P-015	Button: Try again	**P-011** Voice assistance — listening	194
P-016	Back arrow: Back	Previous screen	—
P-016	Button: Choose region	**P-017** Province / region selection	206
P-017	Back arrow: Back	Previous screen	—
P-017	Tile: Balochistan	**P-020** City selection (suggested + search)	213
P-017	Tile: Sindh	**P-020** City selection (suggested + search)	213
P-017	Tile: Punjab	**P-020** City selection (suggested + search)	213
P-017	Tile: Khyber Pakhtunkhwa	**P-020** City selection (suggested + search)	213
P-017	Tile: Islamabad Capital Territory	**P-020** City selection (suggested + search)	213
P-017	Tile: Gilgit-Baltistan / AJK	**P-020** City selection (suggested + search)	213
P-018	Back arrow: Back	Previous screen	—
P-019	Back arrow: Back	Previous screen	—
P-019	Button: Back to Home	**P-001** Passenger Home — default	167
P-020	Back arrow: Back	Previous screen	—
P-020	Tile: Karachi (sample)	**P-024** Cars or Buses	222
P-020	Tile: City B (sample)	**P-024** Cars or Buses	222
P-021	Back arrow: Back	Previous screen	—
P-021	Row: Karachi (sample)	**P-024** Cars or Buses	222
P-021	Row: Karak (sample)	**P-024** Cars or Buses	222
P-022	Back arrow: Back	Previous screen	—
P-022	Button: Clear search	**P-020** City selection (suggested + search)	213
P-023	Back arrow: Back	Previous screen	—
P-023	Row: Other cities in region	**P-020** City selection (suggested + search)	213
P-023	Button: Choose another city	**P-020** City selection (suggested + search)	213
P-024	Back arrow: Back	Previous screen	—
P-024	Tile: Cars	**P-026** Select travel date	227
P-024	Tile: Buses	**P-026** Select travel date	227
P-025	Back arrow: Back	Previous screen	—
P-025	Tile: Cars	**P-026** Select travel date	227
P-026	Back arrow: Back	Previous screen	—
P-026	Button: Show journeys	**P-030** Results — loading	235
P-027	Back arrow: Back	Previous screen	—
P-027	Button: Show journeys	**P-030** Results — loading	235
P-028	Back arrow: Back	Previous screen	—
P-029	Back arrow: Back	Previous screen	—
P-030	Back arrow: Back	Previous screen	—
P-031	Back arrow: Back	Previous screen	—
P-031	App-bar action: ⚙	**P-034** Filter & sort sheet	244
P-031	Button: Select seats	**P-046** Seat map — loading	270
P-031	Button: Select seats	**P-046** Seat map — loading	270
P-032	Back arrow: Back	Previous screen	—
P-032	Button: Change city	**P-020** City selection (suggested + search)	213
P-032	Button: Change vehicle	**P-024** Cars or Buses	222
P-033	Back arrow: Back	Previous screen	—
P-033	Button: Change date	**P-026** Select travel date	227
P-034	Back arrow: Back	Previous screen	—
P-035	Back arrow: Back	Previous screen	—

P-035	Button: Select seats	**P-046** Seat map — loading	270
P-035	Button: Reset filters	**P-031** Available journeys — premium cards	237
P-036	Back arrow: Back	Previous screen	—
P-036	Button: Refresh	**P-031** Available journeys — premium cards	237
P-037	Back arrow: Back	Previous screen	—
P-037	Button: Search again	**P-017** Province / region selection	206
P-038	Back arrow: Back	Previous screen	—
P-038	Row: Boarding point details	**P-039** Boarding & arrival point	256
P-038	Row: Fare & timing explained	**P-040** Fare & timing explanation	258
P-038	Button: Select seats	**P-046** Seat map — loading	270
P-039	Back arrow: Back	Previous screen	—
P-039	Button: Get directions	External: EXT:maps	—
P-040	Back arrow: Back	Previous screen	—
P-040	Button: Got it	Previous screen	—
P-041	Back arrow: Back	Previous screen	—
P-041	Button: Select seats	**P-046** Seat map — loading	270
P-042	Back arrow: Back	Previous screen	—
P-042	Button: See other dates	**P-026** Select travel date	227
P-043	Back arrow: Back	Previous screen	—
P-043	Button: Refresh journeys	**P-030** Results — loading	235
P-044	Back arrow: Back	Previous screen	—
P-044	Button: Try again	**P-030** Results — loading	235
P-044	Button: Go back	Previous screen	—
P-045	Back arrow: Back	Previous screen	—
P-045	Button: Select seats	**P-046** Seat map — loading	270
P-046	Back arrow: Back	Previous screen	—
P-047	Back arrow: Back	Previous screen	—
P-047	Chip: List	**P-055** Seat list alternative	292
P-047	Button: Continue	**P-048** Seats selected	275
P-048	Back arrow: Back	Previous screen	—
P-048	Button: Continue	**P-050** Seat hold active — 10-minute timer	281
P-049	Back arrow: Back	Previous screen	—
P-049	Button: Continue	**P-050** Seat hold active — 10-minute timer	281
P-050	Back arrow: Back	Previous screen	—
P-050	Button: Continue to details	**P-057** Passenger details	297
P-051	Back arrow: Back	Previous screen	—
P-051	Button: Choose another seat	**P-047** Seat map — available	272
P-052	Back arrow: Back	Previous screen	—
P-052	Button: Continue	**P-060** Booking review	306
P-053	Button: Select seats again	**P-047** Seat map — available	272
P-053	Button: Back to results	**P-031** Available journeys — premium cards	237
P-054	Back arrow: Back	Previous screen	—
P-054	Button: Extend once	**P-050** Seat hold active — 10-minute timer	281
P-054	Button: Reselect seats	**P-047** Seat map — available	272
P-055	Back arrow: Back	Previous screen	—
P-055	Chip: Map	**P-047** Seat map — available	272
P-055	Button: Continue	**P-050** Seat hold active — 10-minute timer	281
P-056	Back arrow: Back	Previous screen	—
P-056	Button: Continue	**P-050** Seat hold active — 10-minute timer	281
P-057	Back arrow: Back	Previous screen	—
P-057	Button: Review booking	**P-060** Booking review	306
P-058	Back arrow: Back	Previous screen	—
P-058	Button: Review booking	**P-060** Booking review	306
P-059	Back arrow: Back	Previous screen	—
P-059	Button: Save	**P-060** Booking review	306
P-060	Back arrow: Back	Previous screen	—
P-060	Button: Pay now	**P-068** Payment method	324
P-060	Button: Edit details	**P-059** Edit passenger details	303
P-061	Back arrow: Back	Previous screen	—
P-061	Button: Back to review	**P-060** Booking review	306
P-062	Back arrow: Back	Previous screen	—
P-062	Button: Accept & continue	**P-060** Booking review	306
P-062	Button: Cancel	**P-031** Available journeys — premium cards	237
P-064	Back arrow: Back	Previous screen	—
P-064	Button: Choose another seat	**P-047** Seat map — available	272

P-065	Back arrow: Back	Previous screen	—
P-065	Button: Review details	**P-060** Booking review	306
P-065	Button: Help	**P-139** Help hub	483
P-067	Button: Check status	**P-076** Payment status re-check	341
P-067	Button: Close	**P-094** My Trips — Upcoming	382
P-068	Back arrow: Back	Previous screen	—
P-068	Button: Continue	**P-070** Payment handoff	329
P-069	Back arrow: Back	Previous screen	—
P-069	Button: Contact support	**P-143** Contact support	492
P-069	Button: Back	Previous screen	—
P-070	Back arrow: Back	Previous screen	—
P-070	Button: Cancel	**P-074** Payment cancelled by user	337
P-071	Button: View ticket	**P-078** Booking confirmed	345
P-072	Button: Check status	**P-076** Payment status re-check	341
P-072	Button: Close	**P-094** My Trips — Upcoming	382
P-073	Back arrow: Back	Previous screen	—
P-073	Button: Try again	**P-068** Payment method	324
P-073	Button: Back	**P-060** Booking review	306
P-074	Back arrow: Back	Previous screen	—
P-074	Button: Choose method	**P-068** Payment method	324
P-074	Button: Check status	**P-076** Payment status re-check	341
P-075	Button: Check status	**P-076** Payment status re-check	341
P-075	Button: Close	**P-094** My Trips — Upcoming	382
P-076	Back arrow: Back	Previous screen	—
P-077	Back arrow: Back	Previous screen	—
P-077	Button: Done	**P-094** My Trips — Upcoming	382
P-078	Button: Show QR ticket	**P-084** QR ticket — confirmed	359
P-078	Button: Go to My Trips	**P-094** My Trips — Upcoming	382
P-079	Button: Check status	Stays (action)	—
P-079	Button: Close	**P-094** My Trips — Upcoming	382
P-080	Back arrow: Back	Previous screen	—
P-080	Button: Contact support	**P-105** Ticket support	411
P-080	Button: Back to Home	**P-001** Passenger Home — default	167
P-081	Button: Show QR	**P-084** QR ticket — confirmed	359
P-081	Nav tab: Home	**P-001** Passenger Home — default	167
P-081	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-081	Nav tab: My Tickets	**P-081** My Tickets	351
P-081	Nav tab: Help	**P-139** Help hub	483
P-081	Nav tab: Settings	**P-150** Settings	507
P-082	Button: Book a Journey	**P-017** Province / region selection	206
P-082	Nav tab: Home	**P-001** Passenger Home — default	167
P-082	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-082	Nav tab: My Tickets	**P-081** My Tickets	351
P-082	Nav tab: Help	**P-139** Help hub	483
P-082	Nav tab: Settings	**P-150** Settings	507
P-083	Row: Quetta → Karachi (sample)|Saved 2	**P-088** Cached ticket — offline	369
P-083	Nav tab: Home	**P-001** Passenger Home — default	167
P-083	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-083	Nav tab: My Tickets	**P-081** My Tickets	351
P-083	Nav tab: Help	**P-139** Help hub	483
P-083	Nav tab: Settings	**P-150** Settings	507
P-084	Back arrow: Back	Previous screen	—
P-084	Button: Enlarge QR	**P-085** QR enlarged — high contrast	362
P-084	Button: View full ticket	**P-086** Full ticket details	364
P-085	Back arrow: Back	Previous screen	—
P-085	Button: Close	Previous screen	—
P-086	Back arrow: Back	Previous screen	—
P-086	Button: Share ticket	**P-090** Share ticket	373
P-086	Button: Contact support	**P-105** Ticket support	411
P-087	Back arrow: Back	Previous screen	—
P-087	Button: Refresh status	Stays (action)	—
P-088	Back arrow: Back	Previous screen	—
P-088	Button: Refresh when online	Stays (action)	—
P-089	Back arrow: Back	Previous screen	—
P-089	Button: Try again	Stays (action)	—
P-089	Button: Contact support	**P-105** Ticket support	411

P-089	Button: Contact support	**P-105** Ticket support	411
P-090	Back arrow: Back	Previous screen	—
P-090	Sheet option: Share as image (contains QR)	**P-091** Share fallback (system sheet)	375
P-091	Back arrow: Back	Previous screen	—
P-091	Button: Open share sheet	External: EXT:share	—
P-091	Button: Copy details	Stays (action)	—
P-092	Back arrow: Back	Previous screen	—
P-092	Button: Save for offline	**P-088** Cached ticket — offline	369
P-093	Back arrow: Back	Previous screen	—
P-093	Nav tab: Home	**P-001** Passenger Home — default	167
P-093	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-093	Nav tab: My Tickets	**P-081** My Tickets	351
P-093	Nav tab: Help	**P-139** Help hub	483
P-093	Nav tab: Settings	**P-150** Settings	507
P-094	Chip: Completed	**P-095** My Trips — Completed	385
P-094	Chip: Cancelled	**P-096** My Trips — Cancelled	388
P-094	Row: Quetta → Karachi (sample)|Sat 18 ·	**P-100** Trip details	400
P-094	Row: Quetta → City B (sample)|Mon 20 ·	**P-100** Trip details	400
P-094	Nav tab: Home	**P-001** Passenger Home — default	167
P-094	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-094	Nav tab: My Tickets	**P-081** My Tickets	351
P-094	Nav tab: Help	**P-139** Help hub	483
P-094	Nav tab: Settings	**P-150** Settings	507
P-095	Chip: Upcoming	**P-094** My Trips — Upcoming	382
P-095	Chip: Cancelled	**P-096** My Trips — Cancelled	388
P-095	Nav tab: Home	**P-001** Passenger Home — default	167
P-095	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-095	Nav tab: My Tickets	**P-081** My Tickets	351
P-095	Nav tab: Help	**P-139** Help hub	483
P-095	Nav tab: Settings	**P-150** Settings	507
P-096	Chip: Upcoming	**P-094** My Trips — Upcoming	382
P-096	Chip: Completed	**P-095** My Trips — Completed	385
P-096	Row: Quetta → City D (sample)|Cancelled	**P-102** Cancelled trip details	405
P-096	Nav tab: Home	**P-001** Passenger Home — default	167
P-096	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-096	Nav tab: My Tickets	**P-081** My Tickets	351
P-096	Nav tab: Help	**P-139** Help hub	483
P-096	Nav tab: Settings	**P-150** Settings	507
P-097	Button: Book a Journey	**P-017** Province / region selection	206
P-097	Nav tab: Home	**P-001** Passenger Home — default	167
P-097	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-097	Nav tab: My Tickets	**P-081** My Tickets	351
P-097	Nav tab: Help	**P-139** Help hub	483
P-097	Nav tab: Settings	**P-150** Settings	507
P-098	Nav tab: Home	**P-001** Passenger Home — default	167
P-098	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-098	Nav tab: My Tickets	**P-081** My Tickets	351
P-098	Nav tab: Help	**P-139** Help hub	483
P-098	Nav tab: Settings	**P-150** Settings	507
P-099	Nav tab: Home	**P-001** Passenger Home — default	167
P-099	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-099	Nav tab: My Tickets	**P-081** My Tickets	351
P-099	Nav tab: Help	**P-139** Help hub	483
P-099	Nav tab: Settings	**P-150** Settings	507
P-100	Back arrow: Back	Previous screen	—
P-100	Button: Show ticket	**P-084** QR ticket — confirmed	359
P-100	Button: Cancel booking	**P-106** Cancellation — checking eligibility	413
P-100	Button: Support	**P-105** Ticket support	411
P-101	Back arrow: Back	Previous screen	—
P-102	Back arrow: Back	Previous screen	—
P-102	Button: Refund status	**P-114** Refund pending	431
P-103	Back arrow: Back	Previous screen	—
P-103	Button: View details	**P-122** Trip details changed	448
P-103	Button: Contact support	**P-105** Ticket support	411
P-104	Back arrow: Back	Previous screen	—
P-104	Button: Get directions	External: EXT:maps	—

P-104	Button: Show ticket	**P-084** QR ticket — confirmed	359
P-105	Back arrow: Back	Previous screen	—
P-105	Button: Send	**P-146** Submitting report	498
P-106	Back arrow: Back	Previous screen	—
P-107	Back arrow: Back	Previous screen	—
P-107	Button: Continue	**P-109** Cancellation confirmation	421
P-107	Button: Keep booking	Previous screen	—
P-107	Button: Refund policy	**P-163** Cancellation & refund policy	535
P-108	Back arrow: Back	Previous screen	—
P-108	Button: Continue	**P-109** Cancellation confirmation	421
P-108	Button: Keep booking	Previous screen	—
P-108	Button: Refund policy	**P-163** Cancellation & refund policy	535
P-109	Back arrow: Back	Previous screen	—
P-109	Dialog button: Yes, cancel	**P-110** Cancel request pending	423
P-109	Dialog button: Keep booking	**P-100** Trip details	400
P-111	Button: View refund status	**P-114** Refund pending	431
P-111	Button: Done	**P-094** My Trips — Upcoming	382
P-112	Back arrow: Back	Previous screen	—
P-112	Button: View booking	**P-100** Trip details	400
P-112	Button: Contact support	**P-105** Ticket support	411
P-113	Back arrow: Back	Previous screen	—
P-113	Button: Back	**P-100** Trip details	400
P-114	Back arrow: Back	Previous screen	—
P-114	Button: Refresh	Stays (action)	—
P-114	Button: Need help?	**P-105** Ticket support	411
P-115	Back arrow: Back	Previous screen	—
P-115	Button: Done	**P-094** My Trips — Upcoming	382
P-116	Back arrow: Back	Previous screen	—
P-116	Button: Contact support	**P-105** Ticket support	411
P-117	Back arrow: Back	Previous screen	—
P-117	Button: View status	**P-118** Replacement being sought	440
P-117	Button: Contact support	**P-105** Ticket support	411
P-118	Back arrow: Back	Previous screen	—
P-119	Back arrow: Back	Previous screen	—
P-119	Button: View trip	**P-100** Trip details	400
P-120	Back arrow: Back	Previous screen	—
P-120	Button: Refund status	**P-114** Refund pending	431
P-121	Back arrow: Back	Previous screen	—
P-121	Button: View trip	**P-100** Trip details	400
P-121	Button: Contact support	**P-105** Ticket support	411
P-122	Back arrow: Back	Previous screen	—
P-122	Button: OK	**P-100** Trip details	400
P-123	Back arrow: Back	Previous screen	—
P-123	Button: Contact support	**P-105** Ticket support	411
P-123	Button: Refund policy	**P-163** Cancellation & refund policy	535
P-124	Back arrow: Back	Previous screen	—
P-124	Button: Send	**P-146** Submitting report	498
P-125	Back arrow: Back	Previous screen	—
P-125	Button: Go to SOS	**P-126** SOS — press and hold	457
P-125	Button: Not now	Previous screen	—
P-126	Back arrow: Back	Previous screen	—
P-126	Button: Cancel	**P-127** SOS — cancelled before sending	459
P-127	Back arrow: Back	Previous screen	—
P-127	Button: Back	Previous screen	—
P-129	Button: Share live location	**P-136** Location sharing controls	477
P-129	Button: Close	Previous screen	—
P-130	Button: Try again	**P-128** SOS — sending	461
P-130	Button: Call [configured number]	**P-134** Emergency call action	473
P-131	Back arrow: Back	Previous screen	—
P-131	Button: Retry	**P-128** SOS — sending	461
P-131	Button: Call [configured number]	**P-134** Emergency call action	473
P-132	Back arrow: Back	Previous screen	—
P-132	Button: Send SOS anyway	**P-128** SOS — sending	461
P-132	Button: Turn on location	**SH-010** Location blocked — open Settings	34
P-133	Back arrow: Back	Previous screen	—
P-133	Row: Try again	**P-128** SOS — sending	461

P-133	Row: Call [configured number]	**P-134** Emergency call action	473
P-133	Row: Contact support	**P-143** Contact support	492
P-134	Back arrow: Back	Previous screen	—
P-134	Button: Call [configured number]	External: EXT:dial	—
P-134	Button: Cancel	Previous screen	—
P-135	Back arrow: Back	Previous screen	—
P-135	App-bar action: SOS	**P-126** SOS — press and hold	457
P-135	Button: Sharing settings	**P-136** Location sharing controls	477
P-136	Back arrow: Back	Previous screen	—
P-136	Button: Privacy details	**P-138** Location & privacy explanation	481
P-137	Back arrow: Back	Previous screen	—
P-137	Button: Retry	Stays (action)	—
P-138	Back arrow: Back	Previous screen	—
P-138	Button: Open Privacy Policy	**P-161** Privacy policy	531
P-139	Tile: Booking help	**P-140** FAQ list	486
P-139	Tile: Payments & refunds	**P-140** FAQ list	486
P-139	Tile: Journey help	**P-140** FAQ list	486
P-139	Tile: Emergency	**P-125** SOS — how it works	454
P-139	Button: Contact support	**P-143** Contact support	492
P-139	Nav tab: Home	**P-001** Passenger Home — default	167
P-139	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-139	Nav tab: My Tickets	**P-081** My Tickets	351
P-139	Nav tab: Help	**P-139** Help hub	483
P-139	Nav tab: Settings	**P-150** Settings	507
P-140	Back arrow: Back	Previous screen	—
P-140	Row: How do I book a seat?	**P-141** FAQ detail	488
P-140	Row: How long are seats held?	**P-141** FAQ detail	488
P-140	Row: How do refunds work?	**P-141** FAQ detail	488
P-140	Row: Luggage guidance	**P-142** Luggage guidance (Help)	490
P-141	Back arrow: Back	Previous screen	—
P-141	Button: Was this helpful? Yes	Previous screen	—
P-141	Button: Contact support	**P-143** Contact support	492
P-142	Back arrow: Back	Previous screen	—
P-143	Back arrow: Back	Previous screen	—
P-143	Row: Send a message	**P-145** Report form	496
P-143	Row: Call [configured support number]	External: EXT:dial	—
P-143	Row: Report a problem	**P-144** Report a problem — category	494
P-144	Back arrow: Back	Previous screen	—
P-144	Row: Booking	**P-145** Report form	496
P-144	Row: Payment	**P-145** Report form	496
P-144	Row: Driver or vehicle	**P-149** Safety incident report	504
P-144	Row: Something else	**P-145** Report form	496
P-145	Back arrow: Back	Previous screen	—
P-145	Button: Send	**P-146** Submitting report	498
P-147	Button: Done	**P-139** Help hub	483
P-148	Back arrow: Back	Previous screen	—
P-148	Button: Try again	**P-146** Submitting report	498
P-148	Button: Edit	**P-145** Report form	496
P-149	Back arrow: Back	Previous screen	—
P-149	Button: Go to SOS	**P-125** SOS — how it works	454
P-149	Button: Send report	**P-146** Submitting report	498
P-150	Row: Profile	**P-151** Profile	510
P-150	Row: Language	**P-157** Language settings	522
P-150	Row: Notifications	**P-159** Notification settings	526
P-150	Row: Permissions	**P-160** Permissions status	529
P-150	Row: Privacy & policies	**P-161** Privacy policy	531
P-150	Row: About	**P-164** About / app version	537
P-150	Row: Sign out	**SH-035** Sign-out confirmation	84
P-150	Nav tab: Home	**P-001** Passenger Home — default	167
P-150	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-150	Nav tab: My Tickets	**P-081** My Tickets	351
P-150	Nav tab: Help	**P-139** Help hub	483
P-150	Nav tab: Settings	**P-150** Settings	507
P-151	Back arrow: Back	Previous screen	—
P-151	Button: Edit profile	**P-152** Edit profile	512

P-152	Back arrow: Back	Previous screen	—
P-152	Button: Save	**P-154** Profile — saving	516
P-153	Back arrow: Back	Previous screen	—
P-154	Back arrow: Back	Previous screen	—
P-155	Back arrow: Back	Previous screen	—
P-156	Back arrow: Back	Previous screen	—
P-156	Button: Try again	**P-154** Profile — saving	516
P-157	Back arrow: Back	Previous screen	—
P-157	Tile: English	**P-158** Urdu RTL preview	524
P-157	Tile: اردو	**P-158** Urdu RTL preview	524
P-157	Button: Apply	Previous screen	—
P-158	Back arrow: Back	Previous screen	—
P-158	Button: Apply Urdu	**P-150** Settings	507
P-159	Back arrow: Back	Previous screen	—
P-159	Nav tab: Home	**P-001** Passenger Home — default	167
P-159	Nav tab: My Trips	**P-094** My Trips — Upcoming	382
P-159	Nav tab: My Tickets	**P-081** My Tickets	351
P-159	Nav tab: Help	**P-139** Help hub	483
P-159	Nav tab: Settings	**P-150** Settings	507
P-160	Back arrow: Back	Previous screen	—
P-160	Button: Open Android Settings	Android Settings	—
P-161	Back arrow: Back	Previous screen	—
P-162	Back arrow: Back	Previous screen	—
P-163	Back arrow: Back	Previous screen	—
P-164	Back arrow: Back	Previous screen	—
P-164	Row: Terms	**P-162** Terms of use	533
P-164	Row: Privacy	**P-161** Privacy policy	531
P-165	Back arrow: Back	Previous screen	—
D-001	Button: View approval status	**D-002** Approval pending	543
D-001	Nav tab: Home	**D-013** Driver Home — default	566
D-001	Nav tab: My Trips	**D-016** Driver My Trips	574
D-001	Nav tab: Trip Records	**D-046** Trip Records	636
D-001	Nav tab: Help	**D-063** Driver Help hub	671
D-001	Nav tab: Settings	**D-067** Driver Settings	680
D-002	Back arrow: Back	Previous screen	—
D-002	Button: Refresh	Stays (action)	—
D-002	Button: Contact support	**D-063** Driver Help hub	671
D-003	Back arrow: Back	Previous screen	—
D-003	Button: Update details	**D-004** Driver profile setup	548
D-003	Button: Contact support	**D-063** Driver Help hub	671
D-004	Back arrow: Back	Previous screen	—
D-004	Button: Next: vehicle	**D-005** Vehicle details	550
D-005	Back arrow: Back	Previous screen	—
D-005	Button: Next: documents	**D-006** Document upload (if required)	552
D-006	Back arrow: Back	Previous screen	—
D-006	Button: Take photo	**SH-013** Camera / QR scan education	40
D-006	Button: Choose file	**D-007** Upload progress	554
D-007	Back arrow: Back	Previous screen	—
D-007	Button: Cancel upload	**D-006** Document upload (if required)	552
D-008	Back arrow: Back	Previous screen	—
D-008	Button: Try again	**D-006** Document upload (if required)	552
D-009	Button: Done	**D-001** Driver home — before approval	541
D-010	Back arrow: Back	Previous screen	—
D-010	Button: Request edit	**D-011** Edit request	562
D-011	Back arrow: Back	Previous screen	—
D-011	Button: Send request	**D-009** Submission confirmation	558
D-012	Button: Contact support	**D-063** Driver Help hub	671
D-012	Button: Sign out	**SH-035** Sign-out confirmation	84
D-013	Button: Open trip	**D-018** Trip details	579
D-013	Tile: Scan ticket	**D-022** Scanner ready	588
D-013	Tile: Manifest	**D-020** Passenger manifest	584
D-013	Tile: Report delay	**D-039** Report delay	622
D-013	Tile: SOS	**D-050** Driver SOS	645
D-013	Nav tab: Home	**D-013** Driver Home — default	566
D-013	Nav tab: My Trips	**D-016** Driver My Trips	574
D-013	Nav tab: Trip Records	**D-046** Trip Records	636

D-013	Nav tab: Help	**D-063** Driver Help hub	671
D-013	Nav tab: Settings	**D-067** Driver Settings	680
D-014	Button: Refresh	Stays (action)	—
D-014	Nav tab: Home	**D-013** Driver Home — default	566
D-014	Nav tab: My Trips	**D-016** Driver My Trips	574
D-014	Nav tab: Trip Records	**D-046** Trip Records	636
D-014	Nav tab: Help	**D-063** Driver Help hub	671
D-014	Nav tab: Settings	**D-067** Driver Settings	680
D-015	Button: View trip	**D-018** Trip details	579
D-015	Button: Start trip	**D-031** Start-trip eligibility	606
D-015	Nav tab: Home	**D-013** Driver Home — default	566
D-015	Nav tab: My Trips	**D-016** Driver My Trips	574
D-015	Nav tab: Trip Records	**D-046** Trip Records	636
D-015	Nav tab: Help	**D-063** Driver Help hub	671
D-015	Nav tab: Settings	**D-067** Driver Settings	680
D-016	Row: Quetta → City (sample)|Sat 08:00 ·	**D-018** Trip details	579
D-016	Row: Quetta → City B (sample)|Mon 20 ·	**D-018** Trip details	579
D-016	Nav tab: Home	**D-013** Driver Home — default	566
D-016	Nav tab: My Trips	**D-016** Driver My Trips	574
D-016	Nav tab: Trip Records	**D-046** Trip Records	636
D-016	Nav tab: Help	**D-063** Driver Help hub	671
D-016	Nav tab: Settings	**D-067** Driver Settings	680
D-017	Nav tab: Home	**D-013** Driver Home — default	566
D-017	Nav tab: My Trips	**D-016** Driver My Trips	574
D-017	Nav tab: Trip Records	**D-046** Trip Records	636
D-017	Nav tab: Help	**D-063** Driver Help hub	671
D-017	Nav tab: Settings	**D-067** Driver Settings	680
D-018	Back arrow: Back	Previous screen	—
D-018	Row: Route & stops	**D-019** Route / stop list	582
D-018	Row: Passenger manifest	**D-020** Passenger manifest	584
D-018	Row: Scan tickets	**D-022** Scanner ready	588
D-018	Button: Start trip	**D-031** Start-trip eligibility	606
D-019	Back arrow: Back	Previous screen	—
D-019	Button: Open in maps	**D-038** Navigation handoff	620
D-020	Back arrow: Back	Previous screen	—
D-020	Button: Look up ticket	**D-021** Passenger / ticket lookup	586
D-021	Back arrow: Back	Previous screen	—
D-021	Button: Check	**D-023** Scan — valid ticket	590
D-022	Back arrow: Back	Previous screen	—
D-022	Button: Enter ticket ID	**D-021** Passenger / ticket lookup	586
D-023	Back arrow: Back	Previous screen	—
D-023	Button: Mark boarded	**D-029** Boarding recorded	602
D-023	Button: Cancel	**D-022** Scanner ready	588
D-024	Back arrow: Back	Previous screen	—
D-024	Button: Scan again	**D-022** Scanner ready	588
D-024	Button: Look up manually	**D-021** Passenger / ticket lookup	586
D-025	Back arrow: Back	Previous screen	—
D-025	Button: Scan again	**D-022** Scanner ready	588
D-026	Back arrow: Back	Previous screen	—
D-026	Button: Scan again	**D-022** Scanner ready	588
D-027	Back arrow: Back	Previous screen	—
D-027	Button: Contact support	**D-063** Driver Help hub	671
D-027	Button: Scan again	**D-022** Scanner ready	588
D-028	Back arrow: Back	Previous screen	—
D-028	Button: Retry when online	**D-022** Scanner ready	588
D-028	Button: Back	**D-020** Passenger manifest	584
D-029	Button: Scan next	**D-022** Scanner ready	588
D-029	Button: Boarding status	**D-030** Boarding status	604
D-030	Back arrow: Back	Previous screen	—
D-030	Button: Manifest	**D-020** Passenger manifest	584
D-030	Button: Start trip	**D-031** Start-trip eligibility	606
D-031	Back arrow: Back	Previous screen	—
D-031	Button: Start trip	**D-032** Start-trip confirmation	608
D-032	Back arrow: Back	Previous screen	—
D-032	Dialog button: Start trip	**D-033** Starting trip…	610

D-032	Dialog button: Cancel	**D-018** Trip details	579
D-034	Button: Go to active trip	**D-037** Active trip	618
D-035	Back arrow: Back	Previous screen	—
D-035	Button: Back	**D-018** Trip details	579
D-035	Button: Help	**D-063** Driver Help hub	671
D-036	Back arrow: Back	Previous screen	—
D-036	Button: Retry	**D-033** Starting trip…	610
D-036	Button: Back	**D-018** Trip details	579
D-037	Back arrow: Back	Previous screen	—
D-037	App-bar action: SOS	**D-050** Driver SOS	645
D-037	Row: Stops	**D-019** Route / stop list	582
D-037	Row: Report delay	**D-039** Report delay	622
D-037	Row: Breakdown	**D-056** Breakdown report	657
D-037	Button: End trip	**D-040** End-trip eligibility	624
D-038	Back arrow: Back	Previous screen	—
D-038	Button: Open maps	External: EXT:maps	—
D-038	Button: Back	Previous screen	—
D-039	Back arrow: Back	Previous screen	—
D-039	Button: Send	**D-066** Trip disruption status	678
D-040	Back arrow: Back	Previous screen	—
D-040	Button: End trip	**D-041** End-trip confirmation	626
D-041	Back arrow: Back	Previous screen	—
D-041	Dialog button: End trip	**D-042** Ending trip…	628
D-041	Dialog button: Cancel	**D-037** Active trip	618
D-043	Button: View summary	**D-045** Post-trip summary	634
D-044	Back arrow: Back	Previous screen	—
D-044	Button: Back	**D-037** Active trip	618
D-045	Back arrow: Back	Previous screen	—
D-045	Button: Done	**D-013** Driver Home — default	566
D-046	Row: Quetta → City (sample)|Completed ·	**D-047** Trip record detail	639
D-046	Row: Quetta → City B (sample)|Completed	**D-047** Trip record detail	639
D-046	Nav tab: Home	**D-013** Driver Home — default	566
D-046	Nav tab: My Trips	**D-016** Driver My Trips	574
D-046	Nav tab: Trip Records	**D-046** Trip Records	636
D-046	Nav tab: Help	**D-063** Driver Help hub	671
D-046	Nav tab: Settings	**D-067** Driver Settings	680
D-047	Back arrow: Back	Previous screen	—
D-048	Nav tab: Home	**D-013** Driver Home — default	566
D-048	Nav tab: My Trips	**D-016** Driver My Trips	574
D-048	Nav tab: Trip Records	**D-046** Trip Records	636
D-048	Nav tab: Help	**D-063** Driver Help hub	671
D-048	Nav tab: Settings	**D-067** Driver Settings	680
D-049	Button: Retry	Stays (action)	—
D-049	Nav tab: Home	**D-013** Driver Home — default	566
D-049	Nav tab: My Trips	**D-016** Driver My Trips	574
D-049	Nav tab: Trip Records	**D-046** Trip Records	636
D-049	Nav tab: Help	**D-063** Driver Help hub	671
D-049	Nav tab: Settings	**D-067** Driver Settings	680
D-050	Back arrow: Back	Previous screen	—
D-050	Button: Cancel	Previous screen	—
D-051	Back arrow: Back	Previous screen	—
D-051	Dialog button: Send SOS	**D-052** Driver SOS — sending	649
D-051	Dialog button: Cancel	**D-050** Driver SOS	645
D-053	Button: Close	**D-037** Active trip	618
D-054	Button: Try again	**D-052** Driver SOS — sending	649
D-054	Button: Call [configured number]	External: EXT:dial	—
D-055	Back arrow: Back	Previous screen	—
D-055	Button: Retry	**D-052** Driver SOS — sending	649
D-055	Button: Call [configured number]	External: EXT:dial	—
D-056	Back arrow: Back	Previous screen	—
D-056	Button: SOS	**D-050** Driver SOS	645
D-056	Button: Choose reason	**D-057** Breakdown — reason	659
D-057	Back arrow: Back	Previous screen	—
D-057	Button: Continue	**D-058** Breakdown — location status	661
D-058	Back arrow: Back	Previous screen	—

D-058	Button: Send report	**D-066** Trip disruption status	678
D-059	Back arrow: Back	Previous screen	—
D-059	Button: Call [configured support number]	External: EXT:dial	—
D-059	Button: Back	Previous screen	—
D-060	Back arrow: Back	Previous screen	—
D-060	Button: Send	**D-066** Trip disruption status	678
D-061	Back arrow: Back	Previous screen	—
D-061	Button: Send	**D-066** Trip disruption status	678
D-062	Back arrow: Back	Previous screen	—
D-062	Button: Call [configured number]	External: EXT:dial	—
D-063	Row: Trip help	**D-064** Driver FAQ	674
D-063	Row: Passenger / ticket issue	**D-065** Ticket / passenger issue	676
D-063	Row: Breakdown	**D-056** Breakdown report	657
D-063	Row: SOS	**D-050** Driver SOS	645
D-063	Row: Contact support	**D-060** Support form	665
D-063	Nav tab: Home	**D-013** Driver Home — default	566
D-063	Nav tab: My Trips	**D-016** Driver My Trips	574
D-063	Nav tab: Trip Records	**D-046** Trip Records	636
D-063	Nav tab: Help	**D-063** Driver Help hub	671
D-063	Nav tab: Settings	**D-067** Driver Settings	680
D-064	Back arrow: Back	Previous screen	—
D-065	Back arrow: Back	Previous screen	—
D-065	Button: Send	**D-066** Trip disruption status	678
D-066	Button: Retry	Stays (action)	—
D-066	Button: Back to trip	**D-037** Active trip	618
D-067	Row: Profile	**D-010** Driver profile details	560
D-067	Row: Language	**D-069** Driver language	685
D-067	Row: Notifications	**D-070** Driver notifications	687
D-067	Row: Location	**D-071** Location permission	689
D-067	Row: Privacy & GPS	**D-072** Privacy & GPS explanation	691
D-067	Row: Account status	**D-075** Account status	697
D-067	Row: Policies	**D-073** Policies	693
D-067	Row: Sign out	**SH-035** Sign-out confirmation	84
D-067	Nav tab: Home	**D-013** Driver Home — default	566
D-067	Nav tab: My Trips	**D-016** Driver My Trips	574
D-067	Nav tab: Trip Records	**D-046** Trip Records	636
D-067	Nav tab: Help	**D-063** Driver Help hub	671
D-067	Nav tab: Settings	**D-067** Driver Settings	680
D-068	Back arrow: Back	Previous screen	—
D-068	Button: Save	**D-010** Driver profile details	560
D-069	Back arrow: Back	Previous screen	—
D-070	Back arrow: Back	Previous screen	—
D-070	Nav tab: Home	**D-013** Driver Home — default	566
D-070	Nav tab: My Trips	**D-016** Driver My Trips	574
D-070	Nav tab: Trip Records	**D-046** Trip Records	636
D-070	Nav tab: Help	**D-063** Driver Help hub	671
D-070	Nav tab: Settings	**D-067** Driver Settings	680
D-071	Back arrow: Back	Previous screen	—
D-071	Button: Open Settings	Android Settings	—
D-072	Back arrow: Back	Previous screen	—
D-073	Back arrow: Back	Previous screen	—
D-073	Row: Terms	**P-162** Terms of use	533
D-073	Row: Privacy	**P-161** Privacy policy	531
D-073	Row: Refund policy	**P-163** Cancellation & refund policy	535
D-074	Back arrow: Back	Previous screen	—
D-075	Back arrow: Back	Previous screen	—
D-076	Back arrow: Back	Previous screen	—
D-077	Back arrow: Back	Previous screen	—
D-078	Button: Sign in	**AU-002** Sign in	88
ERR-001	Back arrow: Back	Previous screen	—
ERR-001	Button: Keep waiting	Stays (action)	—
ERR-001	Button: Cancel	Previous screen	—
ERR-002	Back arrow: Back	Previous screen	—
ERR-002	Button: Try again	Stays (action)	—
ERR-002	Button: Back	Previous screen	—
ERR-003	Back arrow: Back	Previous screen	—

ERR-003	Button: Retry	Stays (action)	—
ERR-004	Button: Check status	**P-066** App closed mid-booking — recovery	320
ERR-004	Button: Close	**P-094** My Trips — Upcoming	382
ERR-005	Back arrow: Back	Previous screen	—
ERR-006	Back arrow: Back	Previous screen	—
ERR-006	Button: Sign in	**AU-002** Sign in	88
ERR-006	Button: Discard draft	**P-001** Passenger Home — default	167
ERR-007	Back arrow: Back	Previous screen	—
ERR-009	Back arrow: Back	Previous screen	—
ERR-010	Back arrow: Back	Previous screen	—
ERR-010	Button: Choose seat	**P-047** Seat map — available	272
ERR-011	Button: Check status	**P-076** Payment status re-check	341
ERR-012	Back arrow: Back	Previous screen	—
ERR-012	Button: Refresh QR	**P-084** QR ticket — confirmed	359
ERR-013	Back arrow: Back	Previous screen	—
ERR-013	Button: Fix & continue	Stays (action)	—
ERR-014	Button: Restart	**SH-001** Splash / app initialisation	15
ERR-015	Back arrow: Back	Previous screen	—
ERR-015	Button: Try again	Stays (action)	—
ERR-016	Back arrow: Back	Previous screen	—
ERR-016	Button: Try again	**P-084** QR ticket — confirmed	359
ERR-016	Button: My Trips	**P-094** My Trips — Upcoming	382
ERR-017	Back arrow: Back	Previous screen	—
ERR-017	Button: Open date settings	Android Settings	—
ERR-018	Back arrow: Back	Previous screen	—
ERR-018	Button: OK	Previous screen	—
ERR-019	Back arrow: Back	Previous screen	—
ERR-019	Button: Open settings	Android Settings	—
ERR-019	Button: Not now	Previous screen	—
ERR-020	Back arrow: Back	Previous screen	—
ERR-020	Button: Refresh	**D-013** Driver Home — default	566
ERR-021	Back arrow: Back	Previous screen	—
ERR-021	Button: View status	**D-002** Approval pending	543

17.3 Screen-ID index

ID	Title	Key	Page
AU-001	Choose how to continue	au.entry	86
AU-002	Sign in	au.signin	88
AU-003	Phone number entry	au.phone	90
AU-004	Phone validation error	au.phone_err	92
AU-005	Code entry	au.otp	94
AU-006	Resend timer (waiting)	au.otp_wait	97
AU-007	Invalid code	au.otp_bad	99
AU-008	Expired code	au.otp_exp	101
AU-009	Too many attempts	au.otp_many	103
AU-010	Network failure during OTP	au.otp_net	105
AU-011	Verification success	au.ok	107
AU-012	New-user details	au.new	109
AU-013	New-user validation errors	au.new_err	111
AU-014	Existing-user recovery	au.recov	113
AU-015	Account blocked	au.blocked	115
AU-016	Account under review	au.review	117
AU-017	Account deletion request	au.del_info	119
AU-018	Account deletion confirmation	au.del_conf	121
AU-019	Re-authentication for sensitive action	au.reauth	123
D-001	Driver home — before approval	d.pre	541
D-002	Approval pending	d.pending	543
D-003	Needs correction / rejected	d.rejected	545
D-004	Driver profile setup	d.setup	548
D-005	Vehicle details	d.vehicle	550
D-006	Document upload (if required)	d.docs	552
D-007	Upload progress	d.upl	554
D-008	Document failed / invalid	d.doc_bad	556
D-009	Submission confirmation	d.submitted	558
D-010	Driver profile details	d.profile	560

D-011	Edit request	d.edit_req	562
D-012	Account disabled / suspended	d.suspended	564
D-013	Driver Home — default	d.home	566
D-014	Driver Home — no assigned trip	d.home_none	569
D-015	Driver Home — assigned upcoming trip	d.home_trip	571
D-016	Driver My Trips	d.trips	574
D-017	My Trips — empty	d.trips_empty	577
D-018	Trip details	d.trip	579
D-019	Route / stop list	d.stops	582
D-020	Passenger manifest	d.manifest	584
D-021	Passenger / ticket lookup	d.lookup	586
D-022	Scanner ready	d.scan_ready	588
D-023	Scan — valid ticket	d.scan_valid	590
D-024	Scan — invalid ticket	d.scan_invalid	592
D-025	Scan — wrong trip	d.scan_wrong	594
D-026	Scan — already boarded	d.scan_dup	596
D-027	Scan — pending / unverified	d.scan_pend	598
D-028	Scan — offline warning	d.scan_off	600
D-029	Boarding recorded	d.scan_succ	602
D-030	Boarding status	d.board	604
D-031	Start-trip eligibility	d.start_elig	606
D-032	Start-trip confirmation	d.start_conf	608
D-033	Starting trip…	d.start_load	610
D-034	Trip started (server confirmed)	d.started	612
D-035	Start rejected	d.start_rej	614
D-036	Start — offline not accepted	d.start_off	616
D-037	Active trip	d.active	618
D-038	Navigation handoff	d.nav_hand	620
D-039	Report delay	d.delay	622
D-040	End-trip eligibility	d.end_elig	624
D-041	End-trip confirmation	d.end_conf	626
D-042	Ending trip…	d.end_load	628
D-043	Trip ended (server confirmed)	d.ended	630
D-044	End rejected	d.end_rej	632
D-045	Post-trip summary	d.summary	634
D-046	Trip Records	d.records	636
D-047	Trip record detail	d.record	639
D-048	Trip Records — empty	d.records_empty	641
D-049	Trip Records — error/refresh	d.records_err	643
D-050	Driver SOS	d.sos	645
D-051	Driver SOS — confirm	d.sos_conf	647
D-052	Driver SOS — sending	d.sos_send	649
D-053	Driver SOS — delivered	d.sos_ok	651
D-054	Driver SOS — unconfirmed	d.sos_unconf	653
D-055	Driver SOS — offline	d.sos_off	655
D-056	Breakdown report	d.bd	657
D-057	Breakdown — reason	d.bd_reason	659
D-058	Breakdown — location status	d.bd_loc	661
D-059	Call support	d.bd_call	663
D-060	Support form	d.support	665
D-061	Report incident	d.incident	667
D-062	Emergency guidance	d.guide	669
D-063	Driver Help hub	d.help	671
D-064	Driver FAQ	d.faq	674
D-065	Ticket / passenger issue	d.pax_issue	676
D-066	Trip disruption status	d.disrupt	678
D-067	Driver Settings	d.settings	680
D-068	Edit details	d.edit	683
D-069	Driver language	d.lang	685
D-070	Driver notifications	d.notif	687
D-071	Location permission	d.perm_loc	689
D-072	Privacy & GPS explanation	d.privacy_gps	691
D-073	Policies	d.policies	693
D-074	App version	d.about	695
D-075	Account status	d.acct	697
D-076	Approval status detail	d.appr	699

D-077	Document status	d.docstat	701
D-078	Driver session expired	d.expired	703
ERR-001	Slow network — with cancel	e.slow	125
ERR-002	No internet before action	e.offline	127
ERR-003	Connection lost during read	e.read_lost	129
ERR-004	Connection lost during booking write	e.write_lost	131
ERR-005	Rate limited	e.rate	133
ERR-006	Session expired during action	e.auth_action	135
ERR-007	Return from OS Settings	e.settings_ret	137
ERR-008	Duplicate taps blocked	e.dup	139
ERR-009	Background / foreground during hold	e.bg	141
ERR-010	Conflicting seat reservation	e.conflict	143
ERR-011	Payment pending reconciliation	e.pay_recon	145
ERR-012	Ticket QR needs refresh	e.qr_exp	147
ERR-013	Backend validation summary	e.validation	149
ERR-014	Unhandled exception — safe recovery	e.crash	151
ERR-015	Malformed response	e.malformed	153
ERR-016	Booking saved, ticket not loaded	e.partial	155
ERR-017	Device time looks wrong	e.clock	157
ERR-018	Low storage / memory	e.lowmem	159
ERR-019	Background restriction for GPS	e.battery	161
ERR-020	No assigned trip (action blocked)	e.noassign	163
ERR-021	Driver not approved (action blocked)	e.notappr	165
P-001	Passenger Home — default	p.home	167
P-002	Home — first-time empty	p.home_first	170
P-003	Home — upcoming trip	p.home_trip	173
P-004	Home — no upcoming trip	p.home_none	176
P-005	Home — loading	p.home_load	179
P-006	Home — offline / stale	p.home_off	181
P-007	Announcements	p.ann	183
P-008	Notification centre	p.notifs	186
P-009	Voice assistance — start	p.voice_intro	189
P-010	Voice assistance — help	p.voice_help	192
P-011	Voice assistance — listening	p.voice_listen	194
P-012	Voice — permission denied	p.voice_denied	196
P-013	Voice — no speech	p.voice_none	198
P-014	Voice — understood	p.voice_ok	200
P-015	Voice — ambiguous result	p.voice_ambig	202
P-016	Voice — manual fallback	p.voice_manual	204
P-017	Province / region selection	p.region	206
P-018	Region — loading	p.region_load	209
P-019	Region — no configured destinations	p.region_none	211
P-020	City selection (suggested + search)	p.city	213
P-021	City — search active	p.city_search	216
P-022	City — no results	p.city_none	218
P-023	City — not served	p.city_unserved	220
P-024	Cars or Buses	p.cat	222
P-025	Vehicle — category unavailable	p.cat_dis	225
P-026	Select travel date	p.date	227
P-027	Date — past date blocked	p.date_past	229
P-028	Date — no service	p.date_nosvc	231
P-029	Date changed — results refresh	p.date_changed	233
P-030	Results — loading	p.res_load	235
P-031	Available journeys — premium cards	p.res	237
P-032	No services for route	p.res_empty	240
P-033	No results for date	p.res_nodate	242
P-034	Filter & sort sheet	p.filter	244
P-035	Filter active	p.filter_on	246
P-036	Results stale	p.res_stale	249
P-037	Route no longer available	p.route_gone	251
P-038	Journey detail	p.jdetail	253
P-039	Boarding & arrival point	p.board_detail	256
P-040	Fare & timing explanation	p.fare_expl	258
P-041	Estimated arrival unavailable	p.eta_na	260
P-042	Seats sold out	p.soldout	262

P-043	Trip unavailable at selection	p.unavail_sel	264
P-044	Results — error	p.res_err	266
P-045	Return journeys (if configured)	p.return	268
P-046	Seat map — loading	p.seat_load	270
P-047	Seat map — available	p.seat	272
P-048	Seats selected	p.seat_sel	275
P-049	Booked & held seats shown	p.seat_booked	278
P-050	Seat hold active — 10-minute timer	p.seat_held	281
P-051	Seat no longer available	p.seat_gone	284
P-052	Hold expiring soon	p.hold_warn	286
P-053	Hold expired	p.hold_expired	288
P-054	Extend / reselect hold (if supported)	p.hold_ext	290
P-055	Seat list alternative	p.seat_list	292
P-056	Vehicle layout — data-driven (bus)	p.seat_bus	295
P-057	Passenger details	p.pax	297
P-058	Passenger details — errors	p.pax_err	300
P-059	Edit passenger details	p.pax_edit	303
P-060	Booking review	p.review	306
P-061	Fare calculation	p.fare_break	309
P-062	Fare changed — acknowledge	p.fare_changed	312
P-063	Submitting booking	p.submit	314
P-064	Reservation conflict	p.res_conflict	316
P-065	Server rejected booking	p.reject	318
P-066	App closed mid-booking — recovery	p.mid_recover	320
P-067	Booking created — payment pending	p.bk_pay_pending	322
P-068	Payment method	p.paym	324
P-069	No payment methods configured	p.paym_none	327
P-070	Payment handoff	p.pay_hand	329
P-071	Payment confirmed by server	p.pay_ok	331
P-072	Payment pending	p.pay_pending	333
P-073	Payment failed	p.pay_fail	335
P-074	Payment cancelled by user	p.pay_cancel	337
P-075	Payment timeout — unknown status	p.pay_unknown	339
P-076	Payment status re-check	p.pay_recheck	341
P-077	Counter / cash flow (if configured)	p.counter	343
P-078	Booking confirmed	p.confirmed	345
P-079	Pending confirmation	p.pending	347
P-080	Confirmation failed	p.confirm_fail	349
P-081	My Tickets	p.tickets	351
P-082	My Tickets — empty	p.tickets_empty	354
P-083	My Tickets — offline	p.tickets_off	357
P-084	QR ticket — confirmed	p.qr	359
P-085	QR enlarged — high contrast	p.qr_big	362
P-086	Full ticket details	p.ticket_full	364
P-087	Ticket — pending (no QR)	p.ticket_pend	367
P-088	Cached ticket — offline	p.ticket_cached	369
P-089	Ticket unavailable	p.ticket_na	371
P-090	Share ticket	p.share	373
P-091	Share fallback (system sheet)	p.share_fb	375
P-092	Save / show ticket offline	p.save	377
P-093	Ticket history	p.ticket_hist	379
P-094	My Trips — Upcoming	p.trips	382
P-095	My Trips — Completed	p.trips_done	385
P-096	My Trips — Cancelled	p.trips_canc	388
P-097	My Trips — no upcoming	p.trips_e1	391
P-098	My Trips — no completed	p.trips_e2	394
P-099	My Trips — no cancelled	p.trips_e3	397
P-100	Trip details	p.trip_detail	400
P-101	Trip detail — refreshing	p.trip_refresh	403
P-102	Cancelled trip details	p.trip_canc_detail	405
P-103	Booking status changed	p.status_chg	407
P-104	Boarding point & departure reminder	p.remind	409
P-105	Ticket support	p.tsupport	411
P-106	Cancellation — checking eligibility	p.cq_load	413
P-107	Refund estimate — 100% (within 8 h)	p.cest100	415

P-108	Refund estimate — 75% (after 8 h)	p.cest75	418
P-109	Cancellation confirmation	p.cconf	421
P-110	Cancel request pending	p.cpend	423
P-111	Cancellation successful	p.cok	425
P-112	Cancellation rejected (state changed)	p.cancel_rejected	427
P-113	Cancellation not available	p.cno	429
P-114	Refund pending	p.rf_pend	431
P-115	Refund completed	p.rf_ok	434
P-116	Refund failed — needs support	p.rf_fail	436
P-117	Driver cancellation notice	p.drv_cancel	438
P-118	Replacement being sought	p.repl_seek	440
P-119	Replacement found	p.repl_found	442
P-120	No replacement — full refund	p.no_repl	444
P-121	Delay notice	p.delay	446
P-122	Trip details changed	p.chg	448
P-123	No-show explanation	p.noshow	450
P-124	Company-caused disruption support	p.disrupt	452
P-125	SOS — how it works	p.sos_edu	454
P-126	SOS — press and hold	p.sos_hold	457
P-127	SOS — cancelled before sending	p.sos_cancel	459
P-128	SOS — sending	p.sos_send	461
P-129	SOS — delivered (server confirmed)	p.sos_ok	463
P-130	SOS — delivery unconfirmed	p.sos_unconf	465
P-131	SOS — offline	p.sos_off	467
P-132	SOS — location unavailable/denied	p.sos_locden	469
P-133	Retry & escalation guidance	p.sos_guide	471
P-134	Emergency call action	p.emerg_call	473
P-135	Live trip tracking	p.live	475
P-136	Location sharing controls	p.share_ctrl	477
P-137	GPS unavailable / stale	p.gps_stale	479
P-138	Location & privacy explanation	p.privacy_loc	481
P-139	Help hub	p.help	483
P-140	FAQ list	p.faq	486
P-141	FAQ detail	p.faq_d	488
P-142	Luggage guidance (Help)	p.luggage	490
P-143	Contact support	p.contact	492
P-144	Report a problem — category	p.report	494
P-145	Report form	p.issue	496
P-146	Submitting report	p.sub_pend	498
P-147	Report submitted	p.sub_ok	500
P-148	Report failed	p.sub_fail	502
P-149	Safety incident report	p.safety_inc	504
P-150	Settings	p.settings	507
P-151	Profile	p.profile	510
P-152	Edit profile	p.prof_edit	512
P-153	Edit profile — field errors	p.prof_err	514
P-154	Profile — saving	p.prof_save	516
P-155	Profile — saved	p.prof_ok	518
P-156	Profile — save failed	p.prof_fail	520
P-157	Language settings	p.lang	522
P-158	Urdu RTL preview	p.lang_rtl	524
P-159	Notification settings	p.notif_set	526
P-160	Permissions status	p.perm_stat	529
P-161	Privacy policy	p.privacy	531
P-162	Terms of use	p.terms	533
P-163	Cancellation & refund policy	p.refund_policy	535
P-164	About / app version	p.about	537
P-165	Accessibility & voice settings	p.access	539
SH-001	Splash / app initialisation	sh.splash	15
SH-002	First-launch welcome	sh.welcome	17
SH-003	Choose language	sh.lang	19
SH-004	Language change preview (Urdu RTL)	sh.lang_prev	21
SH-005	Terms & privacy acknowledgement	sh.terms	24
SH-006	Notification permission education	sh.notif_edu	26
SH-007	Notification permission denied result	sh.notif_denied	28
SH-008	Location permission education	sh.loc_edu	30

SH-009	Location permission denied	sh.loc_denied	32
SH-010	Location blocked — open Settings	sh.loc_perm	34
SH-011	Microphone / voice search education	sh.mic_edu	36
SH-012	Microphone denied	sh.mic_denied	38
SH-013	Camera / QR scan education	sh.cam_edu	40
SH-014	Camera denied / blocked	sh.cam_denied	42
SH-015	Optional app update	sh.update_opt	44
SH-016	Required app update	sh.update_req	46
SH-017	Maintenance notice	sh.maint	48
SH-018	Service unavailable	sh.unavail	50
SH-019	Session expired	sh.expired	52
SH-020	Session recovery after process death	sh.recover	54
SH-021	Offline (global)	sh.offline	56
SH-022	Weak / slow connection	sh.weak	58
SH-023	Server unavailable (5xx)	sh.server	60
SH-024	Stale data warning	sh.stale	62
SH-025	Generic recoverable failure	sh.generic	64
SH-026	Non-recoverable failure	sh.fatal	66
SH-027	Confirmation dialog pattern	sh.confirm	68
SH-028	Destructive-action confirmation	sh.destruct	70
SH-029	Bottom-sheet pattern	sh.sheet	72
SH-030	Loading / skeleton pattern	sh.skeleton	74
SH-031	Empty-state pattern	sh.empty	76
SH-032	No-results pattern	sh.noresult	78
SH-033	Inline-error pattern	sh.inline	80
SH-034	Snackbar / toast / banner catalogue	sh.toasts	82
SH-035	Sign-out confirmation	sh.signout	84