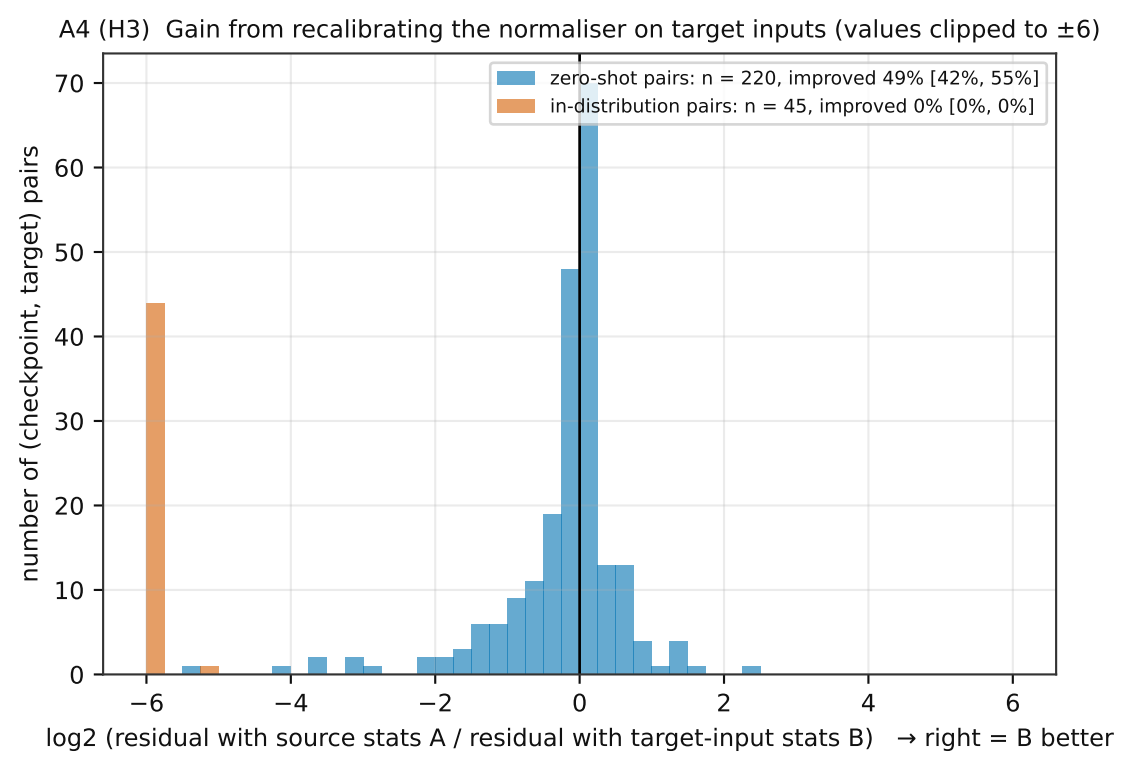
A4 (H3) Gain from recalibrating the normaliser on target inputs (values clipped to ±6)
zero-shot pairs: n = 220, improved 49% [42%, 55%]
in-distribution pairs: n = 45, improved 0% [0%, 0%]
number of (checkpoint, target) pairs
0
10
20
30
40
50
60
70
−6
−4
−2
0
2
4
6
log2 (residual with source stats A / residual with target-input stats B) → right = B better