

Javascript SDK 로그인 방식 가이드

구글 / 페이스북 / 애플 로그인 지원 로그인시 사용되는 도메인은 게임팻 담당자에서 전달 필요 (프로젝트 아이디 / 로그인이 호출되는 도메인 주소)


1. 구글 콘솔에서 설정

1. <https://console.cloud.google.com> 콘솔 진입
2. 프로젝트 선택 > 사용자 인증 정보 > OAuth 2.0 클라이언트 ID 내 웹 애플리케이션 항목이 있는지 확인 (없으면 상단의 사용자 인증 정보 만들기 메뉴를 통해 생성)
3. 웹 애플리케이션 상세 항목을 진입하여 승인된 자바스크립트 원본 항목 + URL 추가 버튼을 클릭하여 호출하는 도메인 정보를 입력 후 저장

The screenshot shows the Google Cloud Platform console interface. On the left, the 'API' menu is open, and '사용자 인증 정보' (User authentication) is selected. The main content area shows the '웹 애플리케이션의 클라이언트 ID' (Web client ID) configuration page. The '이름' (Name) field is 'Web client (auto created by Google Service)'. Below it, there is a note about OAuth 2.0 client IDs. A warning box states that the domain of the added URI must be an '승인된 도메인' (Authorized domain) for the 'OAuth 동의 화면' (OAuth consent screen). The '승인된 자바스크립트 원본' (Authorized JavaScript origins) section shows a list of URIs. The URI 'https://lx4fc.csb.app' is highlighted, and the '+ URI 추가' (Add URI) button is visible below it.

2. 페이스북 콘솔에서 설정


1. <https://developers.facebook.com> 콘솔 진입
2. 앱 선택 및 설정 > 기본 설정 > + 플랫폼 추가 버튼 클릭
3. 웹사이트 항목 선택 > 호출하는 도메인 정보를 입력 후 저장

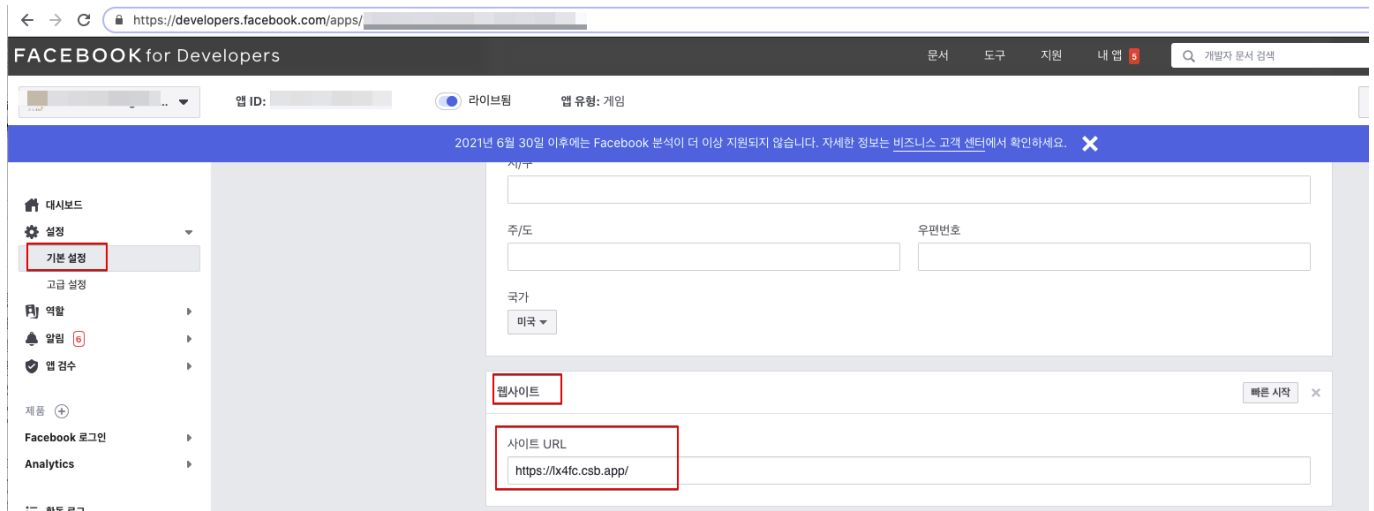

4. Facebook 로그인 > 설정 > JavaScript SDK에 허용된 도메인 항목에 호출하는 도메인 정보를 입력 후 저장

3. 애플 콘솔에서 설정

- 1. https://developer.apple.com 콘솔 진입
- 2. 'Apple developer console' > 'Certificates, Identifiers & Profiles' > 'Identifiers' 메뉴에서 적용하려는 앱의 'IDENTIFIER' 항목을 클릭합니다.

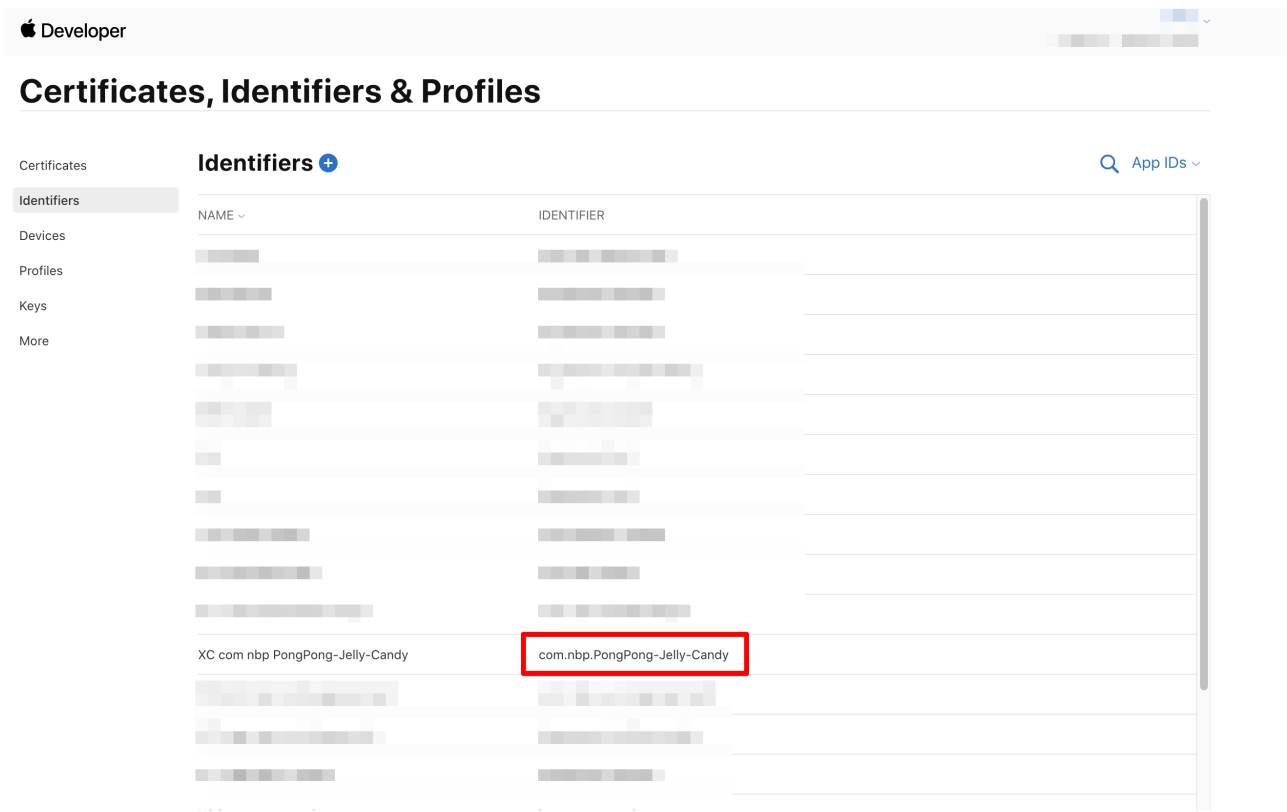














3. 'Capabilities'의 'Sign In with Apple'을 체크합니다.

[← All Identifiers](#)

Edit your App ID Configuration

Remove

Save

<input type="checkbox"/>	 MDM Managed Associated Domains ⓘ		
<input type="checkbox"/>	 Multipath ⓘ		
<input type="checkbox"/>	 Network Extensions ⓘ		
<input type="checkbox"/>	 NFC Tag Reading ⓘ		
<input type="checkbox"/>	 Personal VPN ⓘ		
<input checked="" type="checkbox"/>	 Push Notifications ⓘ	Edit	Certificates (2)
<input checked="" type="checkbox"/>	 Sign In with Apple ⓘ	Edit	Enable as a primary App ID
<input type="checkbox"/>	 SiriKit ⓘ		
<input type="checkbox"/>	 System Extension ⓘ		
<input type="checkbox"/>	 User Management ⓘ		
<input type="checkbox"/>	 Wallet ⓘ		
<input type="checkbox"/>	 Wireless Accessory Configuration ⓘ		
<input type="checkbox"/>	 Mac Catalyst (Existing Apps Only) ⓘ	Configure	

4. 'Edit' 버튼을 눌러 'Enable as a primary App ID' 항목을 체크합니다.

Apple Developer

Certificates, Identifiers & Profiles








[← All Identifiers](#)

Edit your App ID Configuration

Platform
iOS, macOS, tvOS, watchOS

Description
XC.com.nbp.sweetsugargamep...
You cannot use special characters such as spaces, hyphens, or underscores.

Capabilities

ENABLED	NAME
<input type="checkbox"/>	 Access WiFi
<input type="checkbox"/>	 App Attest
<input type="checkbox"/>	 App Groups
<input checked="" type="checkbox"/>	 Apple Pay
<input type="checkbox"/>	 Associated Domains
<input type="checkbox"/>	 AutoFill Credit Cards
<input type="checkbox"/>	 ClassKit ⓘ

Sign In with Apple: App ID Configuration

If you're enabling an App ID for the first time or for a new app, enable the App ID as a primary. You can use primary App IDs on their own or to enable identifiers for related apps and websites through grouping. To enable an App ID for a related app, (for example, an App ID for the iOS version of your Mac app), group it with the existing primary. This will also ensure that users only need to provide consent to share their information with you once for each group of apps and websites.

☒ Enable as a primary App ID

☐ Group with an existing primary App ID


Server to Server Notification Endpoint

Sign in with Apple server to server notifications allow you to receive important updates about your users and their accounts. Notifications are sent for each app group when users change mail forwarding preferences, delete their app account, or permanently delete their Apple ID. Each group of apps can have one URL, which must be absolute and include the scheme, host, and path. TLS 1.3 is required to receive notifications. [Learn more.](#)


Example: <https://example.com/path/to/endpoint>

[Cancel](#) [Save](#)

5. 설정을 저장하고 'Apple developer console' > 'Certificates, Identifiers & Profiles' > 'Identifiers' 메뉴로 돌아갑니다.

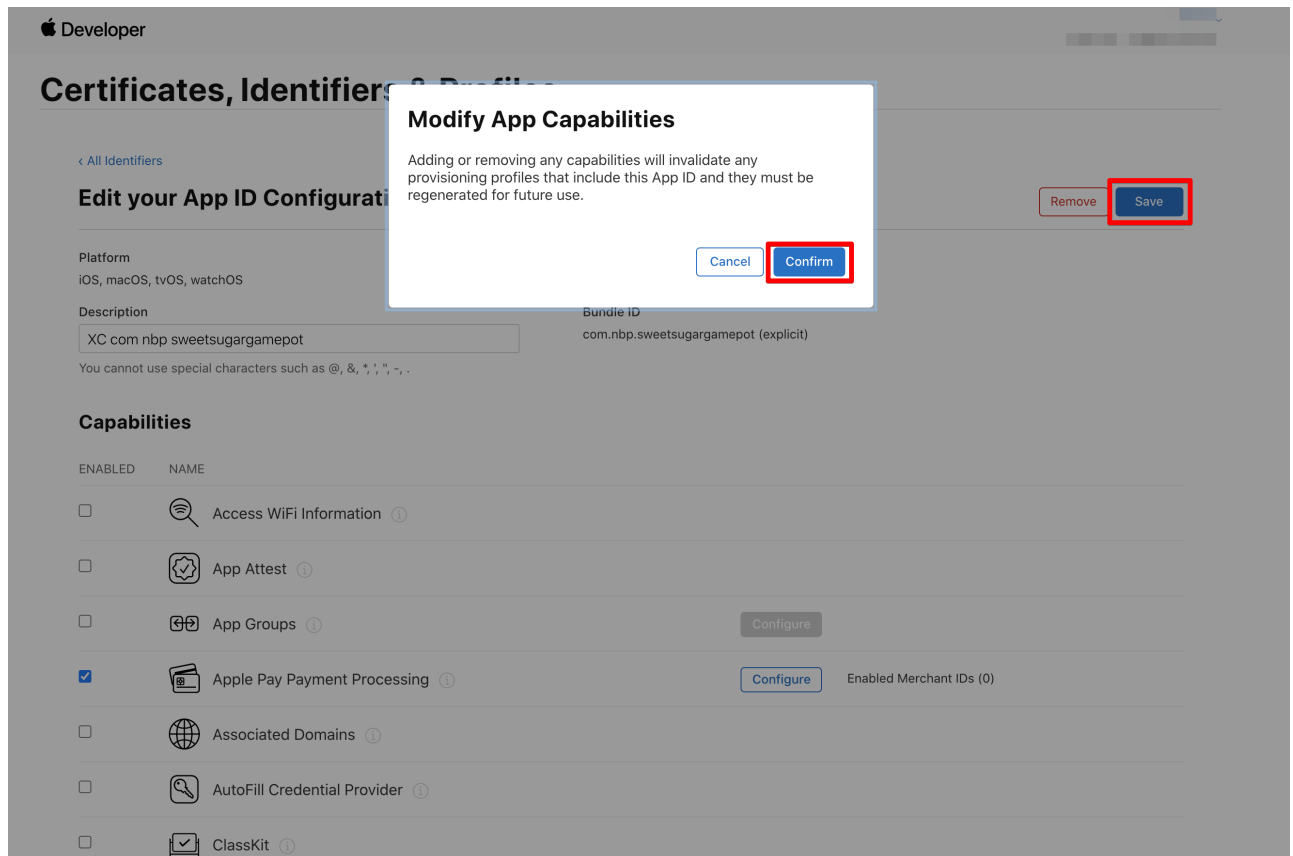

6. '+' 버튼을 클릭하여 'Services ID'를 생성합니다.

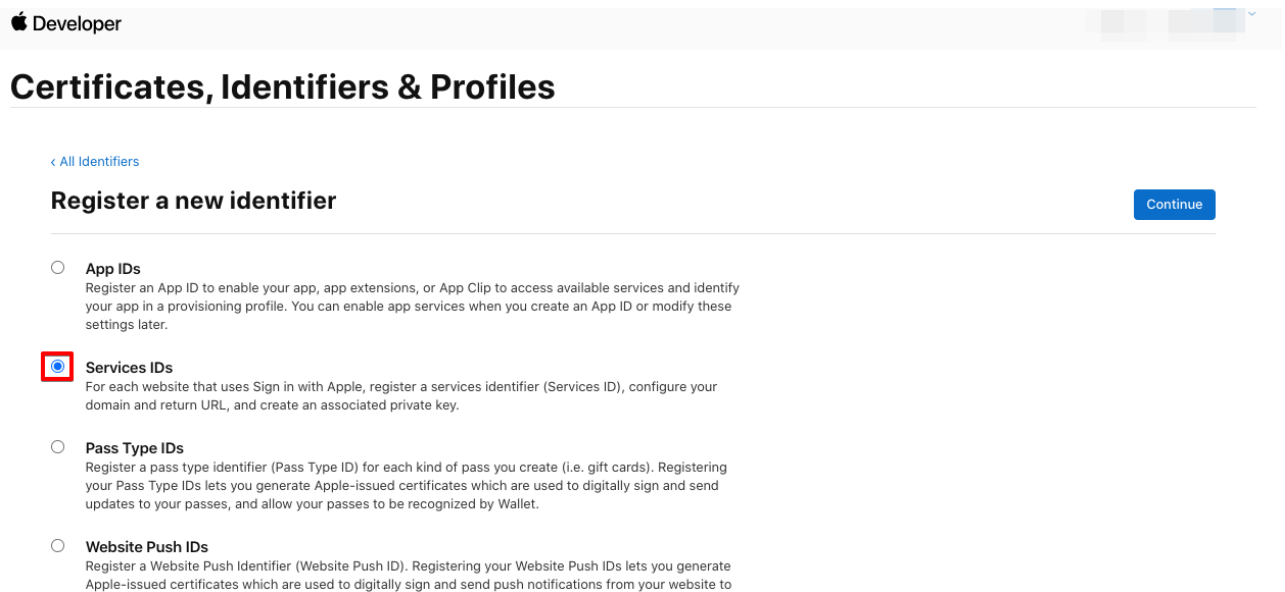

7. 생성된 Services ID를 클릭하여 'Sign In with Apple' 항목을 수정합니다.

Certificates, Identifiers & Profiles

[← All Identifiers](#)

Edit your Services ID Configuration

Remove

Continue

Description

PongPongJelly WebAuth

Identifier

com.nbp.sweetsugargamepot.webauth

You cannot use special characters such as @, &, *, ' ", ~, -.

ENABLED NAME



Sign In with Apple

Configure

8. 'Primary App ID' 항목에 사용할 앱을 선택하고 'Register Website URLs' 항목에 Domains and Subdomains :
https:// 또는 http:// 를 제외한 도메인 정보 (로그인 API를 호출하는 화면의 도메인 주소)
Return URLs : https:// 또는 http:// 를 포함한 주소

developer.apple.com/account/resources/identifiers/serviceid/edit/

Certificates, Identifiers & Profiles

[← All Identifiers](#)

Edit your Services ID Configuration

Description

AppleSignTest

You cannot use special characters such as @, &, *, ' ", ~, -.

ENABLED NAME

☒ Sign In with Apple

Web Authentication Configuration

Use Sign in with Apple to let your users sign in to your app's accompanying website with their Apple ID. To configure web authentication, group your website with the existing primary App ID that's enabled for Sign in with Apple.

Primary App ID 19 App IDs

Register Website URLs

Provide your web domain and return URLs that will support Sign in with Apple. Your website must support TLS 1.2 or higher. All Return URLs must be registered with the https:// protocol included in the URI string. After registering new website URLs, confirm the list you'd like to add to this Services ID and click Done. To complete the process, click Continue, then click Save.

Domains and Subdomains

lx4fc.csb.app

Enter a comma delimited list of domains and subdomains.

Return URLs

https://lx4fc.csb.app

Enter a comma delimited list of Return URLs.

Cancel Next