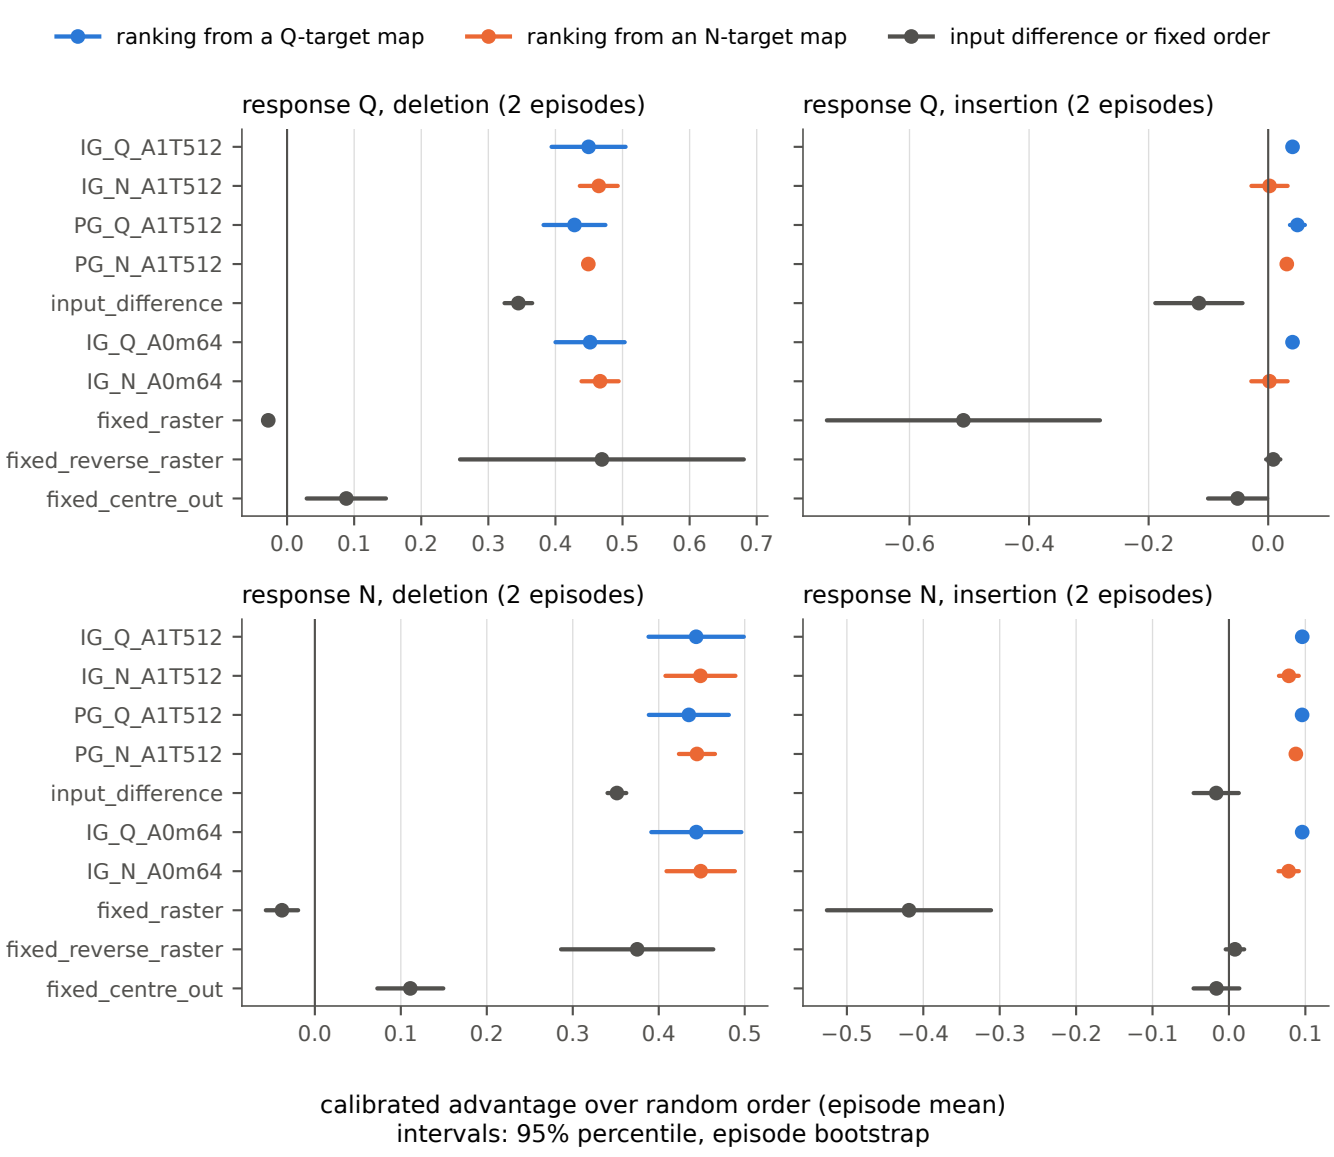
ranking from a Q-target map
ranking from an N-target map
input difference or fixed order
response Q, deletion (2 episodes)
response Q, insertion (2 episodes)
response N, deletion (2 episodes)
response N, insertion (2 episodes)
IG_Q_A1T512
IG_N_A1T512
PG_Q_A1T512
PG_N_A1T512
input_difference
IG_Q_A0m64
IG_N_A0m64
fixed_raster
fixed_reverse_raster
fixed_centre_out
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
−0.6
−0.4
−0.2
0.0
−0.5
−0.4
−0.3
−0.2
−0.1
0.0
0.1
calibrated advantage over random order (episode mean)
intervals: 95% percentile, episode bootstrap