



VESSEL SPECIFICATION SHEET

CLASSIFICATION/CLASS/REGISTRATION

Built	2010, GUANGDONG HONGSHENG Shipyard, China
Class	BV
Flag	Turkmenistan

GENERAL DIMENSIONS

Length Overall	58.7 m
Beam Moulded	14.6 m
Depth Moulded	5.5 m
Draft (Max)	4.80 m
Minimum Height	22.3m
Freeboard	0.7m
Deck Strength	7t/m ²
Displacement	2.810mt
Clear Deck Space	29.9x12.6m
Free Deck Space	375 m ²
Cargo Capacity	550 Tons

TONNAGE

GRT	1520 Tons
NRT	456 Tons
DWT	1390 Tons

CERTIFIED
ISO 9001
ISO 14001
ISO 45001



MACHINERY

Main Engines	2 x CAT 3516 B-TA
Break Horsepower	5150 BHP
Generators	3 x CAT C18, 350 KW ,415v, 2xphases , 50Hz
Emergency Generator	1 x CAT C4.4, 84KW ,410v, 50Hz
Bow Thruster	1 x 440 KW, Electric Motor , 6.6 t . HRP 4008 TT CP
Propulsion	2 x CPP, 4-Blade ,2x Kort Nozzle
Rudders	Independent/Synchronized

SPEED & CONSUMPTION

Maximum Speed	13 Knots 21m3/day
Cruising speed	11 Knots 19m3/day
Economical speed	8-Knots 15m3/day
Service Speed	10 Knots
Standby	0.8m3/day @ 0 Knots
Range @ 11 Knots	6.700nm
Estimated Consumption	Running Free 7 T/24 Hr Towing 11 T/24 Hr

TANKS CAPACITIES

Marine Gas Oil	482 m ³
Potable Water	73.1 m
Fresh Water	228m3
Mud Circulation	Available
Fresh water Ballast	465 m ³
Oil Recovery Tank	6.5 m ³

ACCOMODATION

Air-conditioning	Fully air conditioned
Walk-in cooler	9 m ³
Walk-in freezer	10.1 m ³
Hospital	Yes
Berths	1-man cab x 2 : 2-man cab x 4 : 4-man cab x 8 Passengers 30, Crew 12: Total -42
Galley seating	27

TOWING & A/H EQUIPMENT

Bollard Pull	66.7 Tons
Towing/Anchor handling Winch	Model: Double Drum Waterfall El.Hydraulic D.D. Line Pull -150T@6m/min. 200T brake
Wire Dimensions	Breaking cap-200t, L-1000m x D 52 mm (6x37 IWRC@165kg/mm2)
Stern Roller	SWL- 300mt, 5m x D 1.8 m
Shark Jaws/ Karm Fork	1xSWL 200 MT
Towing Pins	2xSWL 200 tons
Tugger Winch	2 x 10 Tons ,Electro Hydraulic (15 m/min)
Anchor Windlass	El.Hydraulic 2x 9.0 T x 12m/min for 40mm dia.chain , Brake 45T
Capstan	2 x 5T, 15m/min

RADIO & NAVIGATION EQUIPMENT


GMDSS	JRC JSB-196GM
SAT-C	JRC JUE 85
Radar	2x JRC JMA 5300/ JMA-9122/ JMA-2343
Gyro Compass	2xYOKOGAWA
Auto Pilot	ComNav MARINE 2001
Echo Sounder with repeater at Aft console	JRC NJA-98
Navtex	JRC NCR 333
EPRIB	MCMURDO Smartfind E/G8
SART	2xMCMURDO S4
AIS	JRC JHS 182
ECDIS	N/A

FiFi SYSTEM:FFS600/150LB


Fire Monitor	Fi-Fi Class -1
Dynamic positioning	DP-1 Classed
Ref.Systems :	1xMRU: 2x DGPS
Pump Capacity	2 x 1200m ³ / vertical L-45m, horizontal- 70m.Throw L-120m
Water maker	5.5T/day
Foam Capacity	13.4 m ³
Oil Dispersant Capacity	13.4 m ³
Rescue Boat :	6-Man SOLAS Approved




Dubai: Office# 1604 | The Dome Tower | Cluster N | Jumeirah Lakes Towers (JLT) | Dubai | UAE;
Abu Dhabi: Office # 1114 | Gate #1100 | Corniche Building C17 | Abu Dhabi | P.O.BOX 25203 | UAE;
Ashgabat: Business center "Berkarar" | Office No. I-3 | 9th floor | No. 82 | 1972 (Ataturk) street | Ashgabat | 744028 | Turkmenistan | Tel: +993 12 469006 | Fax: +993 12 469007;
Turkmenbashi: Magtymguly street | building 69 «A», | 745000 | tel: +993 243 72345 | fax: +993 12 469007;
Hazar: Balkanabat High Road | 9th km | Dragon Oil base | Hazar.

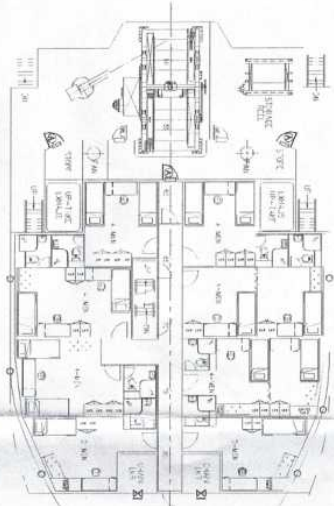


FORECASTLE DECK

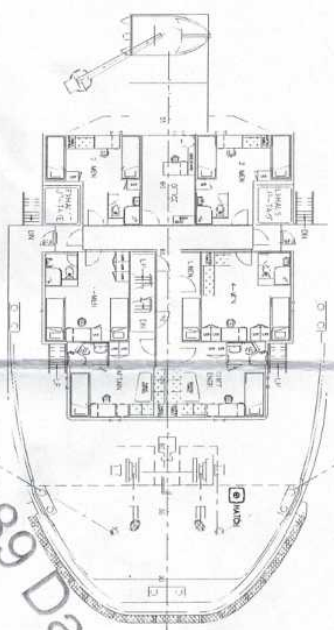


UPPER F.C. DECK

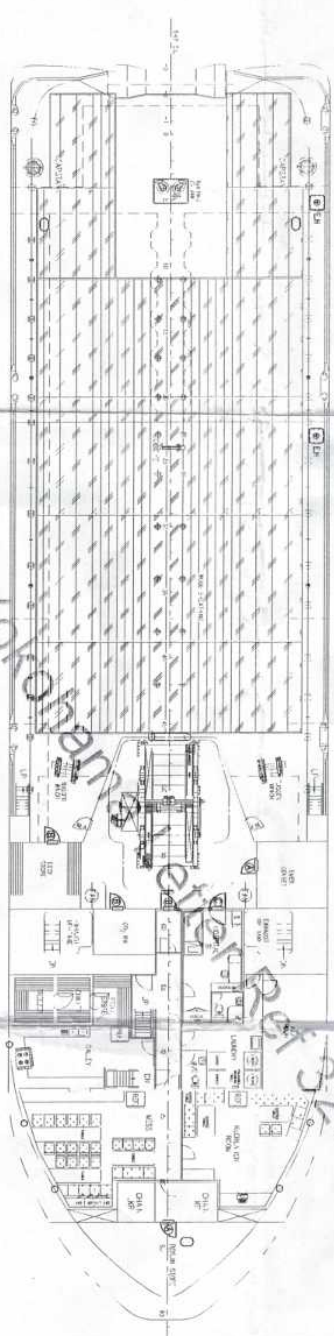

MAIN DECK PLAN

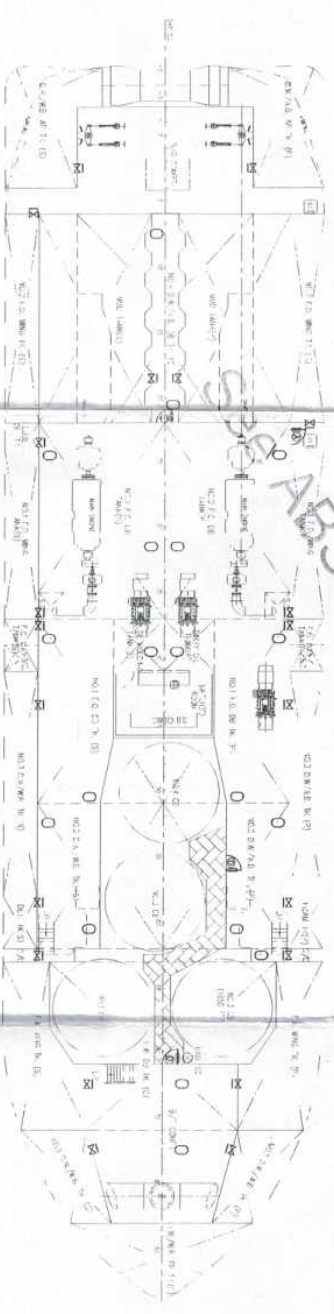

BELOW MAIN DECK PLAN

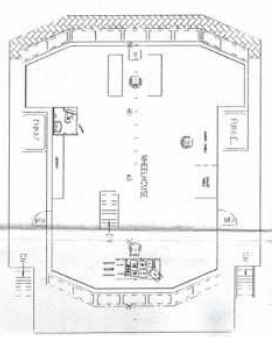

NAVIGATION BRIDGE DECK

APPROVED
 This approval covers only
 ABS requirements and
 does not include items not
 required by ABS. See
 comments in ABS
 letter



THIS DOCUMENT AND THE INFORMATION IT CONTAINS
 IS THE PROPERTY OF ABS. IT IS NOT TO BE COPIED,
 REPRODUCED, OR TRANSMITTED IN ANY FORM OR
 BY ANY MEANS, WITHOUT THE WRITTEN CONSENT
 OF ABS.