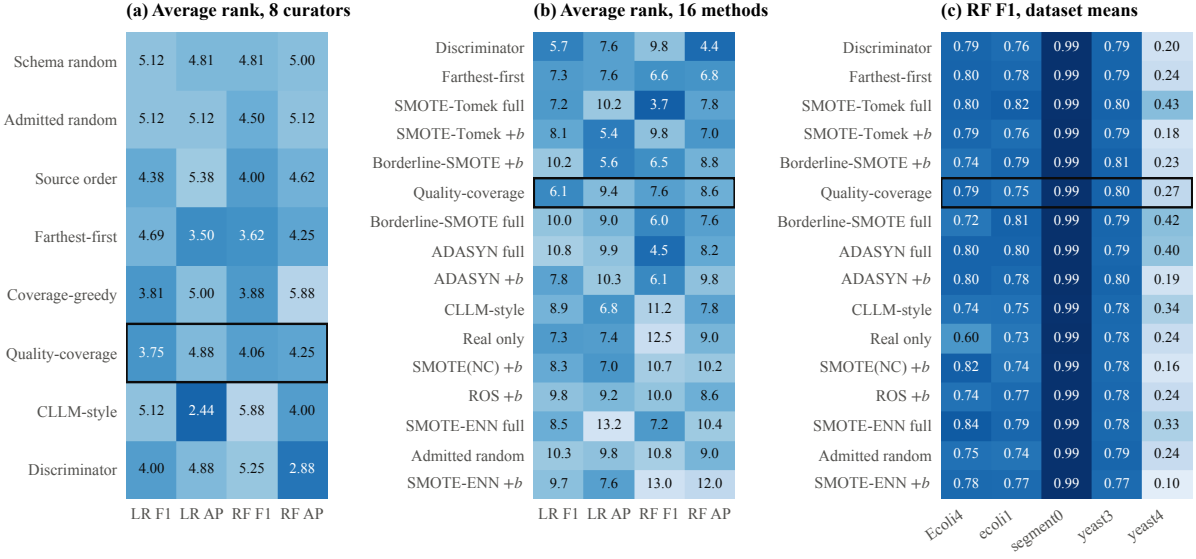

(a) Average rank, 8 curators
Schema random
Admitted random
Source order
Farthest-first
Coverage-greedy
Quality-coverage
CLLM-style
Discriminator
5.12 4.81 4.81 5.00
5.12 5.12 4.50 5.12
4.38 5.38 4.00 4.62
4.69 3.50 3.62 4.25
3.81 5.00 3.88 5.88
3.75 4.88 4.06 4.25
5.12 2.44 5.88 4.00
4.00 4.88 5.25 2.88
LR F1 LR AP RF F1 RF AP
(b) Average rank, 16 methods
Discriminator
Farthest-first
SMOTE-Tomek full
SMOTE-Tomek +b
Borderline-SMOTE +b
Quality-coverage
Borderline-SMOTE full
ADASYN full
ADASYN +b
CLLM-style
Real only
SMOTE(NC) +b
ROS +b
SMOTE-ENN full
Admitted random
SMOTE-ENN +b
5.7 7.6 9.8 4.4
7.3 7.6 6.6 6.8
7.2 10.2 3.7 7.8
8.1 5.4 9.8 7.0
10.2 5.6 6.5 8.8
6.1 9.4 7.6 8.6
10.0 9.0 6.0 7.6
10.8 9.9 4.5 8.2
7.8 10.3 6.1 9.8
8.9 6.8 11.2 7.8
7.3 7.4 12.5 9.0
8.3 7.0 10.7 10.2
9.8 9.2 10.0 8.6
8.5 13.2 7.2 10.4
10.3 9.8 10.8 9.0
9.7 7.6 13.0 12.0
LR F1 LR AP RF F1 RF AP
(c) RF F1, dataset means
Discriminator
Farthest-first
SMOTE-Tomek full
SMOTE-Tomek +b
Borderline-SMOTE +b
Quality-coverage
Borderline-SMOTE full
ADASYN full
ADASYN +b
CLLM-style
Real only
SMOTE(NC) +b
ROS +b
SMOTE-ENN full
Admitted random
SMOTE-ENN +b
0.79 0.76 0.99 0.79 0.20
0.80 0.78 0.99 0.79 0.24
0.80 0.82 0.99 0.80 0.43
0.79 0.76 0.99 0.79 0.18
0.74 0.79 0.99 0.81 0.23
0.79 0.75 0.99 0.80 0.27
0.72 0.81 0.99 0.79 0.42
0.80 0.80 0.99 0.79 0.40
0.80 0.78 0.99 0.80 0.19
0.74 0.75 0.99 0.78 0.34
0.60 0.73 0.99 0.78 0.24
0.82 0.74 0.99 0.78 0.16
0.74 0.77 0.99 0.78 0.24
0.84 0.79 0.99 0.78 0.33
0.75 0.74 0.99 0.79 0.24
0.78 0.77 0.99 0.77 0.10
Ecoli4
ecoli1
segment0
yeast3
yeast4